

**(12) PATENT  
(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 199960272 B2  
(10) Patent No. 764972**

(54) Title  
Method and apparatus for increasing the sensitivity of a global positioning satellite receiver

(51) <sup>6</sup> International Patent Classification(s)  
G01S 001/04

(21) Application No: 199960272 (22) Application Date: 1999.09.02

(87) WIPO No: WO00/14560

(30) Priority Data

(31) Number (32) Date (33) Country  
09/149428 1998.09.08 US

(43) Publication Date : 2000.03.27

(43) Publication Journal Date : 2000.05.18

(44) Accepted Journal Date : 2003.09.04

(71) Applicant(s)  
Qualcomm Incorporated

(72) Inventor(s)  
Samir S Soliman; Serguei A. Glazko; Parag A. Agashe

(74) Agent/Attorney  
MADDERNS, 1st Floor Wolf Blass House, 64 Hindmarsh Square, ADELAIDE SA 5000

(56) Related Art  
WO 97/14057

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

60272/99

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>G01S 1/04</b>		A1	(11) International Publication Number: <b>WO 00/14560</b>
			(43) International Publication Date: 16 March 2000 (16.03.00)
<p>(21) International Application Number: PCT/US99/20341</p> <p>(22) International Filing Date: 2 September 1999 (02.09.99)</p> <p>(30) Priority Data: 09/149,428 8 September 1998 (08.09.98) US</p> <p>(71) Applicant: QUALCOMM INCORPORATED [US/US]; 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).</p> <p>(72) Inventors: SOLIMAN, Samir, S.; 11412 Cypress Canyon Park Drive, San Diego, CA 92131 (US). GLAZKO, Serguei, A.; 9538 Hito Court, San Diego, CA 92129 (US). AGASHE, Parag, A.; 10173 Camino Ruiz #94, San Diego, CA 92126 (US).</p> <p>(74) Agent: GREENHAUS, Bruce, W.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	
<p>(54) Title: METHOD AND APPARATUS FOR INCREASING THE SENSITIVITY OF A GLOBAL POSITIONING SATELLITE RECEIVER</p> <p>(57) Abstract</p> <p>Method and apparatus providing enhanced sensitivity for GPS receivers (400, 500, 600, 700) by allowing coherent integration of a correlation over several code periods of a GPS signal in one embodiment, and by performing a time to frequency domain conversion to the output from a correlation processor (507) in a second embodiment. In the case in which coherent integration is performed over several code periods, advantage is taken of the fact that CDMA cellular telephone base stations transmit information that allows the receiver to determine GPS time before beginning a GPS signal acquisition process. The integration can be expanded to include code periods from more than one bit period, if the GPS receiver (400, 500, 600, 700) takes advantage of the fact that known bit patterns are transmitted at particular times within the transmission from a GPS satellite. If no base station is within range, then the output from a correlator (507) that integrates a correlation over one code period is used to generate values that are input to a discrete time domain to frequency domain transform processor (511). The output from the transform processor (511) will indicate the presence of a signal from a particular satellite and the offset between locally generated signal and the received GPS signal.</p>			
<pre> graph TD     A[Receive signal from GPS Satellite] --&gt; B[Receive GPS timing Information from source other than GPS satellite]     B --&gt; C[Correlate the received signal with locally generated signal using GPS timing information to perform coherent integration over several code periods]     C --&gt; D[Determine presence of satellite signal from coherent integration]     </pre> <p>STEP 801</p> <p>STEP 803</p> <p>STEP 805</p> <p>STEP 807</p>			

**METHOD AND APPARATUS FOR INCREASING THE  
SENSITIVITY OF A GLOBAL POSITIONING SATELLITE  
RECEIVER**

5

**BACKGROUND OF INVENTION**

**Technical Field**

10        This invention relates to a method and apparatus for determining the position of a device based on information broadcast from a satellite, and more specifically to a method and apparatus for increasing the sensitivity of a global positioning system receiver.

15        **Background Art**

      The use of a global positioning system (GPS) to determine the location of people and objects is becoming wide spread. Automobiles, wireless telephones and other devices are being designed to include global positioning system receivers. These receivers are used to receive signals from satellites. These received signals provide information that allows the receiver to determine the receiver's location on earth with relatively great accuracy. The signals that are received from the satellites are typically rather weak. Therefore, in order to determine the position of the receiver, the receiver must be sufficiently sensitive to receive these weak signals and interpret the information that is represented by them.

      In accordance with the format that is used for one such GPS, the signals transmitted by each satellite are encoded to distinguish the signals transmitted by one satellite from the signals transmitted by the other satellites in the system. The codes that are assigned to each satellite are selected such that the receiver can apply a received signal that includes a signal transmitted from a particular satellite and a particular code associated with the particular satellite to a "correlator" and have only the energy of the signal that is encoded with that particular code emerge from the correlator.

35        Figure 1 is an illustration of the timing of a portion of a signal 101 transmitted from a global positioning satellite, such as those in common use today. The transmitted signal 101 shown in Figure 1 is encoded with a particular code having a duration of 1 millisecond (i.e., the "code period").

The signal is modulated with the code (i.e., the code and the information signal to be transmitted are logically exclusively ORed) every code period. Initially, the receiver determines whether signal being transmitted from a particular satellite is being received. This is commonly referred to as

5     "acquiring" a satellite. This is done by attempting to "correlate" the received signal with the code associated with that particular satellite (i.e., inputting the received signal and the particular code to the correlator to see if any of the energy in the received signal was encoded with the particular code). In order for the input signal and the code to be correlated, the code

10    period of the signal being received and the code to which the received signal is being compared must be very closely aligned in time. Figure 1 shows three attempts to correlate the received signal 101 with a code associated with a particular satellite. In the first attempt, the code 102a starts after the beginning of the code period 103 of the received signal 101.

15    Therefore, this first attempt to correlate the received signal with the particular code will fail.

In a second attempt to correlate the received signal 101 with the particular code 102b (which has the same value as the code 102a, but is shifted in time), the code is shifted to a point later in time with respect to

20    the beginning of the code period 103. However, the beginning of the code period of the received signal and the beginning of the code 102 are still not aligned. Therefore, even though the correct code is being compared to the received signal, the timing is not aligned. Accordingly, the attempt to correlate the received signal with the particular code fails again.

25    In the third attempt, the beginning of the code 102c is aligned with the beginning of a code period 103. The particular code is the same as the code with which the received signal was encoded and the code period 104 is aligned with the code 102c. Therefore, the correlation between the particular code and the received signal will be successful, assuming that the

30    signal that was encoded with the particular code is being received with sufficient strength to allow the correlation to be detected.

However, in many cases, the signal being transmitted from a satellite is not sufficiently strong. This may be due to the fact that the amount of interference is too great or the signal is attenuated by obstructions, such as

35    buildings, foliage, etc. Therefore, the correlation may not be detected, even when the timing is correct and the correct code is selected.

One way that has been proposed for improving the sensitivity of the receiver is to add the power that is transmitted in several code periods together and then attempt to correlate the sum of these code periods with the particular code of interest. In addition to the lack of sensitivity, the time 5 at which the code periods begin is not known. Therefore, the same searching function must be performed as was illustrated in Figure 1 and described in the accompanying text. This searching requires a relatively large amount of time.

One method that has been proposed for dealing with the amount of 10 time required to determine the alignment of the code periods requires that several samples be taken for a number of "code sample periods". A code sample period is a period of time that is equal in duration to the code period, but which may not be aligned to a code period. The same number of samples are taken for each code sample period (e.g., 1 millisecond). 15 Corresponding samples from each of these 1 millisecond code sample periods are then summed together to form a composite code sample period of 1 millisecond. Figure 3 is an illustration of four code periods 301, 302, 303, 304 that are sampled 15 times each. The 15 samples from each of the four code periods 301, 302, 303, 304 are summed to form a composite code 20 sample period 305. It should be understood that each such period 301, 302, 303, 304 must begin an integer number of code periods apart and preferably each such period is adjacent in time to one of the other such periods to form a contiguous stream of samples.

The composite code sample period is then transformed from the time 25 domain to the frequency domain. That is, a time domain to frequency domain transform, such as a Fourier transform, is performed on the samples that make up the composite code sample period. The frequency domain result is then multiplied by a frequency domain representation of the particular code to which the received signal is to be correlated. A 30 transform from the frequency domain to the time domain, such as an inverse Fourier transform is then performed on this product. The time domain result provides an indication as to relative time difference between the beginning of the code sample periods and the beginning of the actual code periods of the received signal, assuming that the received signal has 35 sufficient energy which has been encoded with the particular code.

One problem with this approach is that the information that is represented by the received signal, changes the state of the received signal

at regular intervals which are several times longer than the code period. For example, in the GPS system commonly used in the United States, the content of a signal transmitted from a satellite has a bit length of 20 code periods (i.e., 20 ms). This has the effect of potentially inverting the state of the energy that is represented by the codes every 20  
5 milliseconds. Figure 2 illustrates the timing of a bit with respect to a code period. If energy in the signal received during a code period when the bit value is equal to a logical "one" is added to the energy received when the bit value is equal to a logical "zero", the total energy will be equal to zero. Therefore, "bit boundaries" 201 must be known in order to sum the energy of more than one code period. In addition, if the  
10 clock (oscillator) that is used to determine when to take the samples from each code sample period is not extremely stable, then the correlation will not be very good in the frequency domain. This will result in a loss of sensitivity, since the composite code sample period will not correlate well with the particular code of interest.

15 The present invention provides a method and apparatus which increases the sensitivity of a GPS receiver with less need for an extremely stable clock than is required in the case in which composite code samples periods are generated. In addition, the present invention provides a method for determining the location of bit  
20 boundaries within the received signal.

## SUMMARY OF THE INVENTION

In a first aspect the present invention accordingly provides a method for improving the sensitivity of a Global Positioning System (GPS) receiver, the method including the steps of:  
25 a) receiving a GPS signal from a GPS satellite;  
b) determining whether the receiver has a source for synchronization to GPS  
time other than the GPS satellite itself; and  
c) if there is a source for synchronization to GPS time other than the GPS satellite  
itself, then:  
30 1) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;

2) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;

3) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and

5 4) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

In a second aspect the present invention accordingly provides an apparatus for  
10 improving the sensitivity of a Global Positioning System (GPS) receiver, the apparatus including:

15 a) means for receiving a GPS signal from a GPS satellite;

b) means for determining whether the receiver has a source for synchronization to GPS time other than the GPS satellite itself;

c) means, responsive to a determination that there is a source for synchronization to GPS time other than the GPS satellite itself, for:

20 1) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;

2) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;

25 3) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and

4) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

30 In a third aspect the present invention accordingly provides a method for improving the sensitivity of a Global Positioning System (GPS) receiver, the method including the steps of:

a) receiving a GPS signal from a GPS satellite;

- b) providing the receiver with a source for synchronization to GPS time, other than the GPS satellite itself;
- c) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;
- 5 d) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;
- e) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and
- 10 f) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

15

In a forth aspect the present invention accordingly provides an apparatus for improving the sensitivity of a Global Positioning System (GPS) receiver, the apparatus including:

- a) means for receiving a GPS signal from a GPS satellite;
- b) means for providing the receiver with a source for synchronization to GPS time, other than the GPS satellite itself;
- c) means for determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;
- 20 d) means for determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;
- e) means for summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and
- 25 f) means for processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

25

**BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is an illustration of the timing of a portion of a signal transmitted from a global positioning satellite, such as those in common use today.

5 Figure 2 illustrates the timing of a bit with respect to a code period.

Figure 3 is an illustration of four code periods that are sampled 15 times each.

Figure 4 is a simplified block diagram of one embodiment of the disclosed apparatus.

10 Figure 5 is a simplified block diagram of another embodiment of the disclosed apparatus.


Figure 6 is a simplified block diagram of a GPS receiver that does not have a CDMA telephone as part of the GPS receiver.

Figure 7 is a simplified block diagram of another embodiment of the disclosed apparatus.

15 Figure 8 is a flowchart that illustrates one embodiment of the disclosed method.

Figure 9 is a flowchart that illustrates another embodiment of the disclosed method.

It should be noted that like reference numbers refer to like elements.

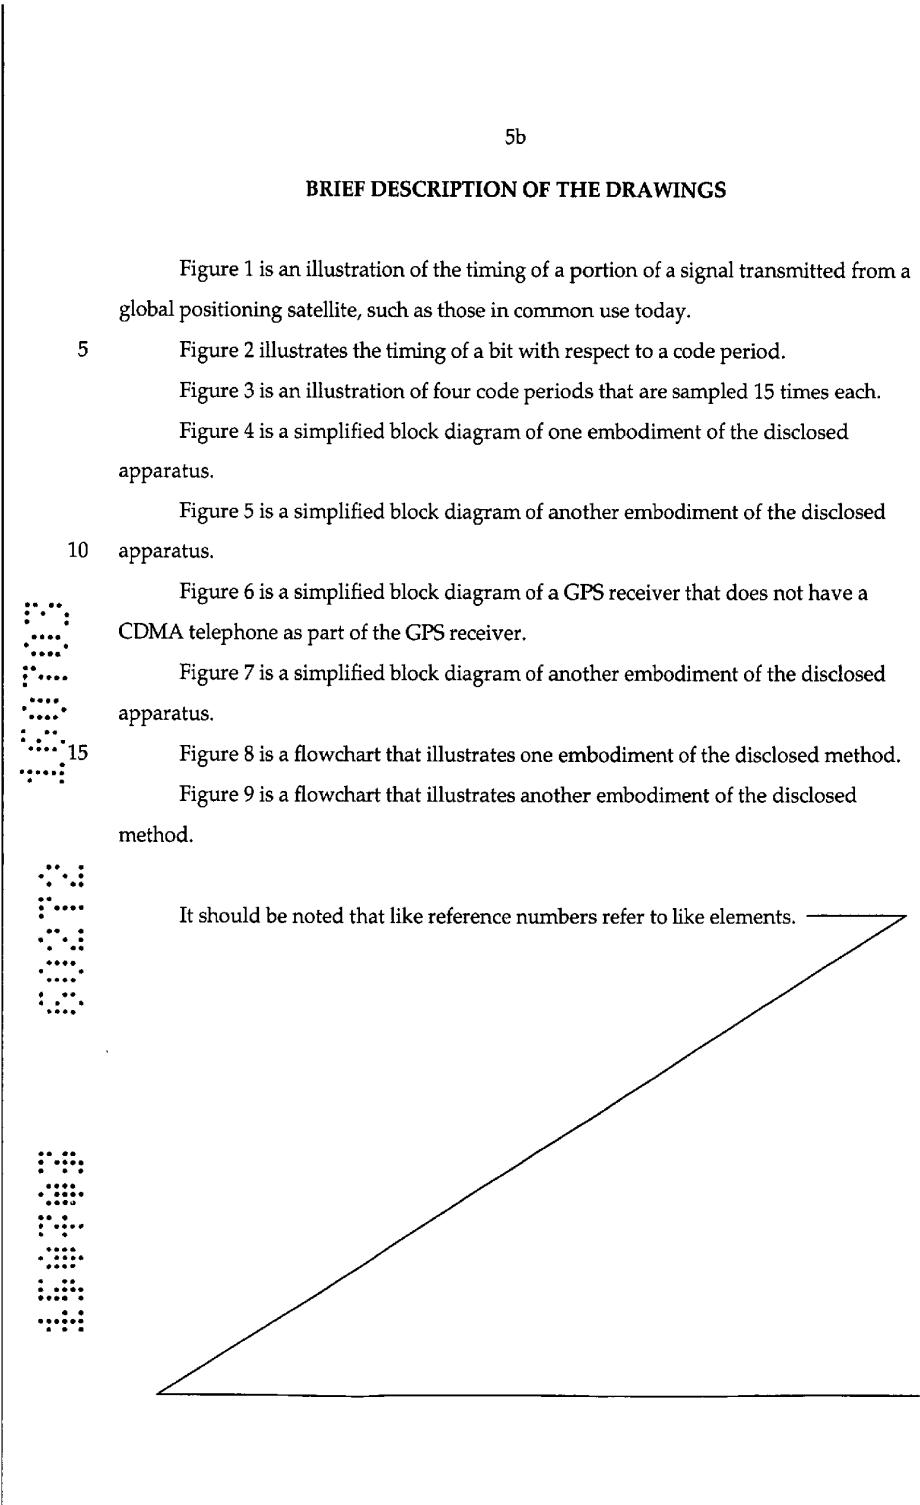

## DETAILED DESCRIPTION

Figure 4 is a simplified block diagram of one embodiment of the disclosed apparatus. The embodiment disclosed in Figure 4 represents a global positioning system (GPS) receiver 400. The GPS receiver 400 includes a code division multiple access (CDMA) cellular telephone 401, a processor 403, a global positioning system (GPS) front end 405, a correlator 407, and memory 409.

10 In accordance with the embodiment of the disclosed method and apparatus shown in Figure 4, a GPS signal is received by the GPS front end 405 from a GPS satellite (not shown). The output from the GPS front end 405 is an IF spread-spectrum signal. Alternatively, the output from the GPS front end 405 is a baseband spread-spectrum signal. Such GPS front ends 15 are well known in the art. The output from the GPS front end 405 is coupled to the correlator 407.

20 The correlator 407 performs a correlation function to determine the amount of correlation between the output from the GPS front end 405 and a predetermined locally generated signal that is encoded with a predetermined code associated with one of the satellites in the GPS system. It will be understood by those skilled in the art that a strong correlation between the output from the GPS front end 405 and the locally generated signal will indicate that the receiver 400 is receiving a signal from a satellite. The particular satellite will be known by the code with which the locally 25 generated signal is encoded.

20 Furthermore, a strong correlation will only occur if the locally generated signal is "aligned" with the received GPS signal. That is, as shown in Figure 2, the GPS signal comprises a series of code periods 202. Each code period starts at the time the previous code period ends. 30 Likewise, the locally generated signal is encoded with the code associated with one of the satellites in the GPS system, such that the code period of the locally generated signal is equal in length to the code period of the signal transmitted by the satellite associated with that code. When the code periods of the locally generated signal and the signal received from a 35 satellite associated with that code start at the same time with respect to one another, then the two signals are said to be aligned.

In accordance with one embodiment of the disclosed method and apparatus, the CDMA cellular telephone 401 is used to receive information

from a CDMA base station (not shown) which is part of a CDMA wireless cellular telephone network. The CDMA base station transmits information that indicates "CDMA system time", which is related to "GPS time". Therefore, the received information is processed by the processor 403 to 5 determine the timing of the signals transmitted from each GPS satellite. The processor receives information that indicates CDMA system time. However, to accurately determine GPS time, the processor 403 must adjust the CDMA system time received from the base station to remove an offset that is added by the delay in the transmission of the GPS time from the base 10 station to the GPS receiver 400. This adjustment is made by measuring the round trip delay for a signal being transmitted from the GPS receiver to the base station and back. When the GPS receiver 400 is attempting to receive signals from a particular satellite, the correlator 407 receives information from the processor 403. The information indicates to the correlator 407 15 which code the locally generated signal should be encoded with, and what the timing of the locally generated signal should be in order to aligned the locally generated signal with the signal being transmitted from the desired satellite. Since the timing of the signal being transmitted from the desired satellite is known, the output of the correlator can be integrated over several 20 code periods. That is, as long as the processor 403 knows the timing of the signal being transmitted from the satellite, the correlator can coherently integrate the results of the correlation function over several code periods (i.e., up to 20 in the currently implemented GPS system). Furthermore, the times at which bit boundaries 201 (see Figure 2) occur in the information 25 bits of the signal being transmitted by the satellite transition (i.e., change logical state) can also be determined by the processor 403 from the information that is received from the CDMA cellular telephone 401. Therefore, the number of code periods that can be coherently integrated is equal to the number of code periods in one "bit time". A bit time is equal to 30 the length of a bit. Figure 2 shows a bit time that is equal to 20 code periods.

Even more advantageously, if there is a bit pattern which is known 35 to occur in the signal that is transmitted from the satellite, then the bit values can be taken into account in the process of coherently integrating the output from the correlator 407. Thus, coherent integration can occur over more than one bit period. For example, in the GPS system that is in common use in the U.S., an 8-bit preamble in the telemetry word in each

subframe is a good candidate. The value of these 8 bits is known and therefore, may be stored in the memory 413 for access by the processor 403. Similarly, other such patterns could be used.

Figure 5 is a simplified block diagram of another embodiment of the disclosed apparatus. The embodiment disclosed in Figure 5 represents a GPS receiver 500. The GPS receiver 500 includes a CDMA cellular telephone 501, a processor 503, a GPS front end 505, a correlator 507, memory 509, and a time to frequency domain transform processor 511.

The embodiment of the apparatus illustrated in Figure 5 operates essentially as described above in connection with the embodiment of the apparatus disclosed in Figure 4. However, in the embodiment of the apparatus illustrated in Figure 5, the output from the correlator 507 is coupled to a time domain to frequency domain transform processor 511. The output from the correlator 507 is used to form a vector of values. The size of the vector,  $N$ , is equal to the number of code periods used to produce the correlator output. An  $N$  point discrete Fourier transform of the vector is taken using a fast Fourier transform or by software post-processing, as is well known in the art. Any other method for performing a time to frequency domain transformation would be equally useful. The output from the transform processor 511 indicates how strongly the received signal correlates with the locally generated signal. In addition, the particular frequency at which the peak value occurs indicates the offset in frequency of the locally generated signal from the signal that is received from the satellite of interest (i.e., the satellite associated with the code with which the locally generated signal was encoded). The process provides a processing gain nearly equal to  $N$ .

In addition, in the embodiment of the disclosed apparatus shown in Figure 5, the frequency offset that is determined by the frequency at which the peak energy is detected at the output of the transform processor 511 can be used to adjust the oscillator which determines the frequency of the locally generated signal.

In addition, the use of a time to frequency domain transform processor provides a strong indication of correlation even when a bit transition occurs such that some of the code periods correlate during a first logical state, and others correlate during a second logical state. In fact, the use of the time to frequency domain processor provides an indication as to when a bit transition occurred within the  $N$  code periods that are correlated.

That is, the particular pattern of side lobes which form around the peak at the output from the transform processor 511 provide information as to when the bit transition took place. Note that if the bit transition took place after exactly half the code periods were correlated, such that one half of the 5 code periods were correlated with a logical one as the information bit logical state, and the other half of the code periods were correlated with a logical zero as the information bit logical state, then the output from the correlator would essentially be a square wave. Accordingly, the output from the transform processor would have side lobes at odd harmonics, as is 10 characteristic of the frequency domain representation of a square wave with 50% duty cycle.

A transform processor can be useful regardless of whether GPS time is available to provide alignment of the locally generated signal with the desired GPS signal. In fact, the transform processor is particularly useful 15 when GPS time is not available. For example, Figure 6 is a simplified block diagram of a GPS receiver 600 that does not have a CDMA telephone as part of the GPS receiver 600. The GPS receiver 600 includes a processor 603, memory 609, GPS front end 605, correlator 607, and time to frequency domain transform processor 611.

20 Since the GPS receiver 600 does not have a CDMA telephone, the GPS receiver 600 cannot determine GPS time prior to acquiring the signals (i.e., determining the timing of the signals) from the GPS satellites. However, use of the transform processor 611 makes it unnecessary to align 25 the locally generated signal and the received satellite signal. This is because there is an assumption that there will be at least some frequency difference between the locally generated signal and the signal received from a GPS satellite. This difference will cause the locally generated signal to "beat" in and out of alignment with the signal received from the satellite at a rate that is equal to the offset between the two signals. It is this offset frequency that 30 will be detected by the transform processor output. In addition, as noted before, the fact that the bit boundaries are not known does not greatly complicate the detection of the received GPS signal, since the relative location of the bit boundaries can be determined from the output of the transform processor 611. However, due to the presence of bit transitions, 35 the technique may suffer at most a 2-dB degradation compared to the coherent integration that occurs when the timing is known from the CDMA telephone in the other embodiments.

It should be noted that the apparatus illustrated in Figure 5 may determine whether GPS time can be attained from a CDMA base station. If signals from a CDMA base station are not available, then the time to frequency transform processor 511 may be used. However, if the GPS 5 receiver 500 can receive CDMA signals and thus, can determine GPS time, then the output from the correlator may be used directly without the need to perform a time to frequency transform, since the GPS receiver 500 will be able to align the received GPS signals with the locally generated signals using GPS time. Nonetheless, the use of the transform processor 511 allows 10 for correction of frequency uncertainty. That is, when the frequency of the locally generated signal differs from the frequency of the received GPS signal, the correlation over several code periods will degrade for the later code periods. By determining the offset between the frequency of the locally generated signal and the signal received from the GPS satellites, this 15 can be corrected, either by controlling the frequency of the locally generated signal, or by periodic corrections within the correlator.

In another embodiment of a GPS receiver 700, shown in Figure 7, a CDMA pilot channel, sync channel, and paging channel receiver 701 are used to detect CDMA signals which indicate the identity of a base station 20 from which such signals originate. This embodiment also includes a processor 703, a GPS front end 705, a correlator 707, memory 709, and a time to frequency domain transform processor 711.

By knowing the identity of the base station from which such signals received by the GPS receiver 700 were transmitted, the location of a base 25 station can be determined by a look-up table within the GPS receiver 700. The location of the GPS receiver is then known to within a distance equal to the distance from which the GPS receiver 700 can receive signals transmitted by the base station.

It should be noted that CDMA system time can be determined from 30 the signals received from the base station. However, GPS time cannot be determined accurately because of the offset in time that is imposed by the propagation of the signal from the base station to the GPS receiver. It should be noted that this offset is accounted for in the embodiment in which the GPS receiver includes a CDMA telephone by measuring the 35 round trip delay. However, without a transmitter in the GPS receiver 700, the round trip delay between the base station and the CDMA receiver cannot be measured. Nonetheless, the offset in time created by the

propagation of that information from the base station to the GPS receiver is relatively small with respect. Therefore, by receiving CDMA system time and the location of the nearest CDMA base station that can be received, the GPS receiver 700 can check a stored almanac. The information in the 5 almanac can then be used to determine which satellites are likely to be in view (i.e., from which satellites the GPS receiver 700 is likely to be able to receive signals). Determining which satellites are in view can greatly reduce the amount of search time required to acquire a GPS satellite.

Figure 8 is a flowchart which illustrates one embodiment of the 10 disclosed method. A signal is received from a GPS satellite by the GPS receiver 400 (STEP 801). In addition, GPS timing information is received from a source other than the GPS satellite (i.e., a "non-GPS source", such as a CDMA base station (STEP 803). In the case in which the GPS timing information is received from a CDMA base station, the information is 15 received by a CDMA cellular telephone 401. The received GPS signal received from the satellite by the GPS receiver 400 is correlated with a locally generated signal (STEP 805). The timing information that is received from the non-GPS source is used to establish the timing of the correlation between the locally generated signal and the received GPS signal. Once the 20 timing of the GPS signal is known, establishing the timing between the local signal and the received GPS signal is well known in the art. Since the timing of the received GPS signal is known prior to acquiring the GPS satellite, coherent integration of the correlation can be performed over several code periods. That is, the correlation of each code period can be 25 added to the correlation of other code periods to provide a greater correlation value for the collection of code periods over which the coherent integration is performed.

By detecting the correlation of the locally generated signal to the 30 received GPS signal using a coherent integration over several code periods, a determination can be made as to whether there is a correlation between the locally generated signal and the received GPS signal. If so, a determination is made that a signal transmitted from a satellite associated with the particular code used to encode the locally generated signal is present in the received GPS signal (STEP 807).

35 Figure 9 is a flowchart which illustrates another embodiment of the disclosed method. A signal is received from a GPS satellite by the GPS receiver 600 (STEP 901). The received GPS signal is correlated with a locally

generated signal for one code period (STEP 903). This process is repeated for a predetermined number of code periods (STEP 905). The output from the correlation process is either stored or passed directly to a time to frequency domain transform processor, such as a digital signal processor capable of performing a fast Fourier

5 transform. The time to frequency domain transform processor performs a time domain to frequency domain transform, such as a discrete Fourier transform on the output values which are the result of each of the correlation processes (STEP 907). Accordingly, a frequency domain representation of the output from the correlator is generated. This frequency domain output is then analyzed to determine whether a signal transmitted

10 from the satellite associated with the particular code used to encode the locally generated signal is present in the received GPS signal (STEP 909).

15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25

#### **Industrial Application**

This invention is capable of exploitation in industry, and can be made and used, whenever it is desired to increase the sensitivity of a global positioning system receiver. The individual components of the apparatus and method shown herein, taken separate and apart from one another, may be entirely conventional, it being their combination which we claim as our invention.

While we have described various modes of apparatus and method, the true spirit and scope of our invention is not limited thereto, but is limited only by the following claims and their equivalents, and we claim such as our invention.

It will be understood that the term "comprise" and any of its derivatives (eg. comprises, comprising) as used in this specification is to be taken to be inclusive of features to which it refers, and is not meant to exclude the presence of any additional features unless otherwise stated or implied.

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for improving the sensitivity of a Global Positioning System (GPS) receiver, the method including the steps of:
  - 5 a) receiving a GPS signal from a GPS satellite;
  - b) determining whether the receiver has a source for synchronization to GPS time other than the GPS satellite itself; and
  - c) if there is a source for synchronization to GPS time other than the GPS satellite itself, then:
    - 10 1) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;
    - 2) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;
    - 15 3) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and
    - 4) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.
- 20 2. The method of claim 1, wherein the source for synchronization to GPS time includes a signal from a Code Division Multiple Access (CDMA) base station.
- 25 3. The method of claim 2, wherein the signal from the CDMA base station includes information based on the round trip delay from the GPS receiver to the bases station and back to adjust the offset between CDMA system time and GPS time.
- 30 4. The method of claim 1, further including the step of:
  - d) if there is no source for synchronization to GPS time other than the GPS satellite itself, then:

1) performing a time to frequency domain transform on the power in the received GPS signal encoded with the particular code associated with the particular satellite during each of the plurality of code periods; and

2) processing the received GPS signal using information about the particular satellite if the amount of power in any one of the frequencies in the frequency domain is greater than a predetermined threshold.

5. The method of claim 4, wherein the source for synchronization to GPS time includes a signal from a Code Division Multiple Access (CDMA) base station.

10

6. The method of claim 5, wherein the signal from the CDMA base station includes information based on the round trip delay from the GPS receiver to the base station and back to adjust the offset between CDMA system time and GPS time.

15

7. Apparatus for improving the sensitivity of a Global Positioning System (GPS) receiver, the apparatus including:

- a) means for receiving a GPS signal from a GPS satellite;
- b) means for determining whether the receiver has a source for synchronization to GPS time other than the GPS satellite itself;
- 20 c) means, responsive to a determination that there is a source for synchronization to GPS time other than the GPS satellite itself, for:
  - 1) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;
  - 2) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;
  - 25 3) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and
  - 4) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

30

8. The apparatus of claim 7, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed to respond to a signal from a Code Division Multiple Access (CDMA) base station.

5

9. The apparatus of claim 8, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed:

- 10 a) to respond to information, included in the signal from the CDMA base station, based on the round trip delay from the GPS receiver to the bases station and back; and
- b) to thereby adjust the offset between CDMA system time and GPS time.

15

10. The apparatus of claim 7, further including means, responsive to a determination that there is no source for synchronization to GPS time other than the GPS satellite itself, for:

- a) performing a time to frequency domain transform on the power in the received GPS signal encoded with the particular code associated with the particular satellite during each of the plurality of code periods; and
- b) processing the received GPS signal using information about the particular satellite if the amount of power in any one of the frequencies in the frequency domain is greater than a predetermined threshold.

11. The apparatus of claim 10, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed to respond to a signal from a Code Division Multiple Access (CDMA) base station.

12. The apparatus of claim 11, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed:

30

a) to respond to information, included in the signal from the CDMA base station, based on the round trip delay from the GPS receiver to the base station and back; and

b) to thereby adjust the offset between CDMA system time and GPS time.

5 13. A method for improving the sensitivity of a Global Positioning System (GPS) receiver, the method including the steps of:

a) receiving a GPS signal from a GPS satellite;

b) providing the receiver with a source for synchronization to GPS time, other than the GPS satellite itself;

10 c) determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;

d) determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;

15 e) summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and

f) processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

20 14. The method of claim 13, wherein the source for synchronization to GPS time comprises a signal from a Code Division Multiple Access (CDMA) base station.

25 15. The method of claim 14, wherein the signal from the CDMA base station includes information based on the round trip delay from the GPS receiver to the base station and back to adjust the offset between CDMA system time and GPS time.

16. Apparatus for improving the sensitivity of a Global Positioning System (GPS) receiver, the apparatus including:

a) means for receiving a GPS signal from a GPS satellite;

- b) means for providing the receiver with a source for synchronization to GPS time, other than the GPS satellite itself;
- c) means for determining, from the synchronization source, the boundaries of a plurality of code periods in the received GPS signal;
- 5 d) means for determining the amount of power in the received GPS signal by applying a particular code associated with a particular satellite to the received GPS signal during each of the plurality of code periods;
- e) means for summing the power received during each code period to determine a total integrated power over the sum of the plurality of code periods; and
- 10 f) means for processing the received GPS signal using information about the particular satellite if the total integrated power is greater than a threshold value.

15

17. The apparatus of claim 16, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed to respond to a signal from a Code Division Multiple Access (CDMA) base station.

20

18. The apparatus of claim 17, wherein the means for determining whether the receiver has a source for synchronization to GPS time, other than the GPS satellite itself, is constructed:

- a) to respond to information, included in the signal from the CDMA base station, based on the round trip delay from the GPS receiver to the base station and back; and
- b) to thereby adjust the offset between CDMA system time and GPS time.

25

19. A method as claimed in claim 1, substantially as herein described with reference to the accompanying drawings.

20

20. An apparatus as claimed in claim 7, substantially as herein described with reference to the accompanying drawings.

21. A method as claimed in claim 13, substantially as herein described with reference to the accompanying drawings.

22. An apparatus as claimed in claim 16, substantially as herein described with reference to the accompanying drawings.

5 23. A method substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings.

10 24. An apparatus substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings.

15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
698  
699  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
798  
799  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
898  
899  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
988  
989  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
998  
999  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1088  
1089  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1098  
1099  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1188  
1189  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1198  
1199  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1288  
1289  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1298  
1299  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1388  
1389  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1398  
1399  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1488  
1489  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1498  
1499  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1588  
1589  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1598  
1599  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1688  
1689  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1698  
1699  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1788  
1789  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1798  
1799  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1849  
1850<br


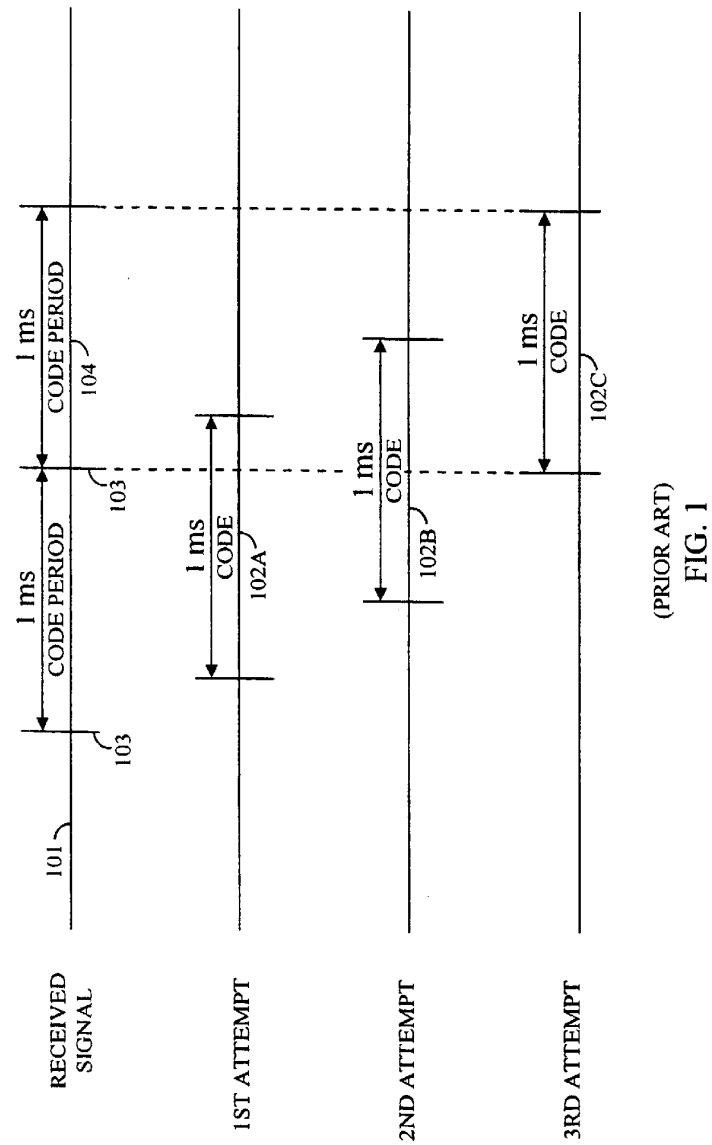


FIG. 1

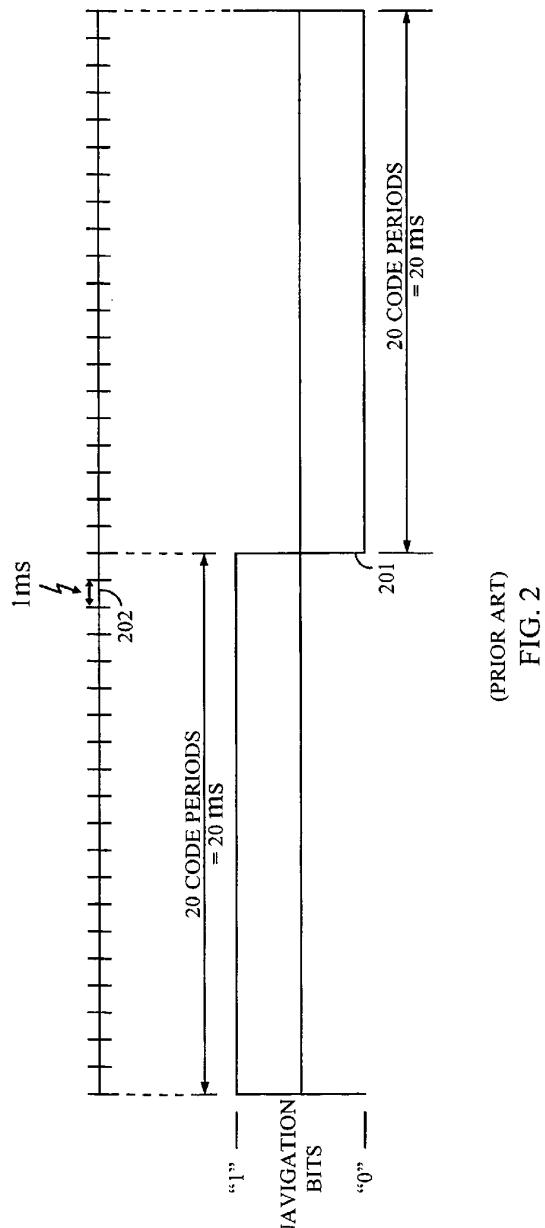

(PRIOR ART)  
FIG. 2

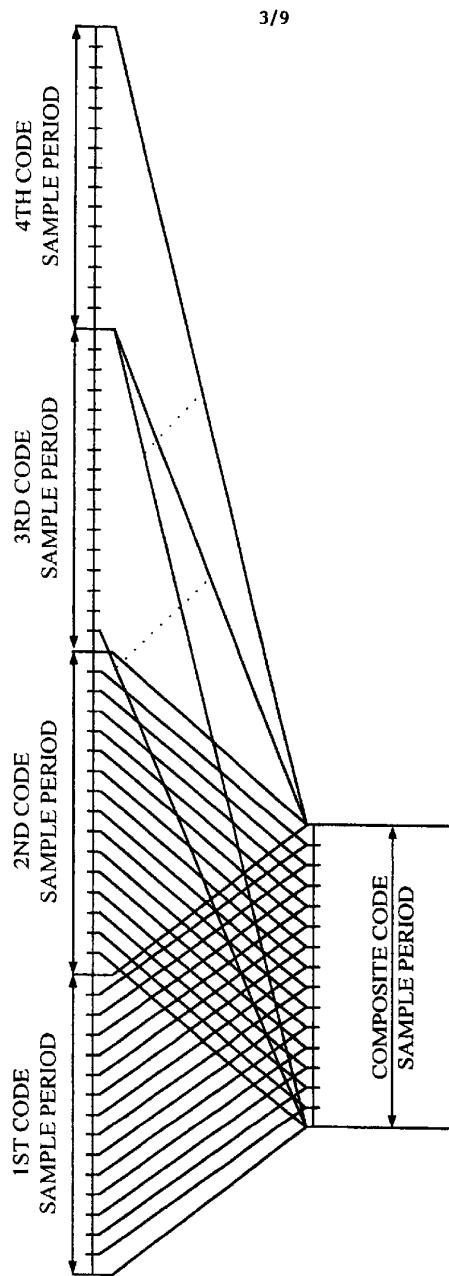


FIG. 3

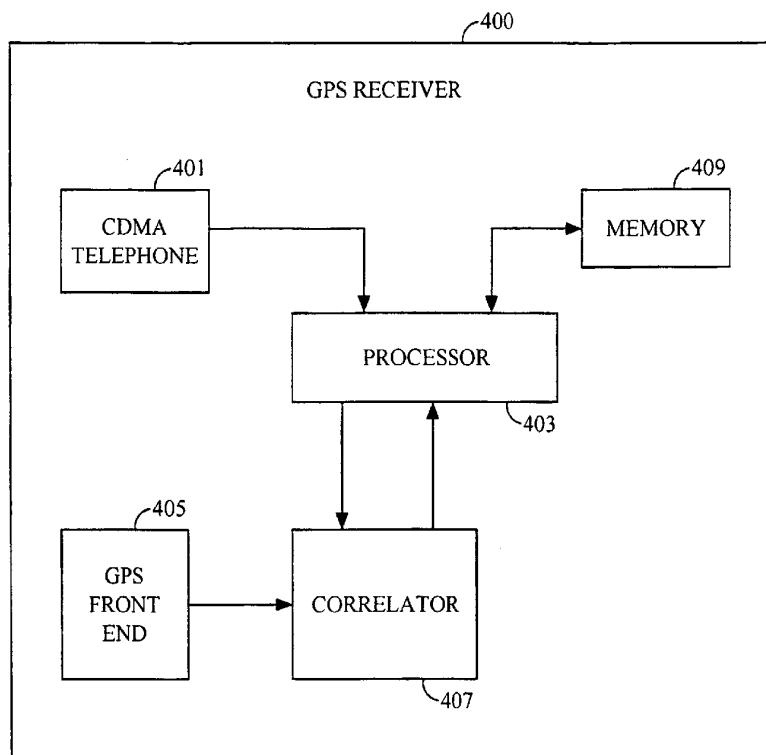


FIG. 4

SUBSTITUTE SHEET (RULE 26)

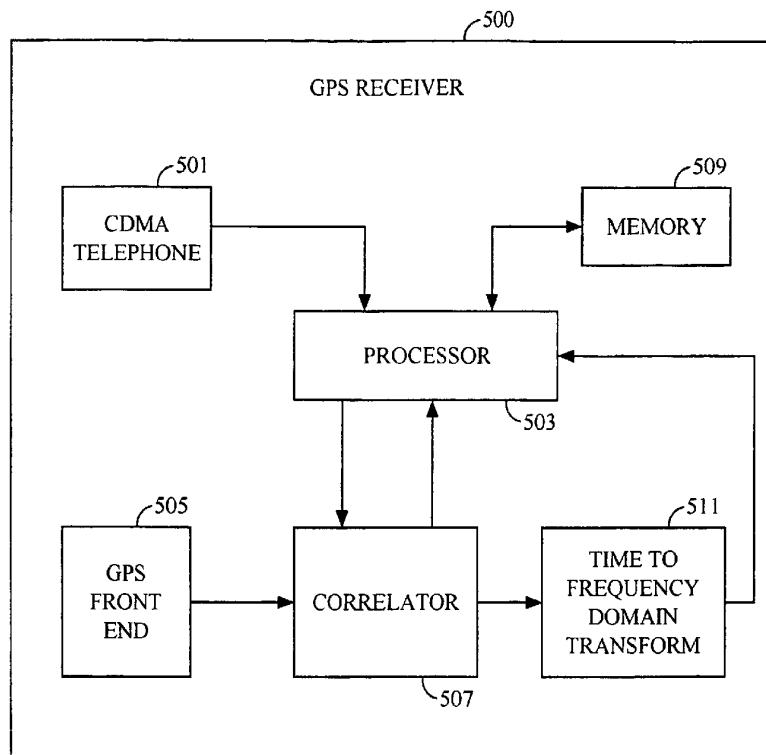


FIG. 5

SUBSTITUTE SHEET (RULE 26)

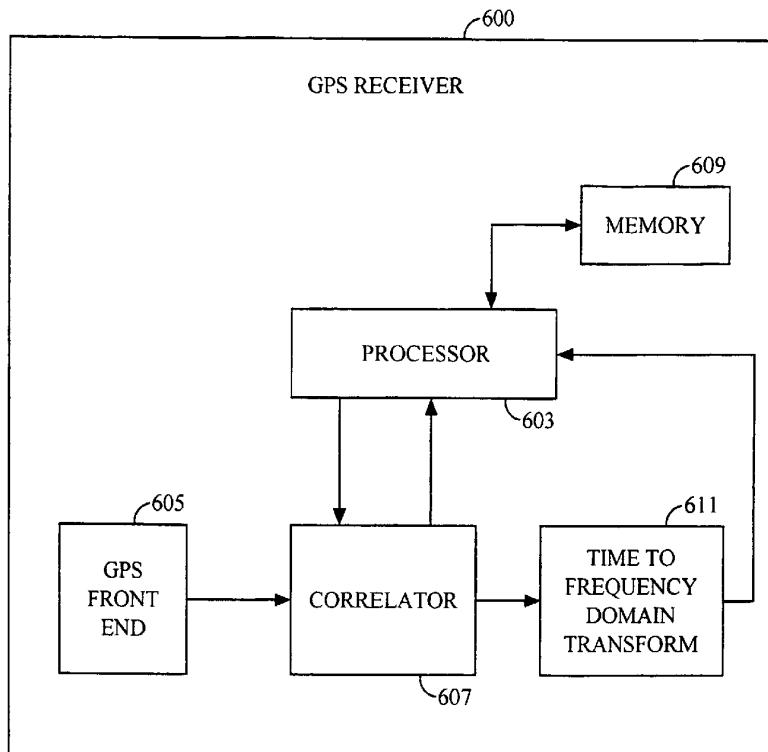


FIG. 6

SUBSTITUTE SHEET (RULE 26)

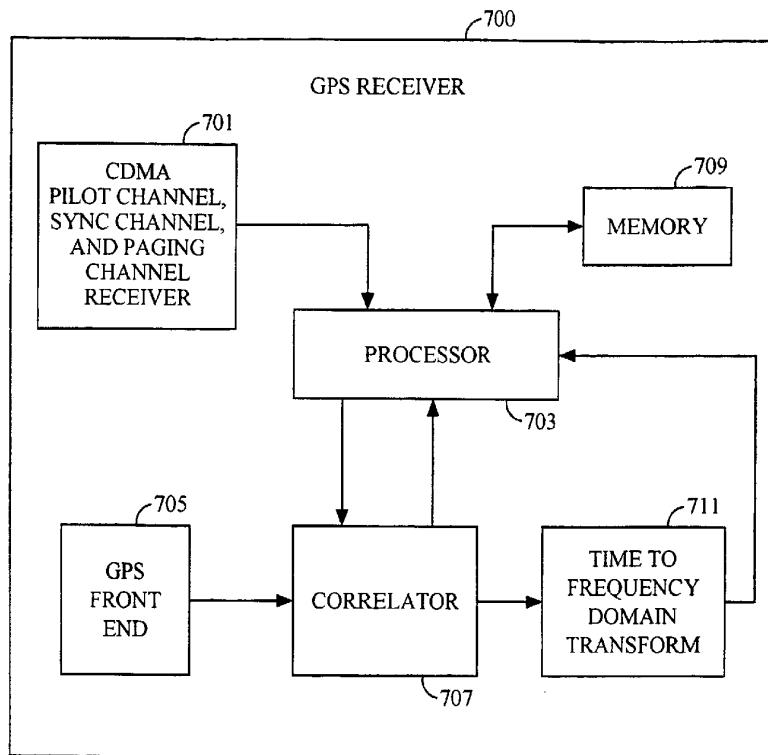


FIG. 7

SUBSTITUTE SHEET (RULE 26)

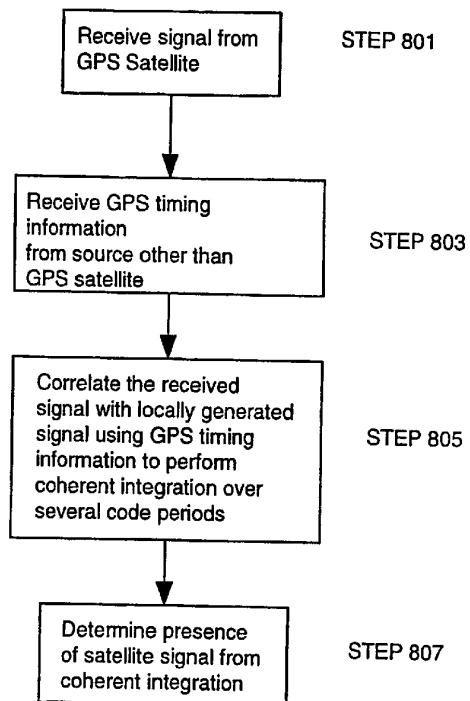


FIGURE 8

9/9

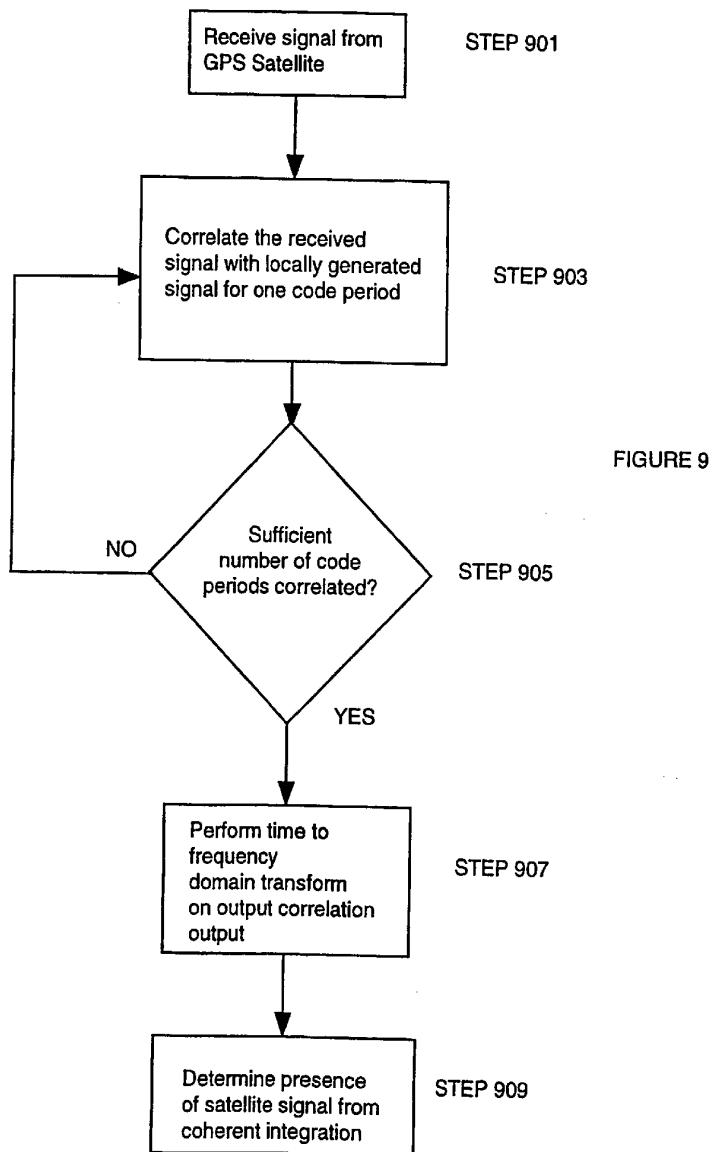


FIGURE 9