




- (51) International Patent Classification:
B60K 26/04 (2006.01) *B60K 31/00* (2006.01)
F02D 11/10 (2006.01)
- (21) International Application Number:
PCT/IB2013/055524
- (22) International Filing Date:
5 July 2013 (05.07.2013)
- (25) Filing Language:
Italian
- (26) Publication Language:
English
- (30) Priority Data:
TO2012A000599 6 July 2012 (06.07.2012) IT
- (71) Applicant: **C.R.F. SOCIETA' CONSORTILE PER AZIONI** [IT/IT]; Strada Torino, 50, Orbassano (IT).
- (72) Inventors: **MARENCO, Silvano**; c/o C.R.F. SOCIETA' CONSORTILE PER AZIONI, Strada Torino, 50, I-10043 Orbassano (IT). **MIGLIETTA, Maurizio**; c/o C.R.F. SOCIETA' CONSORTILE PER AZIONI, Strada Torino, 50, I-10043 Orbassano (IT). **GAIDO, Massimo**; c/o C.R.F. SOCIETA' CONSORTILE PER AZIONI, Strada Torino, 50, I-10043 Orbassano (IT). **MURDOCCO, Vincenzo**; c/o C.R.F. SOCIETA' CONSORTILE PER AZIONI, Strada Torino, 50, I-10043 Orbassano (IT).

- (74) Agents: **BOGGIO, Luigi** et al.; STUDIO TORTA S.p.A., Via Viotti, 9, I-10121 Torino (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SYSTEM FOR ACCELERATING AN AUTOMOBILE COMPRISING AN ACCELERATOR DEVICE WITH ADAPTABLE CHARACTERISTIC, VEHICLE WITH SUCH A DEVICE SYSTEM, ELECTRONIC SIGNAL PROCESSING UNIT AND PROCESSING PROGRAM PRODUCT THEREFORE

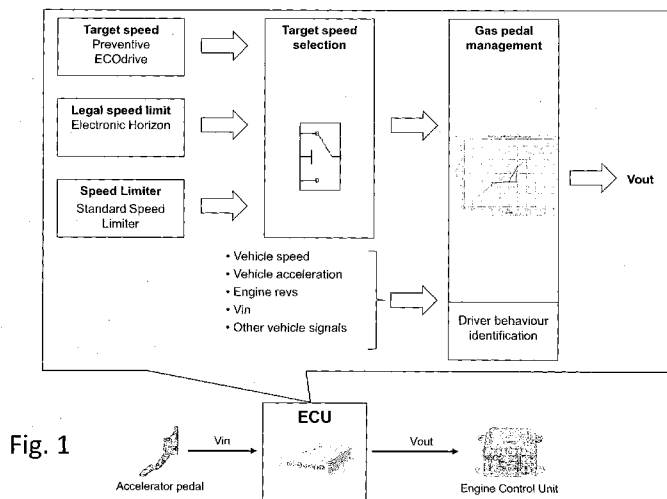

(57) Abstract: An automotive accelerator device comprising an accelerator member movable in response to driver operation, a position sensor associated with the accelerator member to output a position signal indicating an operation degree of the accelerator member, and signal processing means configured to receive the position signal generated by the position sensor and to generate a command for a motor vehicle engine based on the position signal and a characteristic curve of the accelerator device that defines the command for the motor vehicle engine as a function of the position signal; the signal processing means are further configured to: receive signals indicating a current motor vehicle speed and a target motor vehicle speed, and to dynamically adapt the accelerator device characteristic curve based on the current motor vehicle speed with respect to the target motor vehicle speed; wherein dynamically adapting the accelerator device characteristic curve comprises determining lower, intermediate and upper motor vehicle speed ranges based on the target motor vehicle speed and dynamically adapting the accelerator device characteristic curve based on the current motor vehicle speed and the lower, intermediate and upper motor vehicle speed ranges such that

[Continued on next page]



- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

for current motor vehicle speeds within the lower motor vehicle speed range, the command is directly proportional to the position signal, via a first proportionality coefficient, for current motor vehicle speeds within the upper motor vehicle speed range, the command is substantially invariant as the position signal varies, and for current motor vehicle speeds within the intermediate motor vehicle speed range, the command is directly proportional to the position signal, via a second proportionality coefficient lower than the first proportionality coefficient.

SYSTEM FOR ACCELERATING AN AUTOMOBILE COMPRISING AN ACCELERATOR DEVICE
WITH ADAPTABLE CHARACTERISTIC, VEHICLE WITH SUCH A DEVICE SYSTEM, ELECTRONIC
SIGNAL PROCESSING UNIT AND PROCESSING PROGRAM PRODUCT THEREFORE

5

TECHNICAL FIELD OF INVENTION

The present invention relates to automotive gas pedal management aimed at increasing driving safety and reducing fuel consumption and exhaust gas emissions of motor vehicles.

10

STATE OF THE ART

Automotive manufacturers are considering various solutions to increase driving safety and to reduce the fuel consumption and exhaust gas emissions of motor vehicles; of these, a large number are based on controlling vehicle speed, which also includes those based on gas/accelerator pedal management.

Some of these solutions are described in US 6,202,021, US 6,246,951 US 6,304,810, US 6,428,448, US 6, 728,622, US 6,789,009, US 7,493,981, WO 01/47735, FR 2,755,650 and CN 101344990.

In particular, US 6,246,951 describes a system for controlling a vehicular powertrain including an internal combustion engine, in which a signal indicative of the driver-requested engine output and a signal indicative of the current vehicle speed are first generated, after which a reference engine output parameter, based on the signal indicative of the driver-requested engine output and the signal indicative of the current vehicle speed, and a value indicative of the current atmospheric pressure are determined, the reference engine output parameter then being modified on the basis of the value indicative of the current atmospheric pressure and the internal combustion engine controlled on the basis of the modified reference engine output parameter.

In one embodiment, the basic driver-requested engine torque is adjusted on the basis of the barometric pressure to preserve full accelerator pedal travel and prevent the driver having a "dead pedal" sensation when operating the vehicle at

high altitudes and maximum engine torque. The position of the accelerator pedal is thus interpreted as a request for a portion or percentage of the currently available engine torque or power, which varies as a function of the barometric pressure.

SUBJECT AND SUMMARY OF THE INVENTION

The object of the present invention is to provide a relatively simple and inexpensive solution that can be easily adopted in motor vehicles already on the market to increase driving safety and reduce fuel consumption and exhaust gas emissions.

This object is achieved by the present invention in so far as it relates to an automotive accelerator device, as defined in the appended claims.

Broadly speaking, unlike known solutions, and the solution described in US 6,246,951 in particular, where the response of the accelerator pedal is modified in order to cancel engine power "dead zones" that occur as the atmospheric pressure drops, thereby allowing to continue having an increase in engine power as pressure on the pedal increases, in the present invention "dead zones" are instead expressly created where increasing pressure on the accelerator pedal does not correspond to an increase in engine torque or corresponds to a limited increase.

In essence, this is obtained by dynamically modifying the characteristic curve of the accelerator pedal as a function of current vehicle speed with respect to a target vehicle speed (given, for example, by speed limits, an ECO profile, the speed of the vehicle in front, etc.), on the basis of which three vehicle speed zones are identified, for which there are three different corresponding accelerator pedal characteristic curves. These characteristic curves change dynamically, based on the target vehicle speed.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a block diagram of an automotive accelerator device according to one embodiment of the present invention;

5 Figure 2 shows a normal production characteristic curve and a modified characteristic curve of the automotive accelerator device; and

Figure 3 shows a graph indicative of different vehicle speed ranges involved in the management of the automotive
10 accelerator device.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

The present invention will now be described in detail with reference to the attached figures, to enable an expert in the
15 field to embody and practice the present invention. Various modifications to the described embodiments will be immediately obvious to experts in the field, and the generic principles described herein can be applied to other embodiments and applications without departing from the scope of the present
20 invention, as defined in the appended claims. Thus, the present invention is not intended to be limited to the embodiments set forth herein, but is to be accorded the widest scope consistent with the characteristics described and claimed herein.

25 The 'Adaptive Gas Pedal' function consists in intelligently managing the accelerator pedal of a motor vehicle for the purpose of:

- increasing on-board vehicle safety (in terms of respecting speed and safety distance limits) and comfort
30 (stress-free driving);

- reducing fuel consumption and exhaust gas emissions;
- reducing visual and acoustic feedback and the consequent distractions that they can cause.

Some possible applications are:

- 35 - Enhanced Speed Limiter, in order to limit vehicle speed to the legal road limits;

- Distance/Collision Warning, with the aim of warning the driver in event of danger due to a head-on obstruction; and

- Preventive Eco Drive, in order to reduce fuel consumption and exhaust gas emissions on sections of road that are regularly driven along.

The 'Adaptive Gas Pedal' function dynamically changes (in real-time) the characteristic curve of the accelerator pedal of a motor vehicle on the basis of the vehicle's speed with respect to a target speed. This target vehicle speed can be supplied from different sources, such as, for example:

- a telecamera with the function of Traffic Sign Recognition (TSR), which recognises road signs;
- digital maps containing speed limits (eHorizon);
- standard speed limiter, used by the driver to set a desired speed limit value.

Figure 1 shows a self-explaining block diagram of an automotive accelerator device according to the present invention in its application as an Enhanced Speed Limiter.

Three different target speed sources can be seen in the example shown in Figure 1: Preventive ECOdrive, Electronic Horizon (digital maps) and Standard Speed Limiter. Only one of these target speeds is selected in the "Target speed selection" block (in the case where more than one target speed is present and available). Based on the difference between the target speed and the current speed of the vehicle and on other vehicle signals (engine revs, acceleration, etc.), the accelerator device's characteristic curve is dynamically changed in the "Gas pedal management" block.

In particular, the automotive accelerator device comprises an accelerator member operable by the driver, in the form of a pedal in the example shown, although it could also take the form of a member located on the steering wheel for fingertip operation, and two potentiometers associated with the accelerator pedal to each output a voltage proportional to the degree of operation of the accelerator member. The Adaptive Gas Pedal function consists of intercepting these signals via

a dedicated control unit (ECU) and generating two new voltages based on the target speed, the current vehicle speed and other automotive quantities such as engine revs, longitudinal and lateral acceleration, etc.; the new voltage values are then sent to the engine control unit (see Figure 2).

Figure 2 shows an example of how the accelerator device's characteristic curve is modified. The standard characteristic curve (normal production) of an accelerator pedal is shown in dark grey, where the output voltage value (Voltage out) corresponds to a same input voltage value (Voltage in) and is fed to the engine control unit. A possible characteristic curve modified by the ECU is shown instead in light grey. In particular, three pairs of points, indicated by the letters A, B and C, can be noted. The algorithm dynamically calculates these points and their position will affect the response of the accelerator device. It should be noted that in the example shown, three pairs of points are identified, but the accelerator device's new characteristic curve can be segmented with N pairs and therefore assume different shapes.

As shown in Figure 3, the generation of the modified curve of the accelerator device (and therefore the position of points A, B and C) depends on the current vehicle speed (V_{veh}) with respect to the target speed (V_{targ}) and, in particular, the speed zone in which it falls. The speed zones are delimited by a lower threshold speed (Thr_{inf}) and an upper threshold speed (Thr_{sup}). For each speed zone there is a different corresponding accelerator device curve, and therefore a different response.

In particular:

- if $V_{veh} \leq Thr_{inf}$, then the accelerator device has a standard curve and the pedal responds normally (NP - Normal Production), i.e. the characteristic curve is formed by a straight line with a 45° slope and the proportionality coefficient between input voltage (Voltage in) and output voltage (Voltage out) is therefore unitary;
- if $Thr_{inf} < V_{veh} \leq Thr_{sup}$, then the accelerator

device has a characteristic curve with a moderate slope, less than the NP curve, in a certain interval of its travel and therefore the torque requested via the engine control unit will be less than the NP requirement;

- 5 • if $V_{veh} > Thr_{sup}$, then the accelerator device has a flat, almost null curve in a certain interval of its travel and therefore no torque will be requested via the engine control unit (cut-off).

10 According to a different aspect of the present invention, in any speed zone, the Adaptive Gas Pedal function is automatically deactivated if at least one of the following events arises:

- 15 • pressing the accelerator pedal beyond a certain threshold, corresponding to point C (e.g. 90% of accelerator pedal travel). On the x-axis, point B can be more or less close to point C depending on how rapidly it is wished to make the connection between the modified characteristic curve and the NP curve;

- 20 • rapidly pressing the accelerator pedal, i.e. when the position gradient of the accelerator pedal exceeds a certain threshold;

- 25 • when a specially provided driver behaviour identification algorithm recognises a particular driving manoeuvre, for example, an overtaking manoeuvre, exiting a roundabout, aggressive longitudinal/lateral driving, or a sudden manoeuvre (e.g. to avoid an obstacle). In these cases, the function is temporarily disabled until the situation is no longer hazardous and/or the driving style calms down.

30 The lower and upper thresholds are calculated as follows:

$$Thr_{inf} = V_{targ} \cdot \alpha$$

$$Thr_{sup} = V_{targ} \cdot \beta$$

35 where α and β are the coefficients that define the amplitude of the three speed zones and are variable, depending on the application (for example, for the "enhanced speed limiter"

application, α and β could be set to 0.90 and 1.10, respectively, so as to reduce the request for torque if the vehicle's speed is within the range of $V_{targ} \pm 10\%$ and to cancel the request for torque if the vehicle's speed is higher than $V_{targ} + 10\%$.

Obviously, $\alpha < \beta$.

As already mentioned, three pairs of points useful for defining the new characteristic curve of the pedal are calculated for each speed zone. These points refer to voltage values that the ECU generates and sends to the engine control unit and are defined as follows:

- Speed zone 1: standard pedal curve

$$A = (A_x, A_y)$$

$$B = (B_x, B_y)$$

$$C = (C_x, C_y)$$

where:

$A_x = A_y$ = minimum voltage with pedal released (cut-off)

$B_x = B_y$ = voltage corresponding to pedal pressed halfway down

$C_x = C_y$ = voltage corresponding to flooring the pedal

- Speed zone 2: curve slope reduction

$$A = (A_x, A_y)$$

$$B = (B_x, B_y)$$

$$C = (C_x, C_y)$$

where:

$A_x = A_y$ = voltage that would be obtained with the vehicle running regularly at speed V_{targ} (value provided via an experimentally obtained lookup table)

B_x = voltage corresponding to the beginning of the connection between the modified curve and the NP curve

B_y = voltage that would be obtained with the vehicle running regularly at speed V_{targ} (value provided via an experimentally obtained lookup table)

$C_x = C_y$ = voltage corresponding to flooring the pedal (e.g. 90% of travel)

- Speed zone 3: cut-off

$$A = (A_x, A_y)$$

$$B = (B_x, B_y)$$

$$C = (C_x, C_y)$$

where:

5 $A_x = A_y$ = minimum voltage with pedal released (cut-off)

B_x = voltage corresponding to the beginning of the connection between the modified curve and the NP curve

B_y = minimum voltage with pedal released (cut-off)

10 $C_x = C_y$ = voltage corresponding to flooring the pedal (e.g. 90% of travel)

Normally, the accelerator device has the standard characteristic curve, whereas when the vehicle's speed passes from zone 1 to zone 2 or 3, the accelerator device will respond with the corresponding modified curve; the function is deactivated only when the accelerator pedal is pressed beyond 15 a certain threshold (e.g. 90% of travel, point C).

- Once deactivated, the function is re-enabled when the vehicle's speed drops below the target speed.

- In the phase of releasing the accelerator pedal, the 20 generated voltage will follow the input voltage if the latter is less than that corresponding to the curve of the current speed zone.

- The passage from one characteristic curve to another is filtered with a different rate limiter depending on the 25 situation (for example, variable between 1V/s ÷ 25V/s). The rate limiter is greater when passing to a higher speed zone and smaller when passing to a lower speed zone; this is to make the driver more aware of exceeding V_{targ} and to gradually increase the vehicle's speed when it drops below V_{targ} .

30 Modifications and variants can be made to the present invention without departing from the scope defined in the appended claims.

For example, in a different embodiment of the invention that is not shown, instead of being implemented in a dedicated 35 ECU separate from and connected to the vehicle's engine control unit, the Adaptive Gas Pedal function is implemented

directly in the engine control unit, thus omitting the dedicated ECU. In this embodiment of the invention, the two voltages supplied by the potentiometers associated with the accelerator pedal are processed by the engine control unit to generate commands for the vehicle's engine, which must be consistent with the requested engine torque, throttle valve opening, engine power, reference speed, etc.

CLAIMS

1. An automotive accelerator device comprising:

- an accelerator member movable in response to driver operation,

5 • a position sensor associated with the accelerator member to output a position signal indicating an operation degree of the accelerator member, and

10 • signal processing means configured to receive the position signal generated by the position sensor and to generate a command for a motor vehicle engine based on the position signal and a characteristic curve of the accelerator device that defines the command for the motor vehicle engine as a function of the position signal;

15 the accelerator device being characterized in that the signal processing means are further configured to:

- receive a signal indicating a current motor vehicle speed,

- receive a signal indicating a target motor vehicle speed, and

20 • dynamically adapt the accelerator device characteristic curve based on the current motor vehicle speed with respect to the target motor vehicle speed;

 wherein dynamically adapting the accelerator device characteristic curve comprises:

25 • determining lower, intermediate and upper motor vehicle speed ranges based on the target motor vehicle speed; and

30 • dynamically adapting the accelerator device characteristic curve based on the current motor vehicle speed and the lower, intermediate and upper motor vehicle speed ranges such that:

- for current motor vehicle speeds within the lower motor vehicle speed range, the command is directly proportional to the position signal, via a first proportionality coefficient;

35 - for current motor vehicle speeds within the upper motor vehicle speed range, the command is substantially invariant as the position signal varies; and

5 - for current motor vehicle speeds within the intermediate motor vehicle speed range, the command is directly proportional to the position signal, via a second proportionality coefficient lower than the first proportionality coefficient.

10 2. An automotive accelerator device according to claim 1, wherein the lower motor vehicle speed range is defined by current motor vehicle speeds lower than a lower threshold speed, the upper motor vehicle speed range is defined by current vehicle speeds higher than an upper threshold speed, and the intermediate motor vehicle speed range is defined by current vehicle speeds between the lower and upper threshold speeds.

15 3. An automotive accelerator device according to anyone of the preceding claims, wherein the signal processing means are further configured to:

- disable the dynamic adaptation of the accelerator device characteristic curve if the operation degree of the accelerator member exceeds a threshold operation degree.

20 4. An automotive accelerator device according to claim 3, wherein the signal processing means are further configured to:

- re-enable the dynamic adaptation of the accelerator device characteristic curve if the current motor vehicle speed drops below the target motor vehicle speed.

25 5. An automotive accelerator device according to any one of the preceding claims, wherein the signal processing means are further configured to:

- compute the lower and upper threshold speeds based on the target motor vehicle speed.

30 6. An automotive accelerator device according to claim 5, wherein the signal processing means are further configured to:

- compute the lower and upper threshold speeds based on the target motor vehicle speed and respective coefficients that depend on the type of application for which the dynamic adaptation of the accelerator device characteristic curve is intended.

35

7. An automotive accelerator device according to claim 6, wherein, if the dynamic adaptation of the accelerator device characteristic curve is intended to limit the current motor vehicle speed within legal limits provided for by an highway code, the coefficients are such as to result in the command for the motor vehicle engine causing a reduction in an engine torque request if the current motor vehicle speed is within a motor vehicle speed range around the target motor vehicle speed, and substantially a cancellation of the engine torque request if the current motor vehicle speed is higher than said motor vehicle speed range.

8. An automotive accelerator device according to any one of the preceding claims, wherein the signal processing means are further configured to:

• set an upper limit on a rate of change of the command for the motor vehicle engine when the current motor vehicle speed passes to a different speed range.

9. An automotive accelerator device according to any one of the preceding claims, wherein the signal processing means are further configured to:

• set an upper limit on a rate of change of the command for the motor vehicle engine at a higher speed limit when the current motor vehicle speed passes to a higher speed range, and

• set an upper limit on the rate of change of the command for the motor vehicle engine at a lower speed limit when the current motor vehicle speed passes to a lower speed range.

10. An automotive accelerator device according to any one of the preceding claims, wherein the signal processing means are further configured to:

• during a release of the accelerator member, cause the magnitude of the command for the motor vehicle engine to follow that of the position signal if the latter is lower than that which the command would have within the motor vehicle speed range in response to the dynamic adaptation of the accelerator device characteristic curve.

11. An automotive accelerator device according to any one of the preceding claims, wherein the signal processing means are constituted by an automotive signal processing unit separate from and connected to an automotive engine control unit.

12. An automotive accelerator device according to any one of the preceding claims 1 to 10, wherein the signal processing means are implemented in an automotive engine control unit.

13. A vehicle comprising an accelerator device according to any one of the preceding claims.

14. An electronic signal processing unit for an automotive accelerator device, configured to implement the signal processing means as claimed in any one of the preceding claims.

15. Software loadable in an electronic signal processing unit for an automotive accelerator device according to any one of the preceding claims, and designed to cause, when executed, the electronic signal processing unit to implement the signal processing means as claimed in any one of the preceding claims.

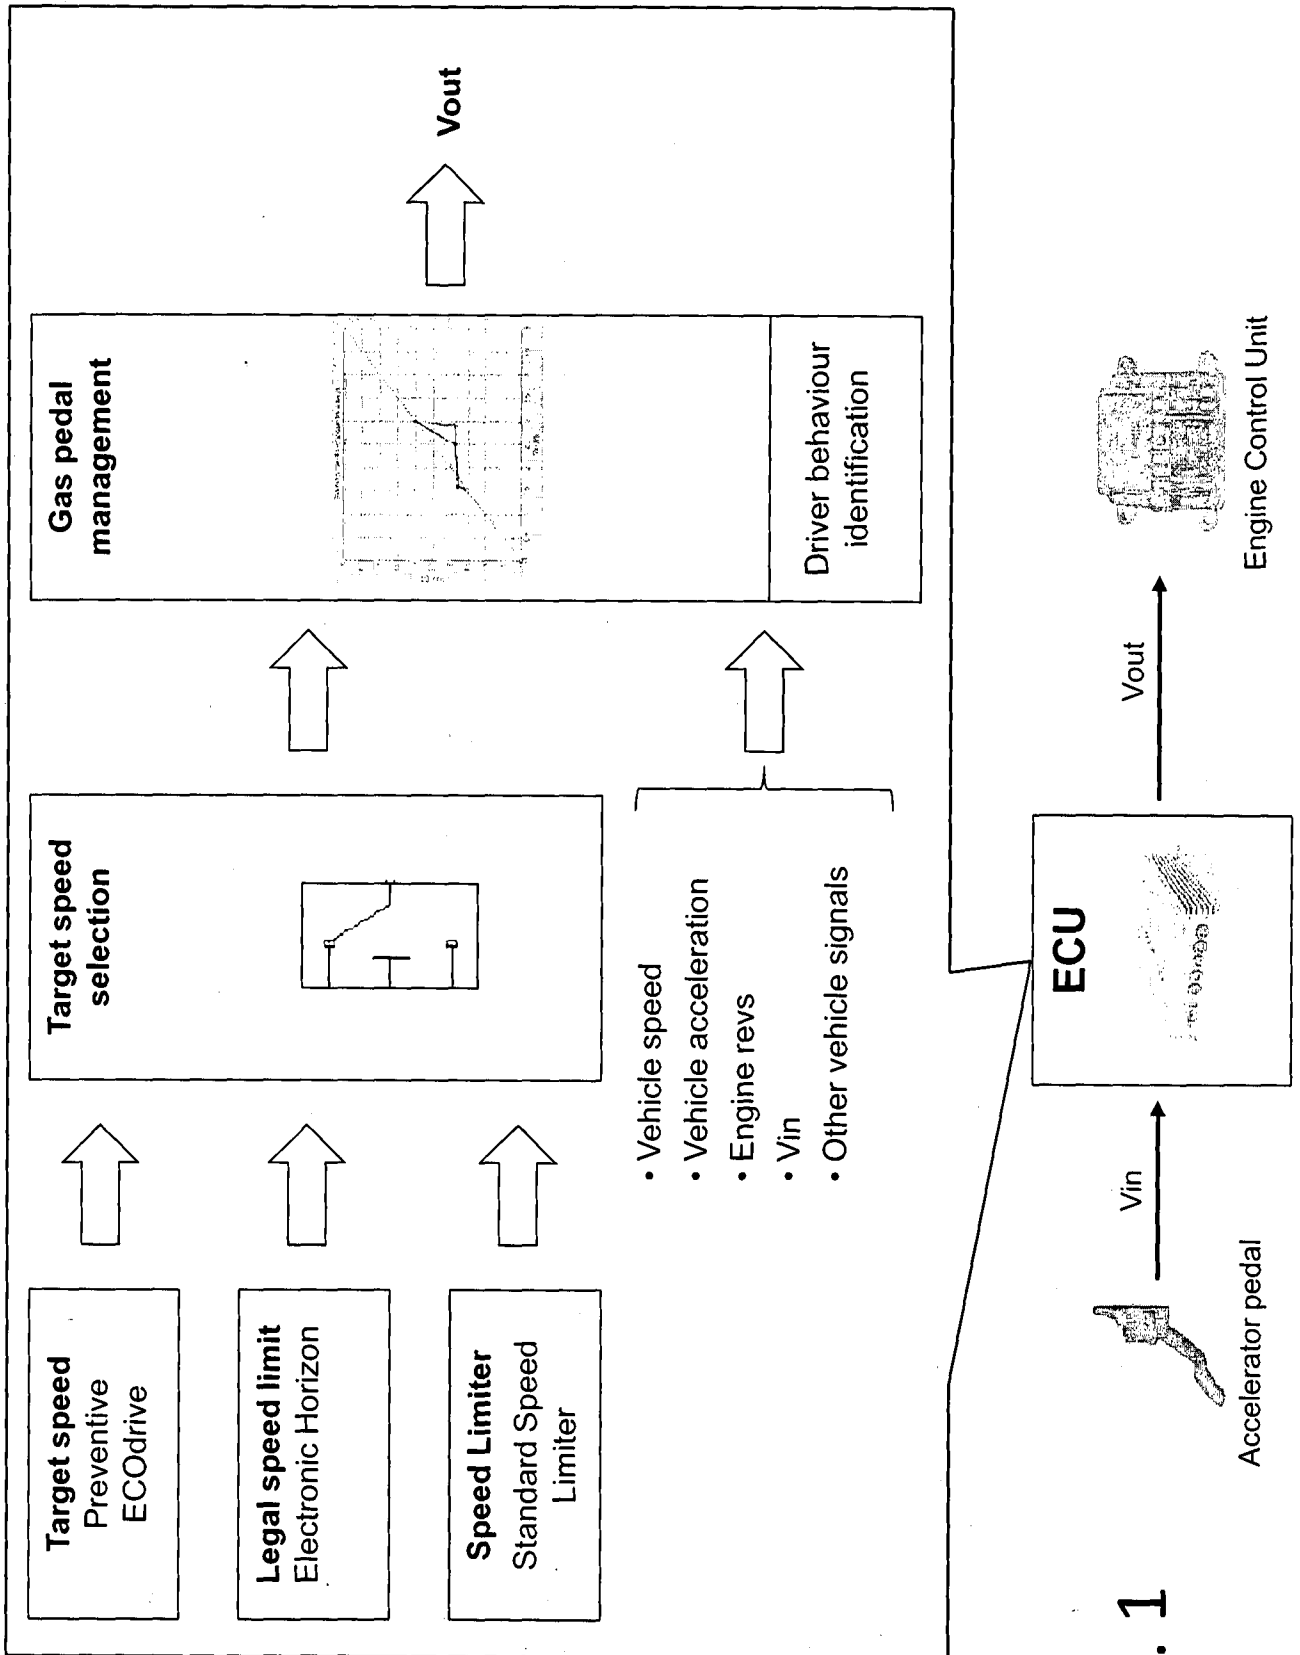


Fig. 1

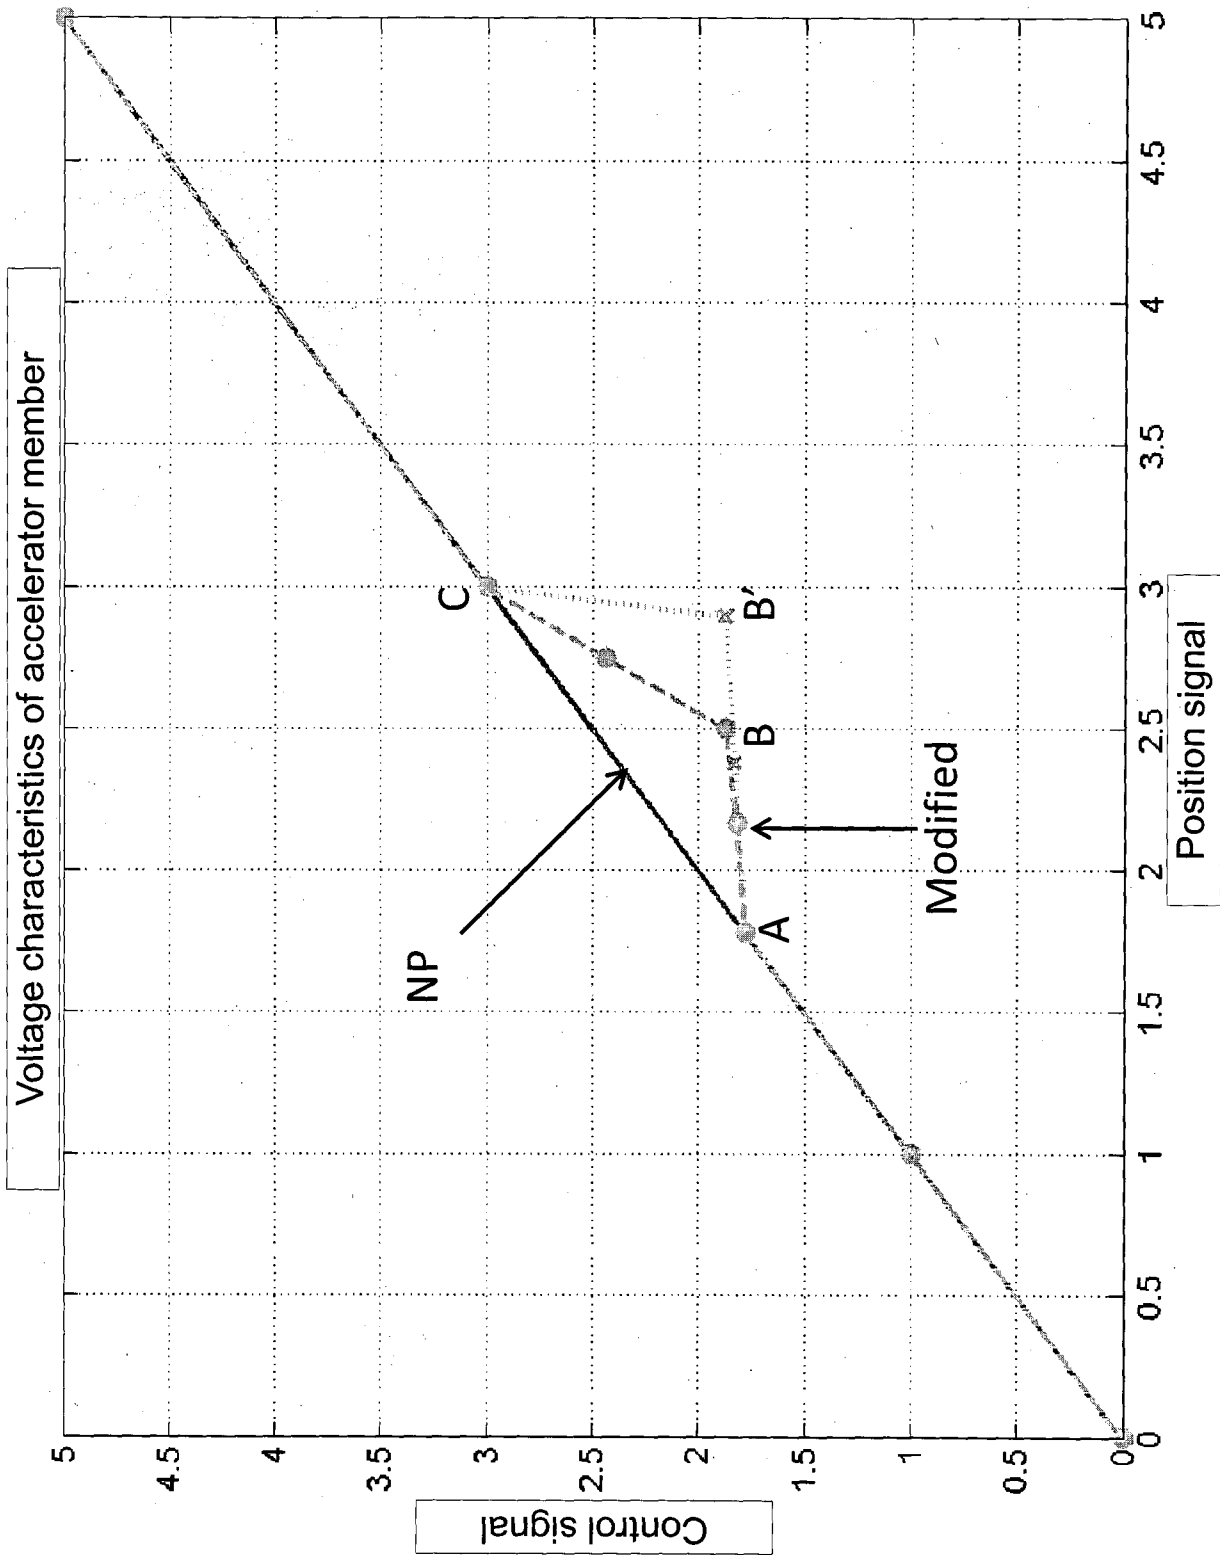


Fig. 2

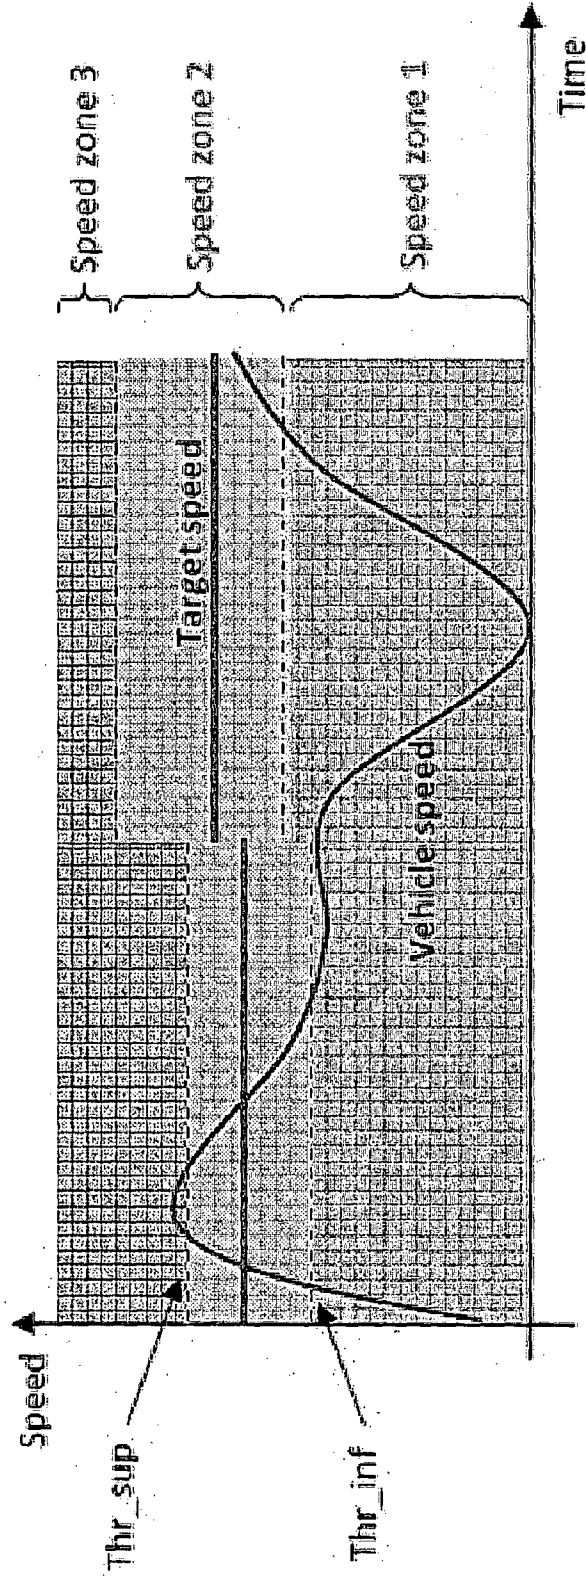


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/055524

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B60K26/04 F02D11/10
 ADD. B60K31/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 B60K F02D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 246 951 B1 (ROBICHAUX JERRY DEAN [US] ET AL) 12 June 2001 (2001-06-12) abstract figures 1,2,4 column 1, line 43 - column 2, line 36 column 2, line 60 - column 3, line 37 column 3, line 66 - column 4, line 34 -----	1-15
A	EP 0 647 773 A2 (GEN MOTORS CORP [US] GEN MOTORS CORP) 12 April 1995 (1995-04-12) abstract column 1, lines 36-38 column 1, line 49 - column 2, line 36 column 5, line 34 - column 7, line 35 figures 1,3-6 ----- -/--	1-15

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 20 November 2013	Date of mailing of the international search report 03/12/2013
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Hauser-Schmieg, M
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/055524

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 2008/300768 A1 (HIJIKATA KENJI [JP]) 4 December 2008 (2008-12-04) abstract figures 3,9-11 paragraphs [0002] - [0010], [0099]</p> <p style="text-align: center;">-----</p>	1-15
A	<p>US 6 078 860 A (KERNS JAMES MICHAEL [US]) 20 June 2000 (2000-06-20) figures 1,4-6 column 4, line 37 - column 5, line 8 column 6, lines 4-17,29-37</p> <p style="text-align: center;">-----</p>	1-15
A	<p>US 6 428 448 B2 (SAITO YOSHIHARU [JP] ET AL) 6 August 2002 (2002-08-06) cited in the application column 1, lines 10-27 column 5, lines 1-15 column 7, line 45 - column 8, line 13 figures 4,8</p> <p style="text-align: center;">-----</p>	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/IB2013/055524

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6246951	B1	12-06-2001	NONE

EP 0647773	A2	12-04-1995	EP 0647773 A2 12-04-1995
			US 5521825 A 28-05-1996

US 2008300768	A1	04-12-2008	NONE

US 6078860	A	20-06-2000	NONE

US 6428448	B2	06-08-2002	DE 10065368 A1 20-09-2001
			JP 2001233082 A 28-08-2001
			US 2001016538 A1 23-08-2001
