



EP 4 089 704 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:  
**09.04.2025 Bulletin 2025/15**

(51) International Patent Classification (IPC):  
**H01H 33/12 (2006.01)** **H01H 31/00 (2006.01)**  
**H01H 33/666 (2006.01)** **H01H 3/42 (2006.01)**

(21) Application number: **21173739.0**

(52) Cooperative Patent Classification (CPC):  
**H01H 33/127; H01H 31/003; H01H 3/42;**  
H01H 33/022; H01H 33/122; H01H 33/666

(22) Date of filing: **13.05.2021**

### (54) A MEDIUM VOLTAGE SWITCHING APPARATUS

MITTELSPANNUNGSSCHALTvorrichtung

APPAREIL DE COMMUTATION MOYENNE TENSION

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

• **Corti, Davide**  
**I-24027 Nembro (BG) (IT)**  
• **Rambaldini, Simone**  
**I-20037 Paderno Dugnano (MI) (IT)**

(43) Date of publication of application:  
**16.11.2022 Bulletin 2022/46**

(74) Representative: **De Bortoli, Eros et al**  
**Zanoli & Giavarini S.p.A.**  
**Via Melchiorre Gioia, 64**  
**20125 Milano (IT)**

(73) Proprietor: **ABB Schweiz AG**  
**5400 Baden (CH)**

(56) References cited:  
**DE-A1- 102010 045 233 DE-A1- 102011 087 630**  
**US-A- 4 268 890**

(72) Inventors:  
• **Invernizzi, Pierluigi**  
**I-24030 Corna Imagna (BG) (IT)**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a switching apparatus for medium voltage electric systems, more particularly to a load-break switch for medium voltage electric systems.

**[0002]** Load-break switches are well known in the state of the art.

**[0003]** These switching apparatuses, which are generally used in secondary distribution electric grids, are capable of providing circuit-breaking functionalities (namely breaking and making a current) under specified circuit conditions (typically nominal conditions for breaking a current and nominal conditions or fault conditions for making a current) as well as providing circuit-disconnecting functionalities (namely grounding a load-side section of an electric circuit).

**[0004]** Most traditional load-break switches of the state of the art have their electric poles immersed in a sulphur hexafluoride ( $SF_6$ ) atmosphere as this insulating gas ensures excellent performances in terms of dielectric insulation between live parts and arc-quenching capabilities when currents are interrupted.

**[0005]** As is known, however,  $SF_6$  is a powerful greenhouse gas and its usage is subject to severe restriction measurements for environmental preservation purposes. For this reason, over the years, there has been made a considerable effort to develop and design load-break switches not employing  $SF_6$  as an insulating gas.

**[0006]** Some load-break switches have been developed, in which electric poles are immersed in pressurized dry air or in an environment-friendly insulation gas, such as mixtures of oxygen, nitrogen, carbon dioxide and/or fluorinated gases. Unfortunately, the experience has shown that these switching apparatuses generally do not show fully satisfactory performances, particularly in terms of arc-quenching capabilities and dielectric insulation.

**[0007]** Additionally, they generally adopt complicated solutions to operate their electric contact arrangements and they still offer poor performances in terms of structural compactness and reliability in operation.

**[0008]** DE 10 2011 087630 A1 discloses a switching apparatus according to the preamble of claim 1. Moreover, US 4 268 890 A discloses a switching apparatus lacking the track member mentioned in claim 1.

**[0009]** The main aim of the present invention is to provide a switching apparatus for MV electric systems that allows solving or mitigating the above-mentioned technical problems.

**[0010]** More particularly, it is an object of the present invention to provide a switching apparatus ensuring high-level performances in terms of dielectric insulation and arc-quenching capabilities during the current breaking process.

**[0011]** Another object of the present invention is to provide a switching apparatus showing high levels of reliability in operation.

**[0012]** Another object of the present invention is to provide a switching apparatus having electric poles with high compactness and structural simplicity.

**[0013]** Another object of the present invention is to provide a switching apparatus that can be easily manufactured at industrial level, at competitive costs with respect to the solutions of the state of the art.

**[0014]** In order to fulfill these aim and objects, the present invention provides a switching apparatus, according to the following claim 1 and the related dependent claims.

**[0015]** In a general definition, the switching apparatus of the invention comprises one or more electric poles.

**[0016]** The switching apparatus comprises, for each electric pole, a first pole terminal, a second pole terminal and a ground terminal. In operation, the first pole terminal can be electrically coupled to a first conductor of an electric line, the second pole terminal can be electrically coupled to a second conductor of said electric line and the ground terminal can be electrically coupled to a grounding conductor.

**[0017]** The switching apparatus comprises, for each electric pole, a fixed contact assembly including a plurality of fixed contact members spaced one from another.

**[0018]** In particular, said fixed contact assembly comprises a first fixed contact member electrically connected to the first pole terminal, a second fixed contact member and a third fixed contact member electrically connected to the second pole terminal, and a fourth fixed contact member electrically connected to the ground terminal.

**[0019]** The switching apparatus comprises, for each electric pole, a movable contact assembly rotatable about a rotation axis. Said movable contact assembly comprises:

- a first main contact member couplable to the first fixed contact member or the fourth fixed contact member, upon a rotational movement of said movable contact assembly about said rotation axis;
- a second main contact member couplable to the second fixed contact member or the third fixed contact member, upon a rotational movement of said movable contact assembly about said rotation axis;
- a vacuum chamber and a pair of arc contact members that are accommodated within said vacuum chamber and that can be mutually coupled or decoupled. Each arc contact member is electrically connected in series to a corresponding main contact member.

**[0020]** According to the invention, when the movable

**[0021]** The movable contact assembly is reversibly movable about said rotation axis in a first end-of-run position, which corresponds to a closed state of said switching apparatus, in a second end-of-run position, which corresponds to an earthed state of said switching apparatus, and in an intermediate position, which corresponds to an open state of said switching apparatus.

**[0022]** According to the invention, when the movable

contact assembly is in said intermediate position, the first main contact member is decoupled from the first and fourth fixed contact members, the second main contact member is decoupled from the second and third fixed contact members, and the arc contact members are coupled one to another.

**[0021]** Conveniently, when the movable contact assembly is in the first end-of-run position, the first main contact member is coupled to the first fixed contact member, the second main contact member is coupled to the second fixed contact member, and the arc contact members are coupled one to another.

**[0022]** Conveniently, when the movable contact assembly is in the second end-of-run position, the first main contact member is coupled to the fourth fixed contact member, the second main contact member is coupled to the third fixed contact member, and the arc contact members are coupled one to another.

**[0023]** According to an aspect of the invention, the above-mentioned arc contact members comprise a fixed arc contact member and a movable arc contact member. The movable arc contact member can be coupled to or decoupled from the fixed arc contact member by moving along a translation axis perpendicular to said rotation axis.

**[0024]** According to an aspect of the invention, the switching apparatus comprises, for each electric pole, at least a track member having a track surface with a cam profile and at least a drive member solidly coupled with the movable arc contact member.

**[0025]** Each drive member is adapted to slide along the track surface of a corresponding track member, upon a rotational movement of said movable contact assembly about said rotation axis.

**[0026]** Each drive member actuates said movable arc contact member along a translation axis perpendicular to said rotation axis between a coupled position to and an uncoupled position from said fixed arc contact member, when sliding along said track surface.

**[0027]** When the movable contact assembly is in said first end-of run position, each drive member is in a first position along said track surface.

**[0028]** When the movable contact assembly is in said intermediate position, the drive member is in said second position along said track surface.

**[0029]** When the movable contact assembly is in said second end-of run position, the drive member is in a third position along said track surface.

**[0030]** Conveniently, said second position is intermediate between said first and third positions.

**[0031]** Each drive member slides along a first track surface portion with a cam profile, when moving between said first and second positions, and it slides along a second track surface portion with a cam profile, when moving between said second and third positions.

**[0032]** Each drive member actuates the movable arc contact member to a coupled position to said fixed arc contact member, when said drive member is in said first

position or in said second position or in said third position along said track surface.

**[0033]** Each drive member actuates the movable arc contact member along said translation axis between a coupled position to and an uncoupled position from said fixed arc contact member, when sliding along said first track surface portion or said second track surface portion.

**[0034]** According to an aspect of the invention, each movable contact assembly comprises a cam mechanism coupled to the movable arc contact member.

**[0035]** Said cam mechanism is adapted to press the movable arc contact member against the fixed arc contact member, when said movable arc contact member is coupled to said fixed arc contact member and said movable contact assembly is in said first end-of-run position or in said second end-of-run position.

**[0036]** Preferably, the cam mechanism comprises:

- a push member movable with respect to the movable arc contact member along said translation axis;
- a spring member arranged along said translation axis and coupled to the push member and to the movable arc contact member.

**[0037]** According to some embodiments of the invention, the cam mechanism comprises a slider member coupled to the push member and couplable with one or more first cam surfaces or one or more second cam surfaces, when the movable contact assembly is in said first end-of-run position or in said second end-of-run position. The slider member exerts, on the push member, an actuation force directed to cause the compression of the spring member and the consequent pressing of the movable arc contact member against the fixed arc contact member, when said slider member is coupled to said one or more first cam surfaces or said one or more second cam surfaces.

**[0038]** According to other embodiments of the invention, the cam mechanism comprises a lever member having a cam profile and couplable to said push member and to one or more first sliding surfaces or one or more second sliding surfaces, when the movable contact assembly is in said first end-of-run position or in said second end-of-run position.

**[0039]** The lever member exerts, on the push member, an actuation force directed to cause the compression of the spring member and the consequent pressing of the movable arc contact member against the fixed arc contact member, when said lever member is coupled to said one or more first sliding surfaces or said one or more second sliding surfaces.

**[0040]** Further characteristics and advantages of the invention will emerge from the description of preferred, but not exclusive embodiments of the switching apparatus, according to the invention, non-limiting examples of which are provided in the attached drawings, wherein:

- Figures 1 is a schematic view of the switching appa-

- ratus, according to the invention;
- Figures 2-4 are schematic views partially showing an embodiment of the switching apparatus, according to the invention;
- Figures 5-7 are schematic views partially showing another embodiment of the switching apparatus, according to the invention;
- Figures 8-16 are schematic views illustrating operation of the switching apparatus of Figs. 5-7.

**[0041]** With reference to the figures, the present invention relates to a switching apparatus 1 for medium voltage electric systems.

**[0042]** For the purpose of the present application, the term "medium voltage" (MV) relates to operating voltages at electric power distribution level, which are higher than 1 kVAC and 1.5 kV DC up to some tens of kV, e.g. up to 72 kV AC and 100 kV DC.

**[0043]** The switching apparatus 1 is particularly adapted to operate as a load-break switch. It is therefore designed for providing circuit-breaking functionalities under specified circuit conditions (normally nominal conditions for making a current and nominal conditions or fault conditions for making a current) as well as circuit-disconnecting functionalities, in particular grounding a load-side section of an electric circuit.

**[0044]** The switching apparatus 1 comprises one or more electric poles 2.

**[0045]** Preferably, the switching apparatus 1 is of the multi-phase (e.g. three-phase) type and it comprises a plurality (e.g. three) of electric poles 2.

**[0046]** Preferably, the switching apparatus 1 comprises an insulating housing 4, which conveniently defines an internal volume where the electric poles 2 are accommodated.

**[0047]** Preferably, the insulating housing 4 has an elongated shape (e.g. substantially cylindrical or parallelepiped-like) developing along a main longitudinal axis A1 (figure 1). The electric poles 2 are arranged side by side along the longitudinal axis A1 at corresponding transversal planes perpendicular the said longitudinal axis.

**[0048]** In general, the insulating housing 4 of the switching apparatus may be realized according to solutions of known type. Therefore, in the following, it will be described only in relation to the aspects of interest of the invention, for the sake of brevity.

**[0049]** Conveniently, the internal volume of the switching apparatus 1 is filled with pressurized dry air or another insulating gas having a low environmental impact, such as mixtures of oxygen, nitrogen, carbon dioxide and/or fluorinated gases.

**[0050]** For each electric pole 2, the switching apparatus 1 comprises a first pole terminal 11, a second pole terminal 12 and a ground terminal 13.

**[0051]** The first pole terminal 11 is adapted to be electrically coupled to a first conductor of an electric line (e.g. a phase conductor electrically connected to an equiva-

lent electric power source), the second pole terminal 12 is adapted to be electrically connected to a second conductor of an electric line (e.g. a phase conductor electrically connected to an equivalent electric load) while the ground pole terminal 13 is adapted to be electrically connected to a grounding conductor.

**[0052]** In general, the terminals 11, 12, 13 of each electric pole 2 of the switching apparatus may be realized according to solutions of known type. Therefore, in the following, they will be described only in relation to the aspects of interest of the invention, for the sake of brevity.

**[0053]** According to the invention, for each electric pole 2, the switching apparatus 1 comprises a fixed contact assembly including a plurality of fixed contact members 5, 6, 7, 8 spaced one from another.

**[0054]** The above-mentioned fixed contact assembly comprises a first fixed contact member 5, a second fixed contact member 6, a third fixed contact member 7 and a fourth fixed contact member 8, which are circumferentially spaced around the longitudinal axis A1.

**[0055]** Each fixed contact member 5, 6, 7, 8 is at least partially made of an electrically conductive material.

**[0056]** As shown in cited figures (figures 2 and 5), each fixed contact member 5, 6, 7, 8 is preferably formed by a shaped piece of conductive material provided with a pair of parallel blades including suitable free contact surfaces with other electric contacts.

**[0057]** In principle, however, each fixed contact member 5, 6, 7, 8 may be realized according to other solutions of known type (e.g. according to a single-blade configuration), which are here not described in details for the sake of brevity.

**[0058]** For each electric pole 2, the first fixed contact member 5 and the second fixed contact member 6 are accommodated in the internal volume of the switching apparatus at opposite sides of the insulating housing 4 with respect to the longitudinal axis A1, in particular at lower and upper walls of the insulating housing 4 (reference is made to a normal installation position of the switching apparatus, as shown in figure 1).

**[0059]** Preferably, the fixed contact members 5, 6 are aligned along a first reference plane perpendicular to said upper and lower walls of the insulating housing 4 and passing through the longitudinal axis A1.

**[0060]** The first fixed contact member 5 is electrically connected to the first pole terminal 11 while the second fixed contact member 6 is electrically connected to the second pole terminal 12. To this aim, the fixed contact members 5, 6 include suitable connecting portions for electrical connection with the corresponding pole terminals 11, 12.

**[0061]** For each electric pole 2, the third fixed contact member 7 and the fourth fixed contact member 8 are accommodated in the internal volume of the switching apparatus at further opposite sides of the insulating housing 4 with respect to the longitudinal axis A1, in particular at opposite lateral walls of the insulating housing (reference is made to a normal installation position of

the switching apparatus, as shown in figure 1).

**[0062]** Preferably, the fixed contact members 7, 8 are aligned along a second reference plane perpendicular to said lateral walls of the insulating housing 4 and passing through the longitudinal axis A1.

**[0063]** The third fixed contact member 7 is electrically connected to the second fixed contact member 6 (and, therefore, to the second pole terminal 12) through a suitable conductive member 67 formed, for example, by a shaped piece of electrically conductive material (as shown in the cited figures) or by an electric cable.

**[0064]** The fourth fixed contact member 8 is electrically connected to the ground terminal 13. To this aim, the fixed contact member 8 includes a suitable connecting portion for electrical connection with said ground terminal.

**[0065]** According to the invention, for each electric pole 2, the switching apparatus 1 comprises a movable contact assembly 10 including a plurality of contact members 15, 16, 17, 18.

**[0066]** The movable contact assembly 10 rotates as a whole about a suitable rotation axis A1 (which is preferably the main longitudinal axis of the switching apparatus) along a given plane of rotation perpendicular to said rotation axis.

**[0067]** The movable contact assembly 10 can rotate according to a first rotation direction R1 or according to a second rotation direction R2, which is opposite to the first rotation direction R1. With reference to an observation plane of figures 8-16, the above-mentioned first rotation direction R1 is oriented counter-clockwise while the above-mentioned second rotation direction R2 is oriented clockwise.

**[0068]** As it will better illustrated in the following, the movable contact assembly 10 moves according to the first rotation direction R1 during an opening manoeuvre or a disconnecting manoeuvre of the switching apparatus and it moves according to the second rotation direction R2 during a closing manoeuvre or a reconnecting manoeuvre of the switching apparatus.

**[0069]** Preferably, the switching apparatus 1 comprises a motion transmission shaft 3 made of electrically insulating material, which can rotate about the rotation axis A1.

**[0070]** Preferably, the switching apparatus 1 comprises an actuation assembly 30 providing suitable actuation forces to actuate the movable components of the switching apparatus.

**[0071]** The motion transmission shaft 3 is conveniently coupled to the movable actuation assembly 30 and to the movable contact assembly 10 of each electric pole.

**[0072]** The motion transmission shaft 3 thus transmits rotational mechanical forces to move the movable contact assembly 10 of each electric pole about the rotation axis A1 during the manoeuvres of the switching apparatus.

**[0073]** Preferably, the actuation assembly 30 comprises an actuator 30A coupled to the transmission shaft 3 through a suitable kinematic chain 30B. The actuator

30A may be, for example, a mechanical actuator, an electric motor or an electromagnetic actuator.

**[0074]** In general, the actuation assembly 30 of the switching apparatus may be realized according to solutions of known type. Therefore, in the following, it will be described only in relation to the aspects of interest of the invention, for the sake of brevity.

**[0075]** Preferably, the movable contact assembly 10 of each electric pole comprises a main support enclosure 9, which is preferably arranged centrally at the rotation axis A1.

**[0076]** Preferably, the support enclosure 9 is conveniently made of an electrically insulating material. Preferably, the support enclosure 9 has an elongated shape (e.g. substantially cylindrical or parallelepiped-like) extending along a corresponding longitudinal axis A2, which is perpendicular to the rotation axis A1.

**[0077]** Preferably, the support enclosure 9 is solidly coupled to the motion transmission shaft 3 in such a way to rotate together with this latter about the rotation axis A1.

**[0078]** More preferably, as shown in the cited figures (figures 2 and 5), the support enclosure 9 is made in one piece with the motion transmission shaft 3.

**[0079]** According to the invention, the movable contact assembly 10 of each electric pole comprises first and second main contact members 15, 16 adapted to rotate about the rotation axis A1.

**[0080]** Preferably, the first and second main contact members 15 protrude from opposite sides of the support enclosure 9, which face the opposite walls of the insulating housing 4 where the first and fourth fixed contact members 5, 8 and the second and third fixed contact members 6, 7 are located, respectively.

**[0081]** Preferably, the main contact members 15, 16 are aligned along the longitudinal axis A2.

**[0082]** The main contact members 15, 16 are solidly coupled to the support enclosure 9 so as to rotate about the rotation axis A1 together with this latter.

**[0083]** Each main contact member 15, 16 of the movable contact assembly 10 is at least partially made of an electrically conductive material.

**[0084]** As shown in cited figures (figures 2 and 5), each main contact member 15, 16 is preferably formed by a shaped piece of conductive material including a pair of parallel blades having suitable free contact surfaces with other electric contacts.

**[0085]** In principle, however, each main contact member 15, 16 may be realized according to other solutions of known type (e.g. according to a single-blade configuration), which are here not described in details for the sake of brevity.

**[0086]** In operation, upon a rotational movement of the movable contact assembly 10 about the rotation axis A1, the first main contact member 15 can be coupled to or decoupled from the first fixed contact member 5 or it can be coupled to or decoupled from the fourth fixed contact member 8 while the second main contact member 16 can

be coupled to or decoupled from the second fixed contact member 6 or it can be coupled to or decoupled from the third fixed contact member 7. According to the invention, the movable contact assembly 10 of each electric pole comprises a vacuum chamber 14 and a pair of arc contact members that are accommodated in said vacuum chamber and that can be coupled to or decoupled from one to another.

**[0087]** According to preferred embodiments of the invention shown in the cited figures, such arc contact members comprise a fixed arc contact member 17 and a movable arc contact member 18.

**[0088]** Preferably, the fixed arc contact member 17 is electrically connected to the first main contact member 15 while the movable arc contact member 18 is electrically connected to the second main contact member 16.

**[0089]** Preferably, the fixed arc contact member 17 is solidly coupled to the support enclosure 9 so as to rotate together with this latter about the rotation axis A1.

**[0090]** The fixed arc contact member 17 is at least partially made of an electrically conductive material. The fixed arc contact member 17 is preferably formed by an elongated piece of conductive material having one end coupled to a first connecting member 170 (e.g. formed by a bolt), which is in turn coupled to the first main contact member 15, and an opposite free end (e.g. T-shaped) including a suitable contact surface with the movable arc contact member 18 (figures 3 and 6).

**[0091]** In principle, however, the fixed arc contact member 17 may be realized according to other solutions of known type (e.g. with a blade configuration), which are here not described in details for the sake of brevity.

**[0092]** The movable arc contact member 18 is coupled to the support enclosure 9 so as to rotate together with this latter about the rotation axis A1. However, the movable arc contact member 18 is movable with respect to the enclosure 9 and the fixed arc contact member 17 along a translation axis (which is preferably the longitudinal axis A2) perpendicular to the rotation axis A1 of the movable contact assembly 10.

**[0093]** In operation, the arc contact member 18 can be coupled to or uncoupled from the arc fixed contact member 17 by moving along the translation axis A2.

**[0094]** Preferably, the movable arc contact member 18 is coupled to the second main contact member 16.

**[0095]** As shown in cited figures, the movable arc contact member 18 is preferably formed by a shaped piece of conductive material having one end coupled to a second connecting member 180 and an opposite free end (e.g. T-shaped) including a suitable contact surface with the fixed arc contact member 17.

**[0096]** The connecting member 180 is coupled to each blade of the second main contact member 16 and a first connecting pin 220 couples the blades of the second main contact member 16. In this way, the movable arc contact member 18 can move together with each blade along the translation axis A2 while rotating together with the movable contact assembly 10 about the rotation axis

A1 (figures 4 and 7).

**[0097]** As shown in cited figures, the connecting member 180 is preferably formed by a shaped piece of conductive material having a portion formed by a bolt coupled to the movable arc contact member 18 and another portion including a pair of parallel blades arranged in parallel to the blades of the second main contact member 16.

**[0098]** In principle, however, the movable arc contact member 18 may be realized according to other solutions of known type (e.g. according to a configuration), which are here not described in details for the sake of brevity.

**[0099]** As mentioned above, the movable contact assembly 10 of each electric pole comprises a vacuum chamber 14, in which a vacuum atmosphere is present.

**[0100]** Conveniently, the arc contact members 17, 18 are accommodated in the vacuum chamber 14, so that their contact surfaces are mutually coupled or decoupled inside said vacuum chamber, therefore being permanently immersed in a vacuum atmosphere.

**[0101]** The vacuum chamber 14 may be realized according to solutions of known type. Therefore, in the following, it will be described only in relation to the aspects of interest of the invention, for the sake of brevity.

**[0102]** In operation, the switching apparatus 1 is capable of switching in three different operating states.

**[0103]** In particular, the switching apparatus 1 can switch in:

- 30 - a closed state, in which each electric pole 2 has the first and second pole terminals 11, 12 electrically connected one to another and electrically disconnected from the ground terminal 13. When the switching apparatus is in a closed state, a line current or a fault current can flow along each electric pole 2 between the corresponding first and second pole terminals 11, 12; or
- 35 - an open state, in which each electric pole 2 has the first and second pole terminals 11, 12 and the ground terminal 13 electrically disconnected one from another. When the switching apparatus is in an open state, no currents can flow along the electric poles 2; or
- 40 - an earthed state, in which each electric pole 2 has the first and second pole terminals 11, 12 electrically disconnected one from another and the second pole terminal 12 and the ground terminal 13 electrically connected one to another. When the switching apparatus is in an earthed state, no line currents can flow along the electric poles 2. However, the second pole terminal 12 of each electric pole (and therefore the second line conductor connected thereto) is put at a ground voltage.

**[0104]** In operation, the switching apparatus 1 is capable of carrying out different types of manoeuvres, each corresponding to a given transition among the above-mentioned operating states.

**[0105]** In particular, the switching apparatus 1 is capable of carrying out:

- an opening manoeuvre when it switches from a closed state to an open state; or
- a closing manoeuvre when it switches from an open state to a closed state; or
- a disconnecting manoeuvre when it switches from an open state to an earthed state; or
- a reconnecting manoeuvre when it switches from an earthed state to an open state.

**[0106]** Obviously, the switching apparatus 1 can switch from a closed state to an earthed state by carrying out an opening manoeuvre and subsequently a disconnecting manoeuvre.

**[0107]** Similarly, the switching apparatus 1 can switch from an earthed state to a closed state by carrying out a reconnecting manoeuvre and subsequently a closing opening manoeuvre.

**[0108]** In order to carry out the above-mentioned manoeuvres of the switching apparatus, the above-mentioned motion transmission shaft 3 suitably drives the movable contact assembly 10 of each electric pole according to the above-mentioned first rotation direction R1 or second rotation direction R2.

**[0109]** In general, upon actuation by the motion transmission shaft 3, the movable contact assembly 10 of each electric pole is reversibly movable between a first end-of-run position  $P_A$ , which corresponds to a closed state of the switching apparatus, and a second end-of-run position  $P_C$ , which corresponds to an earthed state of the switching apparatus.

**[0110]** Conveniently, the movable contact assembly 10 passes through an intermediate position  $P_B$ , which corresponds to an open state of the switching apparatus, when it moves between the first and second end-of-run positions  $P_A$ ,  $P_C$  (figures 8-16).

**[0111]** When the movable contact assembly 10 is in the first end-of-run position  $P_A$ , and the switching apparatus is in a closed state, the first main contact member 15 is coupled to the first fixed contact member 5 and decoupled from the fourth fixed contact member 8, the second main contact member 16 is coupled to the second fixed contact member 6 and decoupled from the third fixed contact member 7, and the movable arc contact member 18 is coupled to the fixed arc contact member 17.

**[0112]** When the movable contact assembly 10 is in the second end-of-run position  $P_C$ , and the switching apparatus is in an earthed state, the first main contact member 15 is decoupled from the first fixed contact member 5 and coupled to the fourth fixed contact member 8, the second main contact member 16 is decoupled from the second fixed contact member 6 and coupled to the third fixed contact member 7, and the movable arc contact member 18 is coupled to the fixed arc contact member 17.

**[0113]** When the movable contact assembly 10 is in the

intermediate position  $P_B$  and the switching apparatus is in an open state, the first main contact member 15 is decoupled from both the first and third fixed contact members 5, 8 and the second main contact member 16 is decoupled from both the second and third fixed contact members 6, 7.

**[0114]** Differently from the known arrangements of the state of the art, however, when the movable contact assembly 10 is in the intermediate position  $P_B$ , the movable arc contact member 18 is coupled to the fixed arc contact member 17.

**[0115]** This solution allows remarkably improving the overall dielectric behaviour of the switching apparatus since it prevents or reduces the arising of partial discharge phenomena in the internal volume of the switching apparatus, which may frequently occur due to parasitic capacitances, when the switching apparatus is an open state.

**[0116]** According to an aspect of the invention, each electric pole 2 comprises at least a track member 20 made of electrically insulating material and having a track surface 21 with a cam profile and at least a drive member 22 solidly coupled with the movable arc contact member 18 and slidably coupled to the track surface 21 of a corresponding track member 20.

**[0117]** Preferably, each electric pole 2 comprises a track member 20 and a corresponding drive member 22 for each blade of the second main contact member 16 (figures 2 and 5).

**[0118]** In the embodiments shown in the cited figures, each electric pole 2 comprises a pair of track members 20 and a corresponding pair of drive members 22, each slidably coupled to the track surface 21 of a corresponding track member 20.

**[0119]** Each track member 20 may be fixed to the insulating housing 4 or be integral part of this latter. In the embodiments shown in the cited figures, each track member 20 extends between the second fixed contact member 6 and the third fixed contact member 7, conveniently with a curved shape.

**[0120]** Preferably, the track surface 21 of each track member 20 is arranged at an outer edge of this latter, which faces the walls of the insulating housing 4 where the second and third fixed contact members 6, 7 are located.

**[0121]** Preferably, each drive member 22 is formed by a roller arranged in such a way to run along the track surface 21 of a corresponding track member 20.

**[0122]** In the embodiments shown in the cited figures, each drive member 22 is slidably coupled to the second main contact member 16.

**[0123]** Preferably, each drive member 22 is arranged externally to a corresponding blade of the second main contact member 16 and it is coupled to the movable arc contact member 18 by means of the above-mentioned connecting pin 220 and connecting member 180.

**[0124]** In the embodiments shown in the cited figures, the permanent contact of each drive member 22 with a

corresponding track surface 21 of the track member 20 is ensured by a coupling force generated by the negative pressure constantly exerted on the movable arc contact member 18 (and directed to move this latter towards the fixed arc contact member 17) as the movable arc contact member 18 is accommodated in the vacuum chamber 14.

**[0125]** According to other embodiments of the invention, however, the permanent contact of the drive member 22 with the track surface 21 may be ensured also in different additional ways, for example by suitably arranging a confined tracking slot in which the drive member 22 can slide. Conveniently, each drive member 22 slides along the track surface 21 of a corresponding track member 20, upon a rotational movement of the movable contact assembly 10 (and consequently of the movable arc contact 18) about the rotation axis A1.

**[0126]** In this way, when the movable contact assembly 10 is in the first end-of-run position P<sub>A</sub>, the drive member 22 is in a first position T<sub>A</sub> along the track surface 21 (figure 8), when the movable contact assembly 10 is in the intermediate position P<sub>B</sub>, the drive member 22 is in a second position T<sub>B</sub> along the track surface 21 (figure 12), and when the movable contact assembly 10 is in the second end-of-run position P<sub>C</sub>, the drive member 22 is in a third position T<sub>C</sub> along the track surface 21 (figure 16).

**[0127]** The second position T<sub>B</sub> is obviously intermediate between the first and third positions T<sub>A</sub>, T<sub>C</sub>. In the embodiments shown in the cited figures, the first position T<sub>A</sub> is conveniently located at the second fixed contact member 6, the third position T<sub>C</sub> is located at the third fixed contact member 7 and the second position T<sub>B</sub> is substantially equally spaced from the first and third positions T<sub>A</sub>, T<sub>C</sub>.

**[0128]** When it slides along a corresponding track surface 21 (following a curved trajectory), each drive member 22 actuates the movable arc contact member 18 along the translation axis A2 between a coupled position to fixed arc contact member 17 and an uncoupled position from said fixed arc contact member, as said track surface has a cam profile.

**[0129]** Preferably, the track surface 21 is shaped so that the movable arc contact member 18 is actuated in a coupled position to the fixed arc contact member 17, when the drive member 22 is in the first position T<sub>A</sub> or in the second position T<sub>B</sub> or in the third position T<sub>C</sub> along the track surface 21.

**[0130]** Preferably, each drive member 22 slides along a first track surface portion 21A with a cam profile when it slides between the first and second positions T<sub>A</sub>, T<sub>B</sub>.

**[0131]** When sliding along the first track surface portion 21A, each drive member 22 actuates the movable arc contact member 18 along the longitudinal axis A2 between a coupled position to and an uncoupled position from the fixed arc contact member 17.

**[0132]** In particular, the first track surface portion 21A is shaped so that the movable arc contact member 18 is decoupled from the fixed arc contact member 17 and it is

subsequently coupled again with the fixed arc contact member 17, when the drive member 22 slides along said first track surface portion.

**[0133]** To this aim, referring to the observation plane of figures 8-16, the first track surface portion 21A conveniently includes first and second surface segments curved towards the fixed arc contact member 17 respectively in proximity of the first and second positions T<sub>A</sub>, T<sub>B</sub> and a second surface segment curved away from the fixed arc contact member 17 between said first and second surface segments.

**[0134]** Preferably, each drive member 22 slides along a second track surface portion 21B with a cam profile when it slides between the second and third positions T<sub>B</sub>, T<sub>C</sub>.

**[0135]** When sliding along the second track surface portion 21B, each drive member 22 actuates the movable arc contact member 18 along the longitudinal axis A2 between a coupled position to and an uncoupled position from the fixed arc contact member 17.

**[0136]** In particular, the second track surface portion 21B is shaped so that the movable arc contact member 18 is decoupled from the fixed arc contact member 17 and it is subsequently coupled again with the fixed arc contact member 17, when the drive member 22 slides along the second track surface portion 21B.

**[0137]** To this aim, referring to the observation plane of figures 8-16, the second track surface portion 21B includes fourth and fifth surface segments curved towards the fixed arc contact member 17 respectively in proximity of the second and third positions T<sub>B</sub>, T<sub>C</sub> and a sixth surface segment curved away from the fixed arc contact member 17 between said fourth and fifth surface segments.

**[0138]** According to an aspect of the invention, the movable contact assembly 10 of each electric pole 2 comprises a cam mechanism 25 coupled to the movable arc contact member 18.

**[0139]** The cam mechanism 25 is conveniently adapted to press the movable arc contact member 18 against the fixed arc contact member 17, when the movable arc contact member 18 is coupled to the fixed arc contact member 17 and the movable contact assembly 10 is in the first end-of-run position P<sub>A</sub> or in the second end-of-run position P<sub>C</sub>.

**[0140]** Preferably, the cam mechanism 25 comprises a push member 26, which is movable with respect to the movable contact member 18 (and to each blade of the of the second main contact member 16) along the translation axis A2 and a spring member 27 coupled to the push member 26 and to the movable arc contact member 18, more particularly to the above-mentioned connecting member 180.

**[0141]** Preferably, the push member 26 is formed by a sleeve arranged coaxially with the connecting member 180 along the longitudinal axis A2.

**[0142]** Preferably, the spring member 27 is preferably formed by a compression spring arranged along the

longitudinal axis A2 and having an end coupled to a coupling surface of the connecting member 180 and the opposite end coupled to a coupling surface of the push member 26.

**[0143]** According to some embodiments of the invention (figures 2-4), the cam mechanism 25 comprises a slider member 28 coupled to the push member 26.

**[0144]** The slider member 28 is couplable with one or more first cam surfaces 31 or with one or more second cam surfaces 32 when the movable contact assembly 10 is in the first end-of-run position  $P_A$  or in the second end-of-run position  $P_c$ , respectively.

**[0145]** When it is coupled to the one or more first cam surfaces 31 or the one or more second cam surfaces 32, the slider member 28 exerts on the push member 26 an actuation force, which is directed to cause the compression of the spring member 27 and the consequent pressing of the movable arc contact member 18 against the fixed arc contact member 17.

**[0146]** Preferably, the slider member 28 is formed by a roller rotatably coupled to a second connecting pin 280, which is, in turn, solidly coupled to the push member 26 (figure 4).

**[0147]** In the embodiment shown in 2-4, the slider member 28 is conveniently positioned in the gap between the parallel blades of the second main contact member 6 and it can move with respect to these latter along the translation axis A2.

**[0148]** Preferably, a first jig member 310 may be fixed to the second fixed contact member 6, conveniently between the parallel blades of this latter. As an alternative, the first jig member 310 may be realized in one piece with the second fixed contact member 6.

**[0149]** The first jig member 310 includes the one or more first cam surfaces 31 (figures 3 and 4). Similarly (figure 3), a second jig member 320 may be fixed to the third fixed contact member 7, conveniently between the parallel blades of this latter. Alternatively, the second jig member 320 may be realized in one piece with the third fixed contact member 7. The second jig member 320 includes the one or more second cam surfaces 32.

**[0150]** According to possible variants, the first and second cam surfaces 31, 32 may be part of jig members solidly coupled to or integrally made with the insulating housing 4.

**[0151]** According to other embodiments of the invention (figures 5-7), the cam mechanism 25 comprises a lever member 29, which comprises one or more first lever surfaces coupled with the push member 26 and one or more second lever surfaces couplable with one or more first sliding surfaces 33 or with one or more second sliding surfaces 34, when the movable contact assembly 10 is in the first end-of-run position  $P_A$  or in the second end-of-run position  $P_c$ .

**[0152]** When it is coupled to the one or more first sliding surfaces 33 or the one or more second sliding surfaces 34, the lever member 29 exerts on the push member 26 an actuation force, which is directed to cause the com-

pression of the spring member 27 and the consequent pressing of the movable arc contact member 18 against the fixed arc contact member 17.

**[0153]** The lever member 29 is preferably solidly coupled to the movable arc contact member 18 (more particularly to the second connecting member 180).

**[0154]** In the embodiments shown in figures 5-7, the lever member 29 is a cam lever rotatably coupled to the first connecting pin 220 and positioned between the parallel blades of the second main contact member 6.

**[0155]** Preferably, a third jig member 331, which supports first rollers 332, is fixed to the second fixed contact member 6 between the parallel blades of this latter. The first rollers 332 include the one or more first sliding surfaces 33 for the lever member 29 (figures 6 and 7).

**[0156]** Similarly (figure 6), a fourth jig member 334, which supports second rollers 342, is fixed to the third fixed contact member 7 between the parallel blades of this latter. The second rollers 334 include the one or more second sliding surfaces 34 for the lever member 29.

**[0157]** According to possible variants, the first and second cam surfaces 31, 32 may be provided by rollers suitably coupled to jig members solidly coupled to or integrally made with the insulating housing 4.

**[0158]** The operation of the switching apparatus 1 for each electric pole 2 is now described in more details with particular reference to the embodiment of the invention of figures 5-7. The switching apparatus 1 operates similarly in the embodiment of figure 2-4.

### Closed state of the switching apparatus

**[0159]** When the switching apparatus is in a closed state, each electric pole 2 is in the operating condition illustrated in figure 8.

**[0160]** In this situation, in each electric pole 2:

- the movable contact assembly 10 is in the first end-of-run position  $P_A$ ;
- the first main contact member 15 is coupled to the first fixed contact member 5;
- the second main contact member 16 is coupled to the second fixed contact member 6;
- the movable arc contact member 18 is coupled to the fixed arc contact member 17;
- the cam mechanism 25 presses the movable arc contact member 18 against the fixed arc contact member 17;
- each guiding member 22 is in the first position  $T_A$  along the track surface 21 of the corresponding track element 20.

**[0161]** When an electric pole 2 is in this operating condition, a line current can flow between the first and second pole terminals 11, 12, the first and second fixed contact members 5, 6, the first and second main contact members 15, 16 and the first and second arc contact members 17, 18, which are all electrically connected in

series.

#### Open state of the switching apparatus

**[0162]** When the switching apparatus is in an open state, each electric pole 2 is in the operating condition illustrated in figure 12.

**[0163]** In this situation, in each electric pole 2:

- the movable contact assembly 10 is in the intermediate position  $P_B$ ;
- the first main contact member 15 is decoupled from the first fixed contact member 5 and the fourth fixed contact member 8;
- the second main contact member 16 is decoupled from the second fixed contact member 6 and the third fixed contact member 7;
- the movable arc contact member 18 is coupled to the fixed arc contact member 17;
- the cam mechanism 25 does not operate;
- each guiding member 22 is in the second position  $T_B$  along the track surface 21 of the corresponding track element 20.

**[0164]** When an electric pole 2 is in this operating condition, no current flows between the first and second pole terminals 11, 12.

#### Earthed state of the switching apparatus

**[0165]** When the switching apparatus is in an earthed state, each electric pole 2 is in the operating condition illustrated in figure 16.

**[0166]** In this situation, in each electric pole 2:

- the movable contact assembly 10 is in the second end-of-run position  $P_C$ ;
- the first main contact member 15 is coupled to the fourth fixed contact member 8;
- the second main contact member 16 is coupled to the third fixed contact member 7;
- the movable arc contact member 18 is coupled to the fixed arc contact member 17;
- the cam mechanism 25 presses the movable arc contact member 18 on the fixed arc contact member 17;
- each guiding member 22 is in the third position  $T_C$  along the track surface 21 of the corresponding track element 20.

**[0167]** When an electric pole 2 is in this operating condition, no line current flows between the first and second pole terminals 11, 12 and the second pole terminal 12 is put at a ground voltage.

#### Opening manoeuvre

**[0168]** The switching apparatus 1 carries out an open-

ing manoeuvre, when it switches from the closed state to the open state.

**[0169]** Initially, each electric pole 2 is therefore in the operating condition of figure 8.

5 **[0170]** During an opening manoeuvre of the switching apparatus, each movable contact assembly 10 moves, according to the first rotation direction  $R_1$ , between the first end-of-run position  $P_A$  and the intermediate position  $P_B$ .

10 **[0171]** The first main contact member 15 moves away from the first fixed contact member 5 while the second main contact member 16 moves away from the second fixed contact member 6.

15 **[0172]** When the second main contact member 16 starts moving according to the first rotation direction  $R_1$ , the lever member 29 progressively decouples from the first sliding surfaces 33 (figures 5-7). Similarly, in the embodiments of figures 2-4, the slider member 28 progressively decouples from the first cam surfaces 31.

20 **[0173]** In both cases, as a consequence, the spring member 27 is progressively released and the movable arc contact member 18 is no more pressed against the fixed contact member 17.

25 **[0174]** In the meanwhile, the guiding member 22 starts moving away from the first position  $T_A$  towards the second position  $T_B$  by sliding along the first track surface portion 21A portion. However, this latter is shaped so that the movable arc contact member 18 remains coupled to the fixed arc contact member 17 until the spring member 27 is released.

30 **[0175]** At this stage of the opening manoeuvre (figure 9), the first and second main contact members 15, 16 are still coupled respectively to the first and second fixed contact members 5, 6 and no arcing phenomena arise between the electric contacts under separation yet.

35 **[0176]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the first segment of this latter) thereby moving towards the second position  $T_B$  (figure 10). The movable arc contact member 18 progressively decouples from the fixed arc contact member 17. The first track surface portion 21A is conveniently shaped so that the movable arc contact member 18 decouples from the fixed arc contact member 17 while the first and second main contact members 15 are still coupled to the first and second fixed contact members 5, 6. In this way, possible arcing phenomena caused by the progressive interruption of the current flowing along the electric pole arise only internally to the vacuum chamber 14. At this stage of the opening manoeuvre, the lever member 29 is decoupled from the first sliding surfaces 33. The cam mechanism 25 does not operate anymore and the spring member 27 is released.

50 **[0177]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the third segment of this latter) thereby mov-

ing towards the second position  $T_B$  (figure 11).

**[0178]** The movable arc contact member 18 is decoupled from the fixed arc contact member 17 and the first and second main contact members 15, 16 are decoupled from the first and second fixed contact members 5, 6. No arcing phenomena are normally present between the electric contacts under separation at this stage of the opening manoeuvre as the interruption of the current flowing along the electric pole 2 is already completed.

**[0179]** At this stage of the opening manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0180]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the second segment of this latter) and it reaches the second position  $T_B$ , when the movable contact assembly 10 reaches the intermediate position  $P_B$  (figure 12).

**[0181]** The movable arc contact member 18 couples again to the fixed arc contact member 17 while the first and second main contact members 15, 16 remain decoupled from the first and second fixed contact members 5, 6.

**[0182]** At this final stage of the opening manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0183]** The switching apparatus 1 is now in an open state.

#### Closing manoeuvre

**[0184]** The switching apparatus 1 carries out a closing manoeuvre, when it switches from the open state to the closed state.

**[0185]** Initially, each electric pole 2 is therefore in the operating condition of figure 12.

**[0186]** During a closing manoeuvre of the switching apparatus, each movable contact assembly 10 moves, according to the second rotation direction R2, between the intermediate position  $P_B$  and the first end-of-run position  $P_A$ .

**[0187]** The first main contact member 15 moves towards the first fixed contact member 5 while the second main contact member 16 moves towards the second fixed contact member 6.

**[0188]** When the second main contact member 16 starts moving according to the second rotation direction R2, the guiding member 22 moves away from the second position  $T_B$  towards the first position  $T_A$  by sliding along the first track surface portion 21A (in particular along the second segment of this latter). The movable arc contact member 18 thus progressively decouples from the fixed arc contact member 17 (figure 11).

**[0189]** At this stage of the closing manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0190]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the third segment of this latter) thereby moving towards the first position  $T_A$  (figure 10).

**[0191]** The movable arc contact member 18 is still decoupled from the fixed arc contact member 17 while the first and second main contact members 15, 16 progressively couple with the first and second fixed contact members 5, 6, respectively.

**[0192]** At this stage of the closing manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is still released.

**[0193]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the third and first segments of this latter) thereby moving towards the first position  $T_A$  (figure 9).

**[0194]** The movable arc contact member 18 progressively couples to the fixed arc contact member 17 while the first and second main contact members 15, 16 are already coupled to the first and second fixed contact members 5, 6.

**[0195]** In the meanwhile, the lever member 29 touches the first sliding surfaces 33 and starts exerting an increasing actuation force on the push member 26 (figures 5-7).

**[0196]** Similarly, in the embodiments of figures 2-4, the slider member 28 touches the first cam surfaces 31 and starts exerting an increasing actuation force on the push member 26.

**[0197]** In both cases, as a consequence, the spring member 27 is progressively compressed.

**[0198]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the first track surface portion 21A (in particular along the first segment of this latter) and it reaches the first position  $T_A$ , when the movable contact assembly 10 reaches the closed position  $P_A$  (figure 8).

**[0199]** The movable arc contact member 18 is coupled to the fixed arc contact member 17 and the first and second main contact members 15, 16 are coupled from the first and second fixed contact members 5, 6.

**[0200]** The lever member 29 is fully coupled to the sliding surfaces 33. Similarly, in the embodiments of figures 2-4, the slider member 28 is fully coupled to the cam surfaces 31.

**[0201]** In both cases, as a consequence, the spring member 27 reaches its maximum compression and the movable arc contact member 18 is pressed against the fixed arc contact member 17.

**[0202]** The switching apparatus 1 is now in a closed state.

#### Disconnecting manoeuvre

**[0203]** The switching apparatus 1 carries out a disconnecting manoeuvre, when it switches from an open state to an earthed state.

**[0204]** Obviously, before carrying out a disconnecting manoeuvre, the switching apparatus has to carry out an opening manoeuvre as described above in order to switch in an open state.

**[0205]** Initially, each electric pole 2 is therefore in the operating condition of figure 12.

**[0206]** During a disconnecting manoeuvre of the switching apparatus, each movable contact assembly 10 moves, according to the first rotation direction R1, between the intermediate position  $P_B$  and the second end-of-run position  $P_C$ .

**[0207]** The first main contact member 15 moves towards the fourth fixed contact member 8 while the second main contact member 16 moves towards the third fixed contact member 7.

**[0208]** When the second main contact member 16 starts moving according to the first rotation direction R1, the guiding member 22 moves away from the second position  $T_B$  towards the third position  $T_C$  by sliding along the second track surface portion 21B (in particular along the fourth segment of this latter). The movable arc contact member 18 progressively decouples from the fixed arc contact member 17 (figure 13).

**[0209]** At this stage of the opening manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0210]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the sixth segment of this latter) thereby moving towards the third position  $T_C$  (figure 14).

**[0211]** The movable arc contact member 18 is decoupled from the fixed arc contact member 17 while the first and second main contact members 15, 16 progressively couple to the fourth and third fixed contact members 8, 7, respectively.

**[0212]** At this stage of the opening manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is still released.

**[0213]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the fifth segment of this latter), thereby moving towards the third position  $T_C$  (figure 15).

**[0214]** The movable arc contact member 18 progressively couples to the fixed arc contact member 17 while the first and second main contact members 15, 16 are already coupled to the fourth and third fixed contact members 8, 7, respectively.

**[0215]** In the meanwhile, the lever member 29 touches the second sliding surfaces 34 and starts exerting an increasing actuation force on the push member 26 (figures 5-7).

**[0216]** Similarly, in the embodiments of figures 2-4, the slider member 28 touches the second cam surfaces 32 and starts exerting an increasing actuation force on the push member 26.

**[0217]** In both cases, as a consequence, the spring

member 27 is progressively compressed.

**[0218]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the fifth segment of this latter) and reaches the third position  $T_C$ , when the movable contact assembly 10 reaches the second end-of-run position  $P_C$  (figure 16).

**[0219]** The movable arc contact member 18 is coupled to the fixed arc contact member 17 and the first and second main contact members 15, 16 are coupled to the fourth and third fixed contact members 8, 7, respectively.

**[0220]** The lever member 29 is fully coupled to the second sliding surfaces 34.

**[0221]** Similarly, in the embodiments of figures 2-4, the slider member 28 is fully coupled to the second cam surfaces 32.

**[0222]** In both cases, as a consequence, the spring member 27 reaches its maximum compression and the movable arc contact member 18 is pressed against the fixed arc contact member 17.

**[0223]** The switching apparatus 1 is now in an earthed state.

25

### Reconnecting manoeuvre

**[0224]** The switching apparatus 1 carries out a reconnecting manoeuvre, when it switches from an earthed state to an open state.

**[0225]** Initially, each electric pole 2 is therefore in the operating condition of figure 16.

**[0226]** During a reconnecting manoeuvre of the switching apparatus, each movable contact assembly 10 moves, according to the second rotation direction R2, between the second end-of-run position  $P_C$  and the intermediate position  $P_B$ .

**[0227]** The first main contact member 15 moves away from the fourth fixed contact member 8 while the second main contact member 16 moves away from the third fixed contact member 7.

**[0228]** When the second main contact member 16 starts moving according to the second rotation direction R2, the lever member 29 progressively decouples from the second sliding surfaces 34 (figures 5-7).

**[0229]** Similarly, in the embodiments of figures 2-4, the slider member 28 progressively decouples from the second cam surfaces 32.

**[0230]** In both cases, as a consequence, the spring member 27 is progressively released and the movable arc contact member 18 is no more pressed against the fixed contact member 17 (figure 15).

**[0231]** In the meanwhile, the guiding member 22 starts moving away from the third position  $T_C$  towards the second position  $T_B$  by sliding along the second track surface portion 21B.

**[0232]** Upon a further movement of the movable contact assembly 10 towards the intermediate position  $P_B$ ,

according to the second rotation direction R2, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the fifth and sixth segments of this latter) thereby moving towards the second position  $T_B$  (figure 14). The movable arc contact member 18 progressively decouples from the fixed arc contact member 17.

**[0233]** At this stage of the opening manoeuvre, the cam lever 29 (or the slider member 28) is decoupled from the second sliding surfaces 34 (or the second cam surfaces 32). The cam mechanism 25 does not operate anymore and the spring member 27 is released.

**[0234]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the fifth segment of this latter) thereby moving towards the second position  $T_B$  (figure 13).

**[0235]** The movable arc contact member 18 is decoupled from the fixed arc contact member 17 and the first and second main contact members 15, 16 are decoupled from the first and second fixed contact members 5, 6.

**[0236]** At this stage of the opening manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0237]** Upon a further movement of the movable contact assembly 10, the guiding member 22 keeps on sliding along the second track surface portion 21B (in particular along the fourth segment of this latter). The guiding member 22 reaches the second position  $T_B$  when the movable contact assembly 10 reaches the intermediate position  $P_B$  (figure 12).

**[0238]** The movable arc contact member 18 couples again to the fixed arc contact member 17 while the first and second main contact members 15, 16 remain decoupled from the first and second fixed contact members 5, 6.

**[0239]** At this final stage of the reconnecting manoeuvre, the cam mechanism 25 does not operate and the spring member 27 is released.

**[0240]** The switching apparatus 1 is now in an open state.

**[0241]** The switching apparatus, according to the invention, provides remarkable advantages with respect to the known apparatuses of the state of the art.

**[0242]** In the switching apparatus of the invention, the electric contacts 17, 18 accommodated within the vacuum chamber 14 of each electric pole are transitionally decoupled during the manoeuvres of the switching apparatus but remain mutually coupled when the switching apparatus is in a closed state, an open state or an earthed state. This allows improving the dielectric behaviour of the internal components of the switching apparatus, in particular when this latter is in an open state.

**[0243]** In the switching apparatus of the invention, the separation between the electric contacts 17, 18 accommodated within the vacuum chamber 14 is driven depending on the position reached by the main contact

members 15, 16 during an opening manoeuvre of the switching apparatus. The breaking process of the current flowing along each electric pole is thus made to occur at level of the electric contacts 17, 18. Possible electric arcs deriving from the interruption of a current flowing along each electric pole therefore form in a vacuum atmosphere only, which allows improving their quenching.

**[0244]** The switching apparatus of the invention has electric poles with a very compact, simple and robust structure with relevant benefits in terms of size optimization.

**[0245]** The switching apparatus, according to the invention, ensures high-level performances in terms of dielectric insulation and arc-quenching capabilities during the current breaking process and, at the same time, it is characterised by high levels of reliability for the intended applications.

**[0246]** The switching apparatus, according to the invention, is of relatively easy and cheap industrial production and installation on the field.

## Claims

**25** 1. A switching apparatus (1) for medium voltage electric systems, said switching apparatus comprising one or more electric poles (2),

wherein, for each electric pole, said switching apparatus comprises:

- a first pole terminal (11), a second pole terminal (12) and a ground terminal (13), wherein said first pole terminal (11) is electrically couplable with a first conductor of an electric line, said second pole terminal (12) is electrically couplable to a second conductor of said electric line and said ground terminal (13) is electrically couplable to a grounding conductor;

- a fixed contact assembly including a plurality of fixed contact members spaced one from another,

- wherein said fixed contact assembly comprises a first fixed contact member (5) electrically connected to said first pole terminal (11), a second fixed contact member (6) electrically connected to said second pole terminal (12), a third fixed contact member (7), and a fourth fixed contact member (8) electrically connected to said ground terminal (13);

- a movable contact assembly (10) rotatable about a rotation axis (A1) and comprising:

- a first main contact member (15) couplable to said first fixed contact member (5) or said fourth fixed contact

member (8), upon a rotational movement of said movable contact assembly about said rotation axis (A1);  
 - a second main contact member (16) 5  
 couplable to said second fixed contact member (6) or said third fixed contact member (7), upon a rotational movement of said movable contact assembly about said rotation axis (A1);  
 - a vacuum chamber (14) and a pair of 10  
 arc contact members (17, 18) that are accommodated within said vacuum chamber and that can be coupled or decoupled one to or from another, each arc contact member being electrically connected in series to a corresponding main contact member (15, 16),  
 wherein said arc contact members (17, 18) comprise a fixed arc contact member (17) and a movable arc contact member (18),  
 15  
 20

wherein said movable arc contact member (18) can be coupled to or decoupled from said fixed arc contact member (17) by moving along a 25  
 translation axis (A2) perpendicular to said rotation axis (A1);  
 wherein said movable contact assembly is reversibly movable about said rotation axis (A1) in a first end-of-run position (P<sub>A</sub>), which corresponds to a closed state of said switching apparatus, in a second end-of-run position (P<sub>C</sub>), which corresponds to a earthed state of said switching apparatus, and in an intermediate position (P<sub>B</sub>), which corresponds to an open state 30  
 35  
 40  
 45  
 50  
 55  
 of said switching apparatus, at which said first and second pole terminals (11, 12) and said ground terminal (13) are electrically disconnected one from another; wherein when said movable contact assembly (10) is in said first end-of-run position (P<sub>A</sub>), said arc contact members (17, 18) are coupled one to another, wherein said switching apparatus comprises, for each electric pole, at least a track member (20), which is made of electrically insulating material and has a track surface (21) with a cam profile, and at least a drive member (22) solidly coupled with said movable arc contact member (18), wherein each drive member (22) is adapted to slide along the track surface (21) of a corresponding track member (20), upon a rotational movement of said movable contact assembly (10) about said rotation axis (A1), wherein said drive member (22) actuates said movable arc contact member (18) along said translation axis (A2) between a coupled position to and an uncoupled position from said fixed arc contact member (17), when sliding along said

track surface (21),  
 wherein when said movable contact assembly (10) is in said first end-of-run position (P<sub>A</sub>), said drive member (22) is in a first position (T<sub>A</sub>) along said track surface (21),  
 wherein, when said movable contact assembly (10) is in said intermediate position (P<sub>B</sub>), said drive member (22) is in a second position (T<sub>B</sub>) along said track surface (21);  
 wherein when said movable contact assembly (10) is in said second end-of-run position (P<sub>C</sub>), said drive member (22) is in a third position (T<sub>C</sub>) along said track surface (21);  
 wherein said second position (T<sub>B</sub>) is intermediate between said first and third positions, wherein said drive member (22) slides along a first track surface portion (21A) with a cam profile, when moving between said first and second positions (T<sub>A</sub>, T<sub>B</sub>), and slides along a second track surface portion (21B) with a cam profile, when moving between said second and third positions (T<sub>B</sub>, T<sub>C</sub>),  
 wherein, when said movable contact assembly (10) is in said second end-of-run position (P<sub>C</sub>), said first main contact member (15) is coupled to said fourth fixed contact member (8), said second main contact member (16) is coupled to said third fixed contact member (7), and said arc contact members (17, 18) are coupled one to another,  
 wherein, when said movable contact assembly (10) is in said intermediate position (P<sub>B</sub>), said first main contact member (15) is decoupled from said first and fourth fixed contact members (5, 8) and  
 said second main contact member (16) is decoupled from said second and third fixed contact member (7) **characterized in that**  
 the third fixed contact member (7) is electrically connected to said second pole terminal, wherein, when said movable contact assembly is in said first end-of-run position (P<sub>A</sub>), said first main contact member (15) is coupled to said first fixed contact member (5) and said second main contact member (16) is coupled to said second fixed contact member (6), wherein, when said movable contact assembly is in said intermediate position (P<sub>B</sub>), said arc contact members (17, 18) are coupled one to another,  
 wherein said track surface (21) is shaped so that said movable arc contact member (18) is actuated to a coupled position to said fixed arc contact member (17), when said drive member (22) is in any of said first, second and third positions (T<sub>A</sub>, T<sub>B</sub>, T<sub>C</sub>) along said track surface (21), wherein said track surface (21) is shaped so that said drive member (22) actuates said movable

arc contact member (18) along said translation axis (A2) between a coupled position to and an uncoupled position from said fixed arc contact member (17), when sliding along said first track surface portion (21A) or said second track surface portion (21B),  
 5 wherein said movable arc contact member (18) is decoupled from said fixed arc contact member (17) and is subsequently coupled again with said fixed arc contact member (17), when said drive member (22) slides along said first track surface portion (21A),  
 10 wherein said movable arc contact member (18) is decoupled from said fixed arc contact member (17) and is subsequently coupled again with said fixed arc contact member (17), when said drive member (22) slides along said second track surface portion (21B).

15

2. Switching apparatus, according to claim 1, **characterised in that** said movable contact assembly (10) comprises a cam mechanism (25) coupled to said movable arc contact member (18),  
 20 wherein said cam mechanism is adapted to press said movable arc contact member (18) against said fixed arc contact member (17), when said movable arc contact member (18) is coupled to said fixed arc contact member (17) and said movable contact assembly (10) is in said first end-of-run position ( $P_A$ ) or in said second end-of-run position ( $P_B$ ).  
 30

3. Switching apparatus, according to claim 2, **characterised in that** said cam mechanism (25) comprises:  
 35 - a push member (26) movable with respect to said movable arc contact member (18) along said translation axis (A2);  
 - a spring member (27) arranged along said translation axis (A2) and coupled to said push member (26) and to said movable arc contact member (18).  
 40

4. Switching apparatus, according to claim 3, **characterised in that** said cam mechanism (25) comprises a slider member (28) coupled to said push member (26) and couplable with one or more first cam surfaces (31) or one or more second cam surfaces (32), when said movable contact assembly (10) is in said first end-of-run position ( $P_A$ ) or in said second end-of-run position ( $P_C$ ),  
 45 wherein said slider member (28) exerts, on said push member (26), an actuation force directed to cause the compression of said spring member (27) and the consequent pressing of said movable arc contact member (18) against said fixed arc contact member (17), when coupled to said one or more first cam surfaces (31) or said one or more second cam surfaces (32).  
 50

5. Switching apparatus, according to claim 3, **characterised in that** said cam mechanism (25) comprises a lever member (29) having a cam profile and couplable to said push member (26) and one or more first sliding surfaces (33) or one or more second sliding surfaces (34), when said movable contact assembly (10) is in said first end-of-run position ( $P_A$ ) or in said second end-of-run position ( $P_C$ ),  
 55 wherein said lever member (29) exerts, on said push member (26), an actuation force directed to cause the compression of said spring member (27) and the consequent pressing of said movable arc contact member (18) against said fixed arc contact member (17), when coupled to said one or more first sliding surfaces (33) or said one or more second sliding surfaces (34).

6. Switching apparatus, according to one of the previous claims, **characterised in that** it is a load-break switch for medium voltage electric systems.

### Patentansprüche

25 1. Schalteinrichtung (1) für elektrische Mittelspannungssysteme, wobei die Schalteinrichtung einen oder mehrere elektrische Pole (2) umfasst,  
 wobei die Schalteinrichtung für jeden elektrischen Pol Folgendes umfasst:  
 - einen ersten Polanschluss (11), einen zweiten Polanschluss (12) und einen Masseanschluss (13), wobei der erste Polanschluss (11) mit einem ersten Leiter einer elektrischen Leitung elektrisch koppelbar ist, der zweite Polanschluss (12) mit einem zweiten Leiter der elektrischen Leitung elektrisch koppelbar ist und der Masseanschluss (13) mit einem Erdungsleiter elektrisch koppelbar ist;  
 - eine feste Kontaktanordnung, die mehrere feste Kontaktelemente umfasst, die voneinander beabstandet sind,  
 wobei die feste Kontaktanordnung ein erstes festes Kontaktelement (5), das elektrisch mit dem ersten Polanschluss (11) verbunden ist, ein zweites festes Kontaktelement (6), das elektrisch mit dem zweiten Polanschluss (12) verbunden ist, ein drittes festes Kontaktelement (7) und ein viertes festes Kontaktelement (8), das elektrisch mit dem Masseanschluss (13) verbunden ist, umfasst;  
 - eine bewegliche Kontaktanordnung (10), die um eine Drehachse (A1) drehbar ist und Folgendes umfasst:

- ein erstes Hauptkontaktelement (15), das bei einer Drehbewegung der beweglichen Kontaktanordnung um die Drehachse (A1) mit dem ersten festen Kontaktelement (5) oder dem vierten festen Kontaktelement (8) 5 koppelbar ist;  
 - ein zweites Hauptkontaktelement (16), das bei einer Drehbewegung der beweglichen Kontaktanordnung um die Drehachse (A1) mit dem zweiten festen Kontaktelement (6) oder dem dritten festen Kontaktelement (7) koppelbar ist; 10  
 - eine Vakuumkammer (14) und ein Paar Lichtbogenkontaktelemente (17, 18), die innerhalb der Vakuumkammer untergebracht sind und die miteinander gekoppelt oder voneinander entkoppelt werden können, wobei jedes Lichtbogenkontaktelement in Reihe mit einem entsprechenden Hauptkontaktelement (15, 16) elektrisch 15 verbunden ist, 20

wobei die Lichtbogenkontaktelemente (17, 18) ein festes Lichtbogenkontaktelement (17) und ein bewegliches Lichtbogenkontaktelement (18) umfassen, 25  
 wobei das bewegliche Lichtbogenkontaktelement (18) durch Bewegen entlang einer Translationsachse (A2) senkrecht zu der Drehachse (A1) mit dem festen Lichtbogenkontaktelement (17) gekoppelt oder von diesem entkoppelt werden kann; 30  
 wobei die bewegliche Kontaktanordnung reversibel um die Drehachse (A1) in eine erste Endlagenposition ( $P_A$ ), die einem geschlossenen Zustand der Schalteinrichtung entspricht, in eine zweite Endlagenposition ( $P_C$ ), die einem geerdeten Zustand der Schalteinrichtung entspricht, und in eine Zwischenposition ( $P_B$ ), die einem offenen Zustand der Schalteinrichtung entspricht, an der der erste und der zweite Polanschluss (11, 12) und der Masseanschluss (13) elektrisch voneinander getrennt sind, beweglich ist; wobei, wenn sich die bewegliche Kontaktanordnung (10) in der ersten Endlagenposition ( $P_A$ ) befindet, die Lichtbogenkontaktelemente (17, 18) miteinander gekoppelt sind, 35  
 wobei die Schalteinrichtung für jeden elektrischen Pol mindestens ein Schienenelement (20), das aus elektrisch isolierendem Material besteht und eine Schienenoberfläche (21) mit einem Nockenprofil aufweist, und mindestens ein Antriebselement (22), das fest mit dem beweglichen Lichtbogenkontaktelement (18) gekoppelt ist, umfasst, 40  
 wobei jedes Antriebselement (22) dazu ausgelegt ist, bei einer Drehbewegung der beweglichen Kontaktanordnung (10) um die Drehachse 45  
 (A1) entlang der Schienenoberfläche (21) eines entsprechenden Schienenelements (20) zu gleiten, wobei das Antriebselement (22) das bewegliche Lichtbogenkontaktelement (18) entlang der Translationsachse (A2) zwischen einer an dem festen Lichtbogenkontaktelement (17) gekoppelten Position und einer davon entkoppelten Position betätigt, wenn es entlang der Schienenoberfläche (21) gleitet, 50  
 wobei, wenn sich die bewegliche Kontaktanordnung (10) in der ersten Endlagenposition ( $P_A$ ) befindet, sich das Antriebselement (22) in einer ersten Position ( $T_A$ ) entlang der Schienenoberfläche (21) befindet, wobei, wenn sich die bewegliche Kontaktanordnung (10) in der Zwischenposition ( $P_B$ ) befindet, sich das Antriebselement (22) in einer zweiten Position ( $T_B$ ) entlang der Schienenoberfläche (21) befindet; 55  
 wobei, wenn sich die bewegliche Kontaktanordnung (10) in der zweiten Endlagenposition ( $P_C$ ) befindet, sich das Antriebselement (22) in einer dritten Position ( $T_C$ ) entlang der Schienenoberfläche (21) befindet; wobei sich die zweite Position ( $T_B$ ) zwischenliegend zwischen der ersten und der dritten Position befindet, wobei das Antriebselement (22) entlang eines ersten Schienenoberflächenabschnitts (21A) mit einem Nockenprofil gleitet, wenn es sich zwischen der ersten und der zweiten Position ( $T_A, T_B$ ) bewegt, und entlang eines zweiten Schienenoberflächenabschnitts (21B) mit einem Nockenprofil gleitet, wenn es sich zwischen der zweiten und der dritten Position ( $T_B, T_C$ ) bewegt, wobei, wenn sich die bewegliche Kontaktanordnung (10) in der zweiten Endlagenposition ( $P_C$ ) befindet, das erste Hauptkontaktelement (15) mit dem vierten festen Kontaktelement (8) gekoppelt ist, das zweite Hauptkontaktelement (16) mit dem dritten festen Kontaktelement (7) gekoppelt ist und die Lichtbogenkontaktelemente (17, 18) miteinander gekoppelt sind, wobei, wenn sich die bewegliche Kontaktanordnung (10) in der Zwischenposition ( $P_B$ ) befindet, das erste Hauptkontaktelement (15) von dem ersten und dem vierten festen Kontaktelement (5, 8) entkoppelt ist und das zweite Hauptkontaktelement (16) von dem zweiten und dem dritten festen Kontaktelement (7) entkoppelt ist, **dadurch gekennzeichnet, dass** das dritte feste Kontaktelement (7) elektrisch mit dem zweiten Polanschluss verbunden ist, wobei, wenn sich die bewegliche Kontaktanordnung in der ersten Endlagenposition ( $P_A$ ) befindet, das erste Hauptkontaktelement (15) mit dem ersten festen Kontaktelement (5) gekoppelt ist;

pelt ist und das zweite Hauptkontaktelement (16) mit dem zweiten festen Kontaktelement (6) gekoppelt ist,  
 wobei, wenn sich die bewegliche Kontaktanordnung in der Zwischenposition ( $P_B$ ) befindet, die 5  
 Lichtbogenkontaktelemente (17, 18) miteinander gekoppelt sind,  
 wobei die Schienenoberfläche (21) so geformt 10  
 ist, dass das bewegliche Lichtbogenkontaktelement (18) in eine mit dem festen Lichtbogenkontaktelement (17) gekoppelte Position betätigt wird, wenn sich das Antriebselement (22) in einer der ersten, zweiten und dritten Position ( $T_A, T_B, T_C$ ) entlang der Schienenoberfläche 15  
 (21) befindet, wobei die Schienenoberfläche (21) so geformt ist, dass das Antriebselement (22) das bewegliche Lichtbogenkontaktelement (18) entlang der Translationsachse (A2) zwischen einer mit dem festen Lichtbogenkontaktelement (17) gekoppelten Position und einer davon entkoppelten Position betätigt, wenn es entlang des ersten Schienenoberflächenabschnitts (21A) oder des zweiten Schienenoberflächenabschnitts (21B) gleitet,  
 wobei das bewegliche Lichtbogenkontaktelement (18) von dem festen Lichtbogenkontaktelement (17) entkoppelt und anschließend wieder mit dem festen Lichtbogenkontaktelement (17) gekoppelt wird, wenn das Antriebselement (22) entlang des ersten Schienenoberflächenabschnitts (21A) gleitet,  
 wobei das bewegliche Lichtbogenkontaktelement (18) von dem festen Lichtbogenkontaktelement (17) entkoppelt und anschließend wieder mit dem festen Lichtbogenkontaktelement (17) gekoppelt wird, wenn das Antriebselement (22) entlang des zweiten Schienenoberflächenabschnitts (21B) gleitet.

2. Schalteinrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die bewegliche Kontaktanordnung (10) einen Nockenmechanismus (25) umfasst, der mit dem beweglichen Lichtbogenkontaktelement (18) gekoppelt ist,  
 wobei der Nockenmechanismus dazu ausgelegt ist, 40  
 das bewegliche Lichtbogenkontaktelement (18) gegen das feste Lichtbogenkontaktelement (17) zu drücken, wenn das bewegliche Lichtbogenkontaktelement (18) mit dem festen Lichtbogenkontaktelement (17) gekoppelt ist und sich die bewegliche Kontaktanordnung (10) in der ersten Endlagenposition ( $P_A$ ) oder in der zweiten Endlagenposition ( $P_B$ ) befindet.

3. Schalteinrichtung nach Anspruch 2, **dadurch gekennzeichnet, dass** der Nockenmechanismus (25) Folgendes umfasst:  
 45  
 50  
 55

- ein Schubelement (26), das in Bezug auf das bewegliche Lichtbogenkontaktelement (18) entlang der Translationsachse (A2) beweglich ist;  
 - ein Federelement (27), das entlang der Translationsachse (A2) angeordnet und mit dem Schubelement (26) und dem beweglichen Lichtbogenkontaktelement (18) gekoppelt ist.

4. Schalteinrichtung nach Anspruch 3, **dadurch gekennzeichnet, dass** der Nockenmechanismus (25) ein Schieberelement (28) umfasst, das mit dem Schubelement (26) gekoppelt und mit einer oder mehreren ersten Nockenflächen (31) oder einer oder mehreren zweiten Nockenflächen (32) kopplbar ist, wenn sich die bewegliche Kontaktanordnung (10) in der ersten Endlagenposition ( $P_A$ ) oder in der zweiten Endlagenposition ( $P_C$ ) befindet,  
 wobei das Schieberelement (28) eine Betätigungs- 20  
 25  
 30  
 35  
 40  
 45  
 50  
 55  
 60  
 65  
 70  
 75  
 80  
 85  
 90  
 95  
 100  
 105  
 110  
 115  
 120  
 125  
 130  
 135  
 140  
 145  
 150  
 155  
 160  
 165  
 170  
 175  
 180  
 185  
 190  
 195  
 200  
 205  
 210  
 215  
 220  
 225  
 230  
 235  
 240  
 245  
 250  
 255  
 260  
 265  
 270  
 275  
 280  
 285  
 290  
 295  
 300  
 305  
 310  
 315  
 320  
 325  
 330  
 335  
 340  
 345  
 350  
 355  
 360  
 365  
 370  
 375  
 380  
 385  
 390  
 395  
 400  
 405  
 410  
 415  
 420  
 425  
 430  
 435  
 440  
 445  
 450  
 455  
 460  
 465  
 470  
 475  
 480  
 485  
 490  
 495  
 500  
 505  
 510  
 515  
 520  
 525  
 530  
 535  
 540  
 545  
 550  
 555  
 560  
 565  
 570  
 575  
 580  
 585  
 590  
 595  
 600  
 605  
 610  
 615  
 620  
 625  
 630  
 635  
 640  
 645  
 650  
 655  
 660  
 665  
 670  
 675  
 680  
 685  
 690  
 695  
 700  
 705  
 710  
 715  
 720  
 725  
 730  
 735  
 740  
 745  
 750  
 755  
 760  
 765  
 770  
 775  
 780  
 785  
 790  
 795  
 800  
 805  
 810  
 815  
 820  
 825  
 830  
 835  
 840  
 845  
 850  
 855  
 860  
 865  
 870  
 875  
 880  
 885  
 890  
 895  
 900  
 905  
 910  
 915  
 920  
 925  
 930  
 935  
 940  
 945  
 950  
 955  
 960  
 965  
 970  
 975  
 980  
 985  
 990  
 995  
 1000  
 1005  
 1010  
 1015  
 1020  
 1025  
 1030  
 1035  
 1040  
 1045  
 1050  
 1055  
 1060  
 1065  
 1070  
 1075  
 1080  
 1085  
 1090  
 1095  
 1100  
 1105  
 1110  
 1115  
 1120  
 1125  
 1130  
 1135  
 1140  
 1145  
 1150  
 1155  
 1160  
 1165  
 1170  
 1175  
 1180  
 1185  
 1190  
 1195  
 1200  
 1205  
 1210  
 1215  
 1220  
 1225  
 1230  
 1235  
 1240  
 1245  
 1250  
 1255  
 1260  
 1265  
 1270  
 1275  
 1280  
 1285  
 1290  
 1295  
 1300  
 1305  
 1310  
 1315  
 1320  
 1325  
 1330  
 1335  
 1340  
 1345  
 1350  
 1355  
 1360  
 1365  
 1370  
 1375  
 1380  
 1385  
 1390  
 1395  
 1400  
 1405  
 1410  
 1415  
 1420  
 1425  
 1430  
 1435  
 1440  
 1445  
 1450  
 1455  
 1460  
 1465  
 1470  
 1475  
 1480  
 1485  
 1490  
 1495  
 1500  
 1505  
 1510  
 1515  
 1520  
 1525  
 1530  
 1535  
 1540  
 1545  
 1550  
 1555  
 1560  
 1565  
 1570  
 1575  
 1580  
 1585  
 1590  
 1595  
 1600  
 1605  
 1610  
 1615  
 1620  
 1625  
 1630  
 1635  
 1640  
 1645  
 1650  
 1655  
 1660  
 1665  
 1670  
 1675  
 1680  
 1685  
 1690  
 1695  
 1700  
 1705  
 1710  
 1715  
 1720  
 1725  
 1730  
 1735  
 1740  
 1745  
 1750  
 1755  
 1760  
 1765  
 1770  
 1775  
 1780  
 1785  
 1790  
 1795  
 1800  
 1805  
 1810  
 1815  
 1820  
 1825  
 1830  
 1835  
 1840  
 1845  
 1850  
 1855  
 1860  
 1865  
 1870  
 1875  
 1880  
 1885  
 1890  
 1895  
 1900  
 1905  
 1910  
 1915  
 1920  
 1925  
 1930  
 1935  
 1940  
 1945  
 1950  
 1955  
 1960  
 1965  
 1970  
 1975  
 1980  
 1985  
 1990  
 1995  
 2000  
 2005  
 2010  
 2015  
 2020  
 2025  
 2030  
 2035  
 2040  
 2045  
 2050  
 2055  
 2060  
 2065  
 2070  
 2075  
 2080  
 2085  
 2090  
 2095  
 2100  
 2105  
 2110  
 2115  
 2120  
 2125  
 2130  
 2135  
 2140  
 2145  
 2150  
 2155  
 2160  
 2165  
 2170  
 2175  
 2180  
 2185  
 2190  
 2195  
 2200  
 2205  
 2210  
 2215  
 2220  
 2225  
 2230  
 2235  
 2240  
 2245  
 2250  
 2255  
 2260  
 2265  
 2270  
 2275  
 2280  
 2285  
 2290  
 2295  
 2300  
 2305  
 2310  
 2315  
 2320  
 2325  
 2330  
 2335  
 2340  
 2345  
 2350  
 2355  
 2360  
 2365  
 2370  
 2375  
 2380  
 2385  
 2390  
 2395  
 2400  
 2405  
 2410  
 2415  
 2420  
 2425  
 2430  
 2435  
 2440  
 2445  
 2450  
 2455  
 2460  
 2465  
 2470  
 2475  
 2480  
 2485  
 2490  
 2495  
 2500  
 2505  
 2510  
 2515  
 2520  
 2525  
 2530  
 2535  
 2540  
 2545  
 2550  
 2555  
 2560  
 2565  
 2570  
 2575  
 2580  
 2585  
 2590  
 2595  
 2600  
 2605  
 2610  
 2615  
 2620  
 2625  
 2630  
 2635  
 2640  
 2645  
 2650  
 2655  
 2660  
 2665  
 2670  
 2675  
 2680  
 2685  
 2690  
 2695  
 2700  
 2705  
 2710  
 2715  
 2720  
 2725  
 2730  
 2735  
 2740  
 2745  
 2750  
 2755  
 2760  
 2765  
 2770  
 2775  
 2780  
 2785  
 2790  
 2795  
 2800  
 2805  
 2810  
 2815  
 2820  
 2825  
 2830  
 2835  
 2840  
 2845  
 2850  
 2855  
 2860  
 2865  
 2870  
 2875  
 2880  
 2885  
 2890  
 2895  
 2900  
 2905  
 2910  
 2915  
 2920  
 2925  
 2930  
 2935  
 2940  
 2945  
 2950  
 2955  
 2960  
 2965  
 2970  
 2975  
 2980  
 2985  
 2990  
 2995  
 3000  
 3005  
 3010  
 3015  
 3020  
 3025  
 3030  
 3035  
 3040  
 3045  
 3050  
 3055  
 3060  
 3065  
 3070  
 3075  
 3080  
 3085  
 3090  
 3095  
 3100  
 3105  
 3110  
 3115  
 3120  
 3125  
 3130  
 3135  
 3140  
 3145  
 3150  
 3155  
 3160  
 3165  
 3170  
 3175  
 3180  
 3185  
 3190  
 3195  
 3200  
 3205  
 3210  
 3215  
 3220  
 3225  
 3230  
 3235  
 3240  
 3245  
 3250  
 3255  
 3260  
 3265  
 3270  
 3275  
 3280  
 3285  
 3290  
 3295  
 3300  
 3305  
 3310  
 3315  
 3320  
 3325  
 3330  
 3335  
 3340  
 3345  
 3350  
 3355  
 3360  
 3365  
 3370  
 3375  
 3380  
 3385  
 3390  
 3395  
 3400  
 3405  
 3410  
 3415  
 3420  
 3425  
 3430  
 3435  
 3440  
 3445  
 3450  
 3455  
 3460  
 3465  
 3470  
 3475  
 3480  
 3485  
 3490  
 3495  
 3500  
 3505  
 3510  
 3515  
 3520  
 3525  
 3530  
 3535  
 3540  
 3545  
 3550  
 3555  
 3560  
 3565  
 3570  
 3575  
 3580  
 3585  
 3590  
 3595  
 3600  
 3605  
 3610  
 3615  
 3620  
 3625  
 3630  
 3635  
 3640  
 3645  
 3650  
 3655  
 3660  
 3665  
 3670  
 3675  
 3680  
 3685  
 3690  
 3695  
 3700  
 3705  
 3710  
 3715  
 3720  
 3725  
 3730  
 3735  
 3740  
 3745  
 3750  
 3755  
 3760  
 3765  
 3770  
 3775  
 3780  
 3785  
 3790  
 3795  
 3800  
 3805  
 3810  
 3815  
 3820  
 3825  
 3830  
 3835  
 3840  
 3845  
 3850  
 3855  
 3860  
 3865  
 3870  
 3875  
 3880  
 3885  
 3890  
 3895  
 3900  
 3905  
 3910  
 3915  
 3920  
 3925  
 3930  
 3935  
 3940  
 3945  
 3950  
 3955  
 3960  
 3965  
 3970  
 3975  
 3980  
 3985  
 3990  
 3995  
 4000  
 4005  
 4010  
 4015  
 4020  
 4025  
 4030  
 4035  
 4040  
 4045  
 4050  
 4055  
 4060  
 4065  
 4070  
 4075  
 4080  
 4085  
 4090  
 4095  
 4100  
 4105  
 4110  
 4115  
 4120  
 4125  
 4130  
 4135  
 4140  
 4145  
 4150  
 4155  
 4160  
 4165  
 4170  
 4175  
 4180  
 4185  
 4190  
 4195  
 4200  
 4205  
 4210  
 4215  
 4220  
 4225  
 4230  
 4235  
 4240  
 4245  
 4250  
 4255  
 4260  
 4265  
 4270  
 4275  
 4280  
 4285  
 4290  
 4295  
 4300  
 4305  
 4310  
 4315  
 4320  
 4325  
 4330  
 4335  
 4340  
 4345  
 4350  
 4355  
 4360  
 4365  
 4370  
 4375  
 4380  
 4385  
 4390  
 4395  
 4400  
 4405  
 4410  
 4415  
 4420  
 4425  
 4430  
 4435  
 4440  
 4445  
 4450  
 4455  
 4460  
 4465  
 4470  
 4475  
 4480  
 4485  
 4490  
 4495  
 4500  
 4505  
 4510  
 4515  
 4520  
 4525  
 4530  
 4535  
 4540  
 4545  
 4550  
 4555  
 4560  
 4565  
 4570  
 4575  
 4580  
 4585  
 4590  
 4595  
 4600  
 4605  
 4610  
 4615  
 4620  
 4625  
 4630  
 4635  
 4640  
 4645  
 4650  
 4655  
 4660  
 4665  
 4670  
 4675  
 4680  
 4685  
 4690  
 4695  
 4700  
 4705  
 4710  
 4715  
 4720  
 4725  
 4730  
 4735  
 4740  
 4745  
 4750  
 4755  
 4760  
 4765  
 4770  
 4775  
 4780  
 4785  
 4790  
 4795  
 4800  
 4805  
 4810  
 4815  
 4820  
 4825  
 4830  
 4835  
 4840  
 4845  
 4850  
 4855  
 4860  
 4865  
 4870  
 4875  
 4880  
 4885  
 4890  
 4895  
 4900  
 4905  
 4910  
 4915  
 4920  
 4925  
 4930  
 4935  
 4940  
 4945  
 4950  
 4955  
 4960  
 4965  
 4970  
 4975  
 4980  
 4985  
 4990  
 4995  
 5000  
 5005  
 5010  
 5015  
 5020  
 5025  
 5030  
 5035  
 5040  
 5045  
 5050  
 5055  
 5060  
 5065  
 5070  
 5075  
 5080  
 5085  
 5090  
 5095  
 5100  
 5105  
 5110  
 5115  
 5120  
 5125  
 5130  
 5135  
 5140  
 5145  
 5150  
 5155  
 5160  
 5165  
 5170  
 5175  
 5180  
 5185  
 5190  
 5195  
 5200  
 5205  
 5210  
 5215  
 5220  
 5225  
 5230  
 5235  
 5240  
 5245  
 5250  
 5255  
 5260  
 5265  
 5270  
 5275  
 5280  
 5285  
 5290  
 5295  
 5300  
 5305  
 5310  
 5315  
 5320  
 5325  
 5330  
 5335  
 5340  
 5345  
 5350  
 5355  
 5360  
 5365  
 5370  
 5375  
 5380  
 5385  
 5390  
 5395  
 5400  
 5405  
 5410  
 5415  
 5420  
 5425  
 5430  
 5435  
 5440  
 5445  
 5450  
 5455  
 5460  
 5465  
 5470  
 5475  
 5480  
 5485  
 5490  
 5495  
 5500  
 5505  
 5510  
 5515  
 5520  
 5525  
 5530  
 5535  
 5540  
 5545  
 5550  
 5555  
 5560  
 5565  
 5570  
 5575  
 5580  
 5585  
 5590  
 5595  
 5600  
 5605  
 5610  
 5615  
 5620  
 5625  
 5630  
 5635  
 5640  
 5645  
 5650  
 5655  
 5660  
 5665  
 5670  
 5675  
 5680  
 5685  
 5690  
 5695  
 5700  
 5705  
 5710  
 5715  
 5720  
 5725  
 5730  
 5735  
 5740  
 5745  
 5750  
 5755  
 5760  
 5765  
 5770  
 5775  
 5780  
 5785  
 5790  
 5795  
 5800  
 5805  
 5810  
 5815  
 5820  
 5825  
 5830  
 5835  
 5840  
 5845  
 5850  
 5855  
 5860  
 5865  
 5870  
 5875  
 5880  
 5885  
 5890  
 5895  
 5900  
 5905  
 5910  
 5915  
 5920  
 5925  
 5930  
 5935  
 5940  
 5945  
 5950  
 5955  
 5960  
 5965  
 5970  
 5975  
 5980  
 5985  
 5990  
 5995  
 6000  
 6005  
 6010  
 6015  
 6020  
 6025  
 6030  
 6035  
 6040  
 6045  
 6050  
 6055  
 6060  
 6065  
 6070  
 6075  
 6080  
 6085  
 6090  
 6095  
 6100  
 6105  
 6110  
 6115  
 6120  
 6125  
 6130  
 6135  
 6140  
 6145  
 6150  
 6155  
 6160  
 6165  
 6170  
 6175  
 6180  
 6185  
 6190  
 6195  
 6200  
 6205  
 6210  
 6215  
 6220  
 6225  
 6230  
 6235  
 6240  
 6245  
 6250  
 6255  
 6260  
 6265  
 6270  
 6275  
 6280  
 6285  
 6290  
 6295  
 6300  
 6305  
 6310  
 6315  
 6320  
 6325  
 6330  
 6335  
 6340  
 6345  
 6350  
 6355  
 6360  
 6365  
 6370  
 6375  
 6380  
 63

électriques (2),

dans lequel, pour chaque pôle électrique, ledit appareil de commutation comprend :

- une première borne de pôle (11), une seconde borne de pôle (12) et une borne de terre (13), dans lequel ladite première borne de pôle (11) peut être couplée électriquement avec un premier conducteur d'une ligne électrique, ladite seconde borne de pôle (12) peut être couplée électriquement à un second conducteur de ladite ligne électrique et ladite borne de terre (13) peut être couplée électriquement à un conducteur de mise à la terre ;
- un ensemble de contact fixe incluant une pluralité d'éléments de contact fixes espacés les uns des autres,

dans lequel ledit ensemble de contact fixe comprend un premier élément de contact fixe (5) relié électriquement à ladite première borne de pôle (11), un second élément de contact fixe (6) relié électriquement à ladite seconde borne de pôle (12), un troisième élément de contact fixe (7), et un quatrième élément de contact fixe (8) relié électriquement à ladite borne de terre (13) ;

- un ensemble de contact mobile (10) rotatif autour d'un axe de rotation (A1) et comprenant :
  - un premier élément de contact principal (15) pouvant être couplé audit premier élément de contact fixe (5) ou audit quatrième élément de contact fixe (8), lors d'un mouvement de rotation dudit ensemble de contact mobile autour dudit axe de rotation (A1) ;
  - un second élément de contact principal (16) pouvant être couplé audit second élément de contact fixe (6) ou audit troisième élément de contact fixe (7), lors d'un mouvement de rotation dudit ensemble de contact mobile autour dudit axe de rotation (A1) ;
  - une chambre à vide (14) et une paire d'éléments de contact d'arc (17, 18) qui sont logés à l'intérieur de ladite chambre à vide et qui peuvent être couplés l'un à l'autre ou découpés l'un de l'autre, chaque élément de contact d'arc étant relié électriquement en série à un élément de contact principal (15, 16) correspondant,

dans lequel lesdits éléments de contact d'arc (17, 18) comprennent un élément de contact

d'arc fixe (17) et un élément de contact d'arc mobile (18),

dans lequel ledit élément de contact d'arc mobile (18) peut être couplé audit ou découpé dudit élément de contact d'arc fixe (17) en se déplaçant le long d'un axe de translation (A2) perpendiculaire audit axe de rotation (A1) ; dans lequel ledit ensemble de contact mobile est mobile de manière réversible autour dudit axe de rotation (A1) dans une première position de fin de course (P<sub>A</sub>), qui correspond à un état fermé dudit appareil de commutation, dans une seconde position de fin de course (P<sub>C</sub>), qui correspond à un état mis à la terre dudit appareil de commutation, et dans une position intermédiaire (P<sub>B</sub>), qui correspond à un état ouvert dudit appareil de commutation, dans lequel lesdites première et seconde bornes de pôle (11, 12) et ladite borne de terre (13) sont déconnectées électriquement les unes des autres ;

dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite première position de fin de course (P<sub>A</sub>), lesdits éléments de contact d'arc (17, 18) sont couplés l'un à l'autre, dans lequel ledit appareil de commutation comprend, pour chaque pôle électrique, au moins un élément de piste (20), qui est constitué de matériau électriquement isolant et a une surface de piste (21) avec un profil de came, et au moins un élément d'entraînement (22) couplé solidement audit élément de contact d'arc mobile (18),

dans lequel chaque élément d'entraînement (22) est adapté pour coulisser le long de la surface de piste (21) d'un élément de piste (20) correspondant, lors d'un mouvement de rotation dudit ensemble de contact mobile (10) autour dudit axe de rotation (A1), dans lequel ledit élément d'entraînement (22) actionne ledit élément de contact d'arc mobile (18) le long dudit axe de translation (A2) entre une position couplée audit et une position découpée dudit élément de contact d'arc fixe (17), lorsqu'il coulisse le long de ladite surface de piste (21),

dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite première position de fin de course (P<sub>A</sub>), ledit élément d'entraînement (22) est dans une première position (T<sub>A</sub>) le long de ladite surface de piste (21),

dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite position intermédiaire (P<sub>B</sub>), ledit élément d'entraînement (22) est dans une seconde position (T<sub>B</sub>) le long de ladite surface de piste (21) ;

dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite seconde position de

fin de course ( $P_C$ ), ledit élément d'entraînement (22) est dans une troisième position ( $T_C$ ) le long de ladite surface de piste (21) ; dans lequel ladite seconde position ( $T_B$ ) est intermédiaire entre lesdites première et troisième positions, dans lequel ledit élément d'entraînement (22) coulisse le long d'une première partie de surface de piste (21A) avec un profil de came, lorsqu'il se déplace entre lesdites première et seconde positions ( $T_A, T_B$ ), et coulisse le long d'une seconde partie de surface de piste (21B) avec un profil de came, lorsqu'il se déplace entre lesdites seconde et troisième positions ( $T_A, T_C$ ), dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite seconde position de fin de course ( $P_C$ ), ledit premier élément de contact principal (15) est couplé audit quatrième élément de contact fixe (8), ledit second élément de contact principal (16) est couplé audit troisième élément de contact fixe (7), et lesdits éléments de contact d'arc (17, 18) sont couplés l'un à l'autre, dans lequel lorsque ledit ensemble de contact mobile (10) est dans ladite position intermédiaire ( $P_B$ ), ledit premier élément de contact principal (15) est découpé desdits premier et quatrième éléments de contact fixes (5, 8) et ledit second élément de contact principal (16) est découpé desdits second et troisième éléments de contact fixes (7), **caractérisé en ce que** le troisième élément de contact fixe (7) est relié électriquement à ladite seconde borne de pôle, dans lequel lorsque ledit ensemble de contact mobile est dans ladite première position de fin de course ( $P_A$ ), ledit premier élément de contact principal (15) est couplé audit premier élément de contact fixe (5) et ledit second élément de contact principal (16) est couplé audit second élément de contact fixe (6), dans lequel lorsque ledit ensemble de contact mobile est dans ladite position intermédiaire ( $P_B$ ), lesdits éléments de contact d'arc (17, 18) sont couplés l'un à l'autre, dans lequel ladite surface de piste (21) est formée de sorte que ledit élément de contact d'arc mobile (18) est actionné sur une position couplée audit élément de contact d'arc fixe (17), lorsque ledit élément d'entraînement (22) est dans l'une quelconque desdites première, seconde et troisième positions ( $T_A, T_B, T_C$ ) le long de ladite surface de piste (21), dans lequel ladite surface de piste (21) est formée de sorte que ledit élément d'entraînement (22) actionne ledit élément de contact d'arc mobile (18) le long dudit axe de translation (A2) entre une position couplée audit et une

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

position découpée dudit élément de contact d'arc fixe (17), lorsqu'il coulisse le long de ladite première partie de surface de piste (21A) ou de ladite seconde partie de surface de piste (21B), dans lequel ledit élément de contact d'arc mobile (18) est découpé dudit élément de contact d'arc fixe (17) et est ensuite couplé de nouveau avec ledit élément de contact d'arc fixe (17), lorsque ledit élément d'entraînement (22) coulisse le long de ladite première partie de surface de piste (21A), dans lequel ledit élément de contact d'arc mobile (18) est découpé dudit élément de contact d'arc fixe (17) et est ensuite couplé de nouveau avec ledit élément de contact d'arc fixe (17), lorsque ledit élément d'entraînement (22) coulisse le long de ladite seconde partie de surface de piste (21B).

2. Appareil de commutation selon la revendication 1, **caractérisé en ce que** ledit ensemble de contact mobile (10) comprend un mécanisme de came (25) couplé audit élément de contact d'arc mobile (18), dans lequel ledit mécanisme de came est adapté pour presser ledit élément de contact d'arc mobile (18) contre ledit élément de contact d'arc fixe (17), lorsque ledit élément de contact d'arc mobile (18) est couplé audit élément de contact d'arc fixe (17) et ledit ensemble de contact mobile (10) est dans ladite première position de fin de course ( $P_A$ ) ou dans ladite seconde position de fin de course ( $P_B$ ).
3. Appareil de commutation selon la revendication 2, **caractérisé en ce que** ledit mécanisme de came (25) comprend :
  - un élément poussoir (26) mobile par rapport audit élément de contact d'arc mobile (18) le long dudit axe de translation (A2) ;
  - un élément ressort (27) agencé le long dudit axe de translation (A2) et couplé audit élément poussoir (26) et audit élément de contact d'arc mobile (18).
4. Appareil de commutation selon la revendication 3, **caractérisé en ce que** ledit mécanisme de came (25) comprend un élément coulissant (28) couplé audit élément poussoir (26) et pouvant être couplé à une ou plusieurs premières surfaces de came (31) ou une ou plusieurs secondes surfaces de came (32), lorsque ledit ensemble de contact mobile (10) est dans ladite première position de fin de course ( $P_A$ ) ou dans ladite seconde position de fin de course ( $P_C$ ), dans lequel ledit élément coulissant (28) exerce, sur ledit élément poussoir (26), une force d'actionnement dirigée pour provoquer la compression dudit élément ressort (27) et le pressage résultant dudit

élément de contact d'arc mobile (18) contre ledit élément de contact d'arc fixe (17), lorsqu'il est couplé auxdites une ou plusieurs premières surfaces de came (31) ou auxdites une ou plusieurs secondes surfaces de came (32). 5

5. Appareil de commutation selon la revendication 3, **caractérisé en ce que** ledit mécanisme de came (25) comprend un élément levier (29) ayant un profil de came et pouvant être couplé audit élément poussoir (26) et une ou plusieurs premières surfaces coulissantes (33) ou une ou plusieurs secondes surfaces coulissantes (34), lorsque ledit ensemble de contact mobile (10) est dans ladite première position de fin de course (P<sub>A</sub>) ou dans ladite seconde position de fin de course (P<sub>C</sub>),  
10  
dans lequel ledit élément levier (29) exerce, sur ledit élément poussoir (26), une force d'actionnement dirigée pour provoquer la compression dudit élément ressort (27) et le pressage résultant dudit élément de contact d'arc mobile (18) contre ledit élément de contact d'arc fixe (17), lorsqu'il est couplé auxdites une ou plusieurs premières surfaces coulissantes (33) ou auxdites une ou plusieurs secondes surfaces coulissantes (34). 15  
20  
25

6. Appareil de commutation selon l'une des revendications précédentes, **caractérisé en ce qu'il** s'agit d'un interrupteur à coupure en charge pour systèmes électriques moyenne tension. 30

35

40

45

50

55

20

FIG. 1

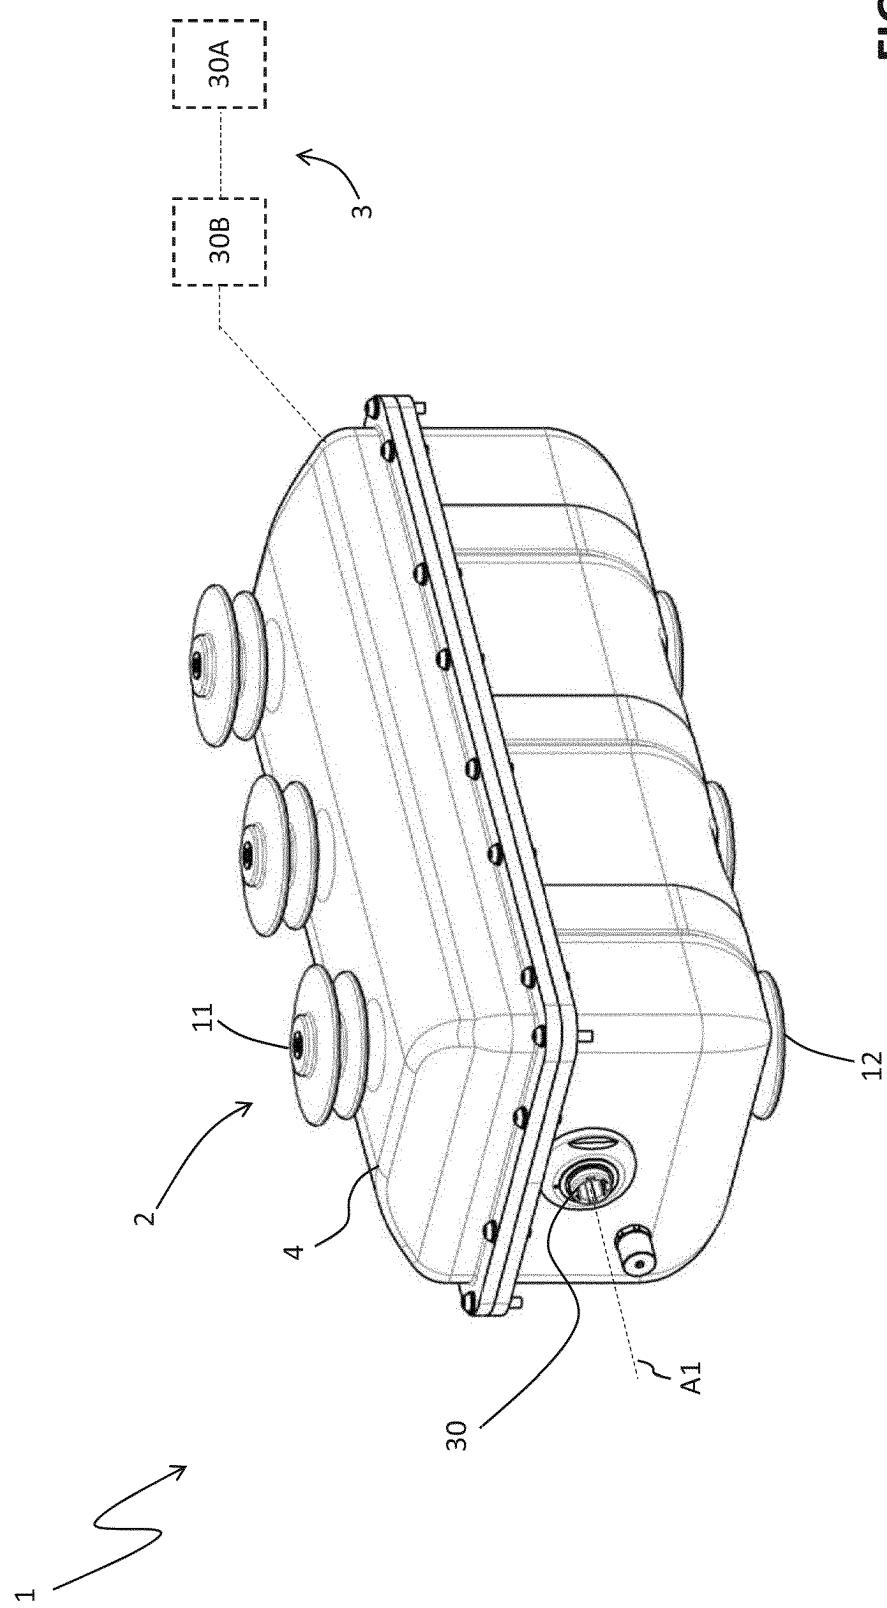


FIG. 2

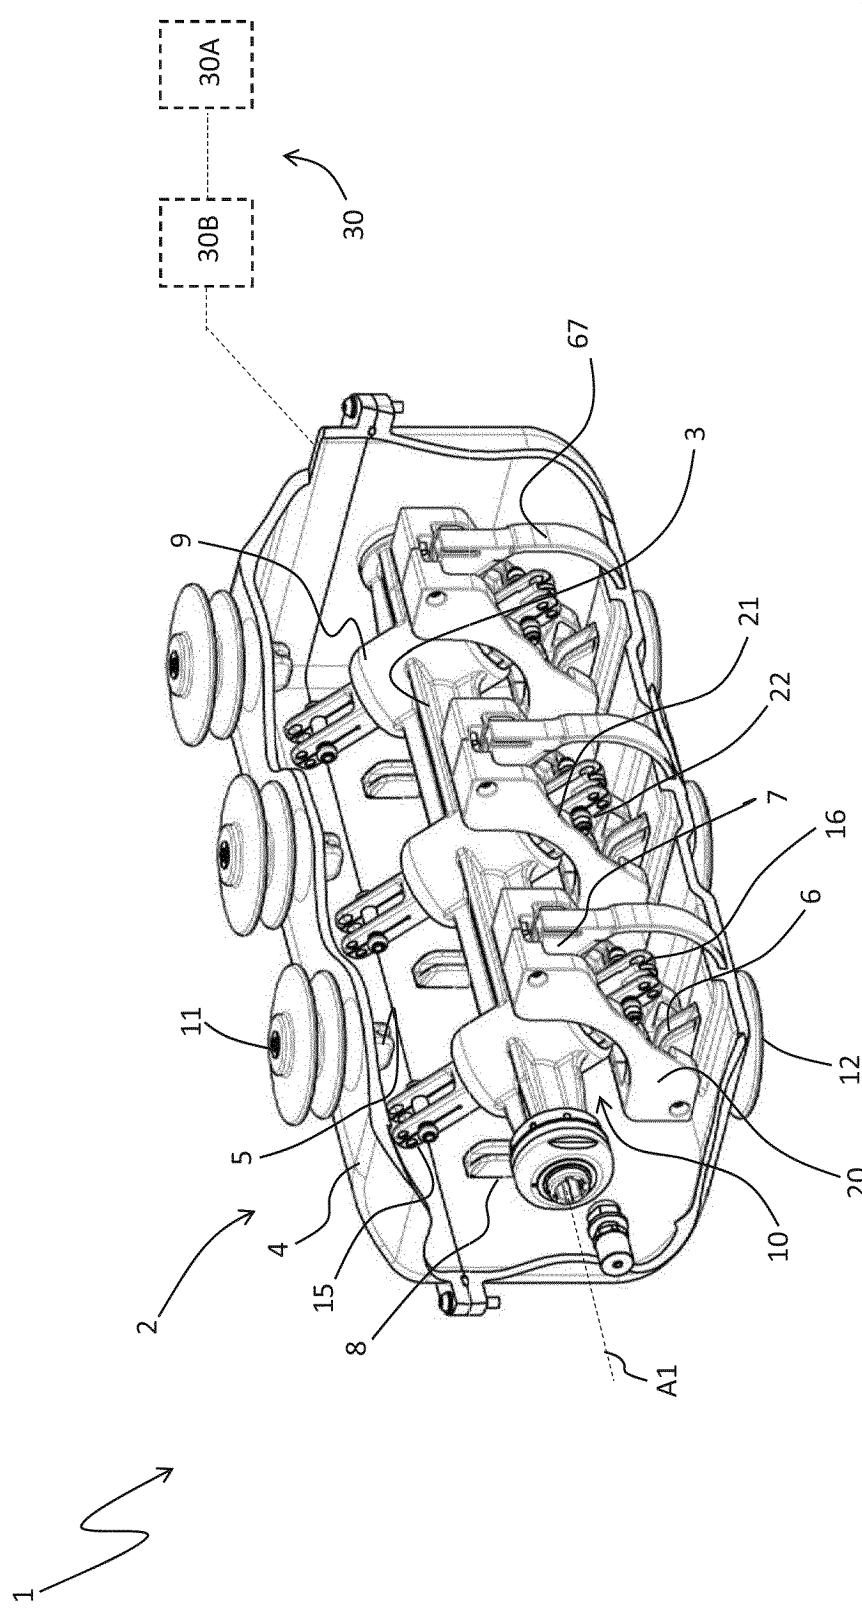


FIG. 3

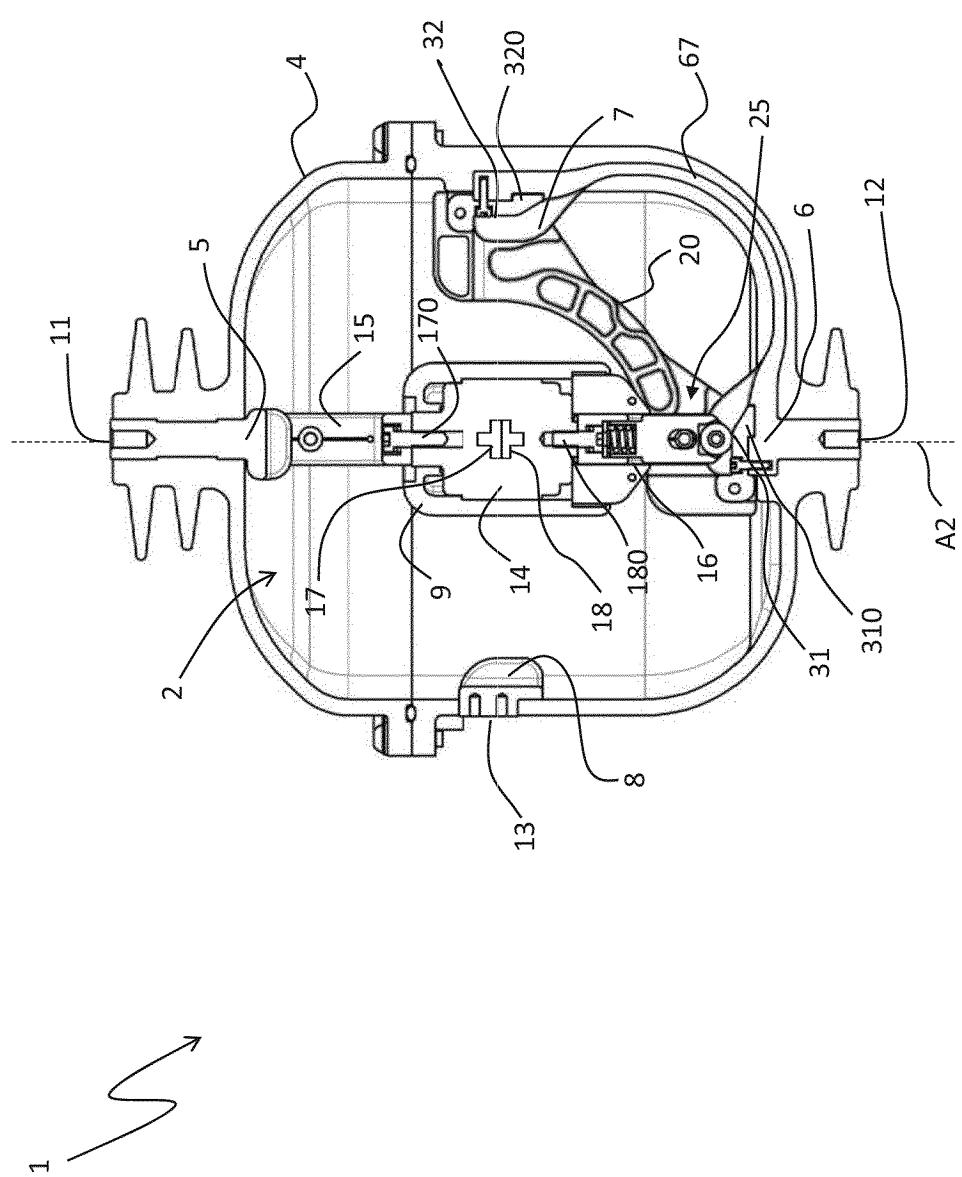


FIG. 4

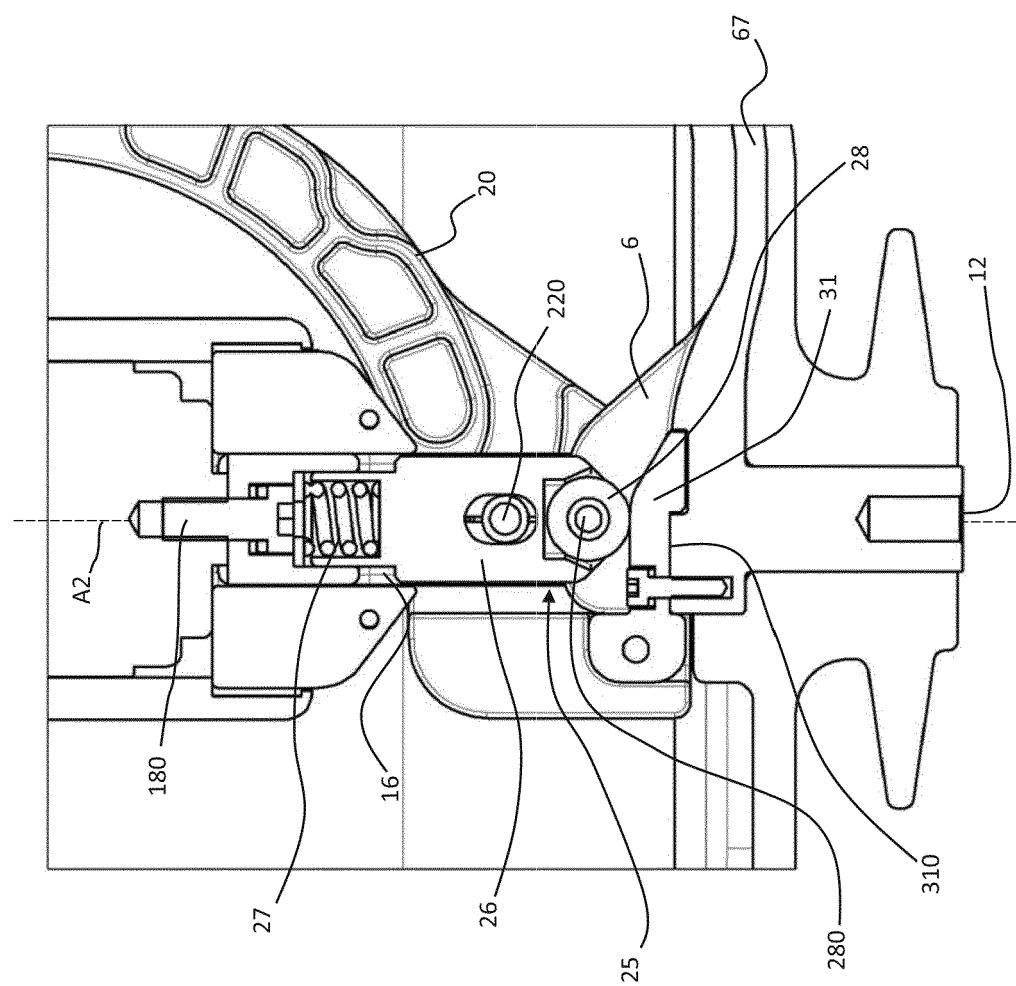


FIG. 5

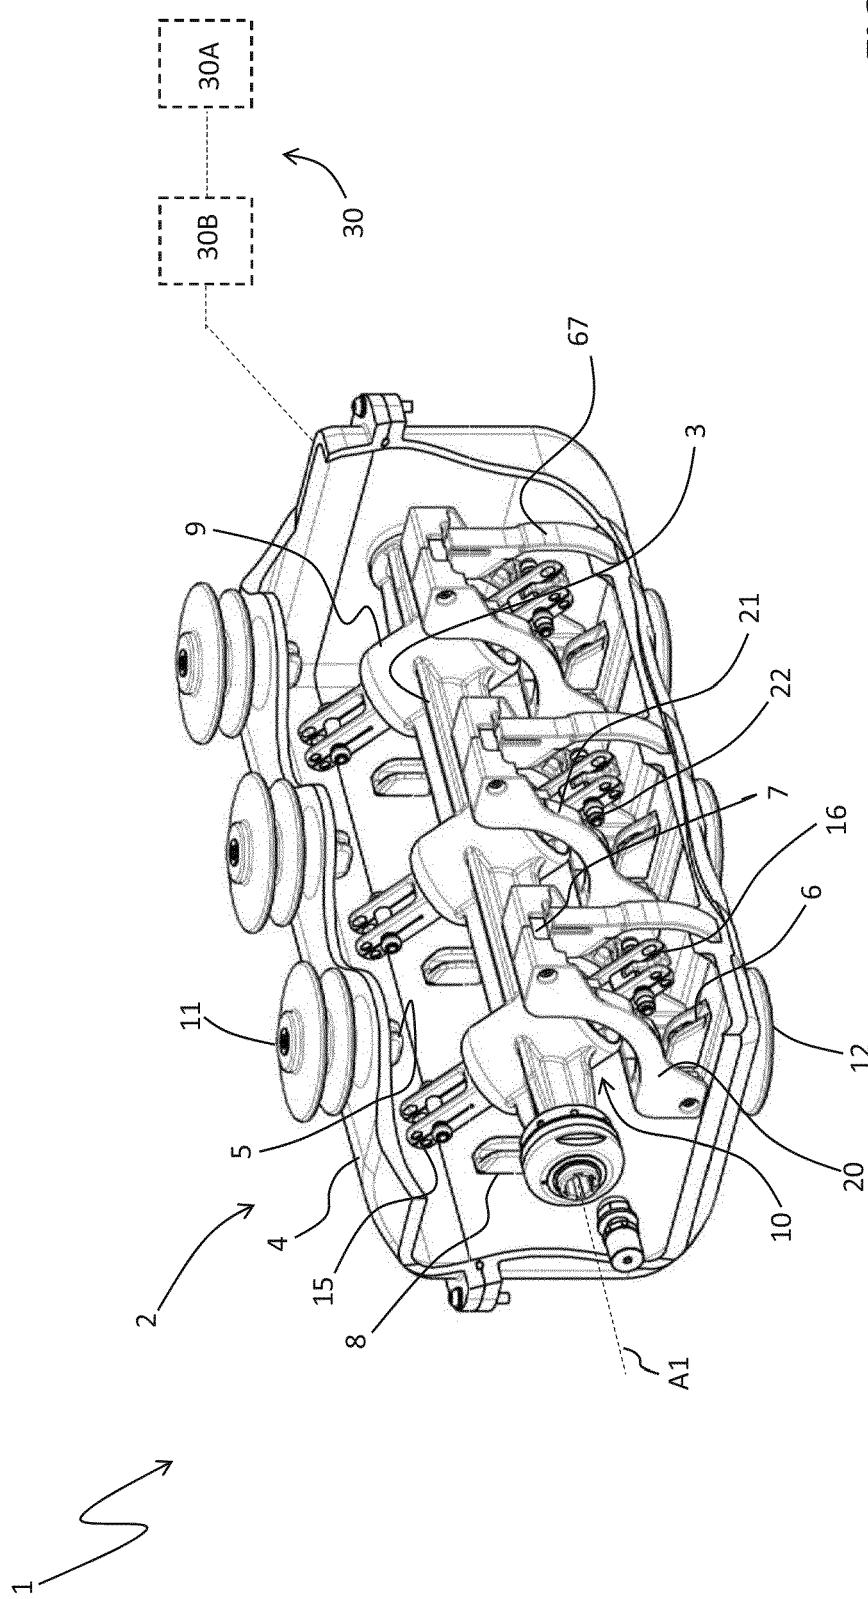


FIG. 6

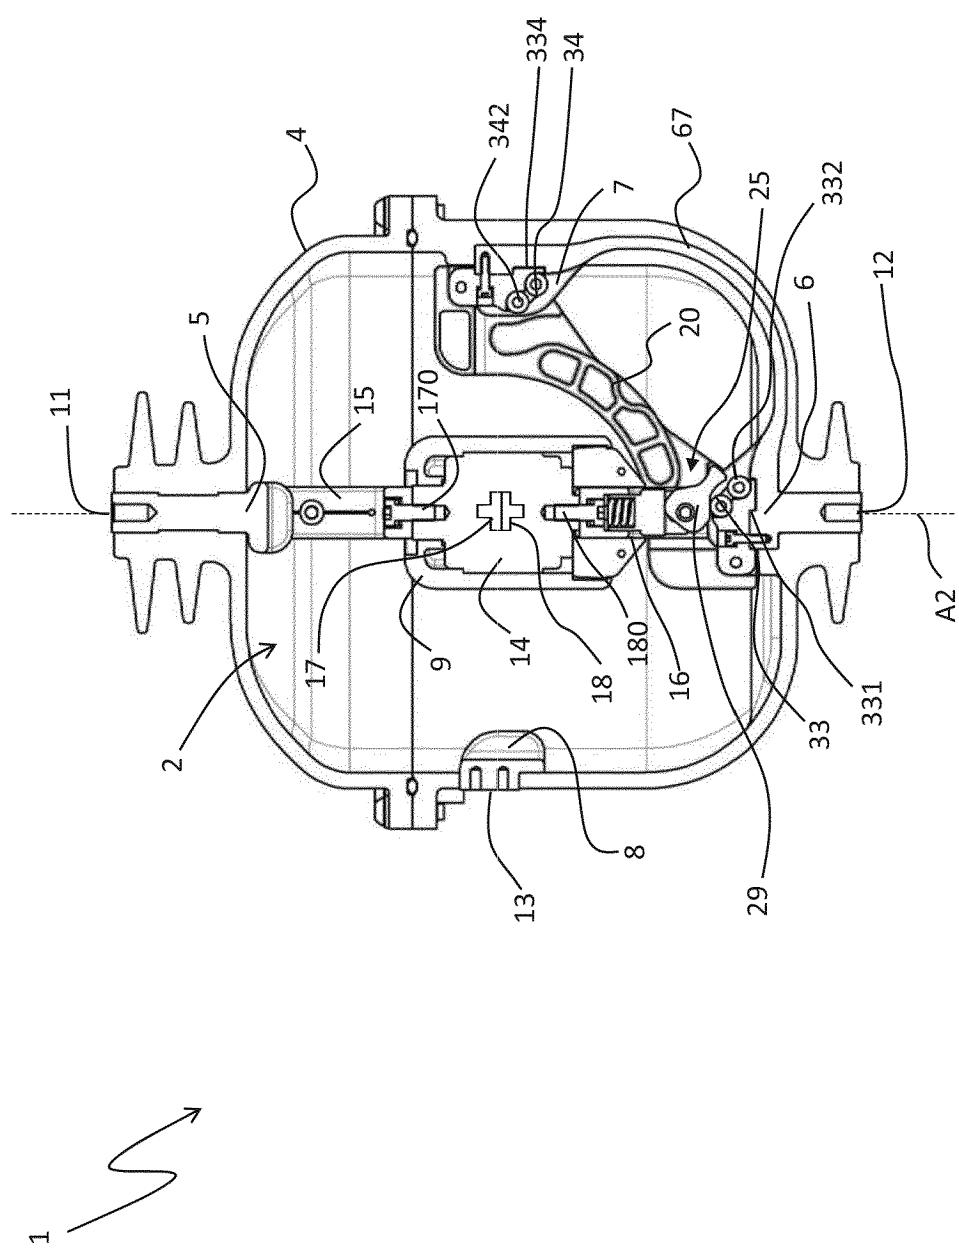


FIG. 7

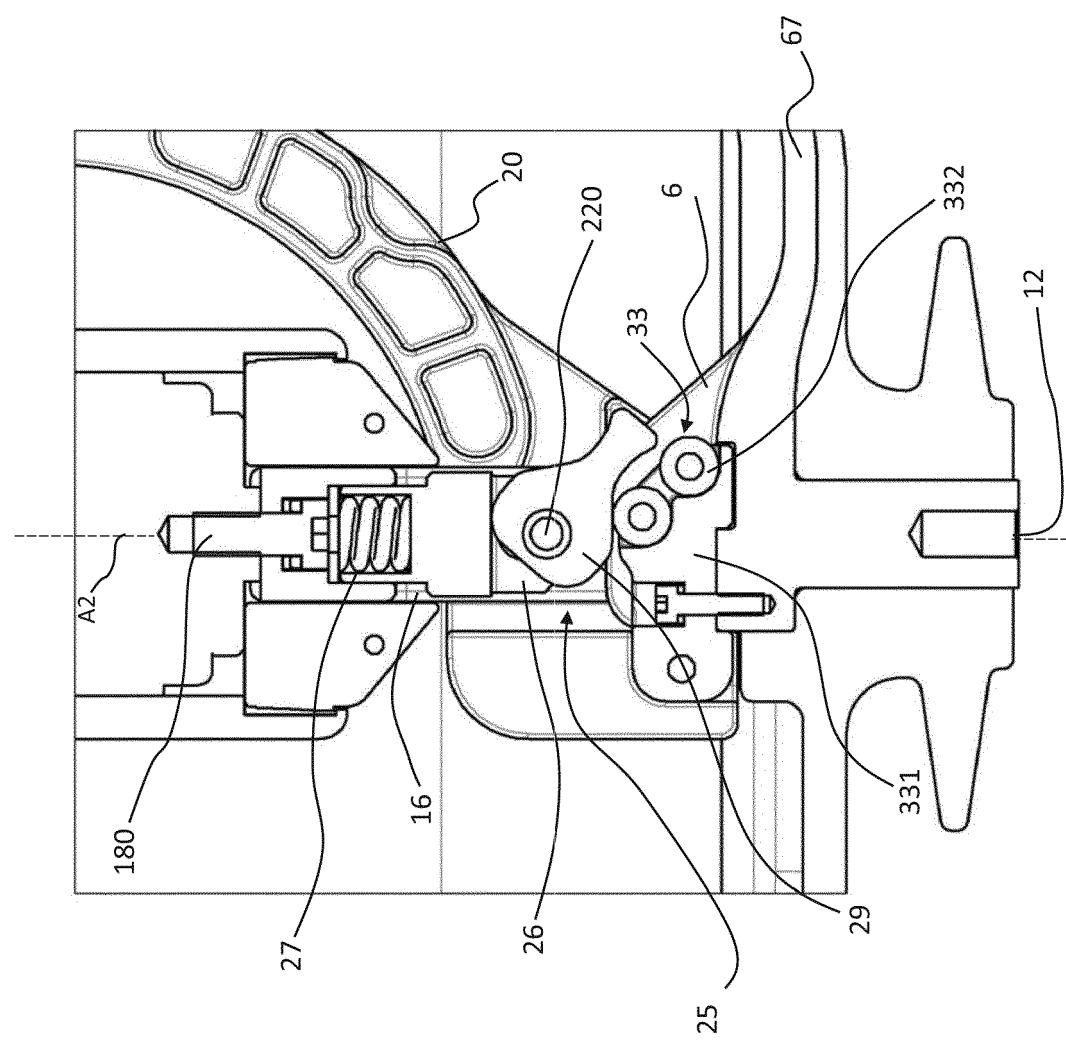


FIG. 8

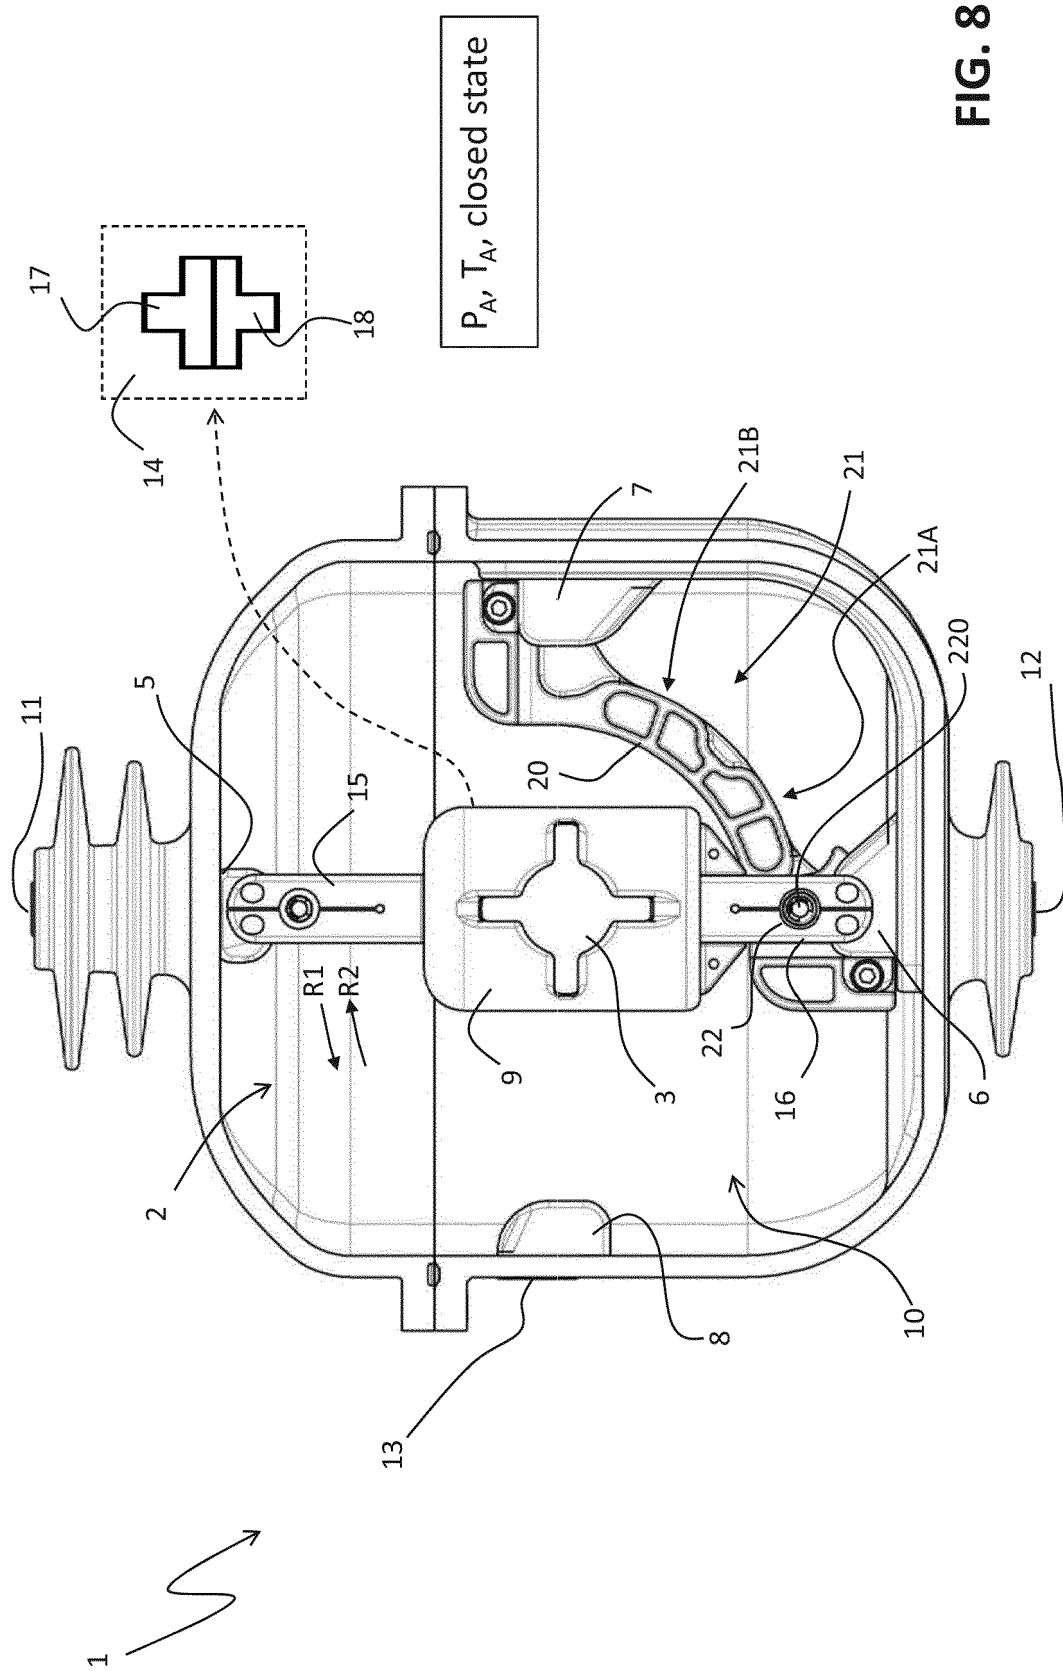


FIG. 9

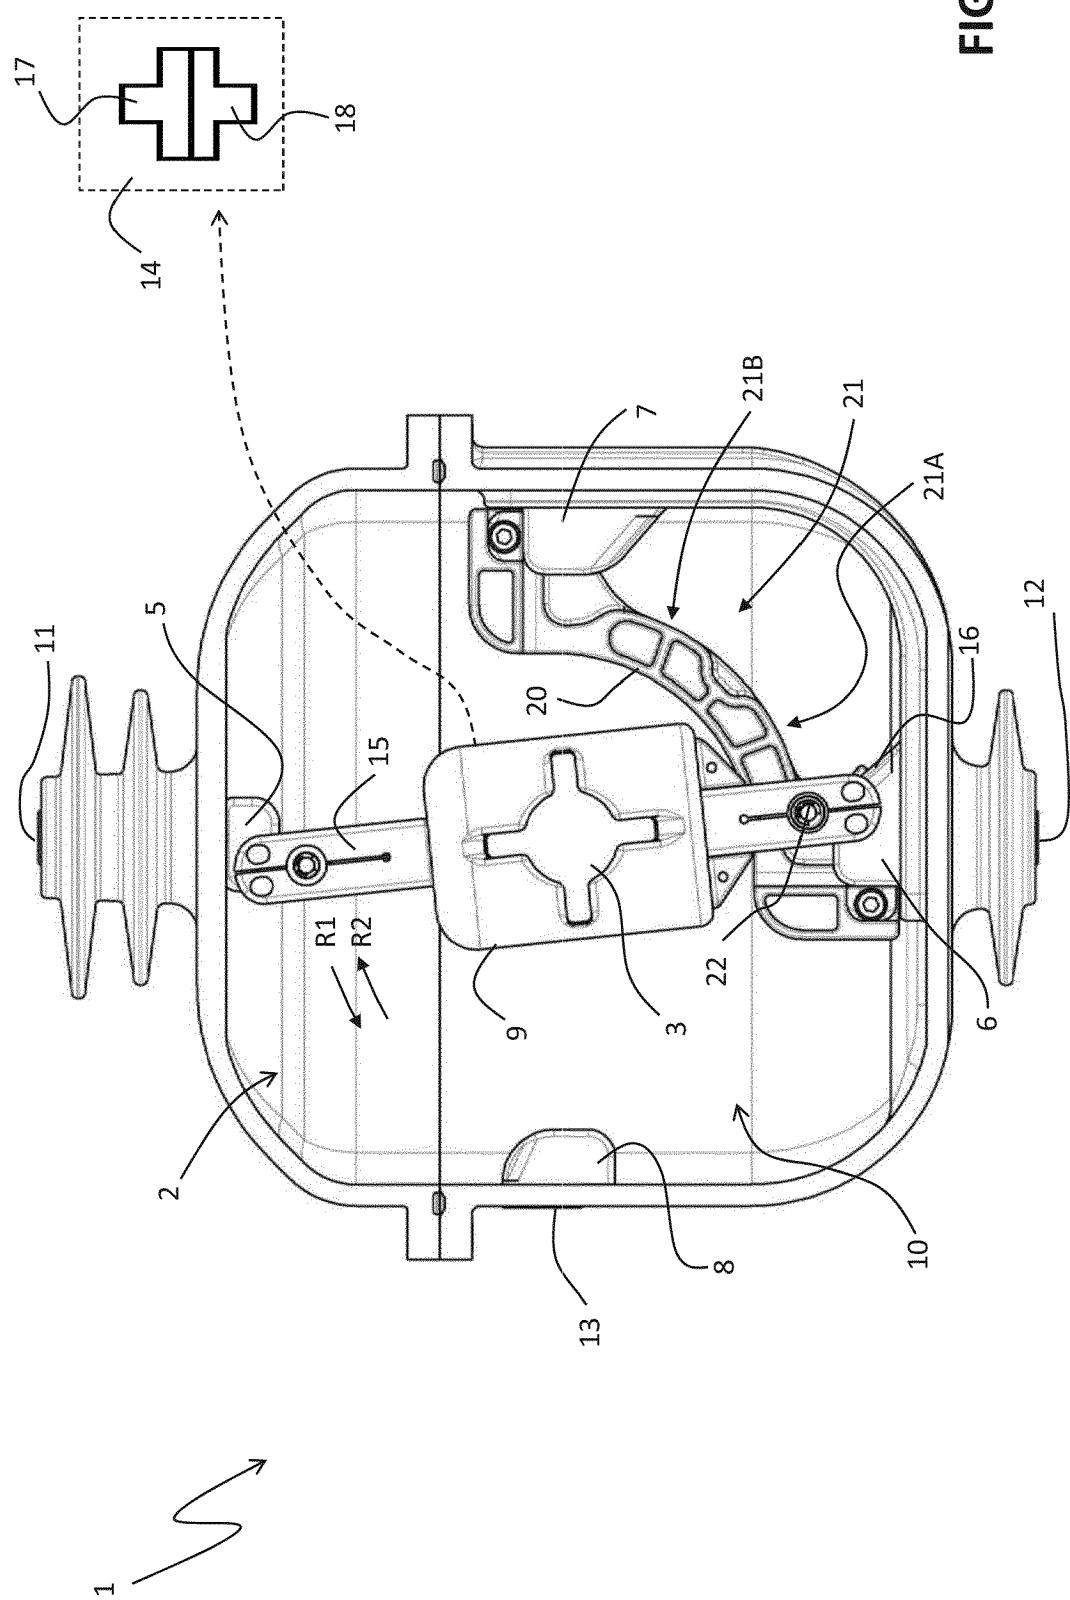


FIG. 10

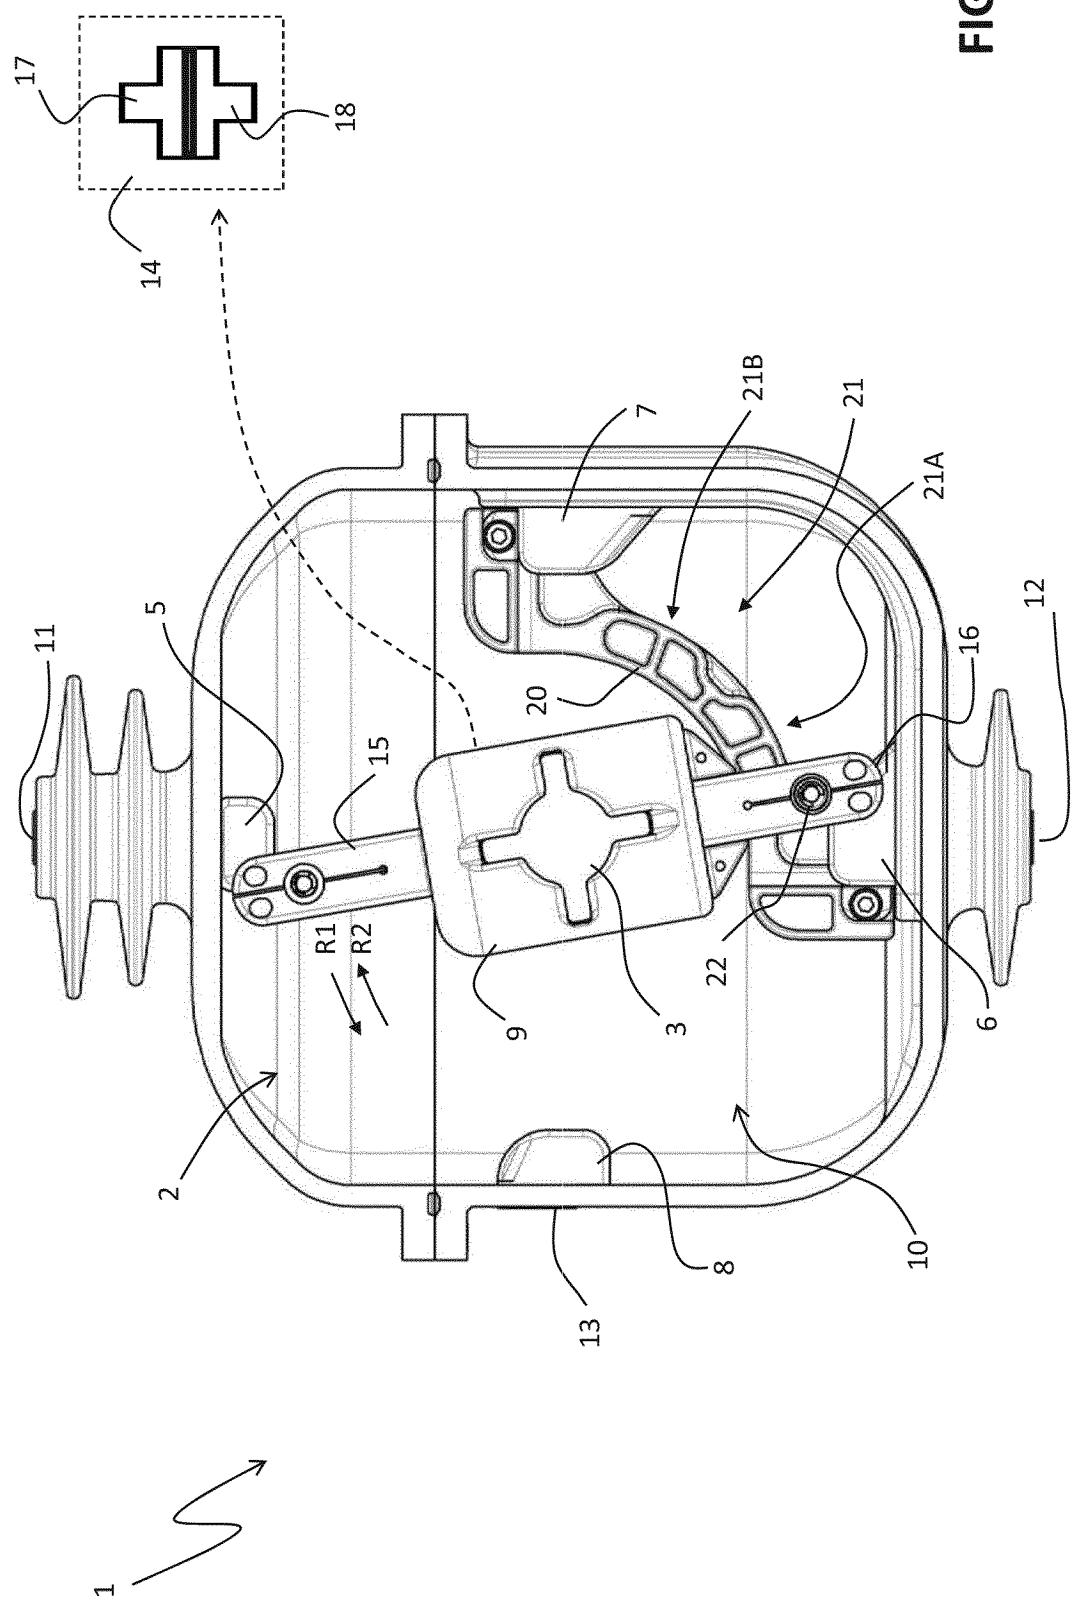


FIG. 11


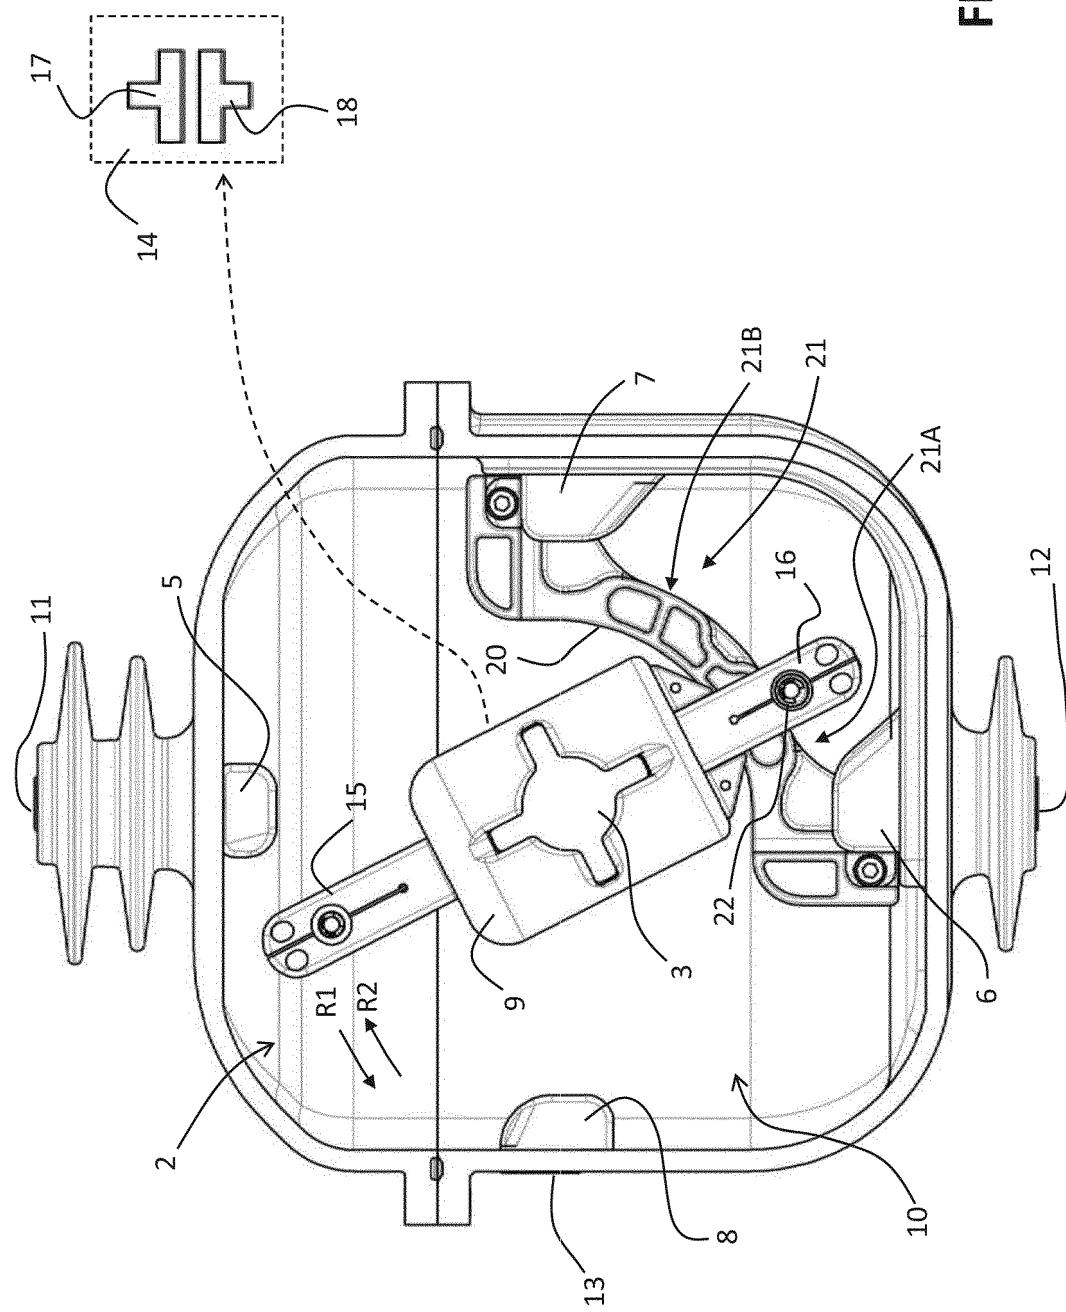


FIG. 12

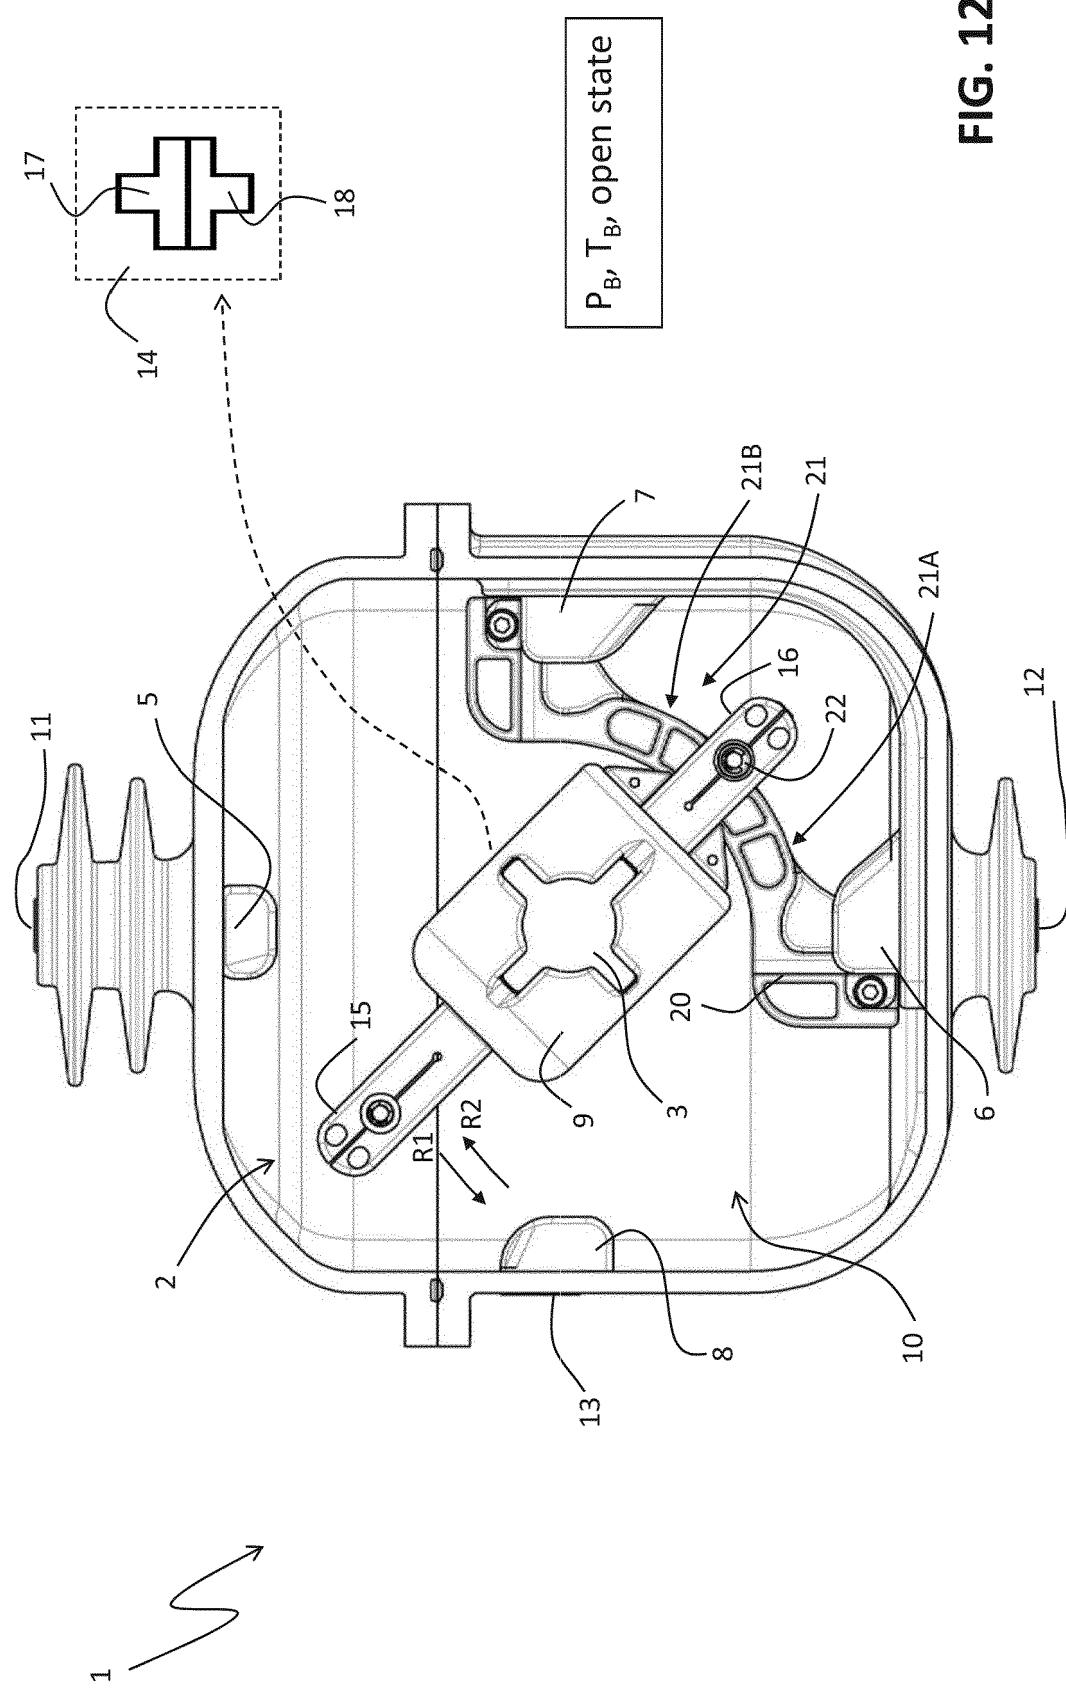


FIG. 13

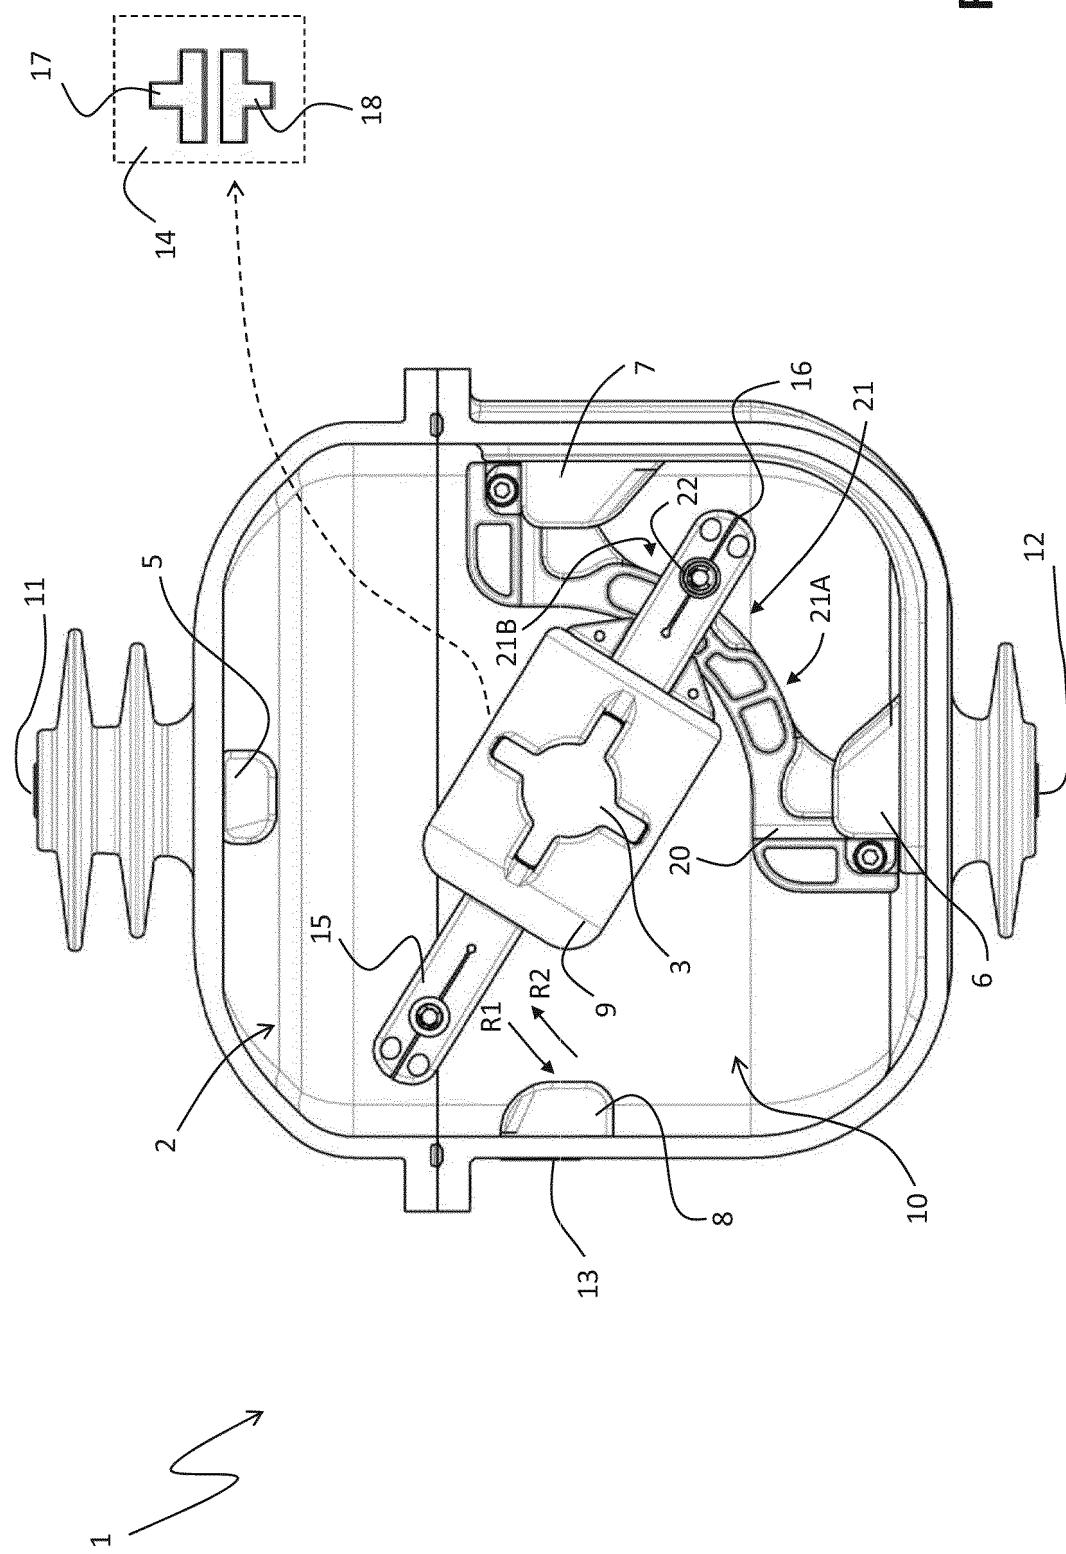


FIG. 14

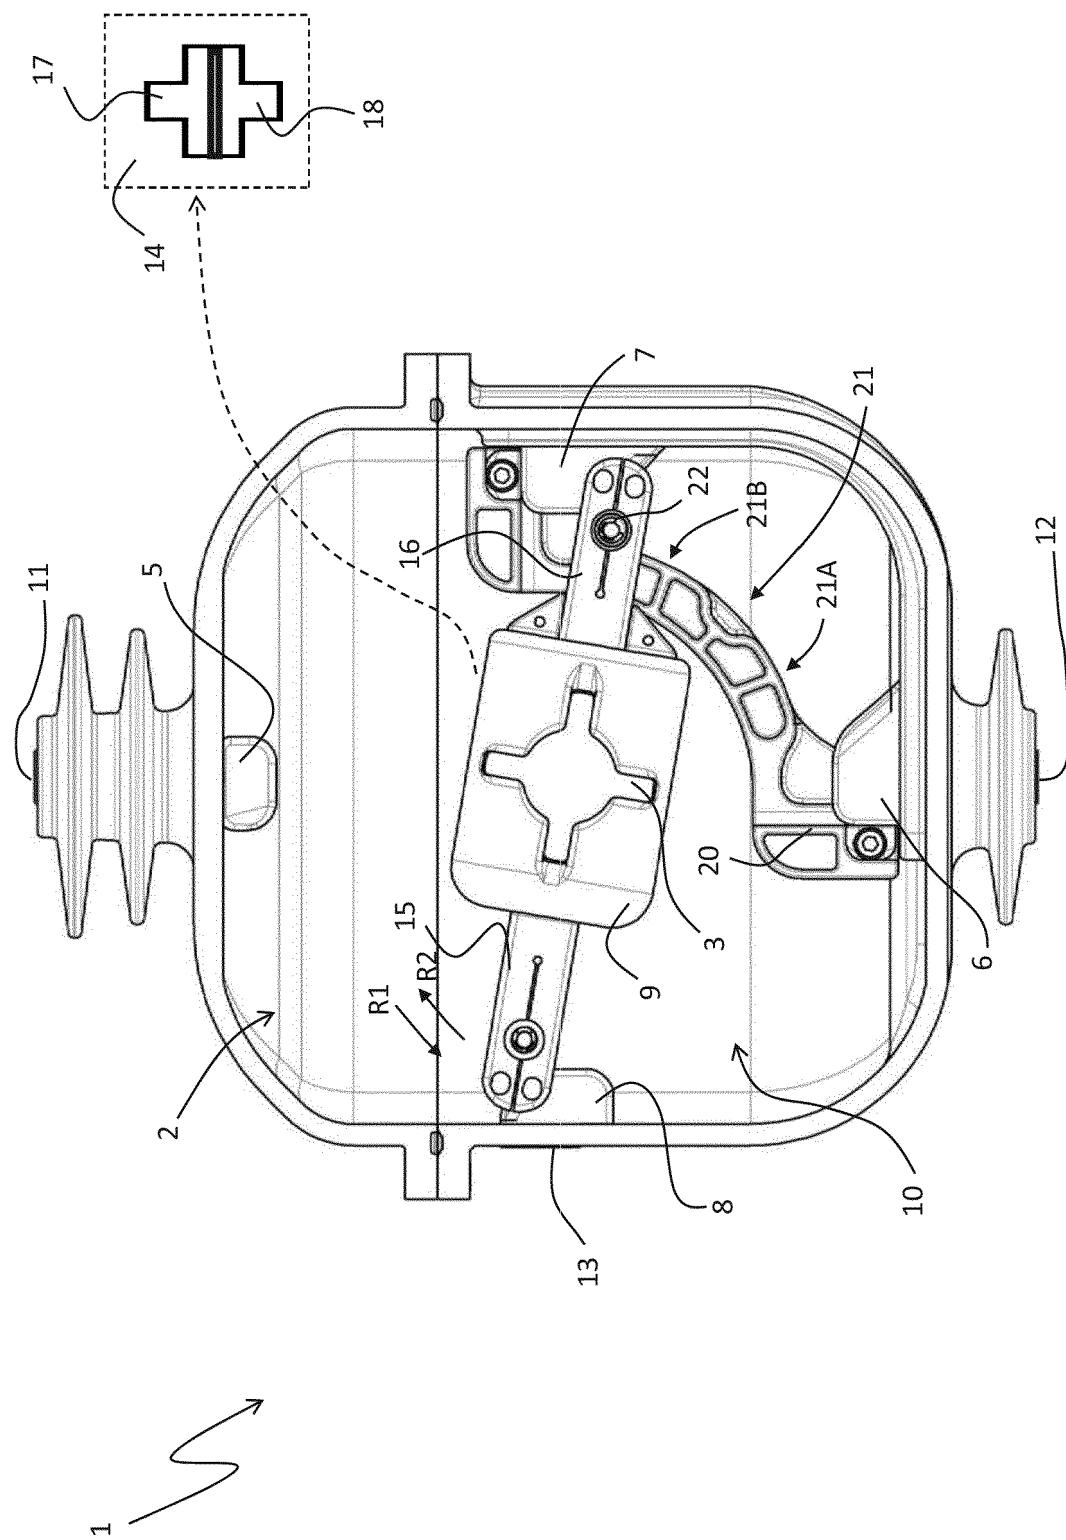


FIG. 15


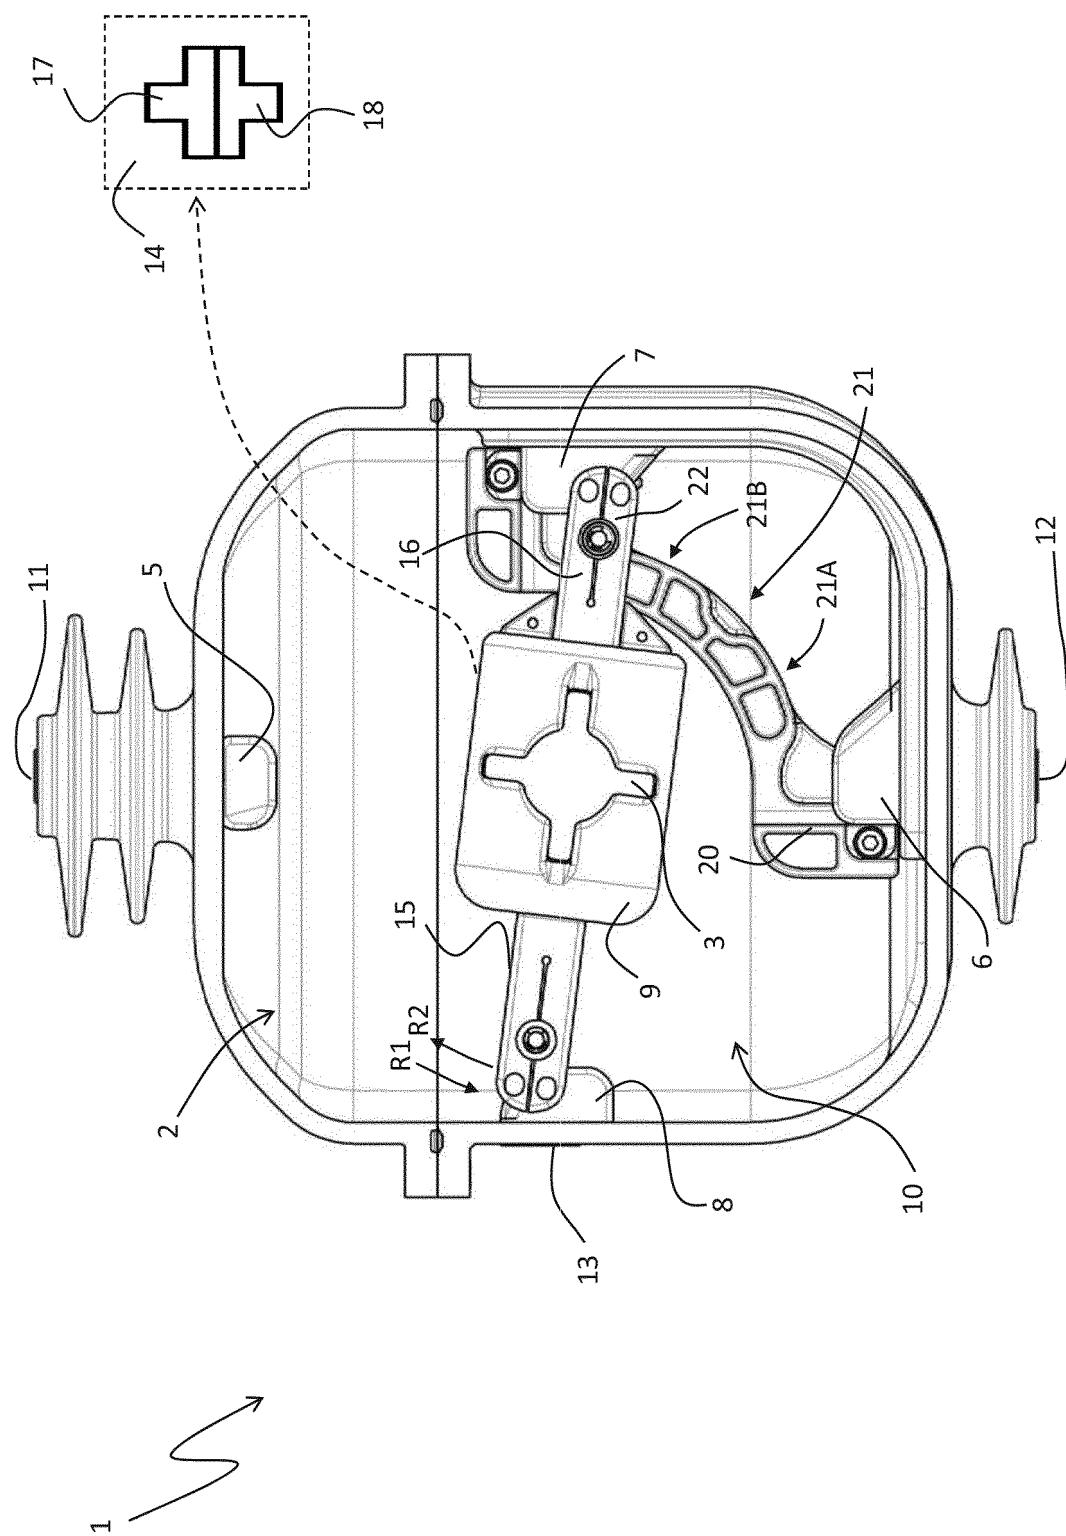


FIG. 16

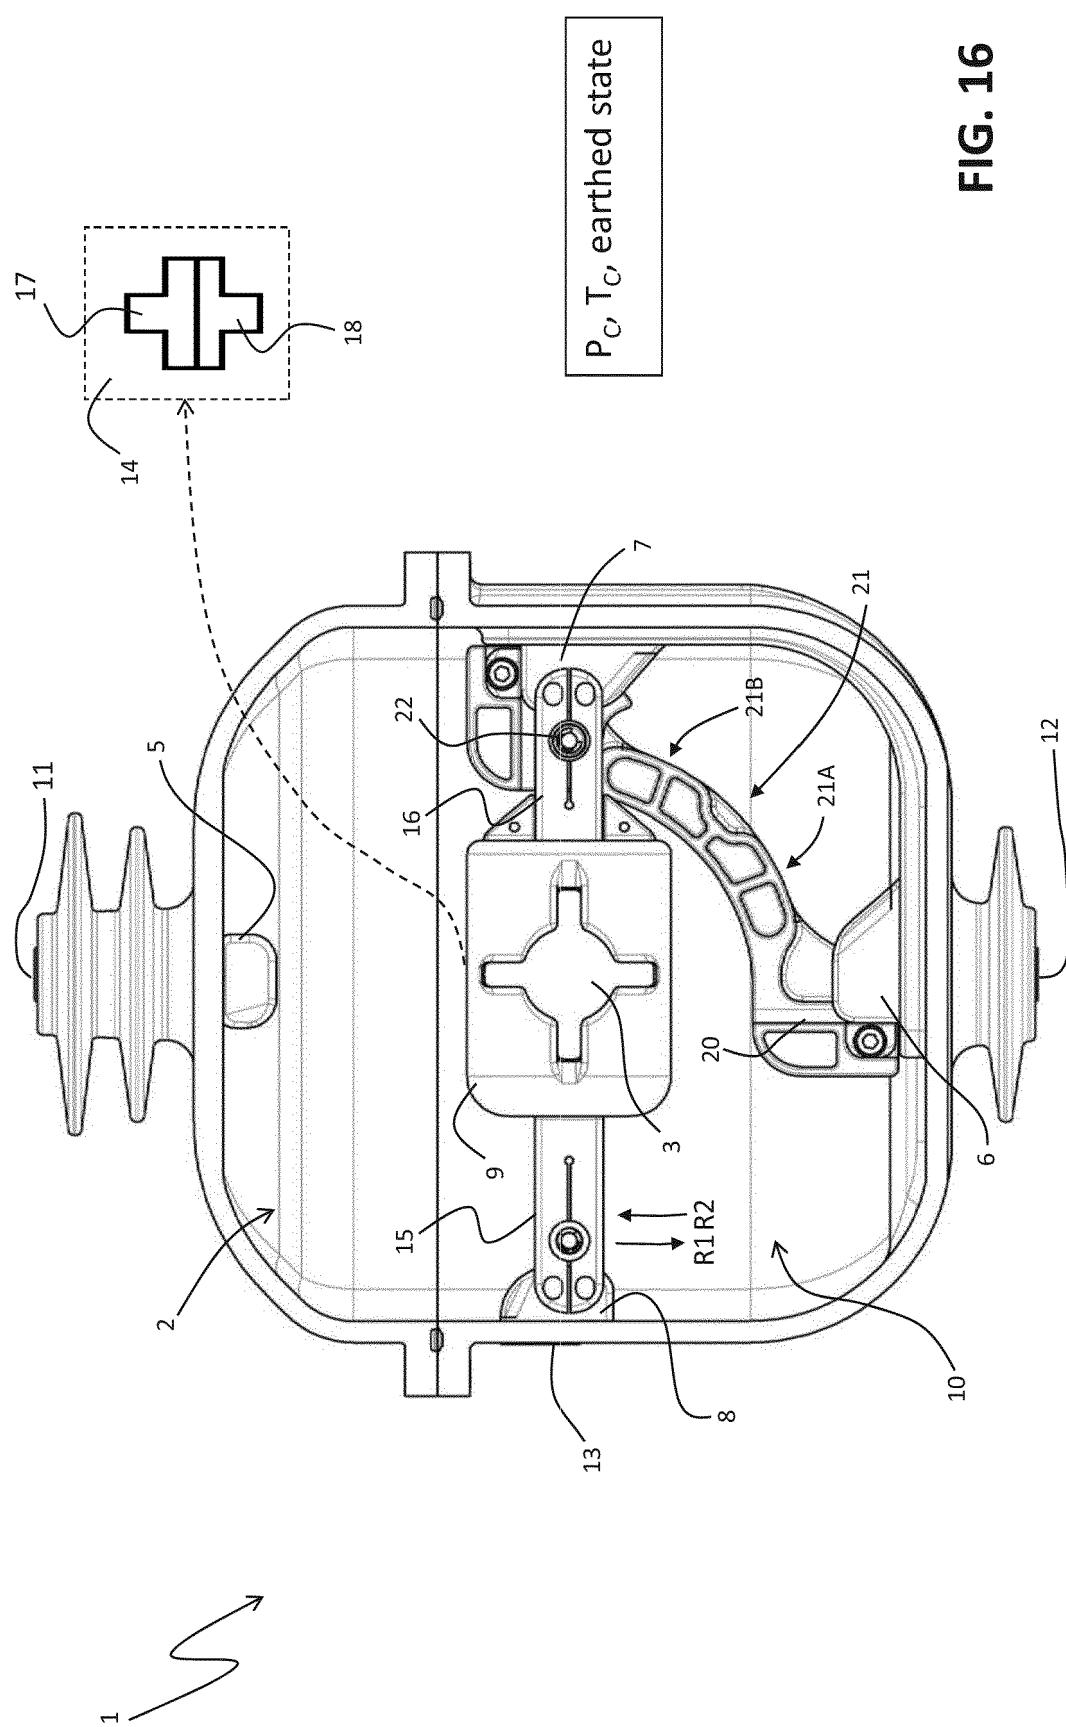

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- DE 102011087630 A1 [0008]
- US 4268890 A [0008]