

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/099131 A1

(43) International Publication Date

26 June 2014 (26.06.2014)

WIPO | PCT

(51) International Patent Classification:

G01N 21/55 (2014.01) G01N 21/94 (2006.01)
A61L 2/28 (2006.01)

(21) International Application Number:

PCT/US2013/067175

(22) International Filing Date:

29 October 2013 (29.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/745,037 21 December 2012 (21.12.2012) US
61/783,340 14 March 2013 (14.03.2013) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventor: BOMMARITO, G. Marco; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: EINERSON, Nicole J. et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: SYSTEMS AND METHODS FOR DETERMINING THE CLEANLINESS OF A SURFACE

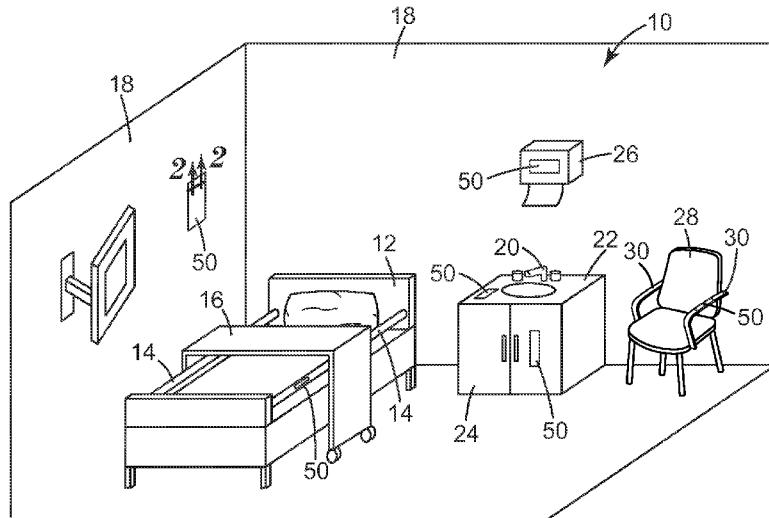


Fig. 1

(57) Abstract: Systems and methods for determining the cleanliness of a surface. Surface marking systems of the present disclosure can include a plurality of retroreflective microspheres dispersed in or dispensed on a carrier. Applicators of the present disclosure can include a container comprising the surface marking system, and a dispenser. Methods of the present disclosure can include applying the surface marking system to at least one discrete site on the surface; illuminating the at least one discrete site on the surface with visible light, after a cleaning; and detecting retroreflection emitted from the at least one discrete site on the surface in response to illuminating the at least one discrete site to determine the effectiveness of the cleaning of the surface.

SYSTEMS AND METHODS FOR DETERMINING THE CLEANLINESS OF A SURFACE**FIELD**

5 The present disclosure generally relates to systems and methods for determining the cleanliness of a surface, and particularly, for determining the cleanliness of an environmental surface, e.g., in a healthcare environment, using a unique surface marking system. The present disclosure also relates to surface marking systems and applicators for applying such marking systems to a surface of interest.

10

BACKGROUND

15

In healthcare facilities, microorganisms may be released onto surfaces (e.g., solid surfaces, equipment surfaces, clothing, etc.) from infected individuals or otherwise. Once a surface becomes contaminated with microorganisms, contact with the contaminated surface may easily and readily transfer microorganisms to other locations, such as another surface, an individual, equipment, food, or the like. In addition, some of the patients of such facilities suffer from infections by pathogenic microbes and, thus, bring the pathogenic microbes into such facilities. Such microbial contamination and/or transfer can be particularly troublesome because many of those who are present in such facilities (e.g., patients) are sick and may be immunologically compromised. Such individuals therefore have an increased risk of becoming sick from infection by the contaminating microbes.

20

Contaminated surfaces in a hospital or healthcare setting have been found to contribute to the epidemic and endemic transmission of a variety of microorganisms or pathogens, including *Clostridium difficile*, vancomycin-resistant *Enterococci* (VRE), methicillin-resistant *Staphylococcus aureus* (MRSA), *Acinetobacter baumannii*, and *Pseudomonas aeruginosa*, as well as to the epidemic transmission of norovirus. Such pathogens have been associated with Healthcare Acquired Infections (HAIs). While environmental cleaning and disinfecting practices have become routine in such healthcare settings, there is still a need for a facile, structured, and robust monitoring system and method for monitoring an environment's cleanliness, and for monitoring the effectiveness of various cleaning and/or disinfecting procedures.

25

Some existing monitoring systems employ a UV dye marking system in a transparent carrier. The glow from the UV dye can only be observed using an appropriate black light, such that the dyes are invisible to environmental services (EVS) staff during the cleaning procedures. Typically, an EVS manager can apply the marking system to a number of surfaces in a patient room, an operating room, or the like, prior to cleaning. The surfaces that have been marked are unknown to the EVS cleaning staff. After cleaning, the EVS manager (e.g., shift manager) can return to the room with a black light to inspect the marked surfaces and establish whether the marking system was thoroughly removed from the surfaces of interest.

SUMMARY

The present inventor has determined that an integrated environmental hygiene monitoring solution includes the use of a visual marking system. The surface marking systems of the present disclosure can be semi-quantitative and are used to determine if a surface has been adequately physically cleaned. Such surfaces can include environmental surfaces (e.g., walls, equipment, furniture, etc.) or skin surfaces (e.g., in monitoring hand washing of healthcare staff). As such, the surface marking system can be a tool to measure the compliance of front-line environmental services (EVS) staff to various cleaning protocols. Visual inspection can be used to monitor the aesthetic appearance of a given environment. In addition, a useful and easy-to-use integrated monitoring solution for determining the cleanliness of an environment and/or for determining compliance with cleaning protocols can be important for EVS to properly manage cleaning a healthcare setting, such as a hospital.

Surface marking systems of the present disclosure can serve as a surrogate for an environmental soil. They can be designed to be covert. Surface marking systems of the present disclosure employ retroreflective microspheres, rather than a UV dye, and therefore do not require a specialized light source to determine cleaning results.

Some aspects of the present disclosure provide a method for determining the cleanliness of a surface. The method can include providing a surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier; applying the surface marking system to at least one discrete site on the surface; illuminating the at least one discrete site on the surface with visible light, after a cleaning; and detecting retroreflection emitted from the at least one discrete site on the surface in response to illuminating the at least one discrete site to determine the effectiveness of the cleaning of the surface.

Some aspects of the present disclosure provide an applicator for applying a surface marking system. The applicator can include a container defining a reservoir; a surface marking system positioned in the reservoir, the surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier; and a dispenser configured to dispense the surface marking system from the reservoir.

Other features and aspects of the present disclosure will become apparent by consideration of the detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a hospital room with a variety of environmental surfaces, and a plurality of discrete sites to which a surface marking system can be applied.

FIG. 2 is a close-up schematic cross-sectional view of a discrete site of FIG. 1 that has been marked with a surface marking system according to one embodiment of the present disclosure, taken along line 2-2 of FIG. 1.

5 FIG. 3 is a flow chart describing a method of determining the cleanliness of a surface according to one embodiment of the present disclosure.

FIGS. 4-18 illustrate normalized pixel frequency versus pixel intensity for a variety of surface marking systems on a variety of surfaces, according to the Examples.

10 FIG. 19 is a photomicrograph of the retroreflective microspheres of Example 3, as described in the Examples section.

FIG. 20 is a photomicrograph of the microparticles of Comparative Example C3, as described in the Examples section.

FIG. 21 is a perspective view of an applicator for a surface marking system according to one embodiment of the present disclosure.

15 FIG. 22 is a perspective view of an applicator for a surface marking system according to another embodiment of the present disclosure.

FIG. 23 is a perspective view of an applicator for a surface marking system according to another embodiment of the present disclosure.

FIG. 24 is a perspective view of an applicator for a surface marking system according to another embodiment of the present disclosure.

20

DETAILED DESCRIPTION

Before any embodiments of the present disclosure are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention 25 is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of "including," "comprising," or "having" and variations thereof herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Unless specified or limited otherwise, the term "coupled" and variations thereof is used 30 broadly and encompasses both direct and indirect couplings. It is to be understood that other embodiments may be utilized, and structural or logical changes may be made without departing from the scope of the present disclosure. Furthermore, terms such as "front," "rear," "top," "bottom," and the like are only used to describe elements as they relate to one another, but are in no way meant to recite specific orientations of the apparatus, to indicate or imply necessary or required orientations of the apparatus, or to 35 specify how the invention described herein will be used, mounted, displayed, or positioned in use.

The present disclosure generally relates to visible-light-based surface marking systems, applicators for applying such surface marking systems to an environmental surface, and methods for determining the cleanliness of a surface and/or for determining compliance with cleaning protocols, e.g., by using such surface marking systems.

5 Methods of the present disclosure can include providing such surface marking systems comprising retroreflective microspheres; applying the surface marking system to a discrete site on a desired surface, allowing a cleaning procedure to take place; illuminating the same discrete site after cleaning with a visible light; and detecting the amount of retroreflection emitted from the same discrete site in response to the illumination to determine the effectiveness of the cleaning process based on the
10 amount of retroreflection that is produced from the surface marking system remaining at the discrete site on the surface. Detection can be performed visually and/or automatically, e.g., with a device that can emit visible light and possibly capture retroreflectivity data, such as brightness, retroreflection, intensity, images that can later be analyzed using appropriate software, etc.

15 Retroreflective articles return incident light back towards the light source. Retroreflectivity in the present disclosure is provided by a plurality of transparent tiny beads or microspheres with a refractive index two times the refractive index of the medium from which the light source is incident. Under these conditions, the sphere surface behaves as a concave spherical mirror with the required curvature for retroreflection. However, the reflective index does not need to be twice that of the ambient medium to achieve retroreflection. Because the beads have a certain amount of spherical aberration, when the
20 reflective index of the bead is at least 1.5 times that of ambient, there will be a radius from the centerline of the bead where a portion of the incident light is focused at the rear surface of the sphere giving rise to retroreflected light.

25 Retroreflectivity can also be provided in the present disclosure by a plurality of tiny beads or microspheres (e.g., made of glass) that cooperate with a reflective agent, such as a coated layer of aluminum. Such coatings can be partial coatings on the outer surfaces of the beads. Incident light entering an exposed portion of a bead (e.g., uncoated) is focused by the bead onto the reflective agent. The reflective agent reflects the incident light back through the bead, causing the light to exit through the exposed portion of the bead in a direction opposite the incident direction.

30 The microspheres (or “beads”) of the present disclosure are substantially spherical in shape to provide uniform and efficient retroreflection. For example, the microspheres of the present disclosure are generally formed by being exposed to a spheroidization process, such as a melt-spheroidization process. The microspheres (i.e., uncoated portions) preferably also are highly transparent to minimize light absorption so that a large percentage of incident light is retroreflected. The microspheres often are substantially colorless but may be tinted or colored in some other fashion. The microspheres may be
35 made from glass, a non-vitreous ceramic composition, or a synthetic resin. In general, glass and ceramic microspheres are preferred because they tend to be harder and more durable and tend to have more

suitable indices of refraction than microspheres made from synthetic resins. Examples of microspheres that may be useful in this invention are disclosed in the following United States patents: 1,175,224, 2,461,011, 2,726,161, 2,842,446, 2,853,393, 2,870,030, 2,939,797, 2,965,921, 2,992,122, 3,468,681, 3,946,130, 4,192,576, 4,367,919, 4,564,556, 4,758,469, 4,772,511, and 4,931,414. The disclosures of 5 these patents are incorporated here by reference.

In some embodiments, the microspheres can have an average diameter of about 30 to 200 micrometers, in some embodiments, about 50 to 150 micrometers, and in some embodiments, about 10 to 100 micrometers. Microspheres smaller than the above ranges tend to provide lower levels of retroreflection, and microspheres larger than this range may impart an undesirably rough texture to the 10 surface marking system. Microspheres used in the present disclosure can have a refractive index of about 1.5 to 3.0, in some embodiments, about 1.6 to 2.2, and in some embodiments, about 1.7 to 2.0.

In some embodiments, the microspheres can be coated with a specularly reflective material to 15 enhance reflection. A variety of metals may be used to provide a specularly reflective metal layer. These include aluminum, silver, chromium, nickel, magnesium, gold, tin, nickel, tungsten, and the like, in elemental form.

Aluminum and silver are preferred metals for use in the reflective layer because they tend to provide good retroreflective brightness. In the case of aluminum, some of the metal may be in the form of the metal oxide and/or hydroxide.

The term "surface" or "environmental surface" generally refers to any surface present in a given 20 environment. Examples of such surfaces that can be present in healthcare facilities (e.g., hospitals, doctor offices, nursing homes, etc.) can include, but are not limited to, walls (including doors), floors, ceilings, drains, ducts (e.g., airducts), vents, toilet seats, handles, doorknobs, handrails, bedrails (e.g., in a hospital), countertops, tabletops, eating surfaces (e.g., trays, dishes, etc.), working surfaces, equipment surfaces, clothing, etc., and combinations thereof. Examples of surfaces can also include skin surfaces, 25 such as surfaces on hands.

As mentioned above, visible light can be used to detect surface marking systems of the present disclosure. For example, the surface marking system can work using the flash from a camera (which also be used to capture before cleaning and after cleaning images). Such a detection system can also be convenient in quantifying the results, because flash photography can be used to measure the amount of 30 reflected light from the beads and thus establish if that surface was cleaned properly. The surface marking system can further include a carrier in or on which the retroreflective microspheres can be dispersed or dispensed in order to dispense the retroreflective microspheres onto a desired surface in a contact deposition mode or a non-contact deposition mode, e.g., using at least one of liquid deposition, spraying, and dry transfer methods.

One potential advantage for using visible light sources as opposed to specialized black light sources is that more convenient devices that may already be present in such a setting can be used for 35

5 detection, as opposed to needing a specialized light source dedicated to the detection process that would not normally be present in that setting. Furthermore, when the visible light source is the flash of a camera or other flash-photography-capable device there is an inherent optimum geometry that maximizes the retroreflected light from the bead based marking system and minimizes variability in the measured intensity, since the flash and camera aperture/shutter are physically located in nearly the same plane and spatially separated by a very small distance. This is in contrast to using a physically separate black light source which is hand held by the user, and as such can be held in different locations and angles with respect to the detection system (generally the human observer), potentially giving rise to variability in the amount of viewable light emitted from the UV based marking system.

10 In addition, the surface marking systems of the present disclosure are particulate in nature. One advantage of using a particulate or particle-based surface marking system can be that effective removal of the surface marking system can only be accomplished by physical means. This is in contrast to a UV dye-based system where simple dissolution may suffice for removal. Since physical removal of contamination can be key to the disinfection process, the surface marking systems and methods of the present disclosure 15 provide a more robust challenge for the cleaning process. Another potential advantage of using the particle-based surface marking system over a UV-dye-based system, is that the light emitted from the particle based system is point-like, and not a uniform glow as in the UV-dye-based systems, which can effectively provide a higher signal-to-noise ratio when measuring light output during detection. In addition, the point-like nature of the emitted light lends itself to analysis based on enumerating or 20 counting the presence of discrete objects on the marked surface as a measurement of cleanliness. This is analogous to, for example, microbiological culture based methods where bacteria are enumerated on the surface of culture plates in order to quantify the concentration of a bacterial sample.

25 As mentioned above, the retroreflective microspheres can be suspended in, dispersed in and/or dispensed on a carrier. In embodiments in which the carrier is a solvent, the quick-drying carriers can be particularly useful. In embodiments in which the retroreflective microspheres are dispensed on the carrier, the carrier can be a thin layer of adhesive that will also require physical removal during the cleaning process. Generally, the carrier has two primary characteristics. First, the carrier does not significantly impede the cleaning process. That is, the carrier does not significantly increase the amount 30 of time that one would need to wait prior to cleaning the marked room (e.g., quick-drying if the carrier is a liquid). Second, the carrier is generally designed to provide a challenge for removal that mimics an environmental soil (or skin soil) typical of the environment (or body part).

35 FIG. 1 illustrates an exemplary hospital room 10 comprising a bed 12 having bedrails 14, a tray 16, one or more walls 18, a sink 20, a countertop 22, a cupboard 24, a paper towel dispenser 26, and a chair 28 having an armrest 30. The above items shown in the hospital room 10 are shown by way of example only to demonstrate a variety of items having surfaces to be cleaned in a hospital cleaning protocol. Surfaces on these items can be marked using surface marking systems of the present disclosure,

cleaned according to a cleaning protocol appropriate for the given environment, and monitored using the methods of the present disclosure. A variety of discrete marking sites 50 are shown in FIG. 1 that can be marked using surface marking systems of the present disclosure and monitored using methods of the present disclosure. For example, discrete sites 50 are shown on a bedrail 14, on a wall 18, on the 5 countertop 22, on the cupboard 24, on the paper towel dispenser 26, and on the armrest 30 of the chair 28. While the discrete sites 50 are shown on surfaces in a hospital room, it should be understood that in some embodiments, the surface marking system 60 can be used to monitor hand hygiene and be used on skin as well.

FIG. 2 illustrates a surface marking system 60 according to one embodiment of the present 10 disclosure. The surface marking system 60 includes a carrier 62, and a plurality of retroreflective microspheres 64 dispersed in or dispensed on the carrier 62.

As shown, the retroreflective microspheres 64 can include a base material 66 formed of any of the 15 above-described materials or combinations thereof, and a coating 68, as described above. The coating 68 is illustrated as a partial coating over the base material 66 of each microsphere 64. The microspheres 64 may end up randomly oriented and distributed in or on the carrier 62, and ultimately, on the surface of interest. In such cases, at least enough of the microspheres 64 will end up oriented such that incident light can enter an exposed portion of a microspheres 64 and be reflected off the reflective coating 68 on the rear surface of the microsphere, back toward the light source, as illustrated by arrow L in FIG. 2.

The carrier 62 can be in a variety of forms and include a variety of materials. For example, in 20 embodiments in which the microspheres 64 are dispensed in a liquid volumetric carrier 62, the carrier 62 can include, but is not limited to, one or more solvents that are at least as volatile as water at room temperature, e.g., 25 degrees C (and in some embodiments, are more volatile than water at room temperature), one or more surfactants, one or more propellants (e.g., chlorofluorocarbons (CFCs), hydrofluoroalkanes (HFAs), etc.), one or more polymeric binders, or combinations thereof.

25 In some embodiments, the carrier 62 can include a non-solid phase that evaporates quickly (e.g., that is at least as volatile as water at room temperature, and in some embodiments, more volatile than water at room temperature), and if any solid components are present in the carrier 62, the solid components are water-soluble. Surface marking systems employing such carriers 62 would dry relatively quickly but would also be easily removed by standard cleaning (e.g., water-based) procedures and 30 products, such that the surface marking system does not significantly impede cleaning procedures or present unnecessary cleaning challenges once dried onto a surface of interest.

35 Examples of solvents that are at least as volatile as water at room temperature that can be employed include, but are not limited to, water, alcohols (e.g., methanol, ethanol, propanol, isopropyl alcohol, etc.), acetone, methyl acetate, ethyl acetate, other suitable solvents that are at least as volatile as water at room temperature, or a combination thereof.

Examples of suitable surfactants can include, but are not limited to, anionic surfactants (e.g., dioctyl sodium sulfosuccinate, perfluorooctanesulfonate (PFOS), perfluorobutanesulfonate, linear alkylbenzene sulfonates), cationic surfactants (cetyl trimethylammonium bromide (CTAB) cetyl trimethylammonium chloride (CTAC) cetylpyridinium chloride (CPC), benzalkonium chloride (BAC), 5 benzethonium chloride (BZT), 5-bromo-5-nitro-1,3-dioxane, dimethyldioctadecylammonium chloride, dioctadecyldimethylammonium bromide (DODAB), etc.); nonionic surfactants (e.g., polyoxyethylene glycol alkyl ethers, octaethylene glycol monododecyl ether, pentaethylene glycol monododecyl ether, polyoxypropylene glycol alkyl ethers, glucoside alkyl ethers, decyl glucoside, lauryl glucoside, octyl glucoside, polyoxyethylene glycol octylphenol ethers, polyoxyethylene glycol alkylphenol ethers, glycerol alkyl esters, polyoxyethylene glycol sorbitan alkyl esters: polysorbate, sorbitan alkyl esters, cocamide MEA, cocamide DEA, dodecyldimethylamine oxide, block copolymers of polyethylene glycol and polypropylene glycol, etc.); or combinations thereof.

In some embodiments, the retroreflective microspheres 64 can be randomly distributed in or on the carrier 62. In addition, in some embodiments, the carrier 62 can be water-soluble and can enable the 15 surface marking system 60 to be temporary, removable with normal or typical cleaning procedures for a given environment or body surface, etc. In addition, in some embodiments, the surface marking system 60 is non-toxic, such that the retroreflective microspheres 64 and the carrier 62 are formed of non-toxic materials that do not present a hazard.

When the microspheres 64 are dispersed in a liquid volumetric carrier, the microspheres 64 can 20 be dispersed in the carrier 62 at a concentration of at least about 1000 (1×10^3) microspheres 64 per mL of carrier 62, in some embodiments, at a concentration of at least about 10,000 (1×10^4), and in some embodiments, at a concentration of at least about 50,000 (5×10^4). In some embodiments, the microspheres 64 can be dispersed in the carrier 62 at a concentration of no greater than about 1,000,000 (1×10^6) microspheres 64 per mL of carrier 62, in some embodiments, at a concentration of no greater 25 than about 500,000 (5×10^5), and in some embodiments, at a concentration of no greater than about 100,000 (1×10^5). In some embodiments, the microspheres 64 can be dispersed in the carrier 62 at a concentration ranging from 1000-1,000,000 microspheres 64 per mL of carrier 62.

In some embodiments, the carrier 62 can include an adhesive or an adhesive layer, and the microspheres 64 can be dispensed onto a surface of the adhesive, the adhesive being suitable for 30 mimicking environmental (or skin) soil in a given environment (or body part). Such an adhesive can include, e.g., a double-side adhesive to adhere to a surface and hold the microspheres 64 in place on the surface sufficiently and reliably. In some embodiments, by way of example only, such an adhesive carrier can be dispensed from a tape dispenser that separates a release liner from the adhesive and lays the adhesive down on a surface while also dispensing the retroreflective microspheres on the adhesive. 35 Adhesive carriers can include, but are not limited to, pressure sensitive adhesives including ones based on

polyacrylates, natural rubber, synthetic rubber, spray adhesives, repositionable adhesives, and combinations thereof.

In embodiments employing an adhesive surface as the carrier 62, the microspheres 64 can be dispensed on the carrier 62 at a concentration of at least about 100 (1×10^2) microspheres 64 per cm^2 of carrier 62, in some embodiments, at a concentration of at least about 1,000 (1×10^3), and in some embodiments, at a concentration of at least about 5,000 (5×10^3). In some embodiments, the microspheres 64 can be dispersed in the carrier 62 at a concentration of no greater than about 100,000 (1×10^5) microspheres 64 per cm^2 of carrier 62, in some embodiments, at a concentration of no greater than about 50,000 (5×10^4), and in some embodiments, at a concentration of no greater than about 10,000 (1×10^4). In some embodiments, the microspheres 64 can be dispensed on the carrier 62 at a concentration ranging from 100-100,000 microspheres 64 per cm^2 of carrier 62.

One potential advantage of the surface marking systems employed in methods of the present disclosure is that the brightness and conspicuity of the surface marking systems of the present disclosure are superior to other existing marking systems. The Examples section below compares examples of surface marking systems of the present disclosure with a comparative microparticle system and existing UV-dye-based marking systems.

In some embodiments, in order to quantify and characterize the intensity or conspicuity of the surface marking system, a quality factor Q and a ‘gain ratio’ for the surface marking system can be obtained. As described in the Examples section below, for a given surface marking system, an intensity histogram can be created, e.g., which plots pixel frequency as the Y axis vs. pixel intensity as the X-axis. The intensity can also be approximated as representing a “lightness” value L present in a Lab color space with dimension L for lightness and “a” and “b” for the color-opponent dimensions, based on nonlinearly compressed CIE XYZ color space coordinates. The pixel frequency (or quantity) therefore provides the number of pixels with a given pixel intensity. Such pixel intensity histograms can then be curve-fit (e.g., as described in the Examples section), and three parameters can be extracted: L_{MAX} , L_{FWHM} , and $f_{\text{Area}}@L_{\text{MAX}}$. L_{MAX} is the pixel intensity or “lightness” at the maximum normalized pixel frequency for the fit function. $f_{\text{Area}}@L_{\text{MAX}}$ is the normalized pixel frequency value corresponding to L_{MAX} . L_{FWHM} is the pixel intensity full width at a normalized pixel frequency value that is exactly half of $f_{\text{Area}}@L_{\text{MAX}}$.

From these parameters, a quality factor $Q = L_{\text{MAX}}/L_{\text{FWHM}}$ can be calculated, for the non-illuminated state of the system (Q_{Off}) as well as for the illuminated state of the system (Q_{On}). The Q factors describe the distribution of pixel intensity across the entirety of the surface mark. High Q factors are representative of surface marks where there is a significant majority of pixels within a very narrow distribution (small L_{FWHM}) about a relatively high center intensity (large L_{MAX}). Low Q factors describe the opposite condition: surface marks where the significant majority of pixels have intensities spread out over a broad distribution (large L_{FWHM}) centered about a relatively low intensity (small L_{MAX}). Furthermore, by calculating the ratio of Q_{On} to Q_{Off} (the ‘gain ratio’), one can determine a quantity that is

representative of the intensity gain for the system when it transitions from the non-illuminated to the illuminated state. This gain ratio describes the magnitude by which the surface mark becomes apparent to an observer when the illuminating source is turned on.

5 In some embodiments, the surface marking system 60 can be substantially invisible or at least inconspicuous (i.e., covert) to the EVS cleaning staff, and in some embodiments, the surface marking system 60 can be visible to the EVS cleaning staff.

10 In some embodiments, in order to quantify and characterize the visibility or covertness of the surface marking system, a transparency ratio for the surface marking system can be obtained. Using the Q factors described above, the ratio of Q_{Off} to the Q factor determined for the non-marked and non-illuminated surface ($Q_{Background}$) is representative of the transparency of the surface mark on a given surface. This ‘transparency ratio’ is indicative of how “covert” the marked surface is to a given observer. Approaching a transparency ratio of 1.0 maximizes the covertness of the system.

15 FIG. 3 illustrates a method 100 according to one embodiment of the present disclosure. As shown, the method 100 can include a first step 102 which includes applying a surface marking system to one or more discrete sites (e.g., the discrete sites 50 of FIG. 1) on a surface of interest. The method of application can be dependent on the type of surface marking system that is employed. For example, in embodiments employing a liquid carrier and retroreflective microspheres dispensed in the liquid carrier, at least one of liquid deposition (e.g., employing a roller ball), spraying, foaming, or the like, or 20 combinations thereof, can be employed. Spraying and foaming can be examples of non-contact application modes, while liquid deposition can be an example of contact application modes. In some embodiments, non-contact application modes can be preferred to allow an applicator to be reused. Applicators employing contact methods of application may need to be re-sterilized or discarded after a single use.

25 As shown, the method 100 further includes a second step 104 of cleaning the surface. The second step 104 may not necessarily form a portion of the methods of the present disclosure, because the cleaning step may be performed by a different entity than the entity performing the remaining steps of the method 100. For example, as described above, in some embodiments, management may perform most of the steps of the method 100, and EVS cleaning staff may perform the cleaning step 104. In some 30 embodiments in which the cleaning step 104 is performed by a separate entity than the remaining steps, the surface marking system can be covert, the discrete sites that have been marked with the surface marking system can be unknown to the cleaning entity (e.g., EVS staff), and/or the monitoring methods of the present disclosure may be unknown to the cleaning entity.

35 The method 100 further includes a third step 106 that includes illuminating the discrete sites that were marked in the first step 102 with a visible light. As mentioned above, a variety of light sources can be used to illuminate the discrete sites with visible light, including, but not limited to, at least one of a

flashlight, a lamp, a lantern, a camera, a smart phone, a smart phone camera, a tablet computer, a tablet computer camera, other portable devices with integrated flash cameras, other suitable visible light sources, and a combination thereof.

The method 100 can further include a fourth step 108 which includes detecting emitted retroreflection from the discrete sites in response to illuminating the discrete sites. Based on the amount of retroreflected light that is emitted from each discrete site, the cleanliness of a surface can be determined and/or compliance with a cleaning protocol can be ascertained. As mentioned above, detection can be performed visually or with a detection device. A variety of detection devices can be employed with the methods of the present disclosure, including, but not limited to, at least one of a camera (e.g., any camera that is capable of flash photography; cameras used in conjunction with an external flash or a separate flashlight; etc.), other suitable detection devices, and combinations thereof.

FIGS. 21-23 illustrate exemplary applicators of the present disclosure. FIG. 21 illustrates an applicator 150A that can be used to spot, dab, paint, foam, or the like as means of applying a surface marking system to an environmental surface. The applicator 150A includes a container 152A that includes or defines a reservoir 154A configured to house a surface marking system 60A comprising retroreflective microspheres 64A dispersed in a carrier 62A (e.g., a liquid volumetric carrier). Any of the above-described liquid carriers and retroreflective microspheres can be employed. The applicator 150A further includes a dispenser or means for dispensing 156A configured to dispense the surface marking system 60A from the reservoir 154A (e.g., via the dispenser 156A). The dispenser 156A can be coupled to the container 152A and positioned in fluid communication with the reservoir 154A of the container 152A, such that the surface marking system 60A can be passed through the dispenser 156A to apply the surface marking system 60A to a surface. For example, in some embodiments, the sides of the container 152A can be squeezed to force the surface marking system 60A through the dispenser 156A. As mentioned above, the dispenser 156A can be configured to spot, dab, paint, foam, or the like, or combinations thereof, to apply the surface marking system 60A to a surface. As such, in some embodiments, the dispenser 156A can include a porous substrate that can be sized to pass the carrier 62A and the retroreflective microspheres 64A therethrough. For example, the dispenser 156A can include a sponge, a foam, a swab, a brush, a dabber, a filter membrane, a screen, or the like, or combinations thereof.

FIG. 22 illustrates an applicator 150B that can be used to spray, squirt, foam and/or atomize as means of applying a surface marking system to an environmental surface. The applicator 150B includes a container 152B that includes or defines a reservoir 154B configured to house a surface marking system 60B comprising retroreflective microspheres 64B dispersed in a carrier 62B (e.g., a liquid volumetric carrier). Any of the above-described liquid carriers and retroreflective microspheres can be employed. The applicator 150B further includes a dispenser or means for dispensing 156B configured to dispense the surface marking system 60B from the reservoir 154B. For example, in some embodiments,

the dispenser 156B can include a nozzle 158 that is in fluid communication with the reservoir 154B. By way of example only, the nozzle 158 is shown as including a pump spray nozzle, but it should be understood that a variety of nozzles (e.g., aerosol, or the like) can instead be employed.

FIG. 23 illustrates an applicator 150C that can be used to apply a surface marking system to an environmental surface. The applicator 150C includes a container 152C that includes or defines a reservoir 154C configured to house a surface marking system 60C comprising retroreflective microspheres 64C dispensed on a carrier 62C (e.g., an adhesive layer). Any of the above-described adhesive or two-dimensional carriers and retroreflective microspheres can be employed. The applicator 150C further includes a dispenser or means for dispensing 156C configured to dispense the surface marking system 60C from the reservoir 154C. For example, such an adhesive carrier 62C can be dispensed from the applicator 150C, which is shown by way of example only as being a tape dispenser and means for separating a release liner (or backing) 165C from the adhesive carrier 62C, such that the applicator 150C lays the adhesive carrier 62C down on a desired surface. The retroreflective microspheres 64C can simultaneously be dispensed onto the adhesive carrier 62C, or the microspheres 64C can be dispensed on the adhesive carrier 62C prior to being loaded into the applicator 150C.

FIG. 24 illustrates an applicator 150D that can be used to apply a surface marking system to an environmental surface. The applicator 150D includes a container 152D that includes or defines a reservoir 154D configured to house a surface marking system 60D comprising retroreflective microspheres 64D dispersed in a carrier 62D (e.g., a liquid volumetric carrier). Any of the above-described liquid carriers and retroreflective microspheres can be employed. The applicator 150D further includes a dispenser or means for dispensing 156D configured to transfer the surface marking system 60D from the reservoir 154D to a surface of interest. For example, in some embodiments, the container 152D can include a lid or cover 153D removably coupled to a base 155D, and the dispenser 156D can be coupled to the lid 153D, such that when the lid 153D is removed from the base 155D, the lid 153D can be grasped like a handle, and the surface marking system 60D can be applied to a surface of interest using the dispenser 156D. Other configurations and variations of the applicator 150D, and particularly the container 152D, are within the scope of the present disclosure. By way of example only, the dispenser 156D is shown as including a brush 170; however, it should be understood that in some embodiments, the dispenser 156D can include a sponge, a foam, a swab, a dabber, etc., or combinations thereof. In some embodiments, the dispenser 156D can include a porous substrate.

Each embodiment shown in FIGS. 21-24 is illustrated as a separate embodiment for clarity in illustrating a variety of features of the applicators of the present disclosure. However, it should be understood that any combination of elements and features of any of the embodiments illustrated in the figures and described herein can be employed in the applicators of the present disclosure.

The following embodiments are intended to be illustrative of the present disclosure and not limiting.

EMBODIMENTS

Embodiment 1 is a method for determining the cleanliness of a surface, the method comprising:

5 providing a surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier;

applying the surface marking system to at least one discrete site on the surface;

illuminating the at least one discrete site on the surface with visible light, after a cleaning;

and

10 detecting retroreflection emitted from the at least one discrete site on the surface in response to illuminating the at least one discrete site to determine the effectiveness of the cleaning of the surface.

Embodiment 2 is the method of embodiment 1, wherein detecting includes visually detecting.

Embodiment 3 is the method of embodiment 1 or 2, wherein the surface is an environmental surface.

15 Embodiment 4 is the method of any of embodiments 1-3, wherein the at least one discrete site on the surface is unknown to environmental services staff.

Embodiment 5 is the method of any of embodiments 1-4, wherein the surface marking system is covert.

20 Embodiment 6 is the method of any of embodiments 1-5, wherein the plurality of retroreflective beads are randomly distributed in or on the carrier.

Embodiment 7 is the method of any of embodiments 1-6, wherein the surface marking system is comprised of non-toxic material.

Embodiment 8 is the method of any of embodiments 1-7, wherein the carrier is water-soluble.

25 Embodiment 9 is the method of any of embodiments 1-8, wherein applying the surface marking system includes non-contact application.

Embodiment 10 is the method of any of embodiments 1-9, wherein applying the surface marking system includes spraying.

Embodiment 11 is the method of any of embodiments 1-10, wherein applying the surface marking system includes foaming.

30 Embodiment 12 is the method of any of embodiments 1-11, wherein applying the surface marking system includes dry transfer.

Embodiment 13 is the method of any of embodiments 1-12, wherein applying the surface marking system includes contact application.

35 Embodiment 14 is the method of any of embodiments 1-13, wherein applying the surface marking system includes liquid deposition.

Embodiment 15 is the method of any of embodiments 1-14, wherein each of the plurality of retroreflective microspheres is at least partially coated with a reflective coating.

Embodiment 16 is the method of any of embodiments 1-15, wherein the plurality of retroreflective microspheres are dispersed in the carrier to a concentration of no greater than about 1 X 5 10^6 microspheres/mL of the carrier.

Embodiment 17 is the method of any of embodiments 1-16, wherein the plurality of retroreflective microspheres are dispensed on the carrier to a concentration of no greater than about 1 X 10^5 microspheres/cm² of the carrier.

Embodiment 18 is the method of any of embodiments 1-17, wherein the plurality of 10 retroreflective microspheres includes an average diameter of 10 to 100 micrometers.

Embodiment 19 is the method of any of embodiments 1-18, wherein the carrier includes at least one of a surfactant, a polymeric binder, an adhesive layer, and a combination thereof.

The following working examples are intended to be illustrative of the present disclosure and not limiting.

Embodiment 20 is an applicator for applying a surface marking system, the applicator 15 comprising:

a container defining a reservoir;

a surface marking system positioned in the reservoir, the surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier; and

a dispenser configured to dispense the surface marking system from the reservoir.

Embodiment 21 is the applicator of embodiment 20, wherein the dispenser includes a porous 20 substrate.

Embodiment 22 is the applicator of embodiment 20 or 21, wherein the dispenser includes at least one of a sponge, a foam, a swab, a brush, a dabber, or a combination thereof.

Embodiment 23 is the applicator of any of embodiments 20-22, wherein the dispenser includes a 25 nozzle.

Embodiment 24 is the applicator of any of embodiments 20-23, wherein the carrier includes an adhesive, and wherein the container includes a tape dispenser.

Embodiment 25 is the applicator of any of embodiments 20-24, wherein the carrier includes a solvent that is at least as volatile as water at room temperature..

Embodiment 26 is the applicator of any of embodiments 20-25, wherein the carrier includes an 30 alcohol.

EXAMPLES

ENVIRONMENTAL MARKERS

35 Six different marker systems were evaluated – three Examples (Examples 1-3) of surface marking systems of the present disclosure employing visible-light-based systems and retroreflective microspheres,

two Comparative Examples (C1 and C2) employing UV (fluorescent)-based marking systems, and one Comparative Example (C3) employing a visible-light-based system and microparticles (i.e., that were not formed into microspheres).

5 Example 1 was prepared with retroreflective microspheres, designated “W” beads, which were formed general glass recycle untreated microspheres with particle size less than 49 microns.

Example 2 was prepared with retroreflective microspheres, designated “Y” Beads, which were finished chromium treated microspheres with the following size distribution:

Table 1. Y Beads Particle Size Distribution

%	Minimum	Maximum
5%	47 microns	70 microns
50%	41 microns	56 microns
95%	30 microns	45 microns

10

Example 3 was prepared with retroreflective microspheres designated “Z” beads, which were finished chromium treated microspheres with the size distribution detailed in Table 2.

15

FIG. 19 is a photomicrograph of the Z beads, taken at 20X, with a digital color camera microscope: Leica DFC360 FX 11547002, available from Leica Microsystems CMS GmbH of Wetzlar, Germany.

Table 2. Z Beads Particle Size Distribution

%	Minimum	Maximum
5%	87 microns	92 microns
50%	64 microns	69 microns
95%	46 microns	52 microns

Comparative Example C1 was trade name GLO GERM, a white emulsion available from the Glo Germ Company of Moab, Utah as the product MINI GEL in a 2 ounce bottle (MG2O).

20

Comparative Example C2 was trade name DAZO Fluorescent Marking System available from Ecolab of St. Paul, MN.

Comparative Example C3 was prepared with microparticles, which were milled glass recycle untreated unformed particles with particle size less than 49 microns.

25

FIG. 20 is a photomicrograph of the microparticles of Comparative Example C3, taken at 20X, with a digital color camera microscope: Leica DFC360 FX 11547002, available from Leica Microsystems CMS GmbH of Wetzlar, Germany.

ENVIRONMENTAL SURFACES

Four different test surfaces were tested. Test Surface #1 was a black colored textured plastic. 30 Test Surface #2 was a dark grey colored FORMICA brand surface. Test Surface #3 was a light grey

colored FORMICA brand surface. Test Surface #4 was a finished (stained and varnished) natural cherry wood surface.

SAMPLE PREPARATION

5 The UV markers (Comparative Examples C1-C2) were used “as is” according to manufacturer’s instructions (shaken before used).

The retroreflective microspheres of Examples 1-3, and the microparticles of Comparative Example C3 were prepared as suspensions in isopropyl alcohol (IPA) at a concentration of 0.5 grams of microspheres/particles per 25 mL of IPA.

10 All the prepared Examples and Comparative Examples were transferred to a clean empty DAZO marking system container which had an approximately 2.2 cm circular (flat) stamp application (dauber) head. Therefore, all samples were applied to the test surfaces with the same type and size applicator, and shaken before used/applied.

TEST METHOD

15 All the Examples were applied to the black Test Surface #1, and select examples were also applied to the other test surfaces #2, #3, and #4, using the dabber applicator described above, creating an approximately circular marker spot of about 2.5 centimeters in diameter. Digital photos were taken of the different markers on the different test surfaces at a constant distance of approximately 50 cm, using an
20 APPLE iPhone4S, while keeping the orientation of the camera itself in a plane approximately parallel to the plane of the test surface being photographed. The reflective microspheres Examples 1-3 and the microparticles of Comparative Example C3, were photographed with the iPhone4S flash set to “ON” and separately with the flash set to “OFF.” The fluorescent markers, Comparative Examples C1 (GLO GERM), and C2 (DAZO) were photographed with the flash “OFF” while under a UV light and with no
25 UV light. Additionally, prior to marking the test surfaces, the surfaces were photographed with the flash “OFF” as a “background” measure.

SAMPLE DATA PROCESSING

30 The digital photographs were transferred as jpg files into SigmaScan V5.0 (available from Systat Software Inc.) and then the surface area to be analyzed was selected to generate an intensity histogram using the software. The histograms were a plot of Pixel Frequency as the Y axis vs. Pixel Intensity as the X-axis, where the Intensity is a relative number between zero to 256. Where zero represents black or minimum lightness and 256 represents maximum white or maximum lightness. The Intensity can also be approximated as representing a “Lightness” value L present in a Lab color space with dimension L for lightness and “a” and “b” for the color-opponent dimensions, based on nonlinearly compressed CIE XYZ color space coordinates. The pixel frequency (or quantity) therefore provides the number of pixels with a
35

given pixel intensity. The histograms were further processed by normalizing the pixel frequency values to a total of 1.0 for each graph, so that appropriate overlays of different photo data could be placed in the same histogram, such as the background measure, the flash “on” and the flash “off” photos. The same was done for the UV light on and UV light off photos. The normalized processed histograms are shown 5 in Figures 4-16 for the various Examples and Comparative Examples on the different Test Surfaces.

Table 3. Example 1 (FIG. 4) & Comparative Example C3 (FIG. 5) on Test Surface #1 (Black)

Parameter	Ex.1 Flash On	Ex.1 Flash Off	Ex. C3 Flash On	Ex. C3 Flash Off	Background Flash Off
Pixel Intensity at max frequency	256	25	122 & 140	48	11
Normalized Pixel Frequency at max Intensity	0.664	0.034	0.024	0.031	0.344

Table 4. Example 2 (FIG. 6) & Example 3 (FIG. 7) on Test Surface #1 (Black)

Parameter	Ex.2 Flash On	Ex.2 Flash Off	Ex.3 Flash On	Ex.3 Flash Off	Background Flash Off
Pixel Intensity at max frequency	256	84	256	12	11
Normalized Pixel Frequency at max Intensity	0.858	0.025	0.668	0.045	0.344

10

Table 5. Comparative Example C1 (FIG. 8) & Comparative Example C2 (FIG. 9) on Test Surface #1 (Black)

Parameter	Ex. C1 GLO GERM UV On	Ex. C1 GLO GERM UV Off	Ex. C2 DAZO UV On	Ex. C2 DAZO UV Off	Background Flash Off
Pixel Intensity at max frequency	191	12	190	11	11
Normalized Pixel Frequency at max Intensity	0.039	0.065	0.072	0.312	0.344

Table 6. Example 3 (FIG. 10) and Comparative Example C1 (FIG. 11) on Test Surface #2 (Dark Grey)

Parameter	Ex.3 Flash On	Ex.3 Flash Off	Ex. C1 GLO GERM UV On	Ex. C1 GLO GERM UV Off	Background Flash Off
Pixel Intensity at max frequency	255	72	112 & 117	73	70
Normalized Pixel Frequency at max Intensity	0.446	0.025	0.014	0.047	0.074

15

Table 7. Example 3 (FIG. 12) and Comparative Example C1 (FIG. 13) on Test Surface #3 (Light Grey)

Parameter	Ex.3 Flash On	Ex.3 Flash Off	Ex. C1 GLO GERM UV On	Ex. C1 GLO GERM UV Off	Background Flash Off
Pixel Intensity at max frequency	255	158	189	147	146
Normalized Pixel Frequency at max Intensity	0.639	0.025	0.031	0.029	0.042

Table 8. Example 3 (FIG. 14) and Comparative Example C1 (FIG. 15) on Test Surface #4 (Wood)

Parameter	Ex.3 Flash On	Ex.3 Flash Off	Ex. C1 GLO GERM UV On	Ex. C1 GLO GERM UV Off	Background Flash Off
Pixel Intensity at max frequency	256	102	218	63	59
Normalized Pixel Frequency at max Intensity	0.424	0.031	0.030	0.031	0.085

5 Table 9. Comparative Example C2 (FIG. 16) on Test Surface #4 (Wood)

Parameter	Ex. C2 DAZO UV On	Ex. C2 DAZO UV Off	Background Flash Off
Pixel Intensity at max frequency	184	56	59
Normalized Pixel Frequency at max Intensity	0.035	0.120	0.085

CURVE FITTING ANALYSIS

In order to compare and contrast the response function of surface marking systems employing retroreflective microspheres with those based on UV dyes or microparticles, the pixel intensity histograms shown in Figures 4-16 were analyzed by fitting each data set to a best-fitting peak function. This was accomplished automatically using the software program available under the trade designation TABLECURVE 2D from Systat Software. The software program was applied to each data set to find the best fitting peak function, from the software's built-in library. The library of peak functions that were selected was constrained to those that had a continuous first derivative. After the curve fit of each data set three useful parameters were available: L_{MAX} , L_{FWHM} , and $f_{Area}@L_{MAX}$. L_{MAX} is in the range from 0 (black) to 256 (white) and is the pixel intensity or "lightness" at the maximum normalized pixel frequency for the fit function. Conceptually, this L_{MAX} is the same as the Pixel Intensity at max frequency, described above and reported in Tables 4-16. However, the L_{MAX} for a curve fit is based on the applied

curve function and will not always be equivalent to the raw data value for Pixel Intensity at max frequency. The value $f_{\text{Area}}@L_{\text{MAX}}$ is the normalized pixel frequency value corresponding to L_{MAX} . L_{FWHM} is in the range from 0 (black) to 256 (white) and is the pixel intensity full width at a normalized pixel frequency value that is exactly half of $f_{\text{Area}}@L_{\text{MAX}}$.

5 FIGS. 17 and 18 graphically illustrate the curve fitting process applied to the data sets and the results obtained. FIG. 17 uses the data set also presented in FIG. 7 for the Flash On and Flash Off data of Example 3 on Test Surface #1 (black). FIG. 18 uses the data set also presented in FIG. 8 for UV Light On and UV Light Off data of Comparative Example 1 on Test Surface #1 (black). FIGS. 17 and 18 graphically show the curve fit lines, as well as vertical lines which identify L_{MAX} and L_{FWHM} .

10

ADDITIONAL ANALYSIS

It was not possible to assign a curve function for the non-illuminated Example 2 on Test Surface #1 (black) using the curve fitting software program. It can be seen in FIG. 6 that the data set showed no apparent curve distribution. Without this fit it was not possible to generate a L_{FWHM} value for the non-15 illuminated Example 2. Although no curve function could be assigned to Example 2 using the software program, the following reasonable estimate was applied. It was visually observed and confirmed by FIGS. 4-7 that Example 2 performed in similar manner to the other visible light, non-UV, particle- or bead-based samples (Example 1, Example 3, and Comparative Example 3) when not illuminated, on Test Surface #1. Therefore, the L_{FWHM} value for Example 2 was estimated as an average of the L_{FWHM} values 20 for Example 1, Example 3, and Comparative Example 3, not illuminated. This provided an estimated L_{FWHM} value of $((47.3+44.0+65.9) / 3) = 52.4$ for Example 2, when not illuminated.

QUALITY FACTOR Q

Given these parameters, a relative quality factor Q was also calculated: $Q = L_{\text{MAX}}/L_{\text{FWHM}}$. Quality 25 factors for both the non-illuminated state of the system, Q_{Off} as well as for the illuminated state of the system, Q_{On} were calculated. As described above, the Q factors described the distribution of pixel intensity across the entirety of the surface mark. High Q factors were representative of surface marks where there is a significant majority of pixels within a very narrow distribution (small L_{FWHM}) about a relatively high center intensity (large L_{MAX}) and are indicative of a surface marking systems which are 30 easy to see with the naked eye because they are very bright. Low Q factors were representative of the opposite condition: surface marks where the significant majority of pixels have intensities spread out over a broad distribution (large L_{FWHM}) centered about a relatively low intensity (small L_{MAX}) and are indicative of a surface marking systems which are less easy to see with the naked eye because they are less bright.

35

When Comparative Example 2 (DAZO) was illuminated by UV light on Test Surface #1 (black) the distribution of pixel intensity exhibited an apparent bimodal (two peaks) shape, see FIG. 9. In an effort to not force the curve fit towards one peak (at 144.6) or the other peak (at 189.9), the following averaging procedure was applied. The Quality Factor for Comparative Example 2 (DAZO) was 5 illuminated by UV light on Test Surface #1 (black) was the area weighted average of the individual quality factors for each peak: Quality Factor = (Fractional Area of First Peak*Quality Factor of First Peak)+(Fractional Area of Second Peak*Quality Factor of Second Peak) = (0.7*7.5)+(0.3*46.3) = 19.2.

Table 10. Curve Fit Results for Background (Unmarked Surfaces)

Example	Test Surface	fArea @ LMAX	LMAX	LFWHM	Quality Factor (LMAX/LFWHM)
Ex.1	#1 Black	0.368	10.6	2.5	4.2
Ex.2	#1 Black	0.368	10.6	2.5	4.2
Ex.3	#1 Black	0.368	10.6	2.5	4.2
Ex.3	#2 Dark Gray	0.072	69.0	12.3	5.6
Ex.3	#3 Light Gray	0.038	143.4	23.4	6.1
Ex.3	#4 Wood	0.081	57.9	12.0	4.8
Ex. C1	#1 Black	0.368	10.6	2.5	4.2
Ex. C1	#2 Dark Gray	0.072	69.0	12.3	5.6
Ex. C1	#3 Light Gray	0.038	143.4	23.4	6.1
Ex. C1	#4 Wood	0.081	57.9	12.0	4.8
Ex. C2	#1 Black	0.368	10.6	2.5	4.2
Ex. C2	#4 Wood	0.081	57.9	12.0	4.8
Ex. C3	#1 Black	0.368	10.6	2.5	4.2

10

Table 11. Curve Fit Results for Non-Illuminated Marking Systems

Example	Test Surface	fArea @ LMAX	LMAX	LFWHM	Quality Factor (LMAX/LFWHM)
Ex.1	#1 Black	0.021	35.3	44.0	0.8
Ex.2	#1 Black	0.011	64.8	52.4 *	1.2
Ex.3	#1 Black	0.026	19.8	65.9	0.3
Ex.3	#2 Dark Gray	0.022	65.8	19.7	3.3
Ex.3	#3 Light Gray	0.015	158.8	61.0	2.6
Ex.3	#4 Wood	0.013	96.8	74.8	1.3
Ex. C1	#1 Black	0.041	12.0	18.9	0.6
Ex. C1	#2 Dark Gray	0.040	70.9	17.3	4.1
Ex. C1	#3 Light Gray	0.023	146.7	35.1	4.2
Ex. C1	#4 Wood	0.019	74.4	50.2	1.5
Ex. C2	#1 Black	0.322	10.8	2.6	4.1
Ex. C2	#4 Wood	0.101	56.2	8.6	6.5

Ex. C3	#1 Black	0.020	39.7	47.3	0.8
--------	----------	-------	------	------	-----

*Average of all reflective bead systems (Ex.1, Ex.3, Ex.C1) on black surface.

Table 12. Curve Fit Results for Illuminated Marking Systems

Example	Test Surface	fArea @ LMAX	LMAX	LFWH M	Quality Factor (LMAX/LFWHM)
Ex.1	#1 Black	0.664	256.0	2.3	111.3
Ex.2	#1 Black	1.172	255.8	0.6	412.6
Ex.3	#1 Black	0.667	256.0	1.8	139.9
Ex.3	#2 Dark Gray	0.447	255.0	1.0	255.0
Ex.3	#3 Light Gray	1.137	255.3	1.0	255.3
Ex.3	#4 Wood	0.424	256.0	2.8	91.4
Ex. C1	#1 Black	0.023	192.9	33.6	5.7
Ex. C1	#2 Dark Gray	0.012	105.5	76.1	1.4
Ex. C1	#3 Light Gray	0.022	182.5	32.0	5.7
Ex. C1	#4 Wood	0.014	217.6	67.5	3.2
Ex. C2	#1 Black (1st peak)	0.022	144.6	19.3	19.2*
Ex. C2	#1 Black (2nd peak)	0.059	189.9	4.1	
Ex. C2	#4 Wood	0.021	191.0	45.4	4.2
Ex. C3	#1 Black	0.011	121.1	96.3	1.3

* Average of two curve functions as described above.

5

QUALITY FACTOR GAIN RATIO (QFGR = Q_{On} / Q_{Off})

The ratio of Q_{On} to Q_{Off} , was calculated for each data set of marker system on a test surface. This ratio of Q_{On} / Q_{Off} was called the Quality Factor Gain Ratio (QFGR) and was used to represent the intensity gain for the system when it transitioned from the non-illuminated to the illuminated state. This gain describes the magnitude by which the surface mark becomes visually apparent to an observer when the illuminating source (visible light or UV) is projected onto the marking system.

10

TRANSPARANCY RATIO

The ratio of Q_{Off} to $Q_{Background}$ was calculated for each data set of marker system on a test surface and is representative of the visual transparency of the surface mark on a given surface. The Q factor determined for the non-marked and non-illuminated surface is $Q_{Background}$. This Transparency Ratio of $Q_{Off} / Q_{Background}$ is indicative of how “covert” the marked surface is to a given observer. Approaching a transparency ratio of 1.0 maximizes the covertness of the system.

15

20

Table 13. Quality Factor Gain Ratios and Transparency Ratios

Example	Test Surface	Quality Factor Gain Ratio QON/QOFF	Transparency Ratio QOFF/QBkgd
Ex.1	#1 Black	138.6	0.19
Ex.2	#1 Black	333.4	0.30
Ex.3	#1 Black	466.3	0.07
Ex.3	#2 Dark Gray	76.3	0.60
Ex.3	#3 Light Gray	98.0	0.42
Ex.3	#4 Wood	70.6	0.27
Ex. C1	#1 Black	9.0	0.15
Ex. C1	#2 Dark Gray	0.3	0.73
Ex. C1	#3 Light Gray	1.4	0.68
Ex. C1	#4 Wood	2.2	0.31
Ex. C2	#1 Black	4.6	0.99
Ex. C2	#4 Wood	0.6	1.36
Ex. C3	#1 Black	1.5	0.20

The embodiments described above and illustrated in the figures are presented by way of example only and are not intended as a limitation upon the concepts and principles of the present disclosure. As such, it will be appreciated by one having ordinary skill in the art that various changes in the elements and their configuration and arrangement are possible without departing from the spirit and scope of the present disclosure.

All references and publications cited herein are expressly incorporated herein by reference in their entirety into this disclosure.

10

Various features and aspects of the present disclosure are set forth in the following claims.

What is claimed is:

1. A method for determining the cleanliness of a surface, the method comprising:
providing a surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier;
5 applying the surface marking system to at least one discrete site on the surface;
illuminating the at least one discrete site on the surface with visible light, after a cleaning;
and
detecting retroreflection emitted from the at least one discrete site on the surface in response to illuminating the at least one discrete site to determine the effectiveness of the cleaning of the
10 surface.
2. The method of claim 1, wherein detecting includes visually detecting.
3. The method of claim 1 or 2, wherein the surface is an environmental surface.
15
4. The method of any of claims 1-3, wherein the at least one discrete site on the surface is unknown to environmental services staff.
5. The method of any of claims 1-4, wherein the surface marking system is covert.
20
6. The method of any of claims 1-5, wherein the plurality of retroreflective beads are randomly distributed in or on the carrier.
7. The method of any of claims 1-6, wherein the surface marking system is comprised of
25 non-toxic material.
8. The method of any of claims 1-7, wherein the carrier is water-soluble.
9. The method of any of claims 1-8, wherein applying the surface marking system includes
30 non-contact application.
10. The method of any of claims 1-9, wherein applying the surface marking system includes spraying.
- 35 11. The method of any of claims 1-10, wherein applying the surface marking system includes foaming.

12. The method of any of claims 1-11, wherein applying the surface marking system includes dry transfer.

5 13. The method of any of claims 1-12, wherein applying the surface marking system includes contact application.

14. The method of any of claims 1-13, wherein applying the surface marking system includes liquid deposition.

10

15. The method of any of claims 1-14, wherein each of the plurality of retroreflective microspheres is at least partially coated with a reflective coating.

15

16. The method of any of claims 1-15, wherein the plurality of retroreflective microspheres are dispersed in the carrier to a concentration of no greater than about 1×10^6 microspheres/mL of the carrier.

20

17. The method of any of claims 1-16, wherein the plurality of retroreflective microspheres are dispensed on the carrier to a concentration of no greater than about 1×10^5 microspheres/cm² of the carrier.

18. The method of any of claims 1-17, wherein the plurality of retroreflective microspheres includes an average diameter of 10 to 100 micrometers.

25

19. The method of any of claims 1-18, wherein the carrier includes at least one of a surfactant, a polymeric binder, an adhesive layer, and a combination thereof.

20. An applicator for applying a surface marking system, the applicator comprising:
a container defining a reservoir;

30 a surface marking system positioned in the reservoir, the surface marking system comprising a plurality of retroreflective microspheres dispersed in or dispensed on a carrier; and
a dispenser configured to dispense the surface marking system from the reservoir.

21. The applicator of claim 20, wherein the dispenser includes a porous substrate.

35

22. The applicator of claim 20 or 21, wherein the dispenser includes at least one of a sponge, a foam, a swab, a brush, a dabber, or a combination thereof.

23. The applicator of any of claims 20-22, wherein the dispenser includes a nozzle.

5

24. The applicator of any of claims 20-23, wherein the carrier includes an adhesive, and wherein the container includes a tape dispenser.

25. The applicator of any of claims 20-24, wherein the carrier includes a solvent that is at least as volatile as water at room temperature.

10 26. The applicator of any of claims 20-25, wherein the carrier includes an alcohol.

15

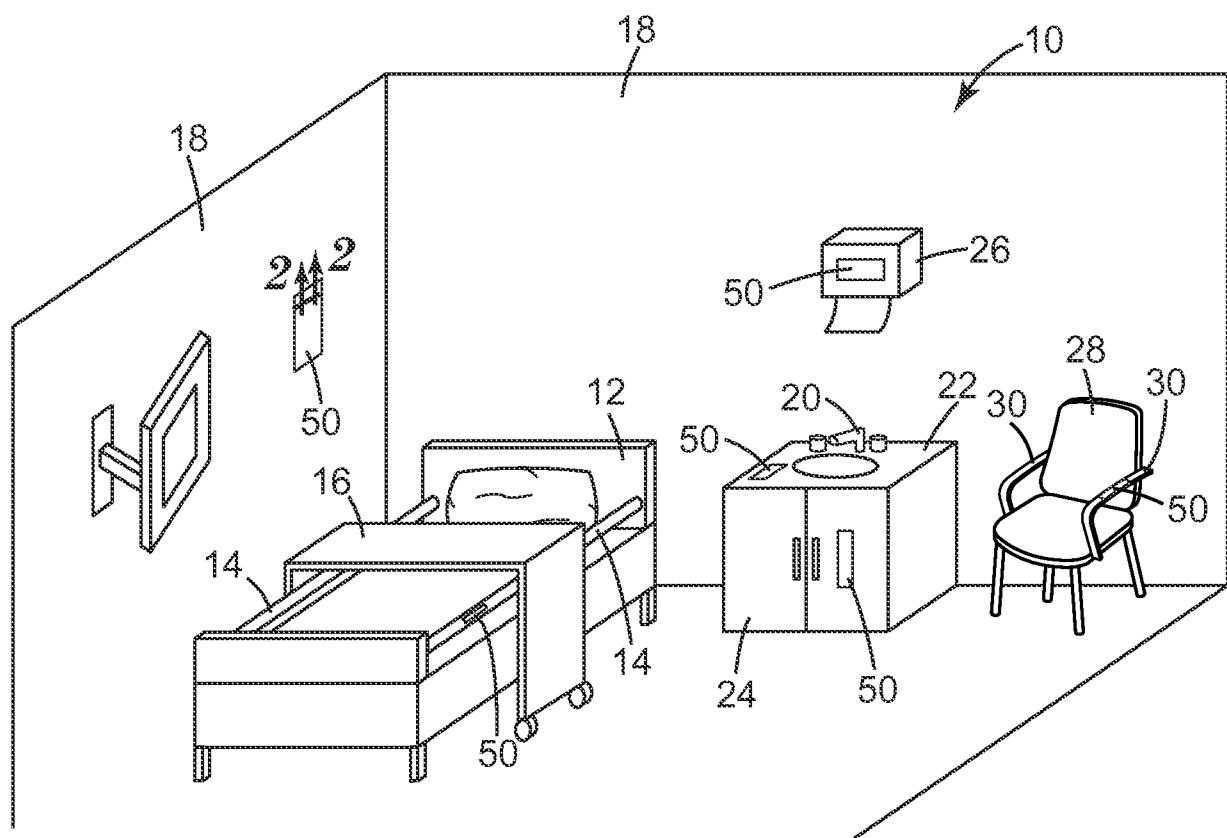


Fig. 1

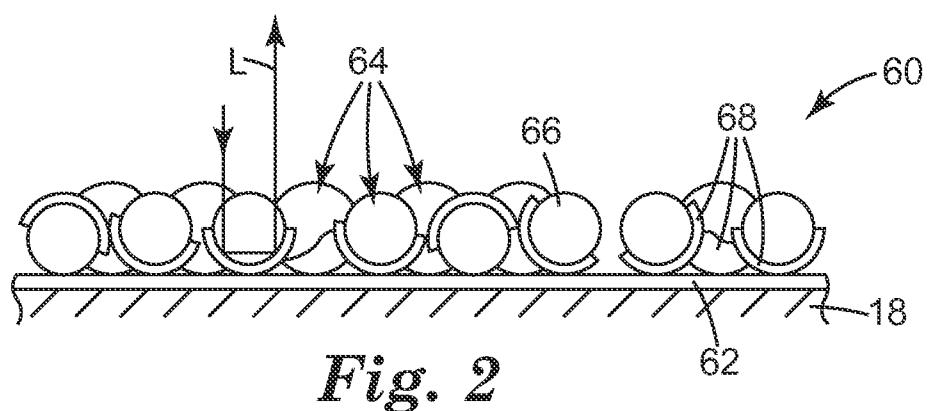


Fig. 2

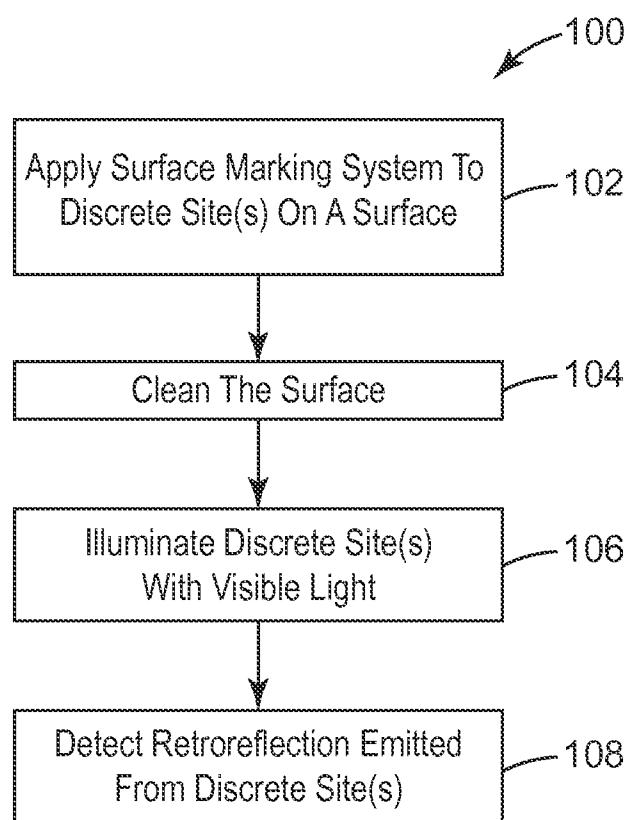


Fig. 3

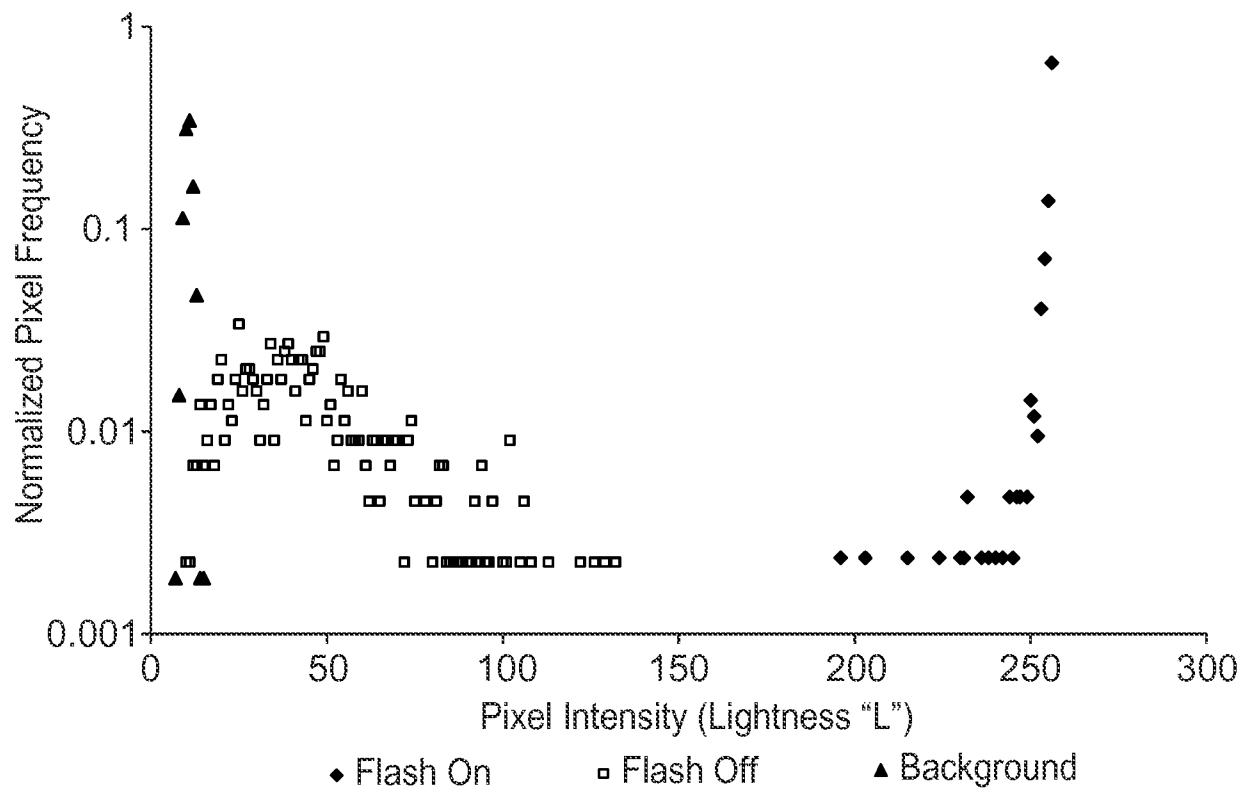


Fig. 4

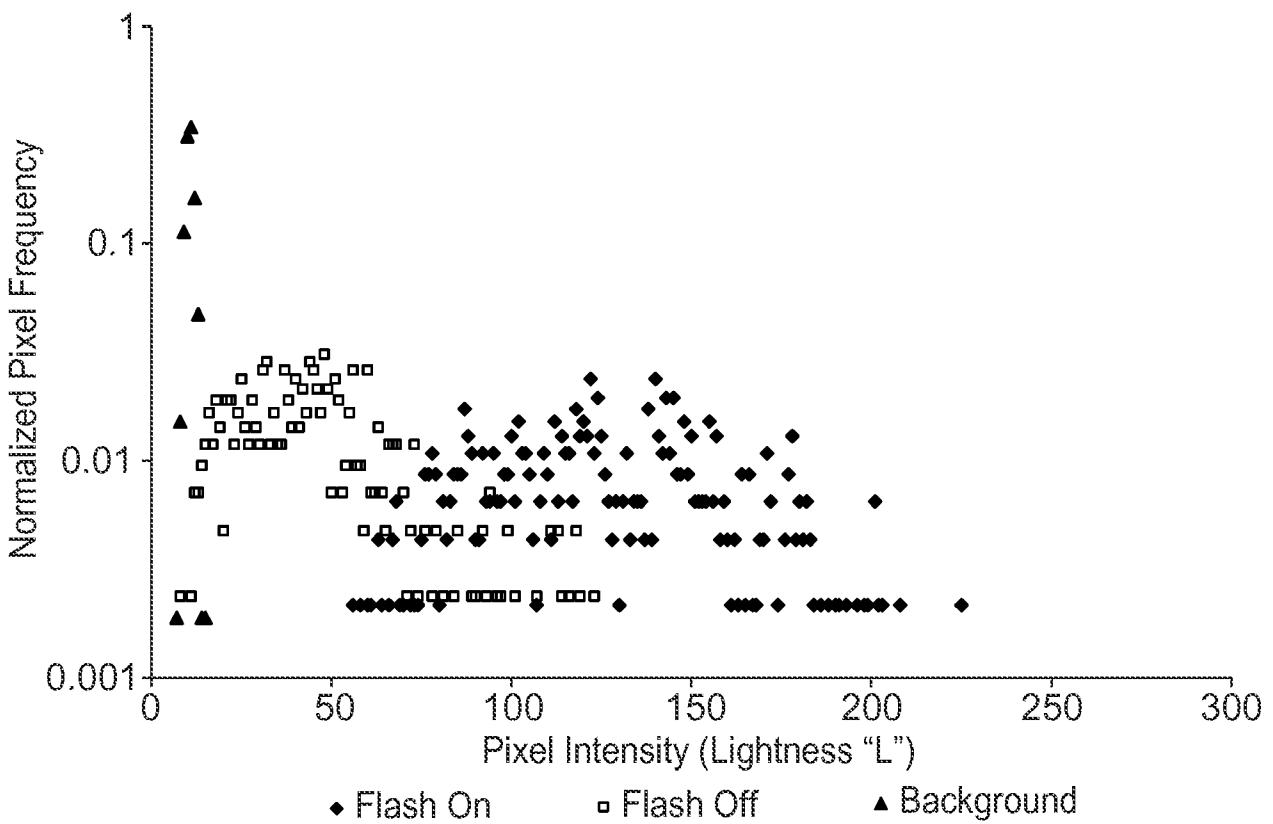


Fig. 5

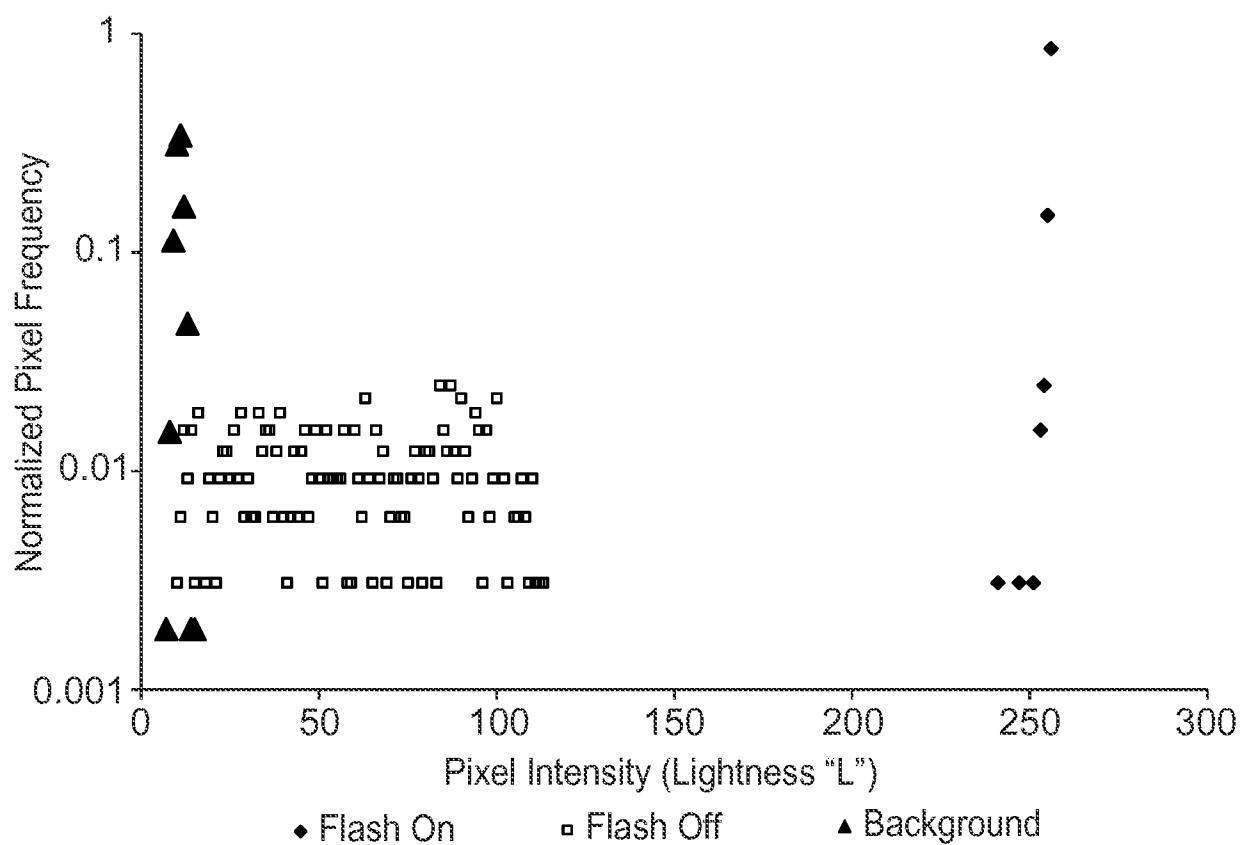


Fig. 6

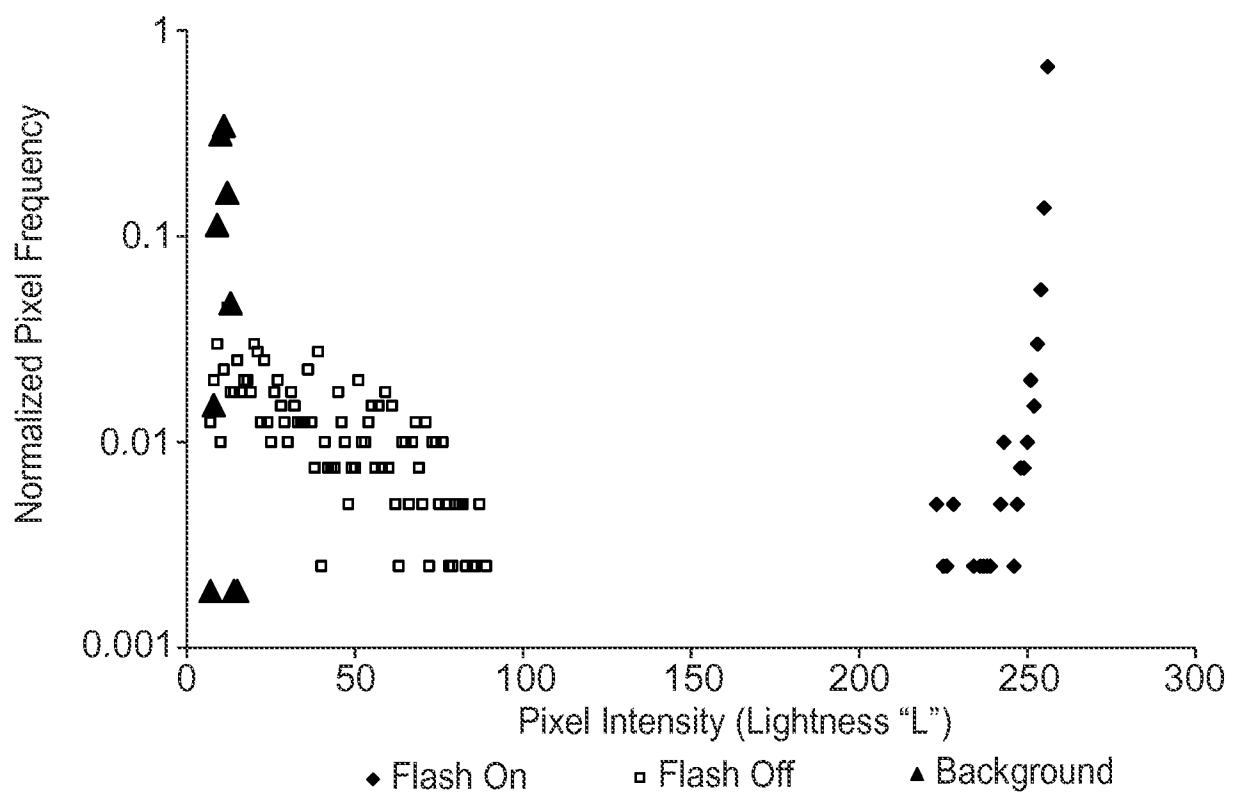


Fig. 7

5/12

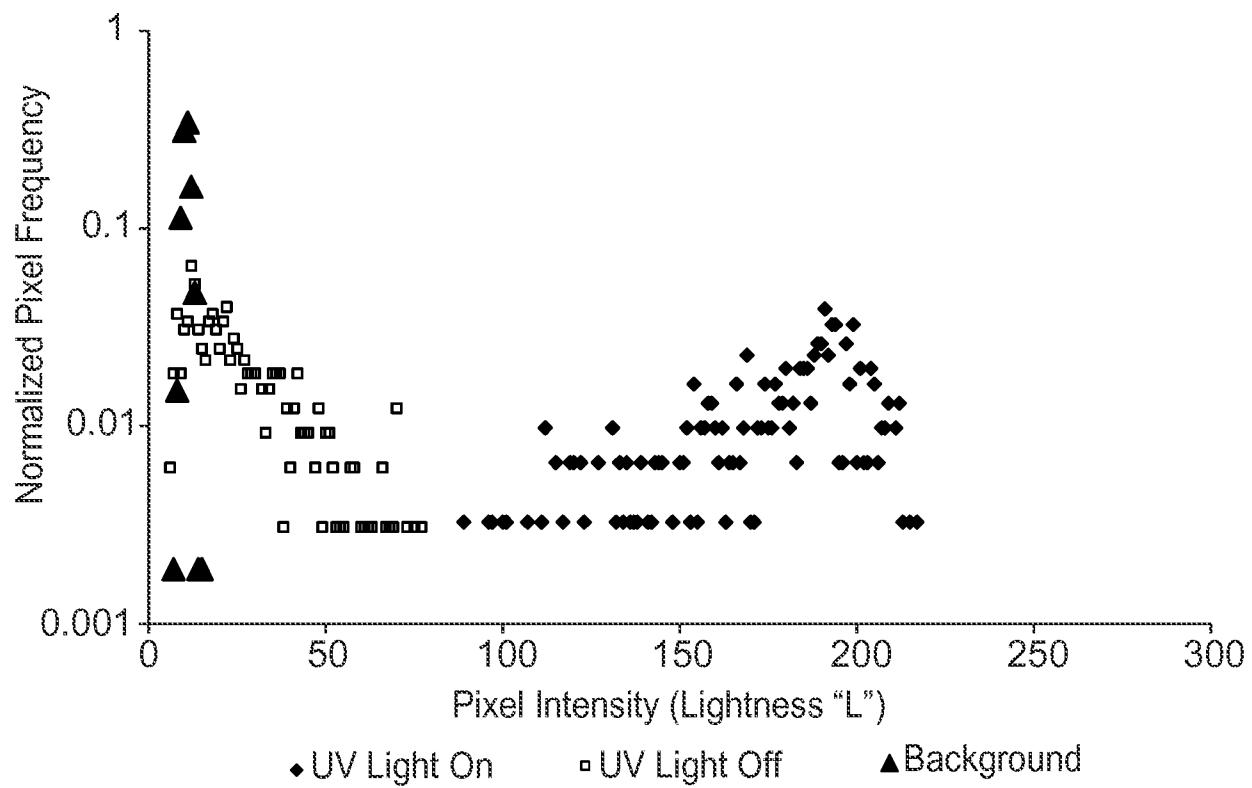


Fig. 8

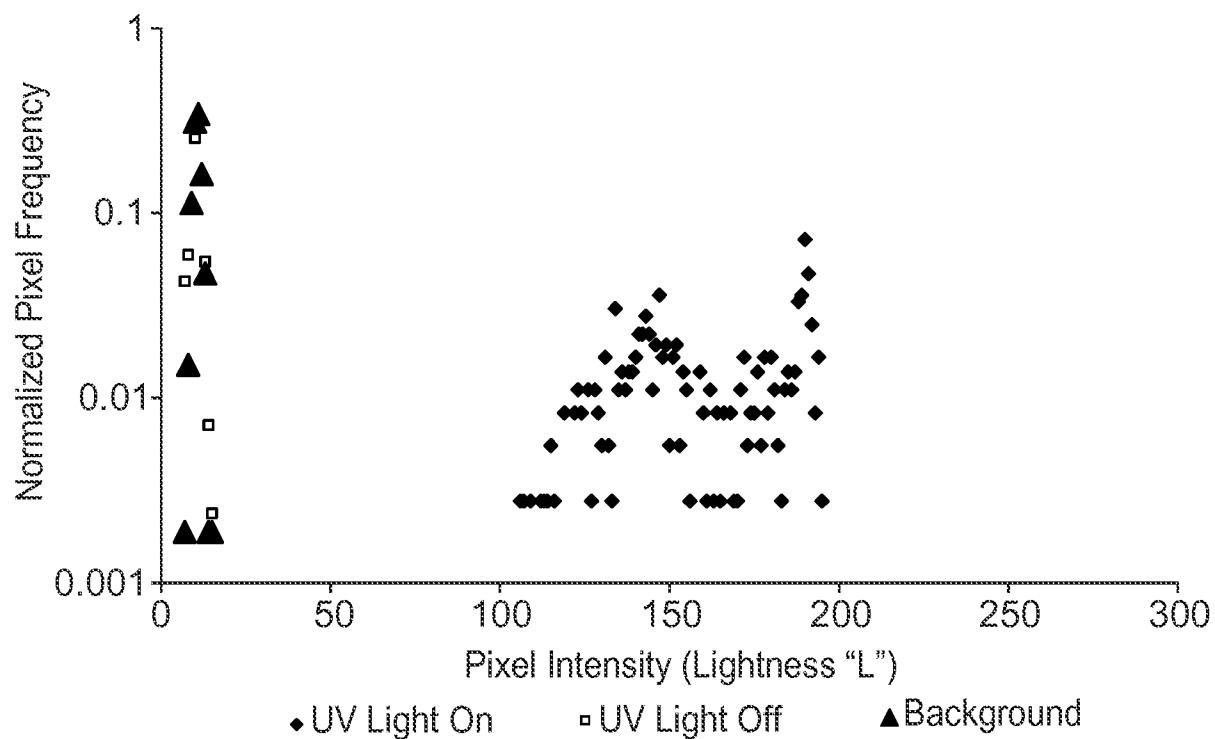


Fig. 9

6/12

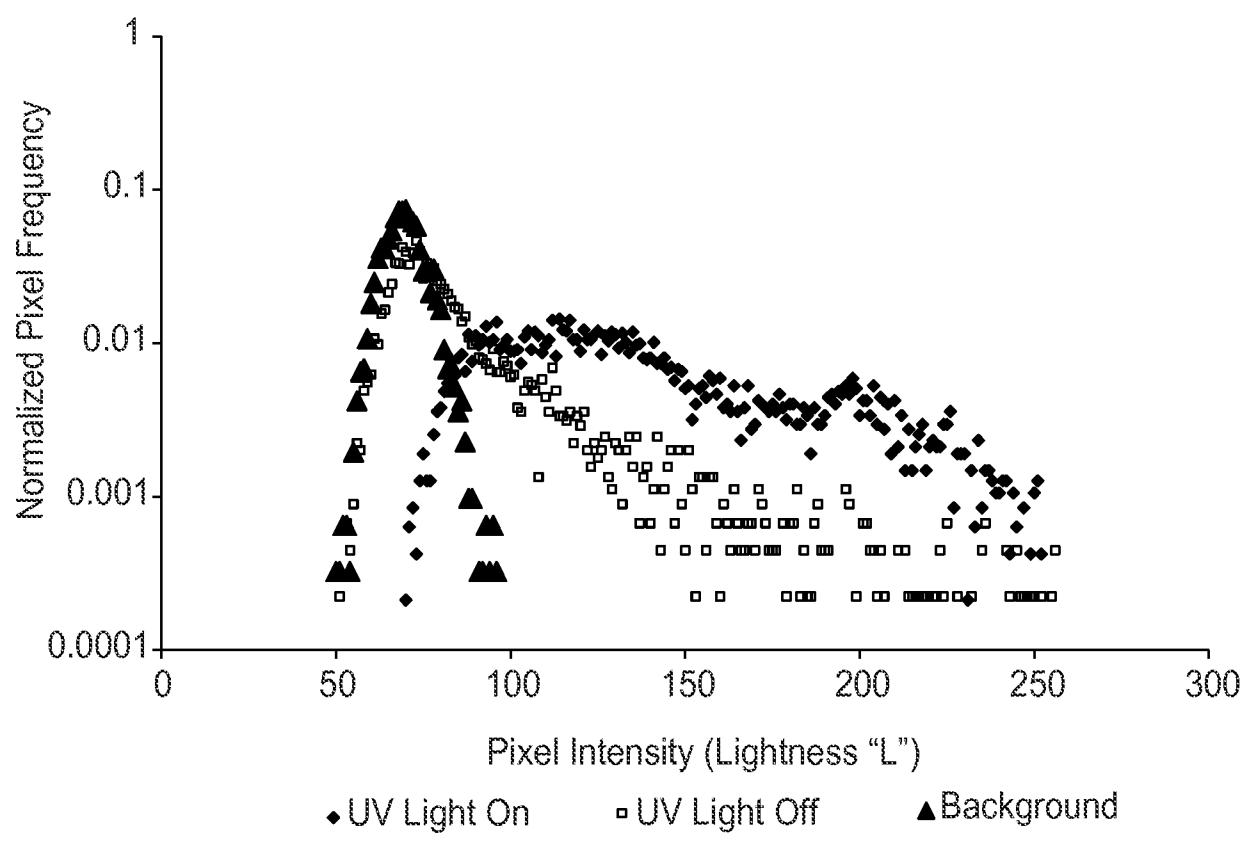
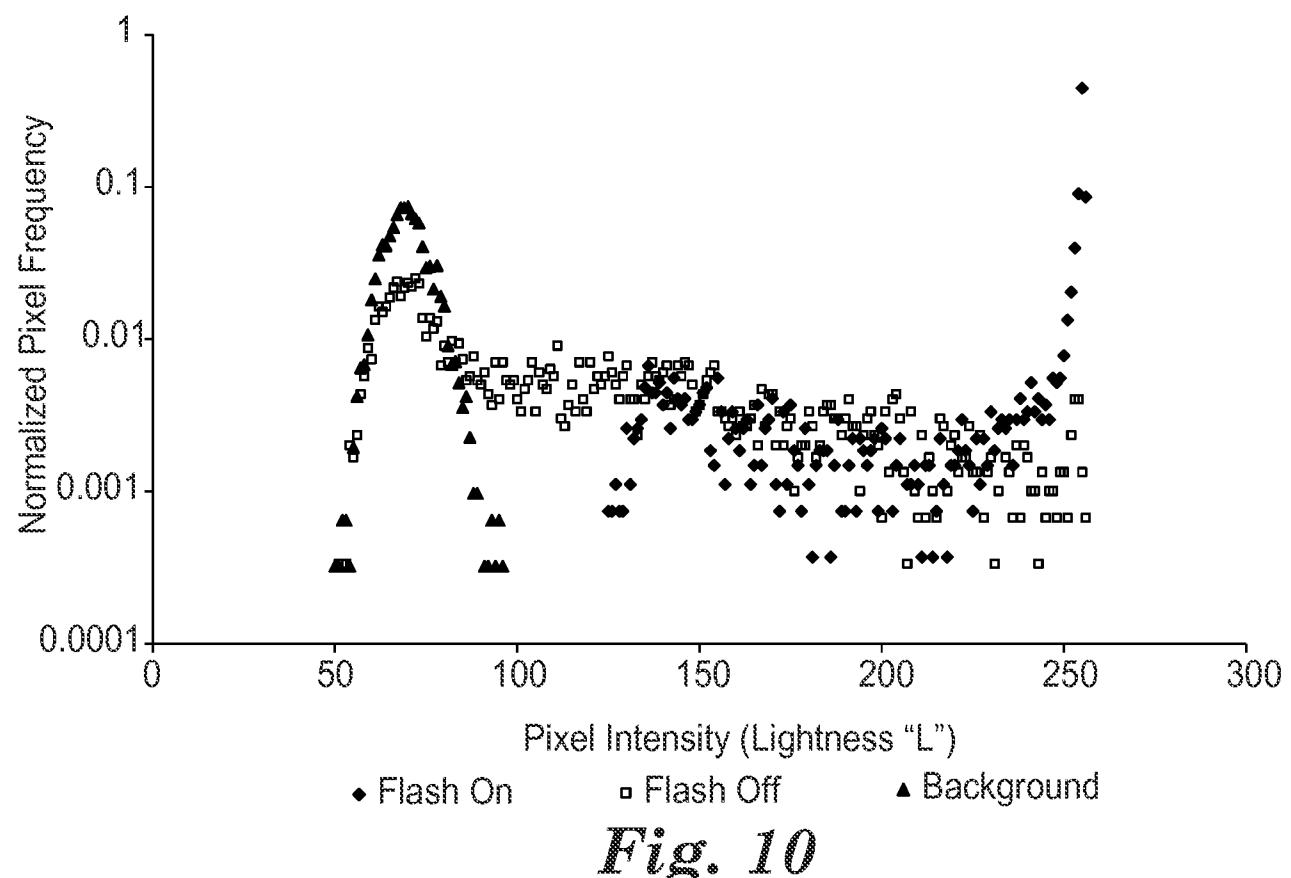


Fig. 11

7/12

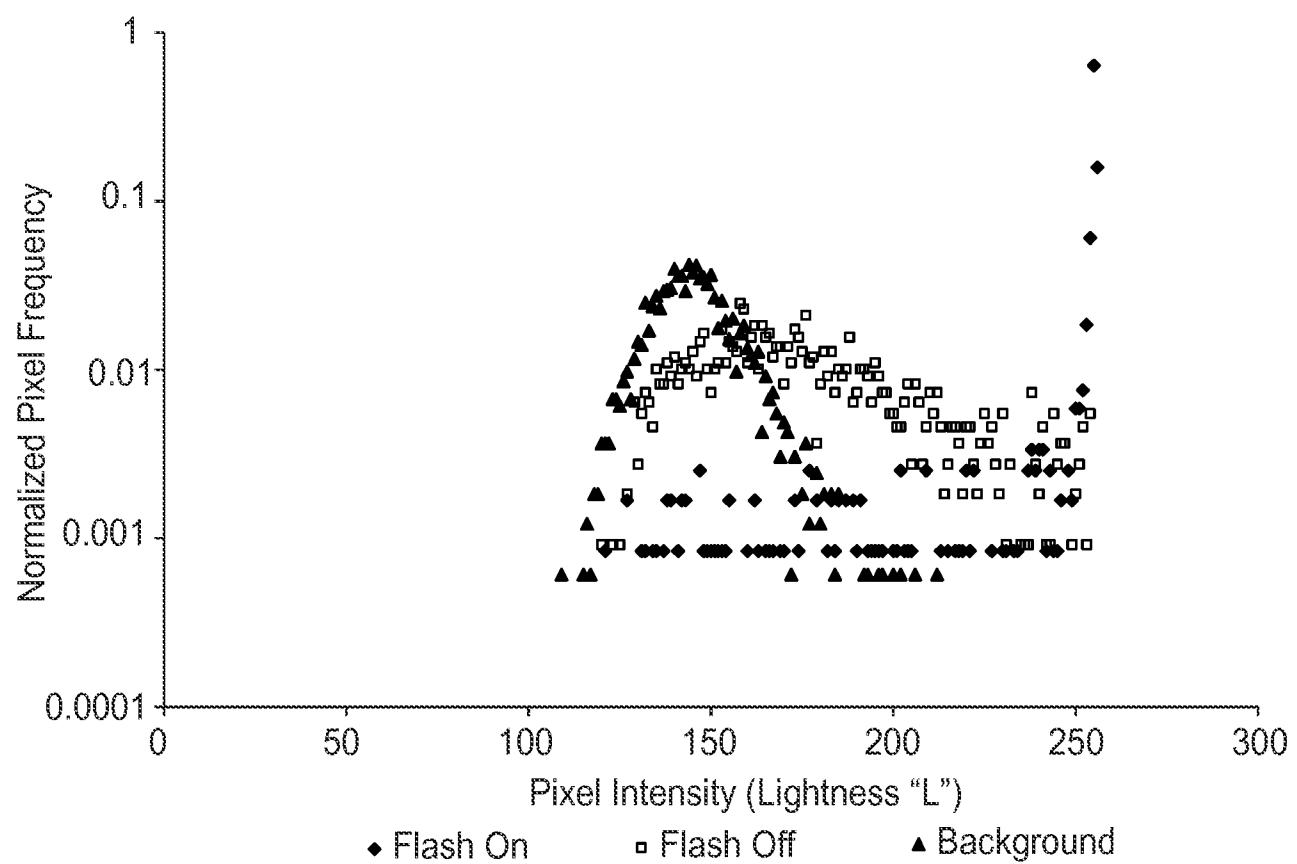


Fig. 12

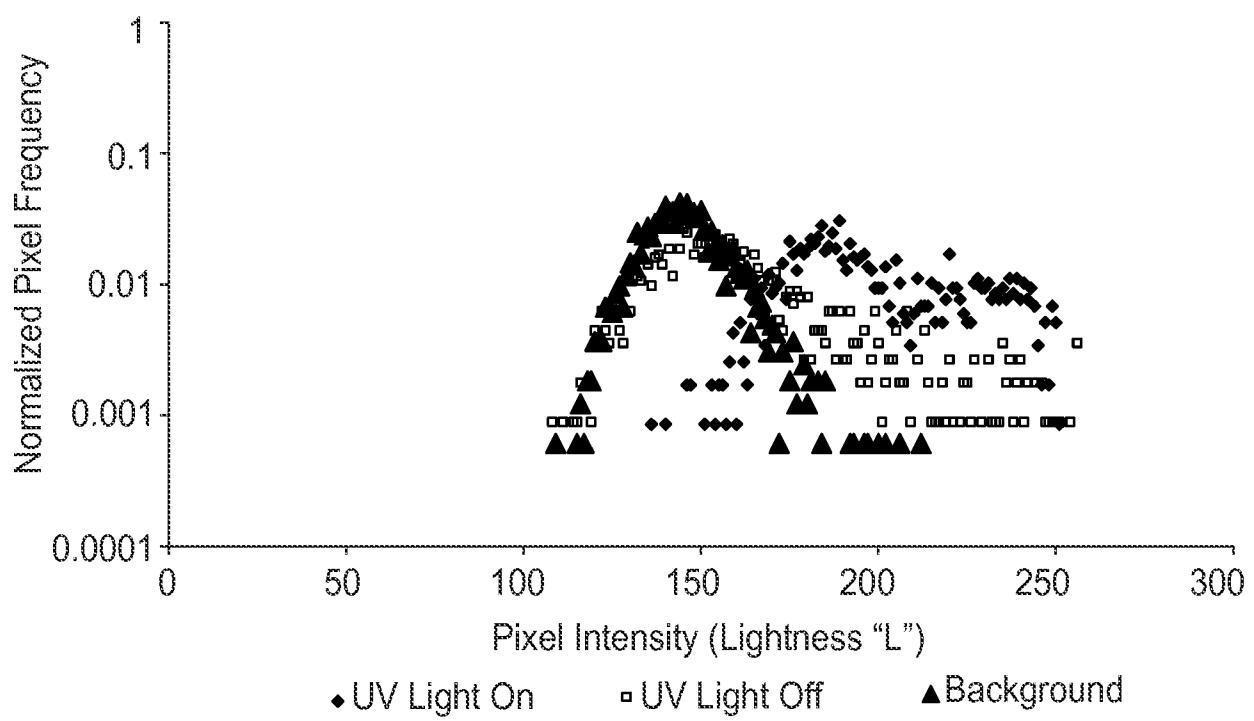
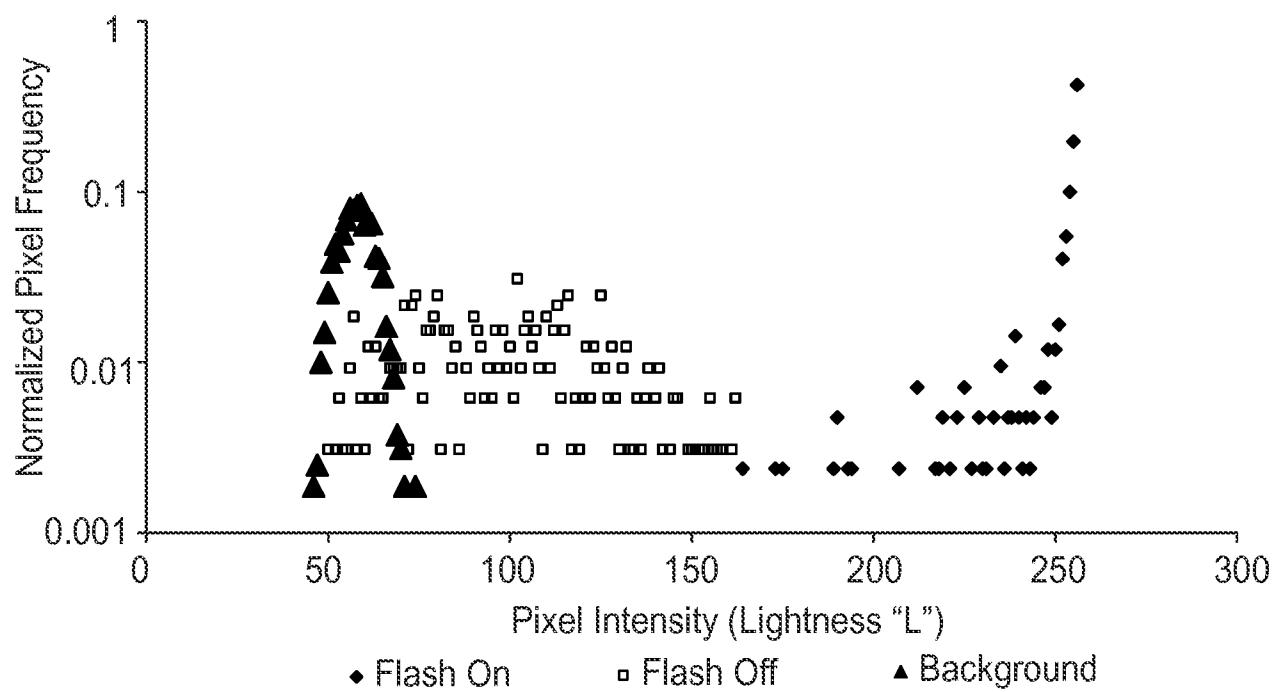
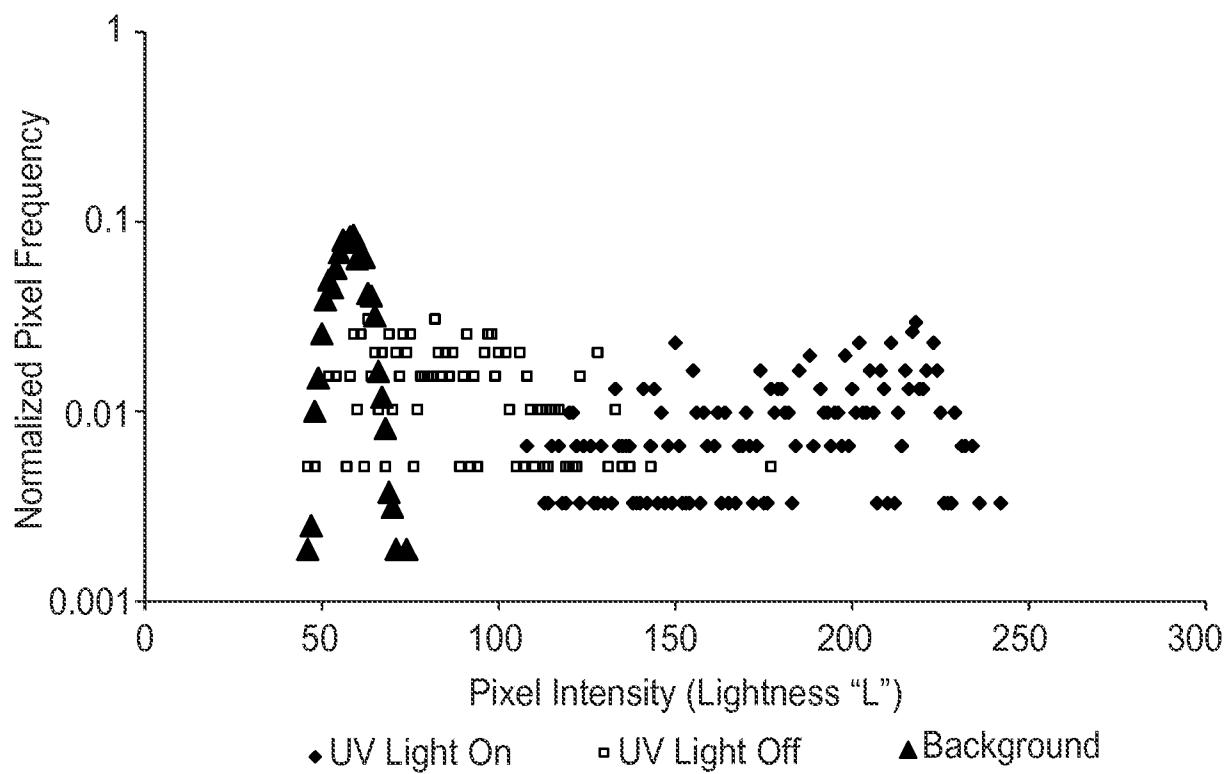


Fig. 13

8/12

*Fig. 14**Fig. 15*

9/12

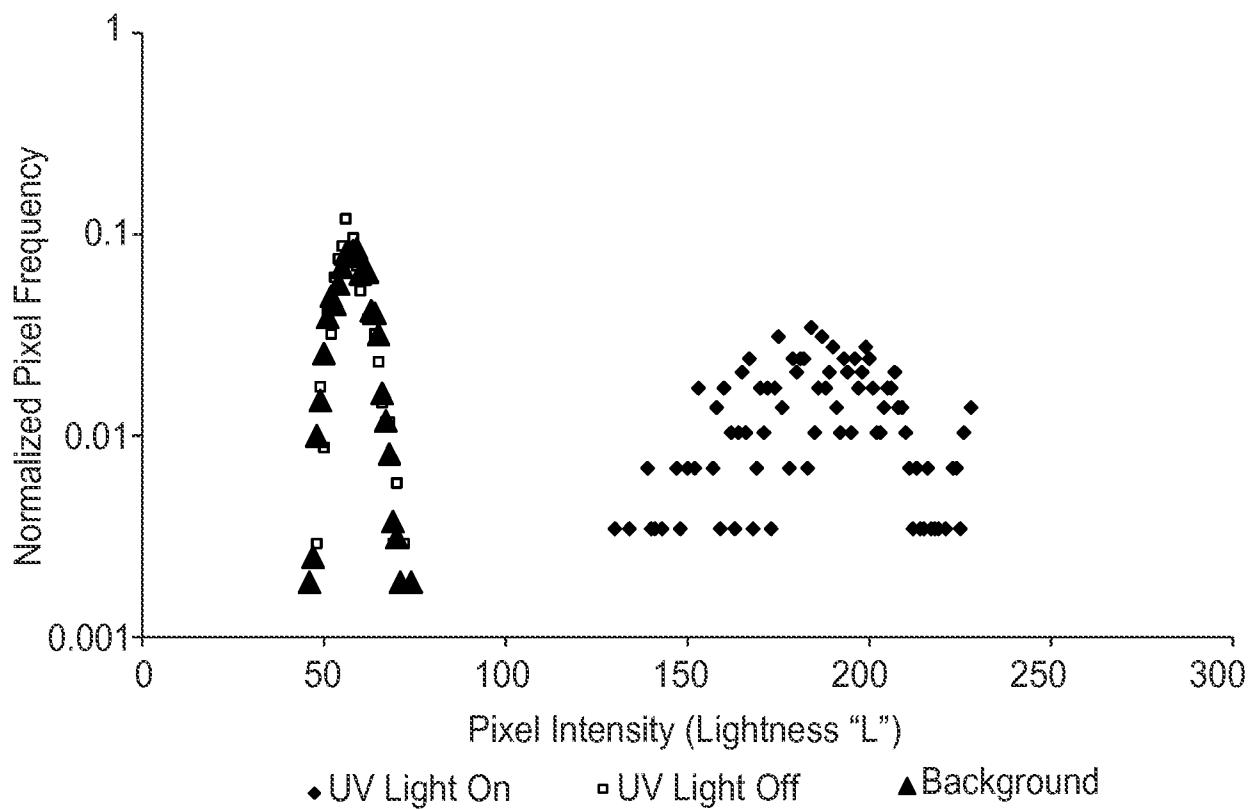


Fig. 16

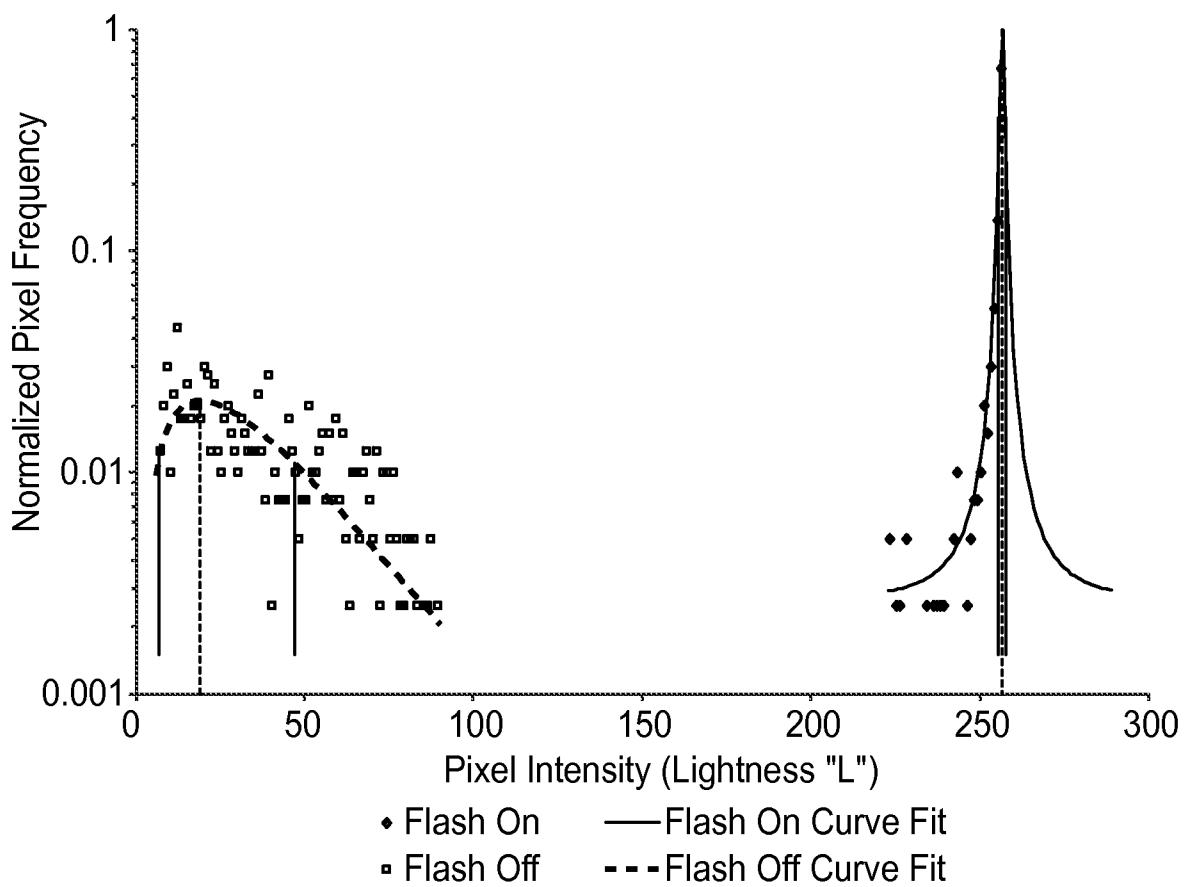


Fig. 17

10/12

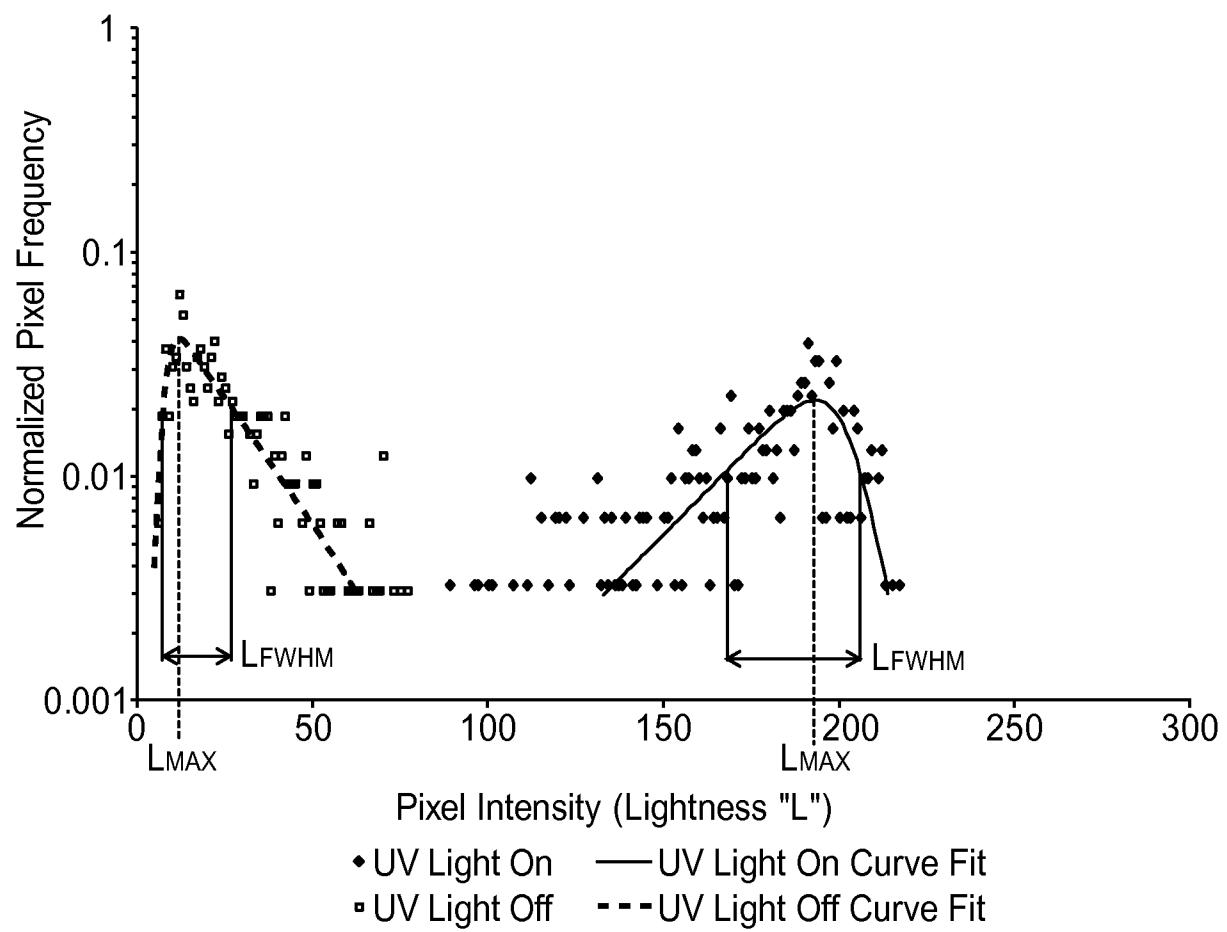


Fig. 18

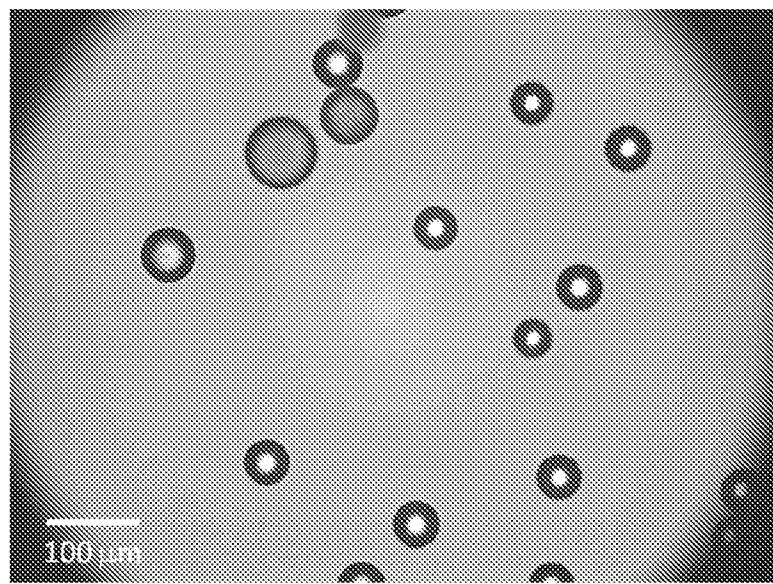


Fig. 19

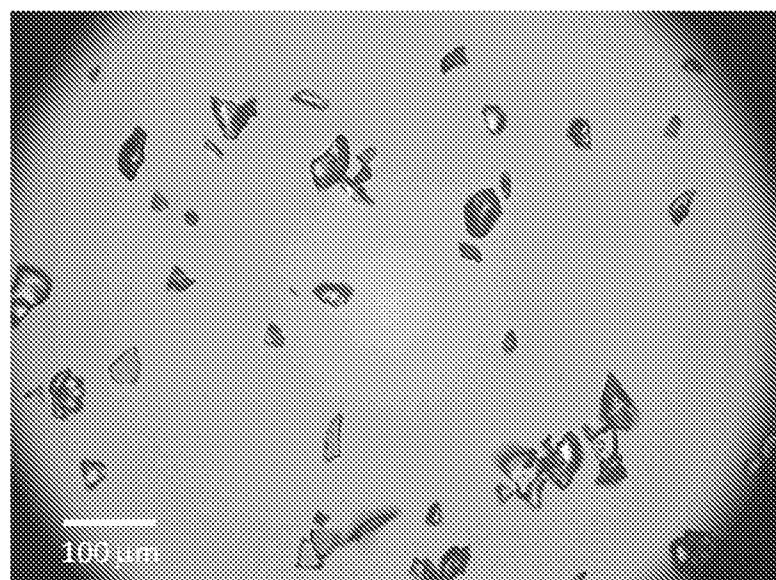


Fig. 20

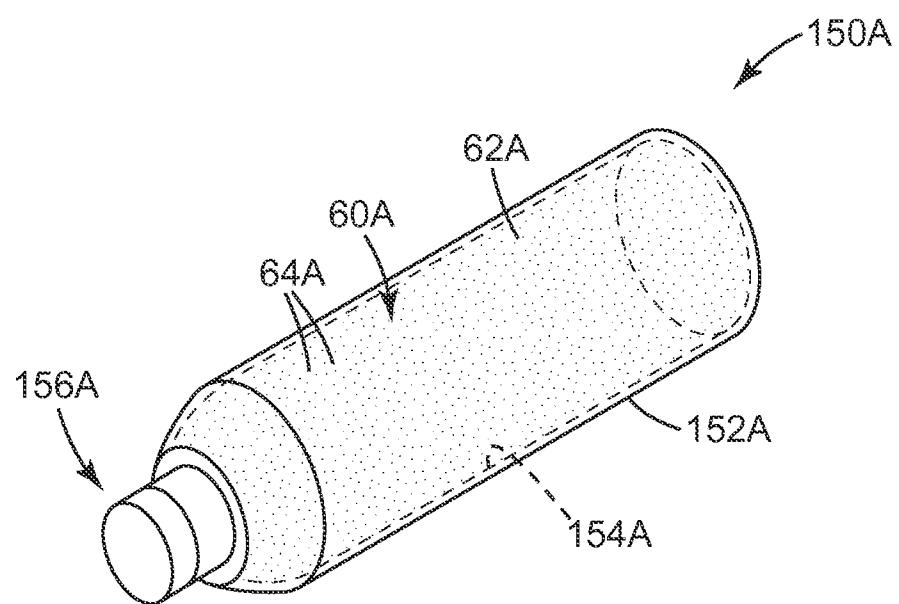


Fig. 21

12/12

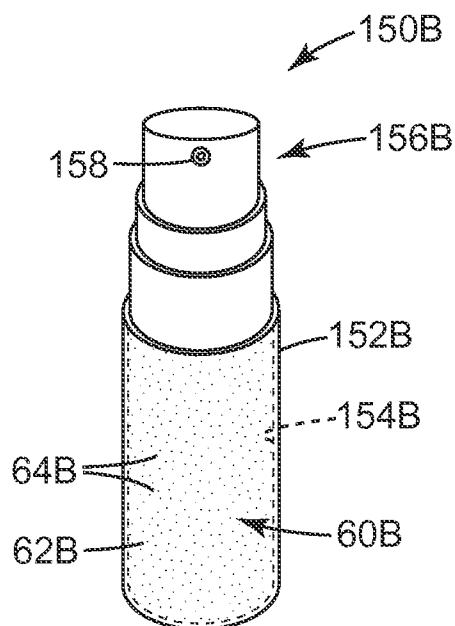


Fig. 22

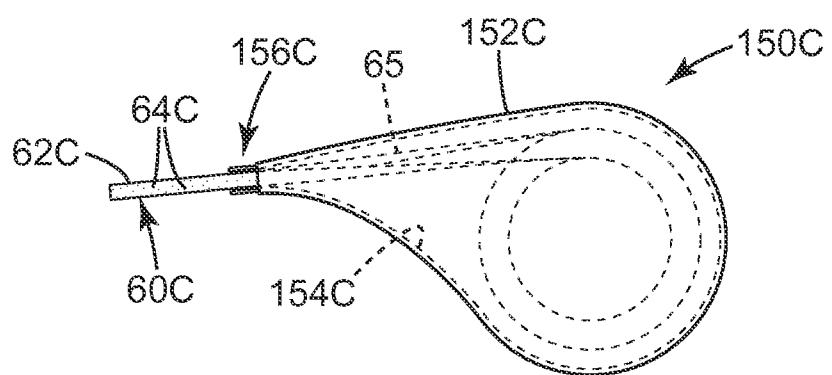


Fig. 23

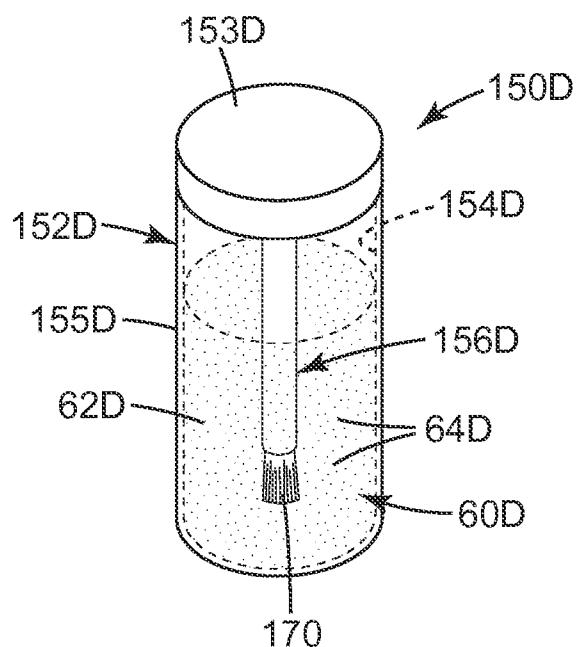


Fig. 24

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/067175

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01N21/55 A61L2/28 G01N21/94
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01N A61L B08B A61B C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2007/057505 A1 (HALVAGEN OY [FI]; PUOLITAIVAL HANNU [FI]; REPOKARI LAURI KULLERO [FI]) 24 May 2007 (2007-05-24) page 2, line 4 - line 9 page 2, line 21 - page 4, line 12 ----- DE 197 54 717 A1 (PARTHY KAI DIPL ING [DE]) 30 July 1998 (1998-07-30) column 2, line 24 - line 30 column 2, line 1 - line 12 column 2, line 27 - line 34 figures 1-3 ----- -/-	1-12, 19-21, 23,24 1,2,6,7, 11-14, 20-22, 24,25
X		

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
7 February 2014	17/02/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer D'Alessandro, Davide

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/067175

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 312 676 A (HOGSETH JOHN M ET AL) 26 January 1982 (1982-01-26) column 1, line 67 - column 2, line 12 column 2, line 45 - line 51 column 3, line 17 - line 38 column 4, line 27 - line 34 column 5, line 35 - line 56 -----	1,2,6,7, 9,15-20, 23,25,26
A	US 2006/223731 A1 (CARLING PHILIP C [US]) 5 October 2006 (2006-10-05) paragraphs [0015] - [0017], [0048] - [0050], [0053], [0054] -----	1-26
A	WO 2008/088424 A1 (INFECTION PREVENTION SYSTEMS I [US]; HWANG FRANKLIN D [US]) 24 July 2008 (2008-07-24) page 6, line 19 - line 29 page 8, line 10 - line 28 page 9, line 14 - line 25 page 12, line 8 - line 21 page 21, line 11 - line 12 -----	1-26
A	DE 196 49 925 A1 (INTERMEDICAL S A H [LU]) 4 June 1998 (1998-06-04) page 2, line 24 - line 26 page 2, line 47 - line 55 page 3, line 34 - line 37 page 5, line 31 - line 43 -----	1-26
2		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/067175

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 2007057505	A1	24-05-2007	NONE		
DE 19754717	A1	30-07-1998	NONE		
US 4312676	A	26-01-1982	NONE		
US 2006223731	A1	05-10-2006	US 2006223731 A1 US 2009042757 A1 US 2009248499 A1 US 2009261270 A1 US 2012071376 A1 US 2013252867 A1	05-10-2006 12-02-2009 01-10-2009 22-10-2009 22-03-2012 26-09-2013	
WO 2008088424	A1	24-07-2008	US 2010134296 A1 WO 2008088424 A1	03-06-2010 24-07-2008	
DE 19649925	A1	04-06-1998	NONE		