

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

18 July 2019 (18.07.2019)



(10) International Publication Number

WO 2019/136515 A1

(51) International Patent Classification:

C06B 31/28 (2006.01) C06B 31/06 (2006.01)

(21) International Application Number:

PCT/AU2019/050003

(22) International Filing Date:

03 January 2019 (03.01.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2018900058 09 January 2018 (09.01.2018) AU

(71) Applicant: **DYNO NOBEL ASIA PACIFIC PTY LIMITED** [AU/AU]; Level 8, 28 Freshwater Place, Southbank, Victoria 3006 (AU).

(72) Inventors: **PETTERSEN, Jade**; Mt. Thorley Technical Centre, 5 Woodland Road, PMB 17, Singleton, New South Wales 2330 (AU). **MCPHAIL, Emma**; Mt. Thorley Technical Centre, 5 Woodland Road, PMB 17, Singleton, New South Wales 2330 (AU). **GORE, Jeff**; Mt. Thorley Technical Centre, 5 Woodland Road, PMB 17, Singleton, New South Wales 2330 (AU).

(74) Agent: **MAXWELL, Nicola Jane, Lake**; IP Solved (ANZ) Pty Ltd, Level 16, 68 Pitt Street, Sydney, New South Wales 2000 (AU).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EXPLOSIVE COMPOSITIONS FOR USE IN REACTIVE GROUND AND RELATED METHODS

(57) Abstract: Explosive compositions for use in high temperature, reactive ground, or both, are disclosed. The explosive compositions can include an emulsion with a continuous organic fuel phase and a discontinuous oxidizer phase. The oxidizer phase can include one or more Group I or Group II nitrates.



WO 2019/136515 A1

EXPLOSIVE COMPOSITIONS FOR USE IN REACTIVE GROUND AND RELATED METHODS

TECHNICAL FIELD

[0001] The present disclosure relates generally to the field of explosives. More particularly, some embodiments of the present disclosure relate to explosive compositions for use under high temperature conditions and/or in reactive ground.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] The written disclosure herein describes illustrative embodiments that are non-limiting and non-exhaustive. Reference is made to certain of such illustrative embodiments that are depicted in the figures, in which:

[0003] FIG. 1 is a graph showing the temperature of a first sample of reactive ground during an isothermal reactive ground test for ammonium nitrate (AN) compared to Formulation C.

[0004] FIG. 2 is a graph showing the temperature of a second sample of reactive ground during an isothermal reactive ground test for AN compared to Formulation C.

[0005] FIG. 3 is a graph showing the temperature of a third sample of reactive ground during an isothermal reactive ground test for AN compared to Formulation C.

[0006] FIG. 4 is a graph showing the temperature of the first sample of reactive ground during an isothermal reactive ground test for AN compared to Formulation B.

[0007] FIG. 5 is a graph showing the temperature of the second sample of reactive ground during an isothermal reactive ground test for AN compared to Formulation B.

[0008] FIG. 6 is a graph showing the temperature of the third sample of reactive ground during an isothermal reactive ground test for AN compared to Formulation B.

[0009] FIG. 7 is a graph showing the temperature of a fourth sample of reactive ground during separate isothermal reactive ground tests for AN, calcium nitrate (CN), and sodium nitrate (SN).

[0010] FIG. 8 is a graph showing the temperature of a fifth sample of reactive ground during separate isothermal reactive ground tests for AN and Formulations D and E.

DETAILED DESCRIPTION

[0011] Explosive compositions for use in reactive ground and/or in high temperature conditions are disclosed herein, along with related methods. Explosives are commonly used in the mining, quarrying, and excavation industries for breaking rocks and ore. Generally, a hole, referred to as a “blast hole,” is drilled into a surface, such as the ground. An explosive composition may then be placed in the blast hole. Subsequently, the explosive composition may be detonated.

[0012] In some embodiments, the explosive composition is an emulsion or blend including the emulsion. In some embodiments, the emulsion comprises fuel oil as the continuous phase and an oxidizer as the discontinuous phase. For example, in some embodiments, the emulsion comprises droplets of an aqueous oxidizer solution that are dispersed in a continuous phase of fuel oil (i.e., a water-in-oil emulsion).

[0013] A potential hazard associated with explosive compositions, such as emulsion explosives, is premature detonation. Generally, explosive material is left in a blast hole for a period of time (i.e., the “sleep time”) until it is fired. Stated differently, the sleep

time of an explosive material is the time between loading of the material into the blast hole and intentional firing of the explosive material. Premature detonation (i.e., detonation during the intended sleep time) creates significant risks.

[0014] One potential cause of premature detonation is an elevated ground temperature. An elevated ground temperature may reduce (or supply) the activation energy needed to trigger detonation of an explosive. As used herein the term “high temperature ground” refers to ground at a temperature of 55 °C or higher.

[0015] A second potential cause of premature detonation is placement of the explosive composition in reactive ground. “Reactive ground” is ground that undergoes a spontaneous exothermic reaction when it comes in contact with nitrates, such as ammonium nitrate. Often the reaction involves the chemical oxidation of sulfides (e.g., iron sulfide or copper sulfide) by nitrates and the liberation of heat. In other words, when an explosive composition is placed in reactive ground, the sulfides within the reactive ground may react with nitrates in the explosive composition. The reaction of nitrates with sulfide-containing ground may result in an auto-catalyzed process that can, after some induction time, lead to runaway exothermic decomposition. In some instances, the resulting increase in temperature (i.e., the resulting exotherm) can lead to premature detonation. One example of reactive ground is ground that includes pyrite.

[0016] Additionally, ground to be blasted can be both high temperature ground and reactive ground.

[0017] Several strategies can be employed to prevent an exotherm and premature detonation. For example, in some embodiments, a physical barrier is placed between the explosive composition and the ground. In other or further embodiments, the reaction

of the explosive composition with the reactive ground may be chemically inhibited. For example, the explosive composition may include an additive that functions as an inhibitor, such as urea, ammonia, soda ash, zinc oxide, organic amines, or combinations thereof (e.g., a urea/ammonia inhibitor).

[0018] As described in further detail below, in the embodiments disclosed herein, the explosive composition includes one or more Group I or Group II nitrates. For example, the oxidizer phase of an emulsion explosive may comprise one or more Group I or Group II nitrate salts in combination with one or more non-Group I or Group II nitrate salts, such as, for example, ammonium nitrate. The use of a Group I or Group II nitrate in the oxidizer phase may reduce the reactivity of the emulsion explosive with reactive ground and/or high temperature ground relative to other explosive compositions or emulsions that lack the Group I or Group II nitrate (or have a relatively lower amount of the Group I or Group II nitrate) in the oxidizer phase. In another example, all or a portion of one or more Group I or Group II nitrate salts may be incorporated into the explosive composition as dry particles (e.g., prill) blended with an emulsion explosive. The explosive compositions described herein may decrease the risk of undesired exotherms and/or premature detonation and, thus, allow for controlled detonation.

[0019] Examples of Group I or Group II nitrates include sodium nitrate, potassium nitrate, and calcium nitrate. In some embodiments, the Group I or Group II nitrates consist of one or more Group I nitrates.

[0020] Compositions for use in reactive ground and/or under elevated ground temperatures are described herein. In some embodiments, the explosive composition is an emulsion. For example, the emulsion may include a continuous organic fuel phase

and a discontinuous oxidizer phase. In some embodiments, the continuous organic fuel phase comprises or consists of fuel oil (e.g., diesel fuel). In other or further embodiments, the continuous organic fuel phase comprises or consists of mineral oil. In some embodiments, the continuous organic fuel phase includes some other organic fuel.

[0021] The discontinuous oxidizer phase of the emulsion explosive may be an aqueous solution. Where the discontinuous oxidizer phase is or comprises an aqueous solution, the water in the discontinuous oxidizer phase may be between about 3% and about 30% of the discontinuous aqueous phase by weight. (Unless otherwise specified, all ranges disclosed herein include both endpoints.) In particular embodiments, the water in the discontinuous oxidizer phase may be about 10% to about 30% or 12% to about 25%.

[0022] As discussed above, the explosive composition may include one or more Group I or Group II nitrates in combination with one or more non-Group I or Group II nitrates. For example, in some embodiments, the Group I or Group II nitrate is present in the emulsion in an amount from about 3% to about 35% by weight. More particularly, in some embodiments, the one or more Group I or Group II nitrates are about 3% to about 35%, about 5% to about 25%, about 5% to about 18%, about 10% to about 35%, or about 10% to about 25% of the discontinuous oxidizer phase by weight.

[0023] Some embodiments include a nitrate salt that is not a Group I or Group II nitrate. For example, the discontinuous oxidizer phase of some emulsion explosives may include ammonium nitrate in addition to the one or more Group I or Group II nitrates. For example, in some embodiments, the nitrate salt that is not a Group I or Group II

nitrate is ammonium nitrate, and the ratio (by weight) of ammonium nitrate to the one or more Group I or Group II nitrates is about 2:1 to about 14:1, such as from about 6:1 to 9:1 (e.g., the ratio of ammonium nitrate to sodium nitrate).

[0024] Relative to embodiments that include the same amount of nitrate salts, embodiments that include a Group I or Group II nitrate may be less prone to undesired exothermic reactions with reactive ground. Stated differently, the presence of a Group I or Group II nitrate may delay the onset and/or reduce the extent of exothermic reactivity with sulfide-containing ground.

[0025] In some embodiments, the discontinuous oxidizer phase further comprises one or more inhibitors, such as urea, ammonia, soda ash, zinc oxide, organic amines, or combinations thereof (e.g., a urea/ammonia inhibitor). The inhibitor may reduce thermal degradation of the emulsion explosive when the emulsion explosive is in contact with reactive ground. Stated differently, when the emulsion explosive is in contact with sulfide-containing ground, the inhibitor may reduce the reaction rate between the nitrate salts of the discontinuous oxidizer phase and the sulfides in the reactive ground. In some embodiments, the inhibitor is dissolved in an aqueous solution of the discontinuous oxidizer phase.

[0026] In some embodiments, the inhibitor is or comprises urea. The urea may be present at any suitable concentration. For example, in some embodiments, urea is between about 0.5% and about 35% of the discontinuous oxidizer phase by weight. More specifically, in some embodiments, the discontinuous oxidizer phase is between about 0.5% and about 10%, between about 1% and about 10%, between about 1% and about 5%, or between about 2% and about 5% urea by weight. For instance, in some

embodiments, urea may be dissolved in an aqueous oxidizer phase at a concentration of between about 1% to about 5% by weight, such as about 3% by weight.

[0027] “Emulsion” as used herein encompasses both unsensitized emulsion matrix and emulsion that has been sensitized into emulsion explosive. For example, the unsensitized emulsion matrix may be transportable as a UN Class 5.1 oxidizer. Emulsion explosives comprise a sufficient amount of sensitizing agent to render the emulsion detonable with standard detonators. The emulsion may be sensitized at the blast site or even in the blast hole. It should be understood that the disclosure herein regarding either “emulsion” or “emulsion explosive” will generally apply interchangeably to the other. In some embodiments, the sensitizing agent is a chemical gassing agent. In some embodiments, the sensitizing agent comprises hollow microspheres or other solid gas-entraining agents. In some embodiments, the sensitizing agent is gas bubbles that have been mechanically introduced into the emulsion. The introduction of gas bubbles into the emulsion may decrease the density of the emulsion that is delivered to the blast hole.

[0028] Typically, explosive emulsions consist of a supersaturated discontinuous phase. If the same solution in the discontinuous phase was stored in a beaker under standard conditions, it would readily crystallize. However, the structure of emulsions reduces the rate crystallization of the supersaturated discontinuous phase. This is due to the emulsifiers creating a curved surface which results in an increase in pressure within the droplet, thereby stabilizing the supersaturated solution. This pressure increase is called the Laplace pressure. The resulting unsensitized emulsion is manufactured above the critical density which means it will fail to detonate at full order at that density. As a

result, the unsensitized emulsion will pass the Series 8 UN testing and be classified as an UN Class 5.1 oxidizer. Reducing the density of the emulsion below the critical density enables the product to be reliably detonatable.

[0029] Methods of using the explosive compositions described herein are also disclosed. For example, an emulsion explosive described herein can be used to blast in reactive ground and/or ground at an elevated temperature.

[0030] For instance, one method of blasting in reactive ground includes the step of placing the emulsion explosive in reactive ground. For instance, the emulsion explosive may be loaded into a blast hole drilled within reactive ground.

[0031] The reactive ground may include any minerals that typically react with one or more nitrate salts to produce an exothermic reaction. For instance, in some embodiments, the reactive ground includes one or more sulfides. More particularly, some reactive ground includes an iron sulfide, such as iron pyrite. Ground can be identified as reactive ground by performing the isothermal reactive ground test of the Australian Explosives Industry and Safety Group Inc. (see Australian Explosives Industry and Safety Group Inc., Code of Practice: Elevated Temperature and Reaction Ground, March 2017).

[0032] When placed in reactive ground, the temperature of the emulsion explosive may not significantly change (e.g., less than 5 °C, less than 3 °C, less than 2 °C, or less than 1.5 °C) from the temperature of the reactive ground due to exothermic reaction(s) with the reactive ground. In other words, the emulsion explosive may be placed in reactive ground and then allowed to sleep for some period of time prior to detonation. A “reactive exotherm” is defined as an increase in temperature of at least 2 °C above the

background temperature in the temperature/time trace for a particular sample, where the increase in temperature shows a return to the background temperature when the reaction is completed. Such reactions may be accompanied by visible signs, such as bubbling and/or the generation of brown nitrogen oxides.

[0033] In some embodiments, no runaway exothermic reaction occurs during the sleep time for the emulsion explosive. In other words, the emulsion explosive does not experience a significant change of temperature due to an exothermic reaction with the reactive ground. In some embodiments, no (or substantially no) exotherm is produced, even when the emulsion explosive is left within reactive ground at elevated temperatures, such as reactive ground that is at elevated temperatures due to geothermal activity. In some embodiments, the reactive ground into which the emulsion explosive is placed has a temperature of greater than 55 °C, greater than 65 °C, greater than 75 °C, greater than 100 °C, greater than 125 °C, greater than 150 °C, greater than 160 °C, and/or greater than 180 °C.

[0034] More particularly, some methods of blasting in reactive ground involve the step of letting the emulsion explosive sleep for at least one day, at least two days, at least two weeks, at least one month, at least two months, or at least three months at an average ground temperature of 55 °C or more. Some methods of blasting in reactive ground may additionally or alternatively include the step of letting the emulsion explosive sleep for at least 12 hours at an average ground temperature of greater than or equal to 150 °C or greater than or equal to 180 °C. For example, the emulsion explosive may sleep for some period of time in reactive ground at a temperature of between 150 °C and 200 °C without provoking a runaway exothermic reaction that

significantly changes the temperature of the emulsion explosive. The avoidance of such a runaway exothermic reaction may prevent or reduce the risk of premature detonation.

[0035] Without wishing to be bound by theory, the combination of a Group I or Group II nitrate salt and urea in the discontinuous oxidizer phase may synergistically delay or otherwise slow a runaway exothermic reaction of the nitrate salt(s) of the oxidizer phase with the reactive ground. Stated differently, for embodiments that include both a Group I or Group II nitrate and urea, the increase in delay time until a significant exotherm develops may be greater than the additive delay from a Group I or Group II nitrate alone and urea alone.

[0036] After the emulsion explosive has been placed in the reactive ground, the emulsion explosive may be detonated at the desired time. For example, in some embodiments, the emulsion explosive may be detonated after the emulsion explosive has been allowed to sleep for a period of greater than 3 hours, 5 hours, 12 hours, 24 hours, 2 days, one week, two weeks, at least one month, at least two months, or at least three months.

Examples

[0037] Example 1—Reactivity of Reactive Ground with Formulations Containing Various Amounts of Sodium Nitrate

[0038] The reactivity of samples from highly reactive ground obtained from an underground copper/gold mine were tested per the isothermal reactive ground test of the Australian Explosives Industry and Safety Group Inc. (see Australian Explosives Industry and Safety Group Inc., Code of Practice: Elevated Temperature and Reaction

Ground, March 2017), but modified for long-term testing. During long-term testing, the samples dry out when subjected to elevated temperatures over extended periods of time. Therefore, 1 mL of water was added every 3 to 4 days to each sample. Regarding the samples, sulfide-rich samples from the mine were initially crushed to a fine powder. Each sample was then mixed with Formulation A, Formulation B, Formulation C, or ammonium nitrate (AN) (see Table 1 below). The values listed in Table 1 show the relative amounts of each component on a weight per weight basis.

Table 1. Compositions of Formulations A, B, and C, and AN.

Formulation	A	B	C	AN
ammonium nitrate	62	67	76	100
sodium nitrate	14	9	0	0
urea	3	3	3	0
sodium thiocyanate	0.3	0.3	0.3	0
water	15	15	15	0
#2 fuel oil	6	6	6	0

[0039] Each mixture was then heated to and kept at 55 °C while monitoring for exothermic reactions using thermocouples that continuously log the temperature. All reactions were monitored for at least 15 days. For instance, the reactive ground samples tested with Formulation B were monitored for 19 days, and the reactive ground samples tested with Formulation A were monitored for more than 110 days. Data from the experiments are shown in FIGS. 1–6 and Table 2. More particularly, FIG. 1 shows temperature changes for a first reactive ground sample (Sample 1) that had been treated with AN and Formulation C. FIGS. 2 and 3 provide analogous graphs for a second sample (Sample 2; FIG. 2) and a third sample (Sample 3; FIG. 3) that had been similarly tested. FIGS. 4–6 show temperature changes for Sample 1 (FIG. 4), Sample 2 (FIG. 5), and Sample 3 (FIG. 6), where each sample had been tested with AN and

Formulation B. Tests with Formulation A (not shown) did not result in a substantial exotherm even after more than 110 days of monitoring.

Table 2. Results for Isothermal Reactive Ground Test

Reactive Ground Composition	Product	Max Temp (°C)	Time to Max Exotherm Peak (D:HH:MM)	Average Temp (°C)	Change in Temperature (°C)
Sample 1	AN	144.4	0:00:32	56.8	87.6
Sample 1	Formulation C	130.3	5:11:07	56.1	74.2
Sample 1	Formulation C	258.7	13:04:17	55.7	203.0
Sample 2	AN	148.5	0:00:40	55.6	92.9
Sample 2	Formulation C	105.0	3:07:35	55.6	49.4
Sample 2	Formulation C	101.9	4:07:55	55.5	46.4
Sample 3	AN	134.8	0:00:33	56.1	78.7
Sample 3	Formulation C	61.4	2:03:54	55.5	5.9
Sample 3	Formulation C	62.6	3:03:11	54.8	7.8
Sample 1	AN	137.5	0:00:38	56.7	80.8
Sample 1	Formulation B	56.4		55.8	0.6
Sample 1	Formulation B	56.3		55.7	0.6
Sample 2	AN	143.5	0:00:39	56.0	87.5
Sample 2	Formulation B	56.3		55.9	0.4
Sample 2	Formulation B	56.1		55.6	0.5
Sample 3	AN	123.0	0:00:51	56.2	66.8
Sample 3	Formulation B	56.8	7:01:26	54.9	1.9
Sample 3	Formulation B	56.7	7:03:47	55.0	1.7
Sample 1	Formulation A	~55		~55	<1.5
Sample 2	Formulation A	~55		~55	<1.5

[0040] Without being bound to any particular theory, it is believed that Group I or Group II nitrates may delay or slow the exothermic reaction of nitrates with reactive species (e.g., sulfides) in the reactive ground. It is also believed that the use of an inhibitor, such as urea, in combination with one or more Group I or Group II nitrates synergistically delays and/or reduces such exothermic reaction(s).

[0041] Example 2—Reactivity of Reactive Ground with Various Nitrate Salts

[0042] The reactivity of a known reactive ground sample (Sample 4) was tested per the isothermal reactive ground test of the Australian Explosives Industry and Safety Group Inc. More particularly, the sample was separately mixed with AN prill, calcium nitrate prill, or sodium nitrate prill.

[0043] Each mixture was then heated to and kept at 55 °C and monitored for exothermic reactions using thermocouples that continuously logged the temperature. The resulting data are shown in FIG. 7 and Table 3.

Table 3. Results for Isothermal Reactive Ground Test Based on Various Nitrate Salts

Reactive Ground Composition	Material Tested	Max Temp (°C)	Time to Max Exotherm Peak (D:HH:MM)	Average Temp (°C)	Change in Temperature
Sample 4	Ammonium Nitrate	100.3	0:00:27	55.3	45.0
Sample 4	Ammonium Nitrate	108.8	0:00:29	55.9	52.9
Sample 4	Calcium Nitrate	80.3	0:00:26	55.8	24.5
Sample 4	Calcium Nitrate	83.7	0:00:29	55.9	27.8
Sample 4	Sodium Nitrate	65.0	0:00:42	54.7	10.3
Sample 4	Sodium Nitrate	65.5	0:00:41	55.2	10.3

[0044] As can be seen in FIG. 7 and Table 3, the ammonium nitrate and calcium nitrate mixtures had a similar elapsed time for the exotherm peak, although the maximum temperature for the calcium nitrate mixtures was less than that for the ammonium nitrate mixtures. Surprisingly, and in contrast with the ammonium nitrate and calcium nitrate mixtures, the time to the exotherm peak for the sodium nitrate mixtures was significantly longer than for the ammonium nitrate and calcium nitrate mixtures. The change in

temperature for the sodium nitrate mixtures was also lower than the change in temperature for the ammonium nitrate mixtures or calcium nitrate mixtures.

[0045] Example 3—Inhibition of Reactive Ground with Formulations D and E

[0046] The inhibition of a reactive ground sample (Sample 5) was tested per the isothermal reactive ground test of the Australian Explosives Industry and Safety Group Inc. More specifically, the reactive ground sample was mixed with AN, Formulation D or Formulation E (see Table 5 below). The values listed in Table 4 show the relative amounts of each component on a weight per weight basis.

Table 4. Composition of Nitrate Salt Formulations

Material/Formulation	AN	D	E
ammonium nitrate	100	68.6	59.2
sodium nitrate	0	0	8.5
urea	0	14.1	14.1
water	0	11.3	12.2
#2 fuel oil	0	6	6

The mixture was then heated to and kept at 165 °C and monitored for exothermic reactions using thermocouples that continuously log the temperature. The resulting data are shown in FIG. 8 and Table 5.

Table 5. Comparison of Inhibited Formulations without Sodium Nitrate (Formulation D) and with Sodium Nitrate (Formulation E)

Ground Composition	Material Tested	Max Temp (°C)	Time to Max Exotherm Peak (D:HH:MM)	Average Temp (°C)	Change in Temperature
Sample 5	AN	256.1	0:00:07	164.6	91.5
Sample 5	Formulation D	168.3	0:15:20	164.5	3.8
Sample 5	Formulation D	168.4	0:15:49	164.9	3.5
Sample 5	Formulation E	166.6		165.5	1.1
Sample 5	Formulation E	166.3		165.2	1.1

[0047] As can be seen in Table 5, the composition that includes sodium nitrate is less prone to an exotherm under relatively high temperature (~165 °C) conditions.

[0048] Any methods disclosed herein include one or more steps or actions for performing the described method. The method steps and/or actions may be interchanged with one another. In other words, unless a specific order of steps or actions is required for proper operation of the embodiment, the order and/or use of specific steps and/or actions may be modified. Moreover, sub-routines or only a portion of a method described herein may be a separate method within the scope of this disclosure. Stated otherwise, some methods may include only a portion of the steps described in a more detailed method.

[0049] Reference throughout this specification to “an embodiment” or “the embodiment” means that a particular feature, structure, or characteristic described in connection with that embodiment is included in at least one embodiment. Thus, the quoted phrases, or

variations thereof, as recited throughout this specification are not necessarily all referring to the same embodiment.

[0050] As the following claims reflect, inventive aspects lie in a combination of fewer than all features of any single foregoing disclosed embodiment. Thus, the claims following this Detailed Description are hereby expressly incorporated into this Detailed Description, with each claim standing on its own as a separate embodiment. This disclosure includes all permutations of the independent claims with their dependent claims.

[0051] Recitation in the claims of the term “first” with respect to a feature or element does not necessarily imply the existence of a second or additional such feature or element. It will be apparent to those having skill in the art that changes may be made to the details of the above-described embodiments without departing from the underlying principles of the present disclosure.

[0052] In this specification, unless the context clearly indicates otherwise, the term “comprising” has the non-exclusive meaning of the word, in the sense of “including at least” rather than the exclusive meaning in the sense of “consisting only of”. The same applies with corresponding grammatical changes to other forms of the word such as “comprise”, “comprises” and so on.

[0053] Any discussion of prior art information in this specification is not to be taken as any form of acknowledgement that that prior art information would be considered common general knowledge by a person of skill in the art, either in Australia or in any foreign country.

We claim:

1. A method of blasting in high temperature ground, reactive ground, or both, the method comprising:

placing an explosive composition comprising an emulsion explosive including a continuous organic fuel phase and a discontinuous oxidizer phase in ground to be blasted, wherein the explosive composition comprises about 3% to about 35% by weight of one or more Group I or Group II nitrates, and wherein the ground contains reactive ground, high temperature ground, or both; and

detonating the emulsion explosive in a controlled manner.

2. The method of claim 1, further comprising determining that the ground to be blasted contains reactive ground.
3. The method of claim 2, wherein the reactive ground includes a sulfidic mineral.
4. The method of claim 2 or claim 3, wherein the reactive ground includes iron pyrite, marcacites, chalcopyrites, or combinations thereof.
5. The method of any one of claims 1–4, wherein the one or more Group I or Group II nitrates comprise sodium nitrate, potassium nitrate, calcium nitrate, or combinations thereof.
6. The method of claim 5, wherein the one or more Group I or Group II nitrates consists of one or more Group I nitrates.

7. The method of any one of claims 1–4, wherein placing the explosive composition in the ground comprises loading a blast hole with the explosive composition.
8. The method of any one of claims 1–7, further comprising determining that the ground to be blasted is high temperature ground.
9. The method of claim 8, wherein the high temperature ground is greater than 100 °C, 120 °C, 150 °C, or 180 °C.
10. The method of any one of claims 1–9, wherein the one or more Group I or Group II nitrates comprise about 3% to about 35%, about 5% to about 25%, about 5% to about 18%, about 10% to about 35%, or about 10% to about 25% of the oxidizer phase by weight.
11. The method of claim 10, wherein the oxidizer phase further comprises ammonium nitrate and a ratio of ammonium nitrate to the one or more Group I or Group II nitrates is about 2:1 to about 14:1 or about 6:1 to about 9:1 by weight.
12. The method of claim 10 or claim 11, wherein the oxidizer phase further comprises water at about 5% to about 30% or about 12% to about 25% by weight.

13. The method of any one of claims 1–11, further comprising letting the explosive composition sleep for at least 3 hours at an average ground temperature of 150 °C or more.
14. The method of any one of claims 1–13, further comprising letting the explosive composition sleep for at least 3 hours at an average ground temperature of 180 °C or more droplets.
15. The method of any one of claims 1–11, further comprising letting the explosive composition sleep in the ground for at least one day longer than an emulsion explosive that is substantially free of Group I or Group II nitrates in the discontinuous oxidizer phase would be allowed to sleep in the ground.
16. The method of any one of claims 1–15, wherein the oxidizer phase further comprises an inhibitor.
17. The method of claim 16, wherein the inhibitor comprises urea, zinc oxide, ammonia, soda ash, or combinations thereof.
18. The method of claim 16 or claim 17, wherein the inhibitor comprises urea, and the urea is present at about 0.5% to about 35%, about 0.5% to about 10%, or about 0.5% to about 5%, by weight of the oxidizer phase.

19. The method of any one of claims 1–18, wherein the explosive composition further comprises a sensitizing agent.
20. An explosive composition comprising an emulsion comprising:
a continuous organic phase comprising fuel oil;
a discontinuous oxidizer phase comprising:
urea, wherein the urea is about 0.5% to about 35% of the discontinuous oxidizer phase by weight;
a non-Group I or Group II nitrate; and
one or more Group I or Group II nitrates, wherein the Group I or Group II nitrates are about 3% to about 35% of the discontinuous oxidizer phase by weight.
21. The explosive composition of claim 20, wherein water in the discontinuous aqueous phase is between 10% and 30% of the discontinuous aqueous phase by weight.
22. The explosive composition of claim 20 or claim 21, wherein the urea is about 1% to about 25% or about 2% to about 5% of the discontinuous oxidizer phase by weight.
23. The explosive composition of any one of claims 20–22, wherein the one or more Group I or Group II nitrates are about 5% to about 25%, about 5% to about

18%, about 10% to about 35%, or about 10% to about 25% of the discontinuous oxidizer phase by weight.

24. The explosive composition of any one of claims 20–23, wherein the emulsion is at least 30% of the explosive composition by weight.

25. The explosive composition of any one of claims 20–24, wherein the one or more Group I or Group II nitrates comprise sodium nitrate, potassium nitrate, calcium nitrate, or combinations thereof.

26. The explosive composition of any one of claims 20–25, wherein the emulsion further comprises a sensitizer.

27. The explosive composition of any one of claims 20–27, for use in reactive ground, high temperature ground, or both.

28. A method of forming a blend, the method comprising:

mixing a slurry comprising ammonium nitrate and fuel oil with an emulsion, the emulsion comprising:

a continuous organic phase comprising fuel oil; and

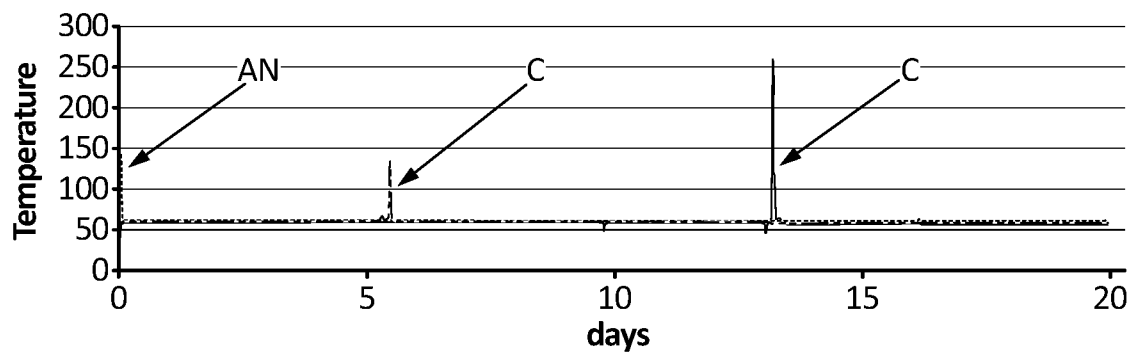
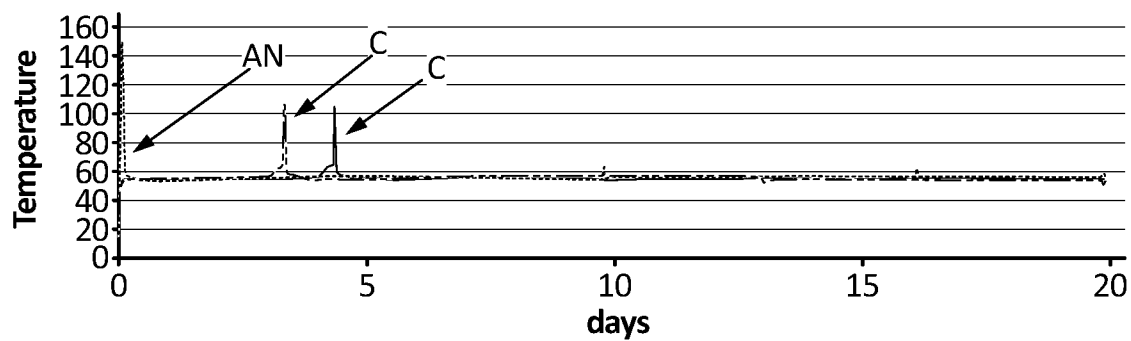
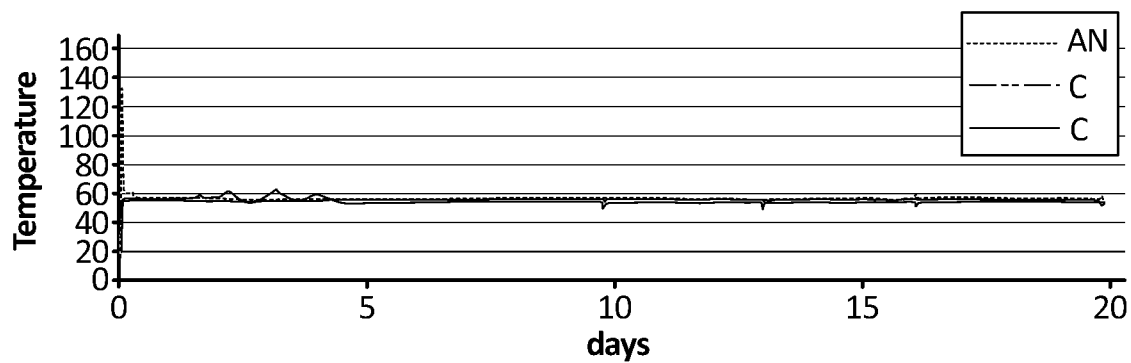
a discontinuous oxidizer phase comprising:

urea, wherein the urea is about 0.5% to about 35% of the discontinuous oxidizer phase by weight;

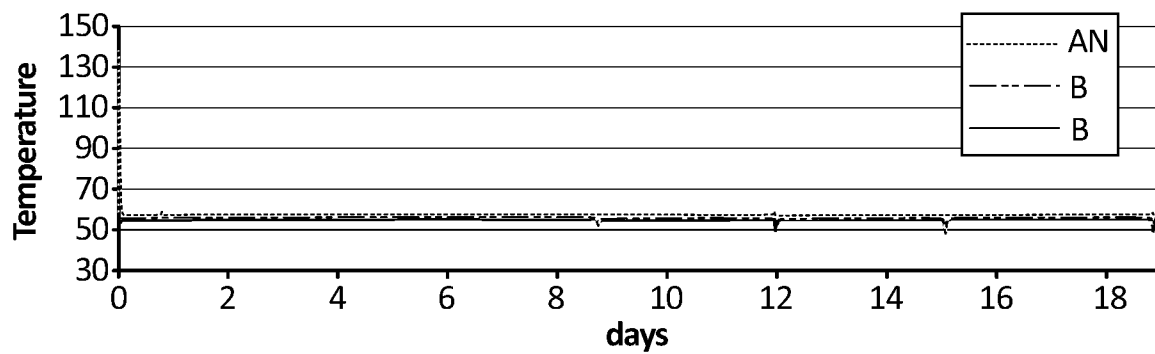
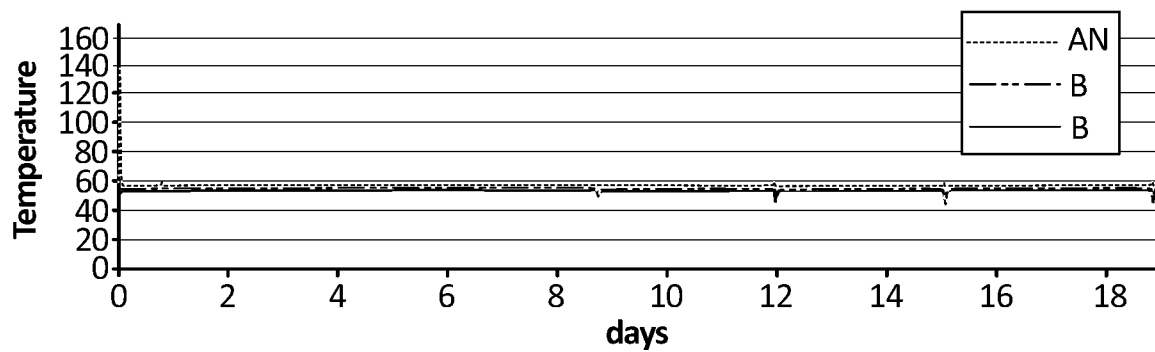
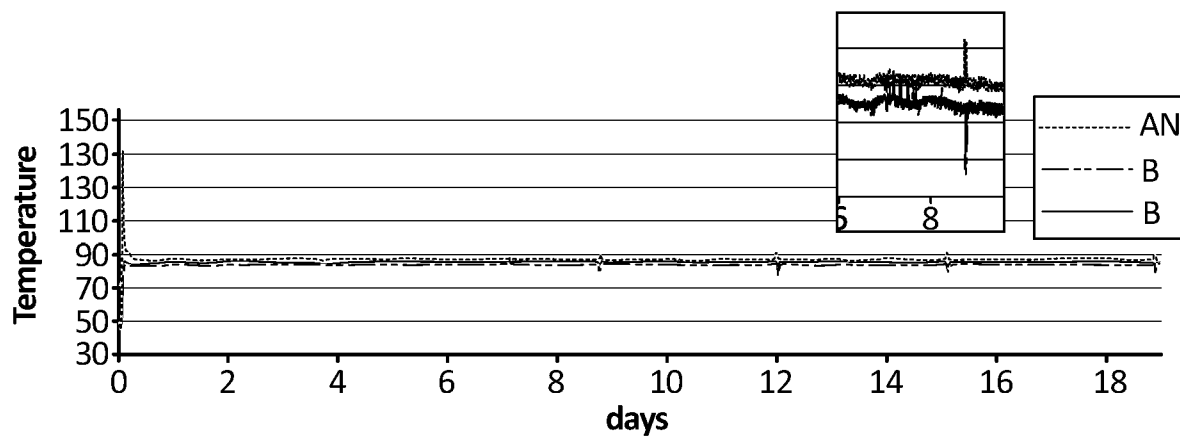
a non-Group I or Group II nitrate; and

one or more Group I or Group II nitrates, wherein the one or more Group I or Group II nitrates are about 3% to about 35% of the discontinuous oxidizer phase by weight.

29. The method of claim 28, wherein the emulsion is at least 30% of the blend by weight.

1/3**FIG. 1****FIG. 2****FIG. 3**

2/3

**FIG. 4****FIG. 5****FIG. 6**

3/3

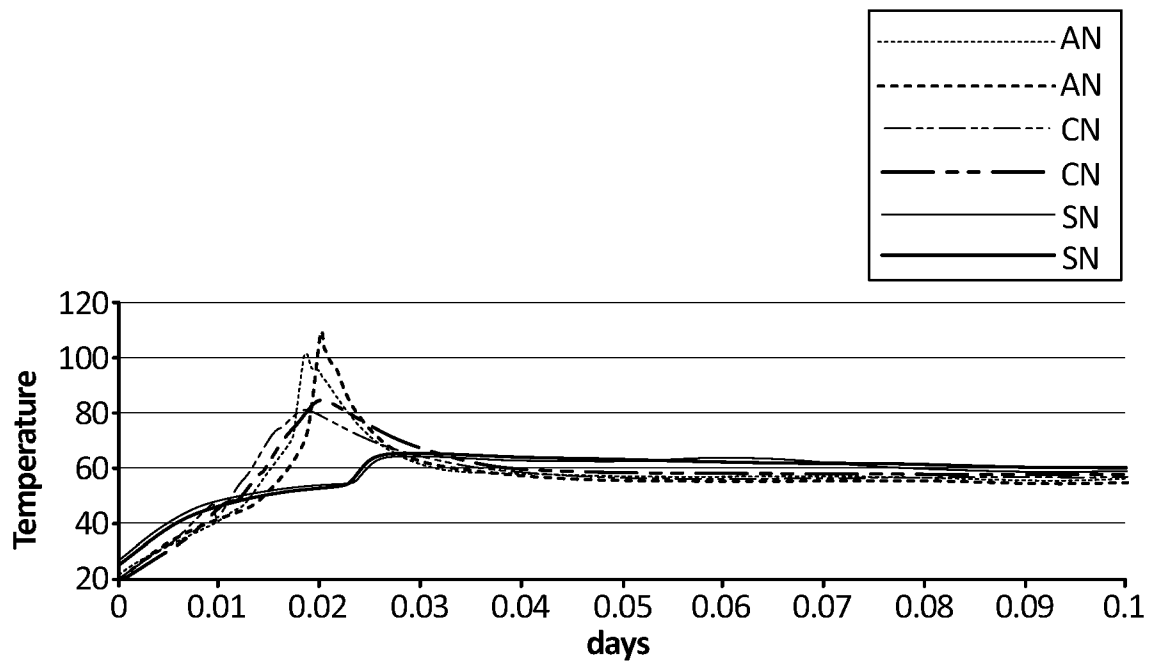


FIG. 7

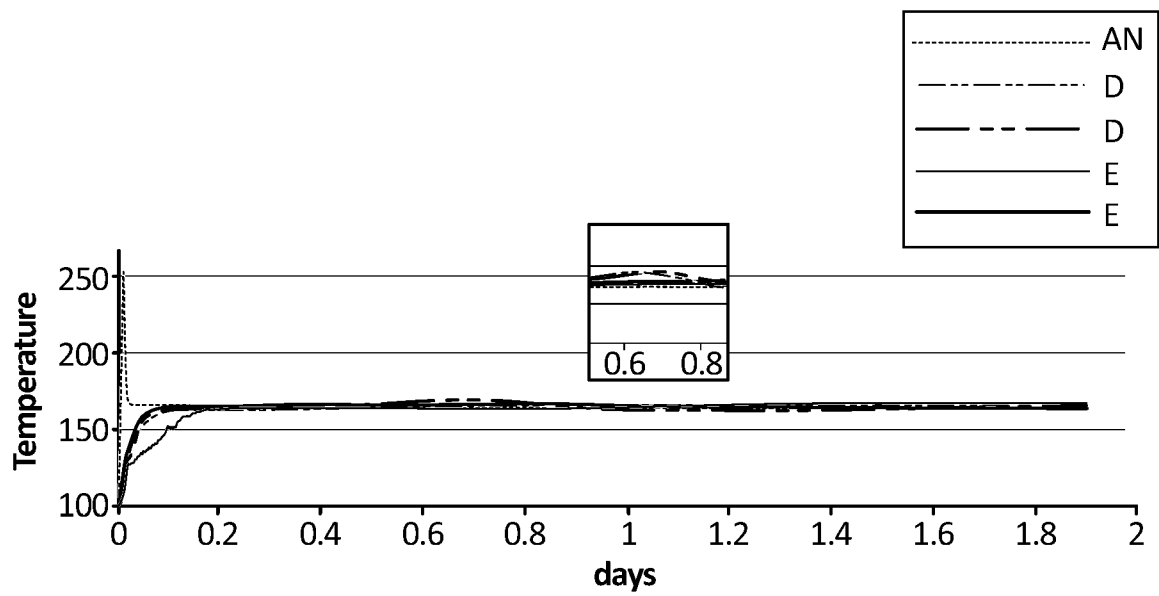


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2019/050003

A. CLASSIFICATION OF SUBJECT MATTER

C06B 31/28 (2006.01) C06B 31/06 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPOQUE: Patenw search using C06B 31/02 and keywords "urea," "reactive+" "blasting" etc.

ESPACENET: Keyword search using Applicant and Inventor names etc.

Applicant(s)/Inventor(s) name searched in internal databases provided by IP Australia

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	



Further documents are listed in the continuation of Box C



See patent family annex

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 9 April 2019		Date of mailing of the international search report 09 April 2019	
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustalia.gov.au		Authorised officer Richard Cordiner AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. +61262832162	

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/AU2019/050003
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0460952 A2 (IRECO INCORPORATED) 11 December 1991 Abstract; Compositions 6-10, Table 1; page 2, lines 5-6; page 3, lines 40-55; claims 9 and 10.	1-29
X	US 2011/0120603 A1 (PEREZ CORDOVA et al) 26 May 2011 Abstract; paragraphs [0014]-[0025]; paragraphs [0026]-[0039]	23-25, 27-29
X	US 6,051,086 A (VILLAMAGNA et al) 18 April 2000 Abstract; column 5, lines 40-48; column 6, lines 7-12; column 6, lines 13-24.	1-15, 19

Form PCT/ISA/210 (fifth sheet) (revised January 2019)

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/AU2019/050003	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
EP 0460952 A2	11 December 1991	EP 0460952 A2	11 Dec 1991
		AU 7727891 A	12 Dec 1991
		AU 639562 B2	29 Jul 1993
		CA 2043369 A1	08 Dec 1991
		US 5159153 A	27 Oct 1992
		ZA 9104103 B	25 Mar 1992
US 2011/0120603 A1	26 May 2011	US 2011120603 A1	26 May 2011
		US 8187397 B2	29 May 2012
		AR 077742 A1	21 Sep 2011
		AU 2010241443 A1	09 Jun 2011
		AU 2010241443 B2	12 Sep 2013
		BR PI1002932 A2	19 Jun 2012
		CA 2716285 A1	23 May 2011
		CN 102153428 A	17 Aug 2011
		CO 6350194 A1	20 Dec 2011
		HN 2010001294 A	28 Jan 2013
		MX 2010008211 A	23 May 2011
		NZ 589433 A	27 Apr 2012
		PE 04912011 A1	22 Jul 2011
		ZA 201008346 B	27 Jul 2011
US 6,051,086 A	18 April 2000	US 6051086 A	18 Apr 2000
		AU 3319599 A	16 Dec 1999
		AU 756663 B2	23 Jan 2003
		CA 2273666 A1	08 Dec 1999
		ID 25945 A	16 Nov 2000
End of Annex			
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(revised January 2019)			