

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/019127 A1

(51) International Patent Classification⁷: **C03C 17/36**,
B32B 17/10, B60J 1/02

[DE/DE]; Am Moenchenberge 5, D-07751 Jena (DE).
LINGLE, Philip, J. [US/US]; 43 E. Temperance Road,
Temperance, MI 48182 (US).

(21) International Application Number:
PCT/US2004/027121

(74) Agent: **RHOA, Joseph, A.**; Nixon & Vanderhye P.C.,
Suite 800, 1100 North Glebe Road, Arlington, VA 22201-
4714 (US).

(22) International Filing Date: 20 August 2004 (20.08.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(26) Publication Language: English

(30) Priority Data:
10/645,838 22 August 2003 (22.08.2003) US

(71) Applicants (for all designated States except US):
GUARDIAN INDUSTRIES CORP. [US/US]; 2300 Har-
mon Road, Auburn Hills, MI 48326-1714 (US). **CENTRE**
LUXEMBOURGEOIS DE RECHERCHES POUR
LE VERRE ET LA CERAMIQUE S.A. (C.R.V.C.)
[LU/LU]; Zone Industrielle Wolser, L-3452 Dudelange
(LU).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KRILTZ, Uwe**

[Continued on next page]

(54) Title: HEAT TREATABLE COATED ARTICLE WITH TIN OXIDE INCLUSIVE LAYER BETWEEN TITANIUM OXIDE
AND SILICON NITRIDE

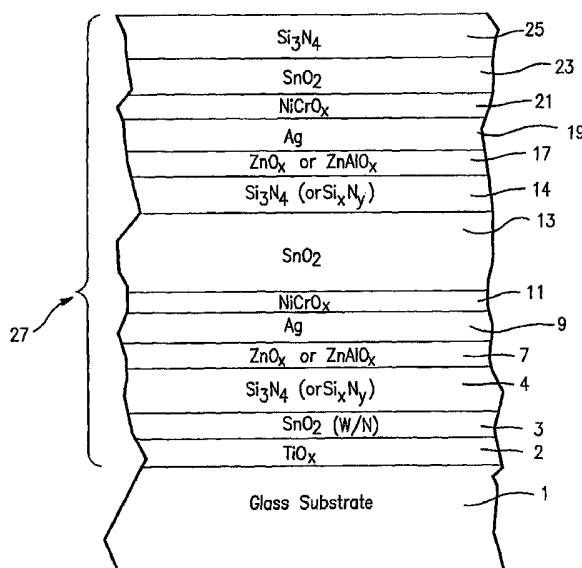

(57) Abstract: A low-E coated article is provided, in certain example embodiments, with a layer including tin oxide provided between a layer including titanium oxide and a layer including silicon nitride. It has been found that the provision of such a tin oxide inclusive layer between silicon nitride and titanium oxide can significantly improve durability of the resulting coated article, especially after heat treatment (HT). In certain example embodiments, the coated article may be formed so as to have a fairly high visible transmission (T_{vis} or T_{vis}) to sheet resistance (R_s) ratio (i.e., a ratio T_{vis}/R_s). Coated articles herein may be used in the context of windows or the like (e.g., laminated vehicle windshields).



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

HEAT TREATABLE COATED ARTICLE WITH TIN OXIDE INCLUSIVE LAYER BETWEEN TITANIUM OXIDE AND SILICON NITRIDE

[0001] The instant application relates to a heat treatable coated article which includes a layer comprising tin oxide located between a layer comprising a metal oxide such as titanium oxide and a layer comprising a nitride such as silicon nitride. Surprisingly, it has been found that the provision of a tin oxide inclusive layer between such layers can significantly improve durability of the resulting coated article, especially after heat treatment (HT).

CROSS-REFERENCE TO RELATED APPLICATIONS

[0002] This application is related to each of U.S. Patent Application Serial Nos. 10/400,080, filed March 27, 2003, 10/636,918, filed August 8, 2003, 10/337,383, filed January 7, 2003, and 10/337,384, filed January 7, 2003 which is a division of 09/794,224, filed February 28, 2001 (now U.S. Patent No. 6,576,349), the disclosures of which are all hereby incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0003] Windows including glass substrates with solar control coatings provided thereon are known in the art. Such windows may be used in the context of architectural windows, insulating glass (IG) window units, automotive windows such as windshields, and/or the like.

[0004] Related U.S. Patent Application Serial No. 10/400,080 discloses at least a coated article having the following layer stack where the layers are listed in order from the glass substrate outwardly: glass/TiO_x(40 Å)/Si_xN_y(113 Å)/ZnO_x(100 Å)/Ag(95 Å) and so forth. While the aforesaid example coated article of 10/400,080 is excellent in most respects, there is room for improvement.

[0005] In particular, the aforesaid coating when used in applications such as laminated windshields may be problematic in the following areas. First, durability is sometimes lacking. For example, when exposed to conventional brush testing for durability following heat treatment (HT), delamination often occurs. Second, it tends to sometimes be too red/purple with respect to reflective color. It would be desirable if more neutral reflective color could be achieved.

[0006] It would be desirable if one or both of the aforesaid two problems could be addressed and/or solved.

[0007] Turning to another separate and distinct issue, it is known that if one wants to improve a coating's solar performance (e.g., infrared reflection), the thickness of the silver layer(s) can be increased in order to decrease the coating's sheet resistance. Thus, if one wants to improve a coating's solar performance by increasing its ability to reflect infrared (IR) rays or the like, one typically would increase the thickness of the IR reflecting silver layer(s). Unfortunately, increasing the thickness of the silver layer(s) causes visible transmission (T_Y or T_{vis}) to drop. Accordingly, in the past, when one sought to improve the solar performance of a coating in such a manner, it was at the expense of visible transmission. In other words, when solar performance was improved, visible transmission was sacrificed and decreased. Stated another way, it has been difficult to increase the ratio of visible transmission to sheet resistance (i.e., T_{vis}/R_s), especially if heat treatability and/or durability are to be provided. This is why many coatings that block (reflect and/or absorb) much IR radiation have a rather low visible transmission.

[0008] An excellent way to characterize a coated article's ability to both allow high visible transmission and achieve good solar performance (e.g., IR reflection and/or absorption) is the coating's T_{vis}/R_s ratio. The higher the T_{vis}/R_s ratio, the better the combination of the coating's ability to both provide high visible transmission and achieve good solar performance.

[0009] Certain heat treatable coatings cannot achieve very high T_{vis}/R_s ratios, thereby illustrating that their combined characteristic of visible transmission relative to sheet resistance (and solar performance) may be improved. In the past, it has been theoretically possible to increase the T_{vis}/R_s ratio, but not in a commercially

acceptable manner. As an example, Example 2 of U.S. Patent No. 4,786,783 could not survive heat treatment (e.g., heat bending, tempering, and/or heat strengthening) in a commercially acceptable manner. If Example 2 of the '783 Patent was heat treated, the sheet resistance would effectively disappear because the silver layer(s) would heavily oxidize and be essentially destroyed, thereby leading to unacceptable optical properties such as massive (very high) haze, very large ΔE^* values, and unacceptable coloration. For example, because Example 2 of the '783 Patent does not use sufficient layer(s) to protect the silver during HT, the coated article would have very high ΔE^* values (glass side reflective and transmissive) due to heat treatment; ΔE^* over 10.0 and likely approaching 20.0 or more (for a detailed discussion on the meaning of ΔE^* , see U.S. Patent Nos. 6,495,263 and/or 6,475,626, both of which are hereby incorporated herein by reference).

[0010] In view of the above, it may be desirable to improve the aforesaid example coating of 10/400,080 or other coatings at least with respect to durability and/or reflective coloration. Moreover, in certain example instances, it may be desirable to provide a coating with good visible transmission without sacrificing solar performance and/or good solar performance without sacrificing visible transmission. With respect to this latter point, it may in certain example non-limiting situations be desirable for the T_{vis}/R_s ratio to be high in a coating that may be heat treated in a commercially acceptable manner.

BRIEF SUMMARY OF EXAMPLE EMBODIMENTS OF THE INVENTION

[0011] In certain example embodiments of this invention, a layer comprising tin oxide is provided between a layer comprising titanium oxide and a layer comprising silicon nitride. Surprisingly, it has been found that the provision of such a tin oxide inclusive layer between layers comprising silicon nitride and titanium oxide can significantly improve durability of the resulting coated article, especially after heat treatment (HT). The overall adhesion in the coating improves due to this layer comprising tin oxide.

[0012] With respect to durability, the reason for the remarkable improvement in durability is not clear. However, it is believed that it may be related to an

interfacial adhesive problem between silicon nitride and titanium oxide. Undesirable stresses at this interface can be removed by inserting a layer of or including tin oxide between the titanium oxide inclusive layer and the silicon nitride inclusive layer, thereby allowing durability to be significantly improved.

[0013] In certain example embodiments of this invention, there is provided a heat treatable coated article having a visible transmission (T_Y , L_{ta} or T_{vis}) to sheet resistance (R_s) ratio (i.e., a ratio T_{vis}/R_s) of at least 25 after heat treatment (HT), more preferably of at least 30 after HT, even more preferably of at least 32 after HT, still more preferably of at least 34 after HT, and most preferably of at least 36 after HT.

[0014] In other example embodiments of this invention, it has surprisingly and unexpectedly been found that coated articles according to certain example embodiments of this invention have improved heat treatability compared to other known coatings. For example, it has surprisingly been found that coated articles according to certain example embodiments of this invention can be exposed to about 650 degrees C of heat treatment for 12 minutes without suffering a loss in visible transmission of more than 2%. In other words, when the coated article is exposed to about 650 degrees C of heat treatment for 12 minutes, the coated article retains at least 98% of its pre-heat-treatment visible transmission.

[0015] In certain example embodiments, there is provided coated article including a multi-layer coating supported by a glass substrate, the multi-layer coating comprising, from the glass substrate outwardly: a layer comprising titanium oxide; a layer comprising tin oxide located over and contacting the layer comprising titanium oxide; a layer comprising silicon nitride located over and contacting the layer comprising tin oxide; a contact layer; a layer comprising silver located over and contacting the contact layer; a dielectric layer comprising a metal oxide; another layer comprising silver; and another dielectric layer. Other layers may also be provided. The coated article may or may not be heat treated.

[0016] In other example embodiments of this invention, there is provided a heat treatable coated article including a multi-layer coating supported by a glass substrate, the multi-layer coating comprising: a layer comprising tin oxide located directly between and contacting each of a layer comprising titanium oxide and a layer

comprising silicon nitride; at least one layer comprising silver located over the layer comprising tin oxide; and when the coated article is exposed to about 650 degrees C of heat treatment for 12 minutes as a reference, the coated article retains at least 98% of its pre-heat-treatment visible transmission.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIGURE 1 is a cross sectional view of a monolithic coated article according to an example embodiment of this invention – the materials and specific layers thereof in this drawing are provided for purposes of example only.

[0018] FIGURE 2 is a cross sectional view of the coated article of Fig. 1 being used in an IG window unit according to an example embodiment of this invention.

[0019] FIGURE 3 is a cross sectional view of the coated article of Fig. 1 being used in a laminated vehicle windshield according to an example embodiment of this invention.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS OF THE INVENTION

[0020] Referring now more particularly to the accompanying drawings in which like reference numerals indicate like parts throughout the several views.

[0021] Coated articles herein may be used in applications such as vehicle windows (e.g., laminated heat treated windshields), monolithic windows, IG window units, and/or any other suitable application that includes single or multiple glass substrates.

[0022] According to certain example embodiments of this invention, a layer of or including tin oxide (e.g., SnO_2 or $\text{SnO}_2:\text{N}$) is added to the aforesaid example coating of related 10/400,080, between the titanium oxide layer and bottom silicon nitride inclusive layer. Surprisingly, and unexpectedly, it has been found that removal of the titanium oxide/silicon nitride interface, and replacement thereof by a layer comprising tin oxide, allows mechanical durability to be significantly improved especially after heat treatment (HT).

[0023] While the reason for the remarkable improvement in durability is not clear, it is believed that it may be related to an interfacial adhesive problem between silicon nitride and titanium oxide in the aforesaid coating of 10/400,800. In particular, it is believed that internal stress(es) within the titanium oxide layer and silicon nitride layer of the aforesaid coating of 10/400,080 become problematic, especially after heat treatment (HT). These stresses, after HT, seem to cause delamination of the coating upon exposure to conventional brush testing thereby illustrating a lack of durability. It has been found that when a layer of or including tin oxide is provided between the titanium oxide and silicon nitride inclusive layers, the problematic interface between the titanium oxide and silicon nitride is no longer present and a significant improvement in durability results. It has also been found that coated articles according to certain example embodiments of this invention have superior thermal stability upon HT, although in different embodiments of this invention coated articles may or may not be heat treated.

[0024] In certain example embodiments of this invention, there is provided a heat treatable coated article having a visible transmission (T_Y , T_{Lta} or T_{vis}) to sheet resistance (R_s) ratio (i.e., a ratio T_{vis}/R_s) of at least 25 after heat treatment (HT), more preferably of at least 30 after HT, even more preferably of at least 32 after HT, still more preferably of at least 34 after HT, and most preferably of at least 36 after HT. The higher this ratio, the better the coated article's combined functionality of providing for both good solar performance (e.g., ability to reflect and/or absorb IR radiation) and high visible transmission. In other words, high visible transmission can be achieved without sacrificing solar performance. In certain example embodiments, coupled with one or more of the aforesaid ratios T_{vis}/R_s , the coated article is heat treatable in a commercially acceptable manner in that: (i) its ΔE^* value (glass side reflective and/or transmissive) due to HT is no greater than about 8.0, more preferably no greater than about 5.0, even more preferably no greater than about 4.0, even more preferably no greater than about 3.0, and sometimes no greater than 2.5; and/or (ii) the coating includes at least one metal inclusive contact layer (e.g., Ni, NiCr, Cr, Ti, TiO, NiCrO_x, ZnO, ZnAlO, Nb, mixtures thereof, or the like) between an IR reflecting layer (e.g., silver layer) and a dielectric layer so as to protect the IR reflecting layer during HT. Additionally, in certain example embodiments of this invention, coated

articles may have a ratio T_{vis}/R_s of at 20 before HT, more preferably of at least 22 before HT, even more preferably of at least 25 before HT, and most preferably of at least 28 before HT. It is noted that in certain embodiments of this invention, coated articles need not have any of the aforesaid T_{vis}/R_s ratios (although they are present in many preferred embodiments). It is further noted that parameters such as R_s , T_{vis}/R_s and ΔE^* are typically measured before lamination in laminated coated article embodiments.

[0025] Factors which may contribute to the surprisingly high T_{vis}/R_s ratios herein include one or more of: example layer stack portions described herein, example layer stoichiometries herein, example layer thicknesses herein, the use of a Si-rich silicon nitride inclusive layer under at least one IR reflecting layer herein, and/or the deposition of different zinc oxide inclusive layers at different oxygen partial pressures. For example, in certain example embodiments, it has surprisingly been found that the use of a combination of a Si-rich silicon nitride inclusive layer and a zinc oxide inclusive layer (e.g., ZnO, ZnAlO_x, or ZnO containing other element(s)) under a layer comprising silver allows the silver be deposited (e.g., via sputtering or the like) in a manner which causes its sheet resistance to be lessened compared to if other material(s) were under the silver. In certain example embodiments, a surprising finding is that the Si-rich silicon nitride inclusive (Si_xN_y) layer(s) allows the ratio T_{vis}/R_s to be increased significantly after HT (e.g., heat strengthening, thermal tempering, and/or heat bending). While it is not certain why this Si-rich layer Si_xN_y works in such a manner, it is believed that the presence of free Si in the Si-rich silicon nitride inclusive layer may allow many atoms such as sodium (Na) which migrate outwardly from the glass during HT to be stopped by the Si-rich silicon nitride inclusive layer before they can reach the silver and damage the same. Thus, it is believed that the oxidation caused by heat treatment allows visible transmission to increase, and that the Si-rich Si_xN_y layer(s) reduces the amount of damage done to the silver layer(s) during HT thereby allowing sheet resistance (R_s) to decrease in a desirable manner.

[0026] Figure 1 is a side cross sectional view of a coated article according to an example non-limiting embodiment of this invention. The coated article includes

substrate 1 (e.g., clear, green, bronze, or blue-green glass substrate from about 1.0 to 10.0 mm thick, more preferably from about 1.0 mm to 3.5 mm thick), and multi-layer coating (or layer system) 27 provided on the substrate 1 either directly or indirectly. The coating (or layer system) 27 may include: dielectric layer 2 of or including titanium oxide, tin oxide inclusive layer 3 which may or may not be doped with nitrogen, dielectric silicon nitride layer 4 which may be Si_3N_4 , or a Si-rich type (which may or may not be doped with Al, stainless steel, or the like), first lower contact layer 7 which contacts and protects IR reflecting layer 9, first conductive and potentially metallic infrared (IR) reflecting layer 9, first upper contact layer 11 which contacts and protects IR reflecting layer 9, dielectric layer 13, another silicon nitride inclusive layer 14 (stoichiometric type or Si-rich type), second lower contact layer 17 which contacts and protects IR reflecting layer 19, second upper contact layer 21 which contacts and protects upper IR reflecting layer 19, dielectric layer 23, and finally protective dielectric layer 25. The "contact" layers 7, 11, 17 and 21 each contact at least one IR reflecting layer (e.g., Ag layer). The aforesaid layers 4-25 make up low-E (i.e., low-emissivity) coating 27 which is provided on glass or plastic substrate 1.

[0027] Compared to the aforesaid coated article of 10/400,080, it has unexpectedly been found that the provision of the tin oxide inclusive layer 3 between the silicon nitride layer 4 and titanium oxide layer 2 is advantageous for the reasons discussed above. Tin oxide layer 3 may or may not be doped with nitrogen (N) (e.g., from about 0-50 atomic %, more preferably from about 1-50 atomic %, even more preferably from about 2-25 atomic %, and most preferably from about 3-20 atomic %) so as to form $\text{SnO}_x\text{:N}$ where x is from about 1.5 to 2.5, more preferably from about 1.8 to 2.2, and may be 2.0 for example. While it is possible that the nitrogen in the tin oxide layer may form an oxynitride in certain example instances, it is believed that the nitrogen therein more likely is trapped in the layer. It is believed that the inclusion of nitrogen in the tin oxide layer may help keep the target clean and/or reduce the effect of internal stresses in the layer so as to allow better heat treatability.

[0028] Titanium oxide layer 2 may or may not be stoichiometric in certain example embodiments of this invention. In other words, for example, the titanium

oxide in layer 2 may be represented by TiO_x in certain example instances, where x is from about 1.5 to 2.5, more preferably from about 1.8 to 2.2. It is possible for the titanium oxide to be doped with other material(s).

[0029] This silicon nitride layer 4 may be doped with Al, B, stainless steel, or the like in different embodiments of this invention (e.g., from 0-15%, more preferably from 1-15%, and most preferably from 5-15%). Moreover, silicon nitride inclusive layer 4 (and/or 14) may be Si-rich in certain embodiments of this invention. In certain example embodiments, it has surprisingly been found that the use of a combination of a Si-rich silicon nitride inclusive layer (4 and/or 14) and a zinc oxide inclusive layer (e.g., ZnO or ZnAlO_x) (7 and/or 17) under a layer comprising silver (9 and/or 19) allows the silver to be deposited (e.g., via sputtering or the like) in a manner which causes its sheet resistance to be lessened compared to if certain other material(s) were under the silver. In certain example embodiments, a surprising finding is that the Si-rich silicon nitride inclusive (Si_xN_y) layer(s) allows the ratio T_{vis}/R_s to be increased significantly after HT (e.g., heat strengthening, thermal tempering, and/or heat bending). It is believed that the presence of free Si in the Si-rich silicon nitride inclusive layer(s) (4 and/or 14) may allow certain atoms such as sodium (Na) which migrate outwardly from the glass 1 during HT to be stopped by the Si-rich silicon nitride inclusive layer before they can reach the silver and damage the same.

[0030] In certain example embodiments, one or both of the potentially Si-rich silicon nitride layers 4 and/or 14 may be characterized by Si_xN_y layer(s), where x/y may be from 0.76 to 1.5, more preferably from 0.8 to 1.4, still more preferably from 0.80 to 1.0 (higher x/y ratios may cause haze levels to increase undesirably). Moreover, in certain example embodiments where little or no oxygen is present in the layer(s) 4 and/or 14, before and/or after HT the Si-rich Si_xN_y layer(s) (4 and/or 14) may have an index of refraction "n" of at least 2.05, more preferably of at least 2.07, even more preferably at least 2.10, and most preferably from about 2.15 to 2.25 (e.g., about 2.20) (e.g., 632 nm) (note: stoichiometric Si_3N_4 has an index "n" of 2.04). Also, the Si-rich Si_xN_y layer(s) (4 and/or 14) in certain example embodiments may have an extinction coefficient "k" of at least 0.001, more preferably of at least 0.003 (note: stoichiometric Si_3N_4 has an extinction coefficient "k" of effectively 0). In

certain example embodiments, the Si-rich Si_xN_y layer(s) 4 and/or 14 has an extinction coefficient "k" of from about 0.01 to 0.02.

[0031] Infrared (IR) reflecting layers 9 and 19 are preferably metallic and/or conductive, and may comprise or consist essentially of silver (Ag), gold, or any other suitable IR reflecting material. These IR reflecting layers help allow coating 27 to have low-E and/or good solar control characteristics. The IR reflecting layer(s) may be slightly oxidized in certain embodiments of this invention.

[0032] The upper contact layers 11 and 21 may be of or include nickel (Ni) oxide, chromium oxide, or a nickel alloy oxide such as nickel chrome oxide (NiCrO_x), or other suitable material(s), in certain example embodiments of this invention. The use of, for example, NiCrO_x for these layers allows durability to be improved. The NiCrO_x layers may be fully oxidized in certain embodiments of this invention (i.e., fully stoichiometric), or may be at least about 50% oxidized in other embodiments of this invention. In certain preferred embodiments, the NiCrO_x for/in these layer(s) may be slightly under-stoichiometric (oxygen deficient). While NiCrO_x is a preferred material for these contact layers, those skilled in the art will recognize that other materials may instead be used. Contact layers 11 and/or 21 (e.g., of or including NiCrO_x) may or may not be oxidation graded in different embodiments of this invention. Oxidation grading means that the degree of oxidation in the layer(s) changes throughout at least part of the thickness of the layer(s) so that for example a contact layer may be graded so as to be less oxidized at the contact interface with the immediately adjacent IR reflecting layer than at a portion of the contact layer(s) further or more/most distant from the immediately adjacent IR reflecting layer. Descriptions of various types of oxidation graded contact layers 11 and 21 are set forth in U.S. Patent No. 6,576,349, the disclosure of which is hereby incorporated herein by reference.

[0033] Lower contact layers 7 and 17 may comprise zinc oxide (e.g., ZnO) in certain example embodiments of this invention. The zinc oxide may contain Al (e.g., to form ZnAlO) or other element(s) in certain example embodiments. In certain alternative embodiments of this invention, another layer (e.g., an oxide of NiCr, an

oxide of Ni, or the like) may be provided between the zinc oxide inclusive layer 7 (or 17) and the nearest IR reflecting layer 9 (or 19).

[0034] Dielectric layer 13 acts as a coupling layer between the two halves of the coating 27, and is of or includes tin oxide in certain embodiments of this invention. However, other dielectric materials may instead be used for layer 13.

[0035] Dielectric layers 23 and 25 may allow the environmental resistance of the coating 27 to be improved, and are also provided for color purposes. In certain example embodiments, dielectric layer 23 may be of or include tin oxide (e.g., SnO_2), although other materials may instead be used. Dielectric overcoat layer 25 may be of or include silicon nitride (e.g., Si_3N_4) in certain embodiments of this invention, although other materials may instead be used such as titanium dioxide, silicon oxynitride, tin oxide, zinc oxide, niobium oxide, or the like such as dielectrics with an index of refraction "n" from 1.6 to 3.0. Layer 23 (and/or other layers in Fig. 1) may be omitted in certain example embodiments of this invention.

[0036] Other layer(s) may also be provided. Moreover, certain layers of coating 27 may be removed in certain embodiments, while others may be added between the various layers or the various layer(s) may be split with other layer(s) added between the split sections in other embodiments of this invention without departing from the overall spirit of certain embodiments of this invention.

[0037] Figure 2 illustrates the coating or layer system 27 being utilized on surface #2 of an IG window unit. Coatings 27 according to any embodiment herein may be used in IG units as shown in Fig. 2. In order to differentiate the "inside" of the IG unit from its "outside", the sun 29 is schematically presented on the outside. The IG unit includes outside glass pane or sheet (i.e., substrate 1 from Fig. 1) and inside glass pane or sheet 31. These two glass substrates (e.g. float glass 1-10 mm thick) are sealed at their peripheral edges by a conventional sealant and/or spacer(s) 33 and may be provided with a conventional desiccant strip (not shown). The panes may then be retained in a conventional window or door retaining frame. By sealing the peripheral edges of the glass sheets and optionally replacing the air in insulating space (or chamber) 30 with a gas such as argon, a typical, high insulating value IG unit is formed. Optionally, insulating space 30 may be at a pressure less than

atmospheric pressure in certain alternative embodiments (with or without a gas in space 30), although this of course is not necessary in all embodiments. While the inner side of substrate 1 is provided with coating 27 in Fig. 2, this invention is not so limited (e.g., coating 27 may instead be provided on the interior surface of substrate 31 in other embodiments of this invention).

[0038] Fig. 3 illustrates the coating of Fig. 1 being used in the context of a laminated window such as a vehicle windshield including heat treated and bent glass substrates 1 and 31. In Fig. 3, the coating 27 is provided on the #3 surface, although this invention is not so limited. In other instances, the coating may be provided on the interior surface of the other substrate.

[0039] Turning back to Fig. 1, while various thicknesses may be used in different embodiments of this invention, example thicknesses and materials for the respective layers on the glass substrate 1 in the Fig. 1 embodiment are as follows, from the glass substrate outwardly:

Table 2 (Example Materials/Thicknesses; Fig. 1 Embodiment)

Layer	Preferred Range (Å)	More Preferred (Å)	Example (Å)
TiO _x (layer 2)	10-1,000 Å	20-100 Å	40 Å
SnO ₂ :N (layer 3)	10-1,000 Å	20-100 Å	40 Å
Si _x N _y (layer 4)	50-450 Å	50-180 Å	120 Å
ZnO _x (layer 7)	10-300 Å	40-150 Å	100 Å
Ag (layer 9)	50-250 Å	80-120 Å	95 Å
NiCrO _x (layer 11)	10-100 Å	20-50 Å	37 Å
SnO ₂ (layer 13)	0-1,000 Å	350-800 Å	550 Å
Si _x N _y (layer 14)	50-450 Å	90-200 Å	115 Å
ZnO _x (layer 17)	10-300 Å	40-150 Å	100 Å
Ag (layer 19)	50-250 Å	80-220 Å	95 Å

NiCrO _x (layer 21)	10-100 Å	20-50 Å	37 Å
SnO ₂ (layer 23)	0-750 Å	70-200 Å	105 Å
Si ₃ N ₄ (layer 25)	0-750 Å	120-320 Å	185 Å

[0040] In certain example embodiments of this invention, the total thickness of the combination of layers 2, 3, 4 and 7 is substantially less than the total thickness of the combination of layers 13, 14 and 17. In certain example embodiments, the combination of layers 2, 3, 4 and 7 is no more than about 50% as thick as the combination of layers 13, 14 and 17, more preferably no more than about 45% as thick, and most preferably no more than about 41% as thick (e.g., in the above example column, the combination of layers 2, 3, 4 and 7 is about 39.2% as thick as the combination of layers 13, 14 and 17). Moreover, in certain example embodiments of this invention, the combination of layers 2, 3, 4 and 7 is no more than about 400 Å thick, more preferably no more than about 350 Å thick, and most preferably no more than about 300 Å thick. It has surprisingly been found that by following the aforesaid ranges, reflective color of the resulting coated article (e.g., windshield) can be kept from becoming too red/purple.

[0041] In certain example embodiments of this invention, coated articles herein may have the following low-E (low emissivity) characteristics set forth in Table 3 when measured monolithically (before any optional HT). The sheet resistances (R_s) herein take into account all IR reflecting layers (e.g., silver layers 9, 19) in the coating, unless expressly stated to the contrary.

Table 3: Low-E/Solar Characteristics (Monolithic; pre-HT)

Characteristic	General	More Preferred	Most Preferred
R_s (ohms/sq.):	≤ 5.0	≤ 3.5	≤ 3.0
E_n :	≤ 0.07	≤ 0.04	≤ 0.03
T_{vis}/R_s :	≥ 20	≥ 22	≥ 25

[0042] In certain example embodiments, coated articles herein may have the following characteristics, measured monolithically for example, after HT:

Table 4: Low-E/Solar Characteristics (Monolithic; post-HT)

Characteristic	General	More Preferred	Most Preferred
R_s (ohms/sq.):	≤ 4.5	≤ 3.0	≤ 2.5
E_n :	≤ 0.07	≤ 0.04	≤ 0.03
T_{vis}/R_s :	≥ 25	≥ 30	≥ 32 (or ≥ 34 or 36)

[0043] As explained above, the rather high values of the ratio T_{vis}/R_s in Tables 3 and 4 are indicative of an excellent combination of high visible transmission and good solar performance (e.g., IR reflection).

[0044] Moreover, coated articles including coatings 27 according to certain example embodiments of this invention have the following optical characteristics (e.g., when the coating(s) is provided on a clear soda lime silica glass substrate 1 from 1 to 10 mm thick) (HT or non-HT). In Table 5, all parameters are measured monolithically, unless stated to the contrary. In Table 5 below, R_gY is visible reflection from the glass (g) side of the monolithic article, while R_fY is visible reflection from the side of the monolithic article on which coating/film (f) (i.e., coating 27) is located. It is noted that the ΔE^* values are of course due to HT (e.g., heat strengthening, tempering, and/or heat bending). All Ill. D65 parameters are at 10 degrees.

Table 5: Optical Characteristics (Mono-HT)

Characteristic	General	More Preferred
T_{vis} (or TY) (Ill. D65):	$\geq 70\%$	$\geq 75\%$
a^*_t (Ill. D65):	-4.0 to +1.0	-3.0 to 0.0
b^*_t (Ill. D65):	-3.0 to +4.0	-1.0 to 3.0
L^*_t (Ill. D65):	85 to 95	88 to 93
R_gY (Ill. D65):	1 to 10%	3 to 9%
a^*_g (Ill. D65):	-4.5 to +2.0	-3.0 to 0.0
b^*_g (Ill. D65):	-5.0 to +10.0	-4.0 to +9.0

L^*_g (III. D65):	25 to 40	28 to 34
R_fY (III. D65):	1 to 10%	1 to 8%
a^*_f (III. D65):	-14.0 to 10.0	-11.0 to 3.0
b^*_f (III. D65):	-9.0 to 20.0	-7.0 to 12.0
L^*_f (III. D65):	25 to 35	28 to 32
ΔE^*_t (transmissive):	≤ 8.0	$\leq 5.0, 4.0, 3.0$ or 2.5
ΔE^*_g (glass side reflective):	≤ 8.0	$\leq 5.0, 4.0, 3.0$ or 2.5
Transmissive Haze:	≤ 0.4	≤ 0.35 , or ≤ 0.25
R_s (ohms/square):	≤ 5.0	≤ 3.0 , or ≤ 2.5

[0045] However, it is noted that in other example embodiments, the visible transmission may be lower (e.g., as low as 60%, or even 40—50% in certain instances).

[0046] The value(s) ΔE^* is important in determining whether or not there is matchability, or substantial color matchability upon HT, in the context of certain embodiments of this invention. Color herein is described by reference to the conventional a^* , b^* values. The term Δa^* is simply indicative of how much color value a^* changes due to HT (the same applies to Δb^*). If color changes too much upon HT (e.g., if ΔE^* is over 10), then the product may not be commercially acceptable. A very high value of ΔE^* may also be indicated of destruction of the Ag layer during HT, and/or of massive haze.

[0047] The term ΔE^* (and ΔE) is well understood in the art and is reported, along with various techniques for determining it, in ASTM 2244-93 as well as being reported in Hunter et. al., *The Measurement of Appearance*, 2nd Ed. Cptr. 9, page 162 et seq. (John Wiley & Sons, 1987). As used in the art, ΔE^* (and ΔE) is a way of adequately expressing the change (or lack thereof) in reflectance and/or transmittance (and thus color appearance, as well) in an article after or due to HT. ΔE may be calculated by the "ab" technique, or by the Hunter technique (designated by employing a subscript "H"). ΔE corresponds to the Hunter Lab L, a, b scale (or L_h , a_h , b_h). Similarly, ΔE^* corresponds to the CIE LAB Scale L^* , a^* , b^* . Both are deemed

useful, and equivalent for the purposes of this invention. For example, as reported in Hunter et. al. referenced above, the rectangular coordinate/scale technique (CIE LAB 1976) known as the L^* , a^* , b^* scale may be used, wherein:

L^* is (CIE 1976) lightness units

a^* is (CIE 1976) red-green units

b^* is (CIE 1976) yellow-blue units

and the distance ΔE^* between L^*_o a^*_o b^*_o and L^*_1 a^*_1 b^*_1 is:

$$\Delta E^* = \{(\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2\}^{1/2} \quad (1)$$

where:

$$\Delta L^* = L^*_1 - L^*_o \quad (2)$$

$$\Delta a^* = a^*_1 - a^*_o \quad (3)$$

$$\Delta b^* = b^*_1 - b^*_o \quad (4)$$

where the subscript "o" represents the coating (or coated article) before heat treatment and the subscript "1" represents the coating (coated article) after heat treatment; and the numbers employed (e.g., a^* , b^* , L^*) are those calculated by the aforesaid (CIE LAB 1976) L^* , a^* , b^* coordinate technique. In a similar manner, ΔE may be calculated using equation (1) by replacing a^* , b^* , L^* with Hunter Lab values a_h , b_h , L_h . Also within the scope of this invention and the quantification of ΔE^* are the equivalent numbers if converted to those calculated by any other technique employing the same concept of ΔE^* as defined above.

[0048] As explained above, coated articles according to certain example embodiments of this invention may have a ΔE^* value (glass side reflective and/or transmissive) due to HT which is no greater than about 8.0, more preferably no greater than about 5.0, even more preferably no greater than about 4.0, even more preferably no greater than about 3.0, and sometimes no greater than about 2.5. These values are indicative of commercially acceptable heat treatable coated articles. In laminated embodiments herein, the ΔE^* value is typically measured before lamination.

[0049] Moreover, coated articles including coatings 27 according to certain example embodiments of this invention have the following characteristics (e.g., when the coating(s) is provided on surface #3 (or other suitable surface) of a heat treated laminated vehicle windshield as shown in Fig. 3). In certain examples, the glass substrates in this respect may be clear glass substrates about 2.1 mm thick and the PVB interlayer may be about 0.76 mm thick. Again, all Ill. D65 measurements were at 10 degrees. Here, since the coating is on surface #3 as shown in Fig. 3, the glass side measurements would be taken from the side of the laminate which would be the interior of the vehicle.

Table 6: Characteristics (Laminated Windshield – HT)

Characteristic	General	More Preferred
L _{ta} (Ill. A, 2 deg.):	$\geq 70\%$	$\geq 75\%$
T _{vis} (or TY) (Ill. D65):	$\geq 70\%$	$\geq 75\%$
a* _t (Ill. D65):	-5.0 to +1.0	-3.5 to 0.0
b* _t (Ill. D65):	-3.0 to +5.0	-1.0 to 3.5
L* _t (Ill. D65):	85 to 95	88 to 93
R _{gY} (Ill. D65):	1 to 12%	3 to 10%
a* _g (Ill. D65):	-4.5 to +2.0	-3.0 to 0.0
b* _g (Ill. D65):	-12.0 to +10.0	-10.0 to +8.0
L* _g (Ill. D65):	30 to 40	34 to 38
R _{fY} (Ill. D65):	1 to 11%	1 to 10%
a* _f (Ill. D65):	-10.0 to 5.0	-5.0 to 3.0
b* _f (Ill. D65):	-10.0 to 20.0	-8.0 to 12.0
L* _f (Ill. D65):	30 to 40	34 to 37
Transmissive Haze:	≤ 0.4	≤ 0.35 , or ≤ 0.33
R _{solar} (ISO 9050):	≥ 25	≥ 30
T _{solar} (TS):	≤ 47	≤ 45

EXAMPLE 1

[0050] The following Example 1 is provided for purposes of example only, and is not intended to be limiting. The following examples included the listed layer stack set forth below, from the clear glass substrate outwardly.

Table 7: Layer Stack for Examples

Layer	Thickness
Glass Substrate	about 2 to 2.3 mm
TiO _x	40 Å
SnO ₂ :N	40 Å
Si _x N _y	120 Å
ZnAlO _x	100 Å
Ag	95 Å
NiCrO _x	37 Å
SnO ₂	550 Å
Si _x N _y	115 Å
ZnAlO _x	100 Å
Ag	95 Å
NiCrO _x	37 Å
SnO ₂	105 Å
Si ₃ N ₄	185 Å

[0051] Moreover, as explained herein, the bottom two silicon nitride layers (Si_xN_y) (which are doped with Al in this Example) are preferably non-stoichiometric and Si-rich. As explained above, it has been found that the use of a combination of a Si-rich silicon nitride inclusive layer and a zinc oxide inclusive layer (e.g., ZnAlO_x) under a layer comprising silver allows the silver to be deposited in a manner which causes its sheet resistance to be lessened (which is desirable) compared to if other material(s) were under the silver. In certain example embodiments, the Si-rich silicon

nitride inclusive (Si_xN_y) layer(s) allows the ratio T_{vis}/R_s to be increased significantly after HT.

[0052] The sputtering process used in forming the coated article of Example 1 is set forth below, with a line speed of 5.0 m/min in a Terra-G flat glass coater. Below, Ar, O and N refer to respective gas flows of these gases in the coater in units of sccm. Pressure is in units of hPa. Volts refers to volts at the cathode. The silver and NiCr targets were planar targets, the Sn targets were Twin-Mags, the ZnAl targets were twin-PLs, the Ti target was a ceramic Ti DCM target, and the SiAl targets were DCMs. Power is indicative of the power set point. For cathodes K11 and K12, the ratio of reactive gas flow to power was about 4.43 ml/kW. Moreover, λ settings for the coater were as follows: K15 – 174; K28 – 184; and K29 – 181.

Table 8: Sputter Processing - Example 1

Cathode	Target	Power(kW)	Ar	O	N	Pressure	Volts
K05	Ti	15	350	25	0	1.88E-03	242.5
K09	Sn	7	250	380	50	2.31E-03	251.8
K11	SiAl	40	350	0	277	2.71E-03	242.5
K12	SiAl	40	350	0	277	1.75E-03	251.8
K15	ZnAl	51.3	250	525	0	1.99E-03	279.9
K21	Ag	8.0	150	0	0	1.27E-03	388.6
K25	NiCr	18.3	250	150	0	1.44E-03	510.1
K28	Sn	29.6	250	491	350	2.23E-03	260.7
K29	Sn	31.2	250	501	350	2.21E-03	257.2
K39	Sn	33.5	250	533	350	2.27E-03	268.2
K40	Sn	32.4	250	503	350	2.36E-03	256.7
K41	Sn	32.2	250	523	350	2.53E-03	267.0
K43	SiAl	65.0	350	0	371	2.05E-03	291.5
K46	ZnAl	43.5	250	545	0	1.49E-03	238.5

K49-b	Ag	9.5	150	0	0	1.32E-03	474.1
K50	NiCr	17.5	250	150	0	1.32E-03	498.7
K54	Sn	46.2	250	653	350	2.12E-03	311.0
K59	SiAl	69.0	350	0	514	2.78E-03	293.7
K60	SiAl	69.0	350	0	514	3.12E-03	336.0

[0053] After being sputter deposited onto the glass substrate, Example 1 had the following example characteristics after being subjected to HT along with another lite, spaced apart by powder, in a conventional furnace (HT in furnace with eight element heat zones (479, 520, 540, 590, 620, 655, 660, 665 degrees C respectively, line speed of 28 cm/minute):

Table 9: Characteristics of Example 1 (Monolithic - HT)

Characteristic	Example 1
Visible Trans. (Y)(Ill. D65, 10 deg.):	79.58%
a*	-1.12
b*	0.58
L*	91.50
ΔE^*_t	about 4-5
Glass Side Refl. (RY)(Ill D65, 10 deg.):	6.86%
a*	-2.77
b*	7.65
L*	31.48
ΔE^*_g	about 2-3
Film Side Refl. (FY)(Ill. D65, 10 deg.):	6.38%
a*	-9.14
b*	9.87

L*	30.36
R _s (ohms/square):	2.5
T _{vis} /R _s (post-HT):	31.83
Transmissive Haze:	0.19

[0054] The coated article of Example 1 was then laminated to another glass sheet (e.g., via PVB or index oil) to form a laminated windshield. The laminated windshield had the following characteristics. The laminate was as shown in Fig. 3, with the coating on the #3 surface (i.e., on the inner glass sheet). The "film side" measure measurements in Table 10 are as viewed from what would be the vehicle exterior, whereas the "glass side" measurements are as viewed from what would be the vehicle interior, since the coating is on the #3 surface of the laminate in this example.

Table 10: Characteristics of Example 1 (Laminated - HT)

Characteristic	Example 1
L _{ta} (T _{vis}) (Ill. A, 2 deg.)	76.0%
Visible Trans. (Y)(Ill. D65, 10 deg.):	76.15%
a*	-2.33
b*	2.63
L*	89.93
Glass Side Refl. (R _Y)(Ill D65, 10 deg.):	9.02%
a*	-2.60
b*	-5.21
L*	36.02
Film Side Refl. (F _Y)(Ill. D65, 10 deg.):	8.63%
a*	-2.40
b*	-6.30

L*	35.26
Transmissive Haze:	0.31
R _{solar} (ISO 9050):	27.5
T _{solar} :	45.0

[0055] In addition to the advantages set forth above, it has surprisingly and unexpectedly been found that coated articles according to certain example embodiments of this invention have improved heat treatability compared to other known coatings. For example, it has surprisingly been found that coated articles according to certain example embodiments of this invention can be exposed to about 650 degrees C of heat treatment in a box furnace for 12 minutes without suffering a loss in visible transmission of more than 2% or delamination. In other words, when the coated article (typically in monolithic form) is exposed to about 650 degrees C of heat treatment for 12 minutes, the coated article retains at least 98% of its pre-heat-treatment visible transmission. This temperature and time are used as a reference(s) herein, and are not intended to be limiting; these values being used to illustrate the improved heat treatability (or improved thermal stability) of certain example embodiments of this invention.

[0056] As an example of heat treatment, the coated article may be heat treated at the same time as another glass lite, with the two lites being spaced from one another in the furnace by a known powder material. During such heat treatment, the coated article may be located in the furnace so as to be spaced from another glass lite via a known powder such as Separol. Thus, it can be seen that thermal stability can be significantly improved according to certain example embodiments of this invention.

[0057] Certain terms are prevalently used in the glass coating art, particularly when defining the properties and solar management characteristics of coated glass. Such terms are used herein in accordance with their well known meaning (unless expressly stated to the contrary) – see parent serial number 10/400,080, incorporated herein by reference. For example, the terms "heat treatment" and "heat treating" as used herein mean heating the article to a temperature sufficient to achieve thermal

tempering, bending, and/or heat strengthening of the glass inclusive article. This definition includes, for example, heating a coated article in an oven or furnace at a temperature of least about 580 or 600 degrees C for a sufficient period to allow tempering, bending, and/or heat strengthening, and also includes the aforesaid test for thermal stability at about 650 degrees C. In some instances, the HT may be for at least about 4 or 5 minutes, or more.

[0058] Haze is a scattering of energy, a percentage of energy lost as it scatters. Haze may be measured, for example, by a BYK Gardner transmission haze meter as will be appreciated by those skilled in the art.

[0059] While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiment, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims. For example, and without limitation, single silver stacks may be used in certain example embodiments of this invention, as opposed to the illustrated double silver stacks.

CLAIMS

1. A coated article including a multi-layer coating supported by a glass substrate, the multi-layer coating comprising, from the glass substrate outwardly:
 - a layer comprising titanium oxide;
 - a layer comprising tin oxide located over and contacting the layer comprising titanium oxide;
 - a layer comprising silicon nitride located over and contacting the layer comprising tin oxide;
 - a contact layer;
 - a layer comprising silver located over and contacting the contact layer;
 - a dielectric layer comprising a metal oxide;
 - another layer comprising silver; and
 - another dielectric layer.
2. The coated article of claim 1, wherein the coated article is heat treated and has a ratio T_{vis}/R_s of at least 25 after heat treatment (where T_{vis} is visible transmission (%) and R_s is sheet resistance of the coating in units of ohms/square) and a ΔE^* value (glass side reflective and/or transmissive) of less than or equal to about 8 due to the heat treatment.
3. The coated article of claim 2, wherein the coated article has a ratio T_{vis}/R_s of at least 30 after heat treatment.

4. The coated article of claim 1, wherein the layer comprising titanium oxide is located directly on the glass substrate so as to contact the glass substrate.
5. The coated article of claim 1, wherein the contact layer comprises zinc oxide.
6. The coated article of claim 1, wherein the layer comprising silicon nitride is Si-rich and has an index of refraction "n" of at least 2.10.
7. The coated article of claim 1, wherein the layer comprising silicon nitride is Si-rich and has an index of refraction "n" of from 2.15 to 2.25.
8. The coated article of claim 1, wherein the coated article comprises a laminated vehicle windshield.
9. The coated article of claim 1, wherein the layer comprising titanium oxide is from 20 to 100 Å thick, the layer comprising tin oxide is from 20 to 100 Å thick, and the layer comprising silicon nitride is from 50 to 450 Å thick.
10. The coated article of claim 1, wherein the coated article has a sheet resistance (R_s) of less than or equal to 4.0.

11. The coated article of claim 1, wherein the coated article is heat treated and has a ΔE^* value (glass side reflective and/or transmissive) of less than or equal to about 5 due to the heat treatment.

12. The coated article of claim 11, wherein the coated article has a ΔE^* value (glass side reflective and/or transmissive) of less than or equal to about 4 due to the heat treatment.

13. The coated article of claim 1, wherein an overall combined thickness of the layer comprising titanium oxide, the layer comprising tin oxide and the layer comprising silicon nitride is no greater than 400 Å.

14. The coated article of claim 1, wherein an overall combined thickness of the layer comprising titanium oxide, the layer comprising tin oxide and the layer comprising silicon nitride is no greater than 350 Å.

15. The coated article of claim 1, wherein said layer comprising silicon nitride is Si-rich and comprises Si_xN_y , where x/y is from 0.8 to 1.0.

16. The coated article of claim 1, wherein the coated article is a laminated vehicle windshield and is heat treated.

17. The coated article of claim 1, wherein the contact layer comprising zinc oxide, and wherein at least one of the layer comprising silicon nitride and the layer comprising zinc oxide further includes aluminum or other metal(s).

18. The coated article of claim 1, wherein the coated article includes the following layers from the glass substrate outwardly:

the layer comprising titanium oxide;

the layer comprising tin oxide;

the layer comprising silicon nitride;

the contact layer, wherein the contact layer comprises zinc oxide and is located directly on and contacting the layer comprising silicon nitride;

the layer comprising silver located over and contacting the contact layer comprising zinc oxide;

a layer comprising at least one metal oxide;

a dielectric layer which comprises tin oxide;

a dielectric layer comprising silicon nitride;

a layer comprising zinc oxide;

another layer comprising silver;

a dielectric layer comprising a metal oxide; and

another dielectric layer comprising silicon nitride.

19. The coated article according to claim 1, wherein the coated article comprises a laminated vehicle windshield and has a transmissive haze value of no greater than 0.4.

20. The coated article according to claim 1, wherein the coated article comprises a laminated vehicle windshield and has a transmissive haze value of no greater than 0.35, and a total solar (TS) value of no greater than 46.

21. The coated article according to claim 1, wherein the layer comprising tin oxide further comprises from 2 to 25% nitrogen.

22. The coated article of claim 1, characterized in that when the coated article is exposed to about 650 degrees C of heat treatment for 12 minutes the coated article retains at least 98% of its pre-heat-treatment visible transmission.

23. A heat treatable coated article including a multi-layer coating supported by a glass substrate, the multi-layer coating comprising:

a layer comprising tin oxide located directly between and contacting each of a layer comprising titanium oxide and a layer comprising silicon nitride;

at least one layer comprising silver located over the layer comprising tin oxide; and

when the coated article is exposed to about 650 degrees C of heat treatment for 12 minutes as a reference, the coated article retains at least 98% of its pre-heat-treatment visible transmission.

24. The coated article of claim 23, wherein the coated article is heat treated and has a ratio T_{vis}/R_s of at least 25 after heat treatment (where T_{vis} is visible transmission (%) and R_s is sheet resistance of the coating in units of ohms/square) and

a ΔE^* value (glass side reflective and/or transmissive) of less than or equal to about 8 due to the heat treatment.

25. The coated article of claim 23, wherein the coated article has a ratio T_{vis}/R_s of at least 30 after heat treatment.

26. The coated article of claim 23, wherein the coated article is a laminated and heat treated vehicle windshield.

27. The coated article of claim 23, wherein the layer comprising silicon nitride is Si-rich and has an index of refraction "n" of from 2.15 to 2.25.

28. A heat treatable coated article including a multi-layer coating supported by a glass substrate, the multi-layer coating comprising:

- a layer one dielectric layer;
- first and second layers comprising silver spaced apart from one another by at least one metal oxide inclusive layer;
- another dielectric layer provided over both of the first and second layers comprising silver; and

when the coated article is exposed to about 650 degrees C of heat treatment for 12 minutes as a reference, the coated article retains at least 98% of its pre-heat-treatment visible transmission.

29. The coated article of claim 28, wherein the coated article is heat treated and has a ratio T_{vis}/R_s of at least 25 after heat treatment (where T_{vis} is visible transmission (%) and R_s is sheet resistance of the coating in units of ohms/square) and a ΔE^* value (glass side reflective and/or transmissive) of less than or equal to about 8 due to the heat treatment.

30. The coated article of claim 29, wherein the coated article has a ratio T_{vis}/R_s of at least 30 after heat treatment.

31. The coated article of claim 28, wherein the coated article comprises a layer comprising tin oxide located between and contacting a layer comprising titanium oxide and a layer comprising silicon nitride.

32. The coated article of claim 28, wherein the layer comprising tin oxide is located beneath both of the layers comprising silver.

1/2

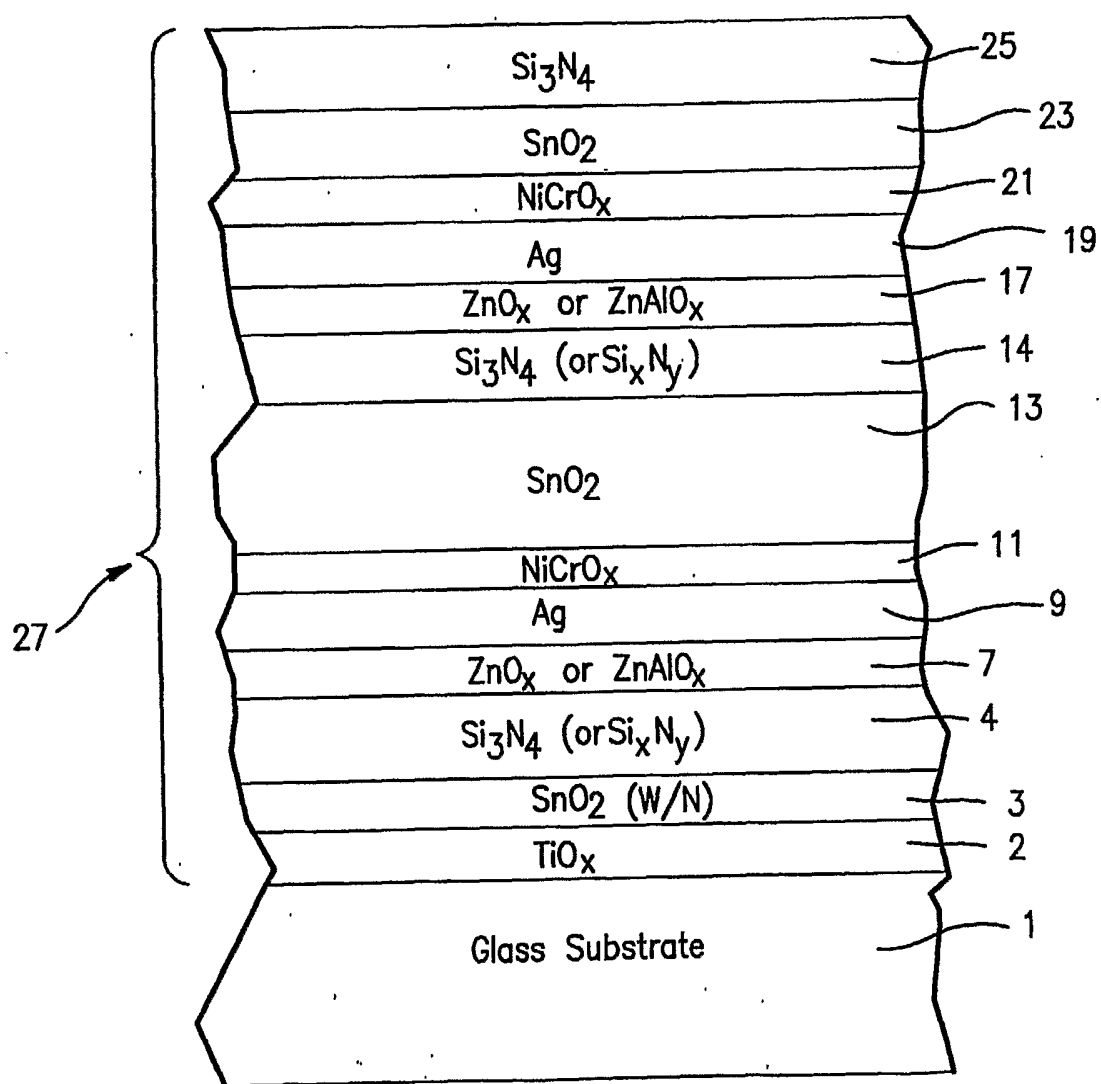


Fig. 1

2/2

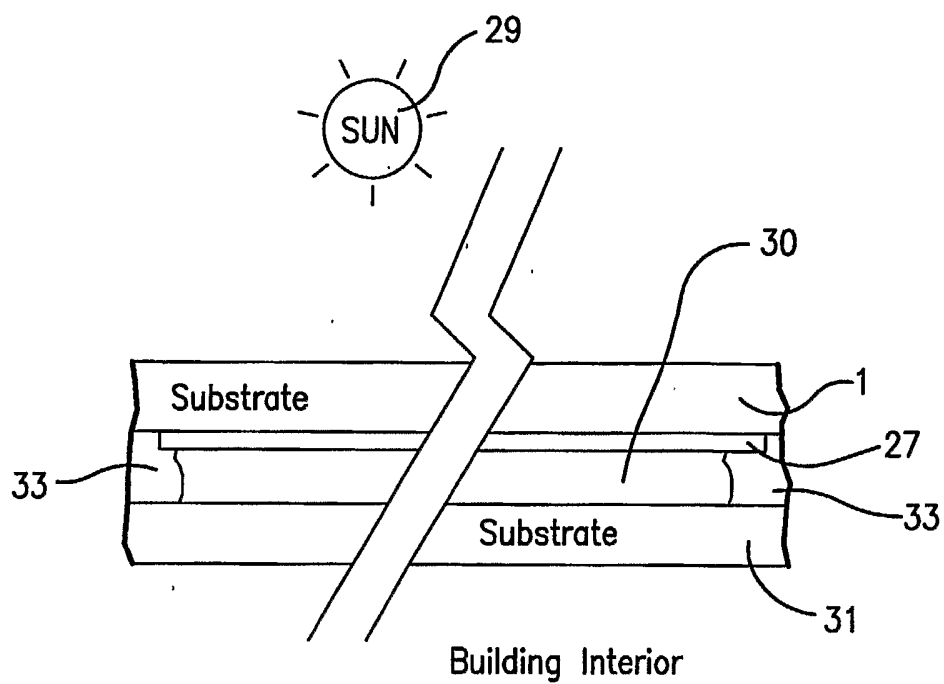


Fig. 2

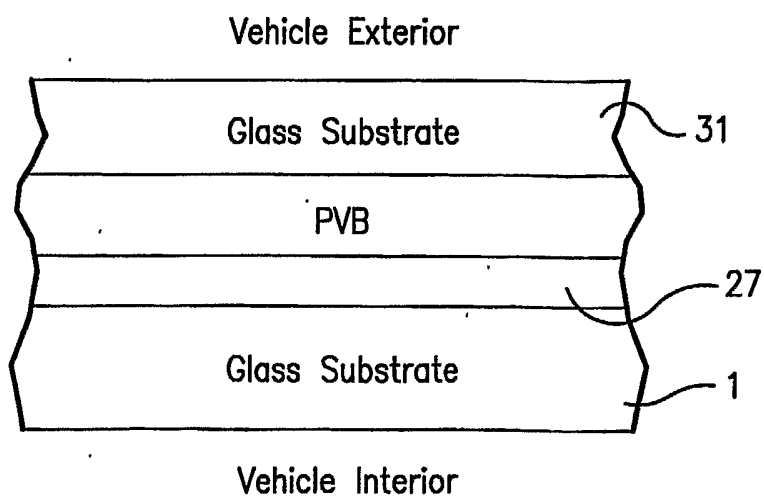


Fig. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027121

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C03C17/36 B32B17/10 B60J1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C03C B32B B60J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	US 2004/101694 A1 (DIETRICH ANTON ET AL) 27 May 2004 (2004-05-27) paragraphs '0009!, '0013!, '0048! paragraph '0040!; table 2 paragraph '0057!; table 7 paragraph '0064!; claim 38 -----	28-30
P,X	US 2003/194567 A1 (DIETRICH ANTON ET AL) 16 October 2003 (2003-10-16) paragraphs '0040! - '0051!, '0084!; figure 1; table 1 paragraphs '0089!, '0090! -----	28
P,X	paragraphs '0038!, '0051!, '0071!, '0075!; claim 13; tables 2,3 ----- -/--	29, 30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

17 December 2004

Date of mailing of the international search report

12/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lindner, T

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/US2004/027121

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 174 397 A (CT LUXEMBOURGEOIS DE RECH S PO ; GUARDIAN INDUSTRIES (US)) 23 January 2002 (2002-01-23) page 2, lines 43-46 page 5, lines 22-47 page 6, lines 25-37 page 7, lines 1-42; figure 1; table 1 claims 1--5, 10-13, 22, 28-41, 45-52, 65-74	1-8, 10-12, 15, 16, 18-20, 22-27
X	page 5, lines 5-10 page 22, lines 6-9 -----	28-30
A	FR 2 818 270 A (SAINT GOBAIN VITRAGE) 21 June 2002 (2002-06-21) page 3, lines 6-14 page 7, lines 13-19 page 8, lines 11-17 -----	1, 5, 8, 21, 23, 26, 28
A	US 2003/099842 A1 (RONDEAU VERONIQUE ET AL) 29 May 2003 (2003-05-29) paragraphs '0002!', '0013!', '0018!' - '0021!', '0049!', '0056!', '0057!; table 1 -----	1, 23, 28
A	US 2002/045037 A1 (BOIRE PHILIPPE ET AL) 18 April 2002 (2002-04-18) paragraphs '0006! - '0011! paragraphs '0035!, '0041! paragraphs '0065! - '0077!; figure 1 examples 3-5; tables 1, 3, 5 paragraphs '0098! - '0102! -----	1, 5, 18-23, 28
A	US 5 110 662 A (DEPAUW JEAN-MICHEL ET AL) 5 May 1992 (1992-05-05) column 5, line 48 - column 6, line 65 -----	1, 23, 28
A	US 2003/143401 A1 (MASCHWITZ PETER A ET AL) 31 July 2003 (2003-07-31) paragraph '0015!; figure 3 paragraph '0033! paragraphs '0037! - '0042!; figure 2 -----	28, 31
A	US 5 376 455 A (HARTIG KLAUS W ET AL) 27 December 1994 (1994-12-27) column 15, lines 41-44; claim 1 -----	28
A	US 2001/003628 A1 (DEMIRYONT HULYA) 14 June 2001 (2001-06-14) paragraphs '0012! - '0022! paragraphs '0066!, '0069!; figures 5a, 5b; example 2 -----	28
	----- -/--	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027121

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 993 950 A (NOVIS YVAN ET AL) 30 November 1999 (1999-11-30) column 1, lines 63-67 column 3, lines 25-51 column 4, lines 17-23 table 1 -----	1,23,28

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-27,31,32

coated article wherein a layer comprising tin oxide contacts a layer comprising titanium oxide and another layer comprising silicon nitride

2. claims: 28,29,30

Heat treatable coated article which includes on a glass substrate a multi-layer coating comprising at least two dielectric layers situated above and below first and second silver comprising layers spaced apart by at least one metal oxide layer. Visible transmission of the coated article is retained to at least 98% after heat treatment.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2004/027121

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027121

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004101694 A1	27-05-2004	US 2004005467 A1	08-01-2004
		US 2004086723 A1	06-05-2004
		US 2003194567 A1	16-10-2003
		US 2003194570 A1	16-10-2003
		US 2002064662 A1	30-05-2002
		WO 2004087598 A2	14-10-2004
		US 2004058169 A1	25-03-2004
		US 2004229073 A1	18-11-2004
		US 2004229074 A1	18-11-2004
		AU 7178701 A	21-01-2002
		CA 2414176 A1	17-01-2002
		EP 1174397 A2	23-01-2002
		EP 1238950 A2	11-09-2002
		PL 360117 A1	06-09-2004
		WO 0204375 A2	17-01-2002
		US 2003198816 A1	23-10-2003
		US 2002192474 A1	19-12-2002
		US 2002021495 A1	21-02-2002
US 2003194567 A1	16-10-2003	US 2002064662 A1	30-05-2002
		US 2004058169 A1	25-03-2004
		US 2004086723 A1	06-05-2004
		US 2004101694 A1	27-05-2004
		US 2004229073 A1	18-11-2004
		US 2004229074 A1	18-11-2004
		AU 7178701 A	21-01-2002
		CA 2414176 A1	17-01-2002
		EP 1174397 A2	23-01-2002
		EP 1238950 A2	11-09-2002
		PL 360117 A1	06-09-2004
		WO 0204375 A2	17-01-2002
		US 2003194570 A1	16-10-2003
		US 2003198816 A1	23-10-2003
		US 2002192474 A1	19-12-2002
		US 2002021495 A1	21-02-2002
EP 1174397 A	23-01-2002	US 2002064662 A1	30-05-2002
		AU 7178701 A	21-01-2002
		CA 2414176 A1	17-01-2002
		EP 1174397 A2	23-01-2002
		EP 1238950 A2	11-09-2002
		PL 360117 A1	06-09-2004
		WO 0204375 A2	17-01-2002
		US 2002192474 A1	19-12-2002
		US 2003194567 A1	16-10-2003
		US 2003194570 A1	16-10-2003
		US 2003198816 A1	23-10-2003
		US 2004058169 A1	25-03-2004
		US 2004101694 A1	27-05-2004
		US 2002021495 A1	21-02-2002
		US 2004229074 A1	18-11-2004
		US 2004086723 A1	06-05-2004
		US 2004229073 A1	18-11-2004
FR 2818270 A	21-06-2002	FR 2818270 A1	21-06-2002
US 2003099842 A1	29-05-2003	FR 2821349 A1	30-08-2002
		AU 5048101 A	07-11-2001

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027121

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2003099842	A1		CA 2407032 A1 CZ 20023552 A3 EP 1278707 A1 WO 0181262 A1 JP 2003531094 T PL 357566 A1	01-11-2001 17-12-2003 29-01-2003 01-11-2001 21-10-2003 26-07-2004
US 2002045037	A1	18-04-2002	FR 2757151 A1 US 6322881 B1 AT 280140 T DE 69731268 D1 EP 0847965 A1 JP 10217378 A US 6045896 A	19-06-1998 27-11-2001 15-11-2004 25-11-2004 17-06-1998 18-08-1998 04-04-2000
US 5110662	A	05-05-1992	BE 1002992 A3 CH 679580 A5 DE 3941027 A1 DK 635589 A FR 2641271 A1 GB 2229737 A , B JP 2289449 A JP 2876325 B2 LU 87646 A1 NL 8903147 A , B, NO 894864 A , B, SE 469523 B SE 8904231 A	15-10-1991 13-03-1992 12-07-1990 06-07-1990 06-07-1990 03-10-1990 29-11-1990 31-03-1999 10-07-1990 01-08-1990 06-07-1990 19-07-1993 06-07-1990
US 2003143401	A1	31-07-2003	EP 1472194 A2 WO 03065081 A2	03-11-2004 07-08-2003
US 5376455	A	27-12-1994	AT 162505 T AU 677859 B2 AU 7441694 A BR 9403982 A CA 2133512 A1 CN 1111217 A CZ 9402422 A3 DE 69408069 D1 DE 69408069 T2 DK 646551 T3 EP 0646551 A1 ES 2111824 T3 GR 3026486 T3 HU 72105 A2 JP 2786400 B2 JP 7172872 A KR 9708986 B1 NO 943710 A NZ 264622 A PL 305299 A1 RU 2108988 C1 SK 119394 A3 US 5584902 A ZA 9407747 A	15-02-1998 08-05-1997 27-04-1995 13-06-1995 06-04-1995 08-11-1995 13-03-1996 26-02-1998 02-07-1998 21-09-1998 05-04-1995 16-03-1998 31-07-1998 28-03-1996 13-08-1998 11-07-1995 03-06-1997 06-04-1995 28-10-1996 18-04-1995 20-04-1998 10-05-1995 17-12-1996 17-05-1995
US 2001003628	A1	14-06-2001	US 6190776 B1	20-02-2001

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027121

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001003628 A1		US 2001006734 A1	05-07-2001
US 5993950 A	30-11-1999	BE 1011444 A3	07-09-1999
		CA 2211420 A1	25-01-1998
		CH 692505 A5	15-07-2002
		CN 1173428 A ,B	18-02-1998
		DE 19731438 A1	29-01-1998
		ES 2156655 A1	01-07-2001
		FR 2751666 A1	30-01-1998
		GB 2315496 A ,B	04-02-1998
		IT T0970572 A1	26-01-1998
		LU 90108 A1	13-01-1998
		NL 1006500 C2	23-02-1999
		NL 1006500 A1	28-01-1998
		SE 513629 C2	09-10-2000
		SE 9702555 A	26-01-1998