




US 20140121904A1

(19) **United States**(12) **Patent Application Publication**
Dornhege et al.(10) **Pub. No.: US 2014/0121904 A1**(43) **Pub. Date: May 1, 2014**(54) **METHOD FOR REDUCING STEERING TORQUE IN A STEERING SYSTEM OF A VEHICLE**(30) **Foreign Application Priority Data**

Oct. 26, 2012 (DE) 102012218836.3

(71) Applicant: **Ford Global Technologies, LLC**,
Dearborn, MI (US)**Publication Classification**(72) Inventors: **Jens Dornhege**, Pulheim NRW (DE);
Frank Peter Engels, Solingen NRW (DE); **Goetz-Philipp Wegner**, Dortmund NRW (DE)(51) **Int. Cl.**
B62D 6/08 (2006.01)
(52) **U.S. Cl.**
CPC **B62D 6/08** (2013.01)
USPC **701/42**(73) Assignee: **Ford Global Technologies, LLC**,
Dearborn, MI (US)(57) **ABSTRACT**

A method for reducing the steering torque in a steering system of a vehicle. A method including the steps of monitoring a driver's torque as applied by a driver of the vehicle; providing a plurality of torques that can be imposed on the steering system; and reducing the torques that can be imposed on the steering system by a central reduction factor if monitoring of the steering system reveals a violation of a safety criterion.

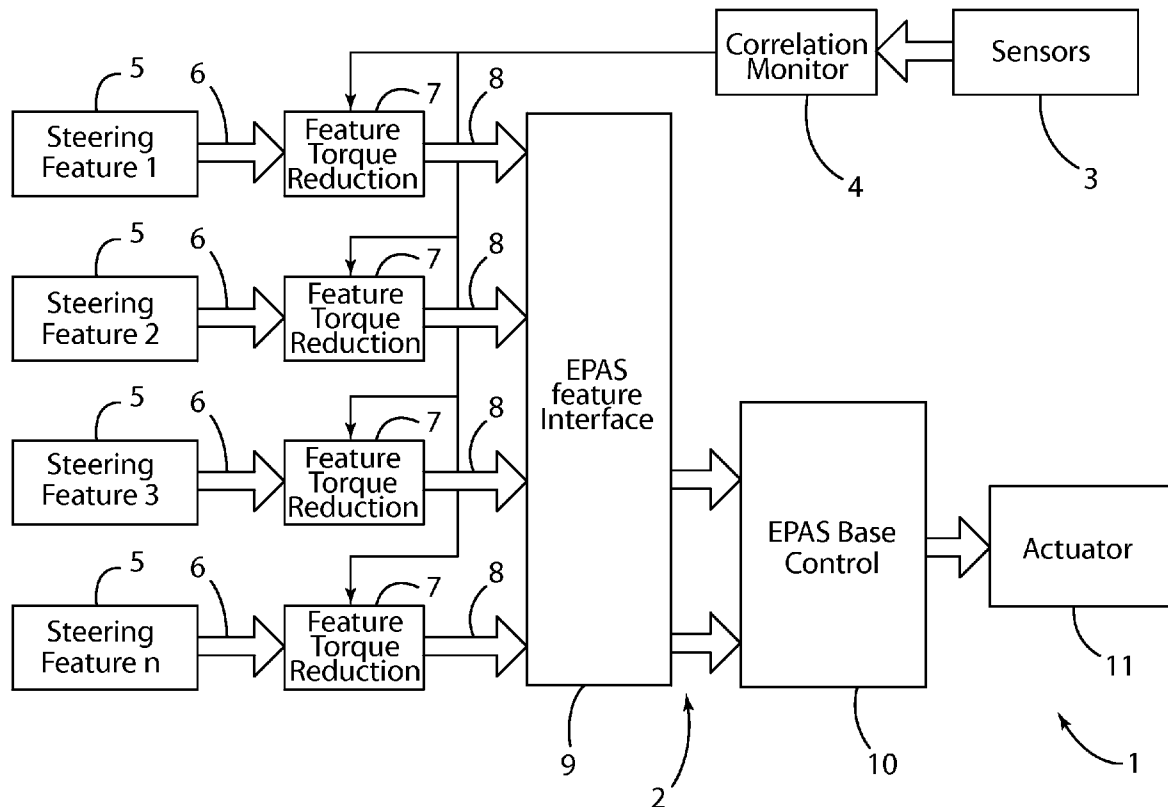(21) Appl. No.: **14/054,652**(22) Filed: **Oct. 15, 2013**


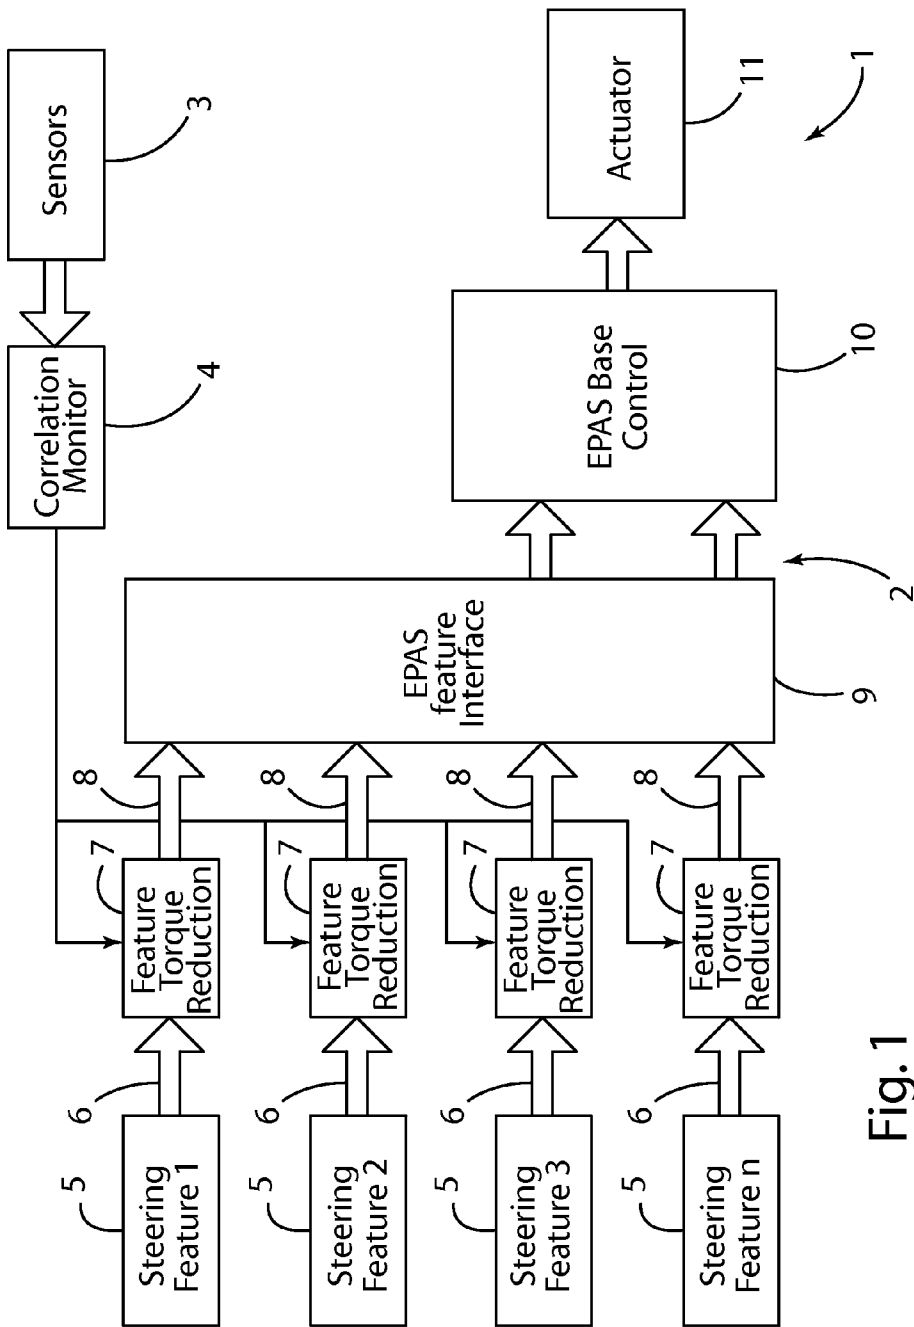


Fig. 1

Fig. 2

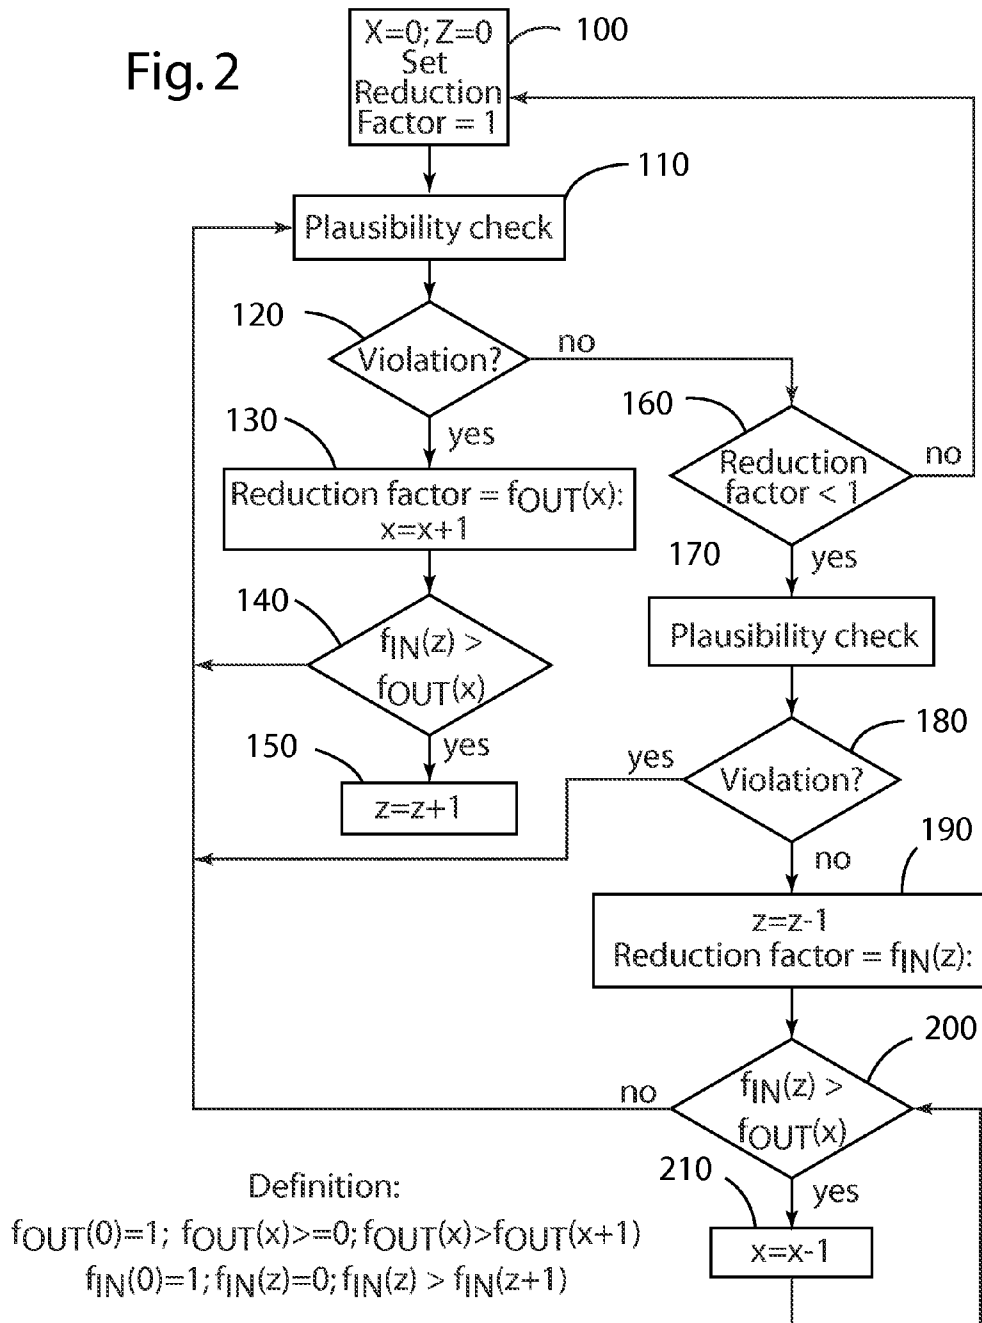

METHOD FOR REDUCING STEERING TORQUE IN A STEERING SYSTEM OF A VEHICLE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] Not Applicable.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates to vehicle steering systems and, more specifically, to a method for controlling or reducing steering torque in a steering system of a vehicle.

[0004] 2. Description of Related Art

[0005] Modern steering systems include assistance systems that enable the imposition of steering torque in order to provide driver comfort. Moreover, such assistance systems operate to reduce disturbing torque influences caused by the vehicle or the surface of the highway.

[0006] The steering wheel is the haptic interface to the driver and any imposed torque must be configured whereby it can be controlled by the driver. For example, in the event of a fault, such as an unintentional imposed torque, the driver's reaction remains an important non-negligible part of the overall system.

[0007] Consideration of the impact of unfavorable torque impositions on the overall steering system in the event of a fault must be taken into account during the design of such assistance systems. Normally, the steering torque superimposed on the driver's torque by such assistance systems is limited in amplitude and dynamics. In order to determine controllable thresholds, customer clinics or expert clinics, i.e. studies or investigations, are carried out. Because of the variance of the assessments, the worst case has to be assumed here; i.e., the limitation must be oriented to the most critical case or to the most critical assessment in the event of a fault.

[0008] This means that the potential performance of additional functions or torque impositions cannot always demand torque useful or necessary for the respective situation.

[0009] For the regulation of steering assistance, there are various approaches to imposing additional torque to influence the overall system. These include the measurement value of the torque sensor (input torque), based on which the steering assistance is calculated, for a second thing the calculated steering assistance can be superimposed with an additional torque (output torque), and for a third thing both interfaces, which corresponds to a torque applied by the driver to the steering wheel (driver's torque).

[0010] The torque limitation described above must be oriented to the driver's torque in order to ensure controllability. This means that all limiting additional functions for providing the additional torque in the control loop have to calculate/determine the corresponding driver's torque.

[0011] This also applies to the functions that calculate the corresponding assist motor torque of the electronically assisted steering EPAS (output torque) for control/regulation and feed the same into the control loop. The calculation of the driver's torque is complex on the one hand and can frequently only be carried out roughly because of the complexity of the control loop. This can lead to loss of quality of the respective functions.

[0012] A combined limitation of the output torque and of the driver's torque is in general not possible, because both torques are not necessarily linearly dependent.

[0013] With a further approach, an estimate is carried out using the magnitude of the transverse dynamic reactions or yaw rates, which is directly related to the controllability assessment of the driver and hence takes into account the variables driver/vehicle/situation and enables a driver/vehicle/situation-dependent torque imposition, which enables maximum benefit for the respective function without violating the safety requirements. This means that it will only be limited if the imposed torque leads to a corresponding critical vehicle reaction in the driver/vehicle/situation composite. Alternatively, a future yaw response can also be concluded from a steering angle response.

[0014] With the previously conducted limitation of the maximum permitted torque with respect to the driver's torque, all limiting additional functions have to calculate the driver's torque and accordingly feed this into the control loop. This is complex depending on the complexity of the steering control loop and can cause delays and inaccuracies. The quality of the additional steering functions can degrade because of this.

[0015] DE10 2009 000 868 B4 discloses a controller for a steering system having a plurality of steering functions, each of which directs a steering demand to the steering system. A logic circuit prioritizes the steering demands and inhibits any coincident steering demands, so that an overall level of the steering torque exerted by the steering system is not exceeded.

SUMMARY OF THE INVENTION

[0016] According to one example of the invention, a method for the reduction of steering torques of a steering system of a vehicle includes monitoring driver's torque applied by a driver of the vehicle; providing a plurality of torques that can be imposed for functions of the steering system; and reduction of the torques that can be imposed by means of a central reduction factor if monitoring reveals a violation of a safety criterion.

[0017] The invention proposes a new approach to the limitation of the driver's torque in relation to the permissible amplitude and dynamics. Using a reduction algorithm that returns the imposed torques, combined use of the assist motor torque interface and driver's torque interface is possible if a violation of the safe driving state is recognized. The reduction of all torques using a reduction factor according to the invention advantageously provides a method for the limitation of the torque independently of the steering control loop interface. This enables the use of all steering interfaces with the use of a limiting function. The step of monitoring and/or plausibility checking can include, as described, the steering movements in relation to the driver's intention in the form of the torque that is applied by the driver and/or other criteria or parameters, with which a violation of the safe driving state can be recognized. The use of a central or common reduction factor significantly simplifies the control of the steering system or the reduction of steering torques of the steering system, because only one calculation has to be carried out. The safety criterion can include one or a plurality of limiting values for parameters or variables, which are monitored, such as e.g. the driver's torque applied by the driver of the vehicle.

[0018] If there is a violation, the torques that can be imposed or the requirements for torque impositions can be

continuously reduced or the delivery of the torque can also be carried out continuously over a period, e.g. if the plausibility check is not carried out with calculated values but with measured values.

[0019] The reduction factor can comprise a hysteresis. This prevents oscillations of the reduction factor in the event of adaptation of the factor or in the event of a continuous flow of the method.

[0020] The monitoring can include the maximum permissible driver's torque and/or lateral dynamic reactions or yaw rates of the vehicle. These are variables that are simple to detect or are already known in the system. Other parameters can also come into use. It is important that a violation of the safe driving state can be recognized using the parameters.

[0021] Each torque that can be imposed can be reduced individually with the reduction factor or combined torques that can be imposed can be reduced together using the reduction factor. The reduction factor is used to reduce the summed imposed torques. In order to achieve this, each torque that can be imposed or each torque demand of the summed torque vector of an interface or torque vector can be individually reduced or multiplied by the reduction factor. The appropriate selection depends inter alia on the system used. The present method thus enables optimal adaptation to different situations or vehicles.

[0022] According to a second aspect of the invention, a controller for a steering system of a vehicle comprises a plurality of functional units for imposition of torques for functions of the steering system, a monitoring unit for monitoring a driver's torque applied by a driver of the vehicle and a reduction unit for the reduction of the torques that can be imposed by a central reduction factor depending on the monitoring. The above-described advantages and modifications apply.

[0023] The reduction unit can be in communication with each functional unit. Thus, each additional function can be directly limited by the reduction unit without the additional functions having to calculate the limitation individually.

[0024] According to another aspect of the invention, a steering system of a vehicle comprises a controller as described above. The above-described advantages and modifications apply.

[0025] Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating the preferred embodiment of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The present invention will become more fully understood from the detailed description and the accompanying drawings, wherein:

[0027] FIG. 1 shows a controller for a steering system of a vehicle according to the invention.

[0028] FIG. 2 shows a method for the reduction of steering torques of a steering system of a vehicle according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] The following description of the preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[0030] FIG. 1 shows a steering system 1 of a vehicle and a controller 2 for the steering system 1 schematically. For clarity, only components that are important for the explanation of the invention are illustrated here, other components such as e.g. steering wheel, steering column, etc. being therefore not shown.

[0031] One or a plurality of sensors 3, such as e.g. a sensor for detecting a driver's torque applied by a driver of the vehicle, is/are connected to a monitoring unit or a "correlation monitor" 4. The monitoring unit 4 monitors or plausibility checks the steering movements with respect to the driver's intention using the torque that is applied by the driver. Monitoring of the driver's torque applied by the driver of the vehicle takes place.

[0032] The steering system 1 or the controller 2 comprises a plurality of functional units 5 for imposing torques for functions of the steering system 1. These can be comfort and/or safety functions; for example a functional unit 5 may impose a torque based on a determination of a corresponding assist value for such events as a crosswind, inclined road surface or speed sensitive steering. The functional units 5 produce torques that can be imposed 6, which are output to reduction units 7. The torques can thereby be directly generated, wherein only a demand for a torque is generated in the normal case. The reduction units 7 are used for the reduction of the torques that can be imposed 6. The reduction is carried out using a central reduction factor, which is described in detail below in connection with FIG. 2.

[0033] The reduction units 7 are controlled by the monitoring unit 4. The torques that can be imposed 6 are reduced if monitoring reveals a violation of a safety criterion, i.e. if the plausibility check in the monitoring unit 4 signals a fault or a violation. The central reduction factor is then calculated and/or adapted. This can take place in the monitoring unit 4 and/or in the reduction units 7. The individual components such as the monitoring unit 4 and/or the reduction units 7 can be implemented in hardware and/or software in already existing systems such as an existing steering control. The reduction units 7 can be implemented in one unit or integrated in the functional units 5.

[0034] The reduction units 7 output a reduced or limited torque 8 or fully inhibit the output. The reduced torque 8 or the reduced demand is fed to a functional interface 9 of the electronic steering or an EPAS feature interface. The reduced torque 8 may be processed or converted for the controller 2 there in order to be processed, converted and/or plausibility checked in a base unit 10 or EPAS base control.

[0035] The base unit combines the different reduced torques or demands 8. This can also be at least partly carried out in the interface 9. Finally, the base unit 10 outputs a control signal to an actuator or a control element 11 that generates the torque that is noticeable by the driver to the steering column or the steering wheel.

[0036] Using FIG. 2, the reduction algorithm or the calculation of the central reduction factor is now described. Said algorithm or the calculation can take place in the monitoring unit 4, the reduction unit or units 7 or a different controller that may already be present and that has the required information available.

[0037] The reduction algorithm or calculation of the central factor includes two functions or equations f_{OUT} and f_{IN} . f_{OUT} represents the function to ramp out torque and f_{IN} represents the function to increase torque once a violation ends. In the disclosed example f_{OUT} is calibrated in a way to ramp out the torque quite fast if a violation is detected and f_{IN} to increase the torque smoothly once a violation ends. Thus, either function (equation/algorithm) may not be linear; it may describe any type of curve or parameters based on the particular vehicle or use intended. Each function describes a vector extending from 0 to 1 with its respective index value x , z setting forth a position on that vector wherein that position equates to the reduction factor. Assuming no violation of the plausibility check, the reduction factor always remains at 1, thus 1 times the applied torque is still the applied torque.

[0038] In a first initializing step **100**, the counters or index values x and z used are set to zero. The following assumptions apply to the algorithm:

$$f_{OUT}(0)=1; f_{OUT}(x) \geq 0; f_{OUT}(x) > f_{OUT}(x+1).$$

$$f_{IN}(0)=1; f_{IN}(z) \geq 0; f_{IN}(z) > f_{IN}(z+1).$$

[0039] As set forth above, the result or output of the function f_{OUT} and f_{IN} may vary, depending upon the selected equation/algorithm, as long as it follows the limitations set forth in the definitions or assumptions previously set forth.

[0040] As illustrated, step **100** sets the reduction factor to 1. In a second step **110**, the torque or a torque vector of the driver's torque and the central reduction factor are subjected to a plausibility check.

[0041] In another step **120**, a check is carried out as to whether there is a violation of the safe driving state or a safety criterion. Said monitoring is oriented to the torque and possibly additionally to the reduction factor.

[0042] If there is a violation, the reduction factor index is increased in a step **130**. The reduction factor can be described with respect to the duration of the violation of the plausibility check using a mathematical function $f_{OUT}(x)$. The index increase takes place with $x=x+1$. The reduction factor lies between zero and one. If there is a violation, and the index x increments by 1 which correspondingly lowers the value of the output of the reduction factor since $f_{OUT}(x) > f_{OUT}(x+1)$. Accordingly, the output of the function or the "reduction factor" must be less than 1. This is now less than $f_{IN}(z)$ which was initially set at 1. Accordingly we index $f_{IN}(z)$ until the output is less than that of $f_{OUT}(x)$.

[0043] The insertion of the torques can be described by a separate function $f_{IN}(z)$. The functions $f_{OUT}(x)$ and $f_{IN}(z)$ are selected so that the reduction of the torques by the reduction factor in the event of a violation of the plausibility check acts more strongly than the insertion of the torques can by the function $f_{IN}(z)$ and thus has a higher priority. This is ensured by the steps or blocks **140** and **150**.

[0044] If the function $f_{OUT}(x)$ has more weight, branching back to step **110** occurs. This results in a control loop. This enables continuous reduction of the applied torque until complete locking if there is a violation of the plausibility check.

[0045] If the torque reduction is sufficient in order to no longer determine a plausibility violation, the reduction factor is frozen until an increase of the reduction factor no longer leads to a violation of the plausibility check.

[0046] If no violation is detected in step **120**, a branch to step **160** takes place, in which it is queried whether the reduction factor is still less than one. If this is not the case, a branch occurs to step **100**, in which the variables are reset.

[0047] If the reduction factor is less than one, in a step **170** a plausibility check is carried out for the torque and a reduced insertion of the torques is carried out with $f_{IN}(z-1)$. Here and in the following steps, checking and adaptation of the insertion $f_{IN}(z)$ take place similarly to steps **120** through **150**.

[0048] Accordingly, in the event of a violation of said plausibility check in a step **180**, a branch back to step **110** occurs. If this plausibility check is not violated, a branch occurs to step **190**, in which the reduction factor is set as $f_{IN}(z)$, i.e. it enables insertion of the torques that can be imposed. In step **190**, z is also decremented by 1. Subtracting 1 from the index value of z moves the reduction factor closer to 1. f_{IN} is compared with f_{OUT} and f_{OUT} increments accordingly until f_{OUT} becomes greater than f_{IN} at which point the system returns to step **110** for a plausibility check. If no violation it then goes to step **160** wherein the reduction factor would be less than 1 which would cause it to reset to 1 in step **100**.

[0049] In step **200**, a check is made as to whether f_{IN} is greater than the f_{OUT} . If this is not the case, branching back to step **110** occurs. If the insertion is greater, the index factor x is reduced by 1 in step **210** and branching back to step **200** occurs.

[0050] The description of the invention is merely exemplary in nature and, thus, variations that do not depart from the gist of the invention are intended to be within the scope of the invention. Such variations are not to be regarded as a departure from the spirit and scope of the invention.

What is claimed is:

1. A method for the reduction of steering torque in a steering system of a vehicle comprising the steps of:
 - monitoring a torque applied by a driver of the vehicle;
 - providing a plurality of torques that can be imposed in the steering system; and
 - reducing the torques imposed by a reduction factor if monitoring reveals a violation of a safety criterion.
2. The method of claim 1 wherein the imposed torques are continuously reduced in the event of a violation.
3. The method of claim 1 wherein the reduction factor has a hysteresis.
4. The method of claim 1 wherein the monitoring includes the maximum permissible driver's torque.
5. The method of claim 1 wherein the monitoring includes the lateral dynamic reactions or yaw rates of the vehicle.
6. The method of claim 1 including the step of imposing said plurality of torques individually wherein each individually imposed torque can be individually reduced with the reduction factor.
7. The method of claim 1 wherein the imposed torques are reduced together with the reduction factor.
8. A method for the reduction of steering torque in a steering system of a vehicle comprising the steps of:
 - monitoring a torque applied by a driver of the vehicle;
 - providing a plurality of torques that can be imposed in the steering system;
 - establishing a safety criterion based on vehicle dynamics;
 - performing a plausibility check to determine if a violation occurs;
 - reducing torques imposed by the steering system in the event of a violation; and
 - increasing torques imposed by the steering system upon cessation of the violation.
9. The method of claim 9 including the steps of rapidly ramping out the imposed torque if a violation is detected; and

smoothly increasing the imposed torque when a violation is no longer detected.

10. A steering system of a vehicle comprising:

a plurality of functional units for imposing torques on the steering system;

a monitoring unit for monitoring a driver's torque applied by a driver of the vehicle; and

a reduction unit for reduction of imposed torques by a reduction factor depending on the monitoring.

11. The steering system of claim **10** wherein the reduction unit is in communication with each functional unit.

12. The steering system claim **10** including a plurality of reduction units each reduction unit paired with a corresponding functional unit.

13. The steering system of claim **10** including a controller, said controller operative to determine a reduction factor and transmit said reduction factor to said reduction unit.

* * * * *