



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B43L 23/00	A2	(11) International Publication Number: WO 00/53431 (43) International Publication Date: 14 September 2000 (14.09.00)
(21) International Application Number: PCT/US00/06673 (22) International Filing Date: 10 March 2000 (10.03.00) (30) Priority Data: 09/266,354 11 March 1999 (11.03.99) US (71) Applicant: PENSHAR, LLC [US/US]; 1 South 312 Ardmore, Villa Park, IL 60181 (US). (72) Inventor: DONALDSON, Joseph, K.; 130 North Morgan, Wheaton, IL 60187 (US). (74) Agent: KENAGA, Michael, L.; Piper Marbury Rudnick & Wolfe, P.O. Box 64807, Chicago, IL 60664-0807 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: PENCIL SHARPENER (57) Abstract There is described herein a sharpener for a carpenter's pencil having a centering collar (14) mounted to a base enclosure (12) for relative rotation to generate the sharpening effect. Within the base enclosure (12) there is a symmetrical pencil point contour surface (22) and a blade (26;40) mounted along the contour surface (22) for cutting against the inserted pencil. The shape of the blade (26;40) is either curved or formed from a plurality of sections (42,44) to produce a narrow cut around the point extremity of the pencil and a wider cut further up the pencil shaft.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PENCIL SHARPENER

Field of the Invention

The present invention relates generally to devices for sharpening pencils and more particularly to sharpeners designed for the flattened style of carpenter's pencils.

Description of the Prior Art

The need for a sharpening device designed for the sharpening of a carpenter's pencil has long been well known, as sharpening has generally required the use of a knife to accommodate the odd shape of the pencil. The difficulty of sharpening this style of pencil with such a sharpening device without leaving wood on the broad sides of the rectangular pencil lead has long presented a major obstacle. For example, in U.S. Patent No. 5,077,903 a sharpener is presented with dual rotary cutter assemblies arranged to cut two curves in the point. In U.S. Patents No. 4,759,129 and No. 4,918,816 four cutters and associated gearing are similarly used to achieve the desired sharpening effect on a carpenter's pencil. In U.S. Patent No. 4,081,010 a cutting blade is driven around the pencil in a complicated "eccentric" motion by means of cams to achieve the required pencil point shaping. Clearly, the need for a simplified device that does not require the many blades, gears and motors of the prior art has been long sought after, yet such a device has not previously been developed.

SUMMARY OF THE INVENTION

The present invention presents a simplified solution for a device which will sharpen a carpenter's pencil. Particularly, there is provided a base enclosure having a symmetrical pencil point contoured surface defined therein. A blade mounted within the base enclosure conforms to the contour and cuts against an inserted pencil. A pencil centering collar is mounted to the base enclosure for receiving the pencil and for rotating the pencil relative to the base enclosure to cause the sharpening effect on the pencil.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective of a sharpening device in accordance with the present invention, showing a pencil oriented for insertion therein.

Figure 2 is an end view of the collar portion of the sharpening device of Figure 1, showing the crossed slot feature.

Figure 3 is a side view of the collar of Figure 2.

Figure 4 is a combination cut away and cross section view of the base enclosure portion of the sharpening device of Figure 1, viewed from the top with a portion of the contoured surface and collar cut away.

Figure 5 is a cross section view of the base enclosure portion of the sharpening device of Figure 1, viewed from the side.

Figure 6 is an exploded view of the sharpening device of Figure 1.

Figure 7 is a cross section view of the base enclosure portion of an alternate embodiment of the sharpening device employing an alternate version of the blade design.

Figure 8 is a perspective view of the alternate blade design of the sharpening device of Figure 7.

While the invention will be described in connection with a preferred embodiment, it will be understood that it is not the intent to limit the invention to that embodiment. On the contrary, it is the intent to cover all alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning first to Figure 1 there is shown a pencil sharpening device in accordance with the present invention, having a base enclosure 12 and pencil centering means, such as a centering collar 14, mounted to the base enclosure for rotation relative thereto. The collar 14 exhibits an encircling shoulder 15 (Figure 3) arranged to removably fit within a resilient track 16 encircling the end of the base enclosure 12 for allowing rotation of the collar relative to the base enclosure 12 about a central axis 13 (Figure 6).

The collar further presents an opening 18 for insertion of a pencil to be sharpened, and in the preferred embodiment the collar opening is in the form of

intersecting rectangular slots (Figure 2) designed to accommodate the dimensions of a plurality of sizes of carpenter's pencils. For example, a wide pencil can be positioned within the wide slot 18a and a narrow pencil can be positioned within the narrow slot 18b. Consequently, rotation of the collar with the pencil inserted through the collar into the base enclosure causes the pencil to rotate about the central axis for the sharpening effect as hereinafter described.

Within the base enclosure there is a pencil point contour surface 22 defined about a central axis 13, the inside shape of a first embodiment of which is depicted in Figure 4. This contour matches the desired shape of the sharpened end of the pencil; it presents a narrow portion near the point extremity of the pencil and a wider portion further up the pencil shaft away from the point extremity.

In the first embodiment (see Figure 5), the edge 22a of the contoured surface 22 presents a single radius curve in cross section which creates a curved cone shape for the desired shape of the sharpened pencil. In this embodiment a corresponding single radius curve is also employed for the radius of the curve of the blade. In the preferred embodiment of this curved version of the sharpening device, the radius of the curve is approximately 2 1/4 inches in length.

In a second embodiment (see Figure 7 and Figure 8) the blade 40 is formed from a plurality of sections, 42 and 44, and the contoured surface presents, in cross section, an edge 46 having sections corresponding to the blade

sections. These sections can be straight or curved and additional sections can be included to create a more complicated cut if desired. Accordingly, it can be appreciated that by employing multiple sections, a contoured surface is created which is similar to the curved cone shape and matches the desired shape of the sharpened pencil point; a narrow contour near the pencil point and a wider contour away from the point.

When the carpenter's pencil is cut to the described contoured shape, a narrow cut is made around the point while a wider cut is made further up on the pencil. Consequently, when the pencil and collar are rotated relative to the enclosure, wood is sufficiently removed from all sides around the pencil point, including the wood from the flat sides 23 (Figure 1) of the pencil shaft, and a graduated transition is provided from the vicinity of the pencil point to the body of the pencil shaft.

As best shown in Figure 1, the base enclosure is open 24 on one side, being cut-away to allow for removal of debris cut from the pencil during the sharpening process. At this open side the contoured surface 22 is interrupted with a narrow slot opening 25 where the blade 26 is mounted along the contoured surface to present a blade edge 28 tangentially to the contoured surface at the slot opening.

CLAIMS

1. A pencil sharpening device for cutting a point on the extremity of a pencil comprising:
a base enclosure having a pencil point contour surface defined therein,
said contour surface being defined about a central axis and
presenting a narrow portion near the point extremity of the pencil;
a curved blade mounted within said base enclosure, said blade having a
cutting edge positioned along said contour surface for cutting
against the pencil when the pencil is rotated about said central
axis; and
centering means for centering the pencil along said central axis.
2. The device of Claim 1 wherein said centering means comprises a collar
having a slot therein for receiving the pencil, and wherein said collar is
mounted for selective rotation of the pencil and said collar relative to said
base enclosure.

3. The device of Claim 2 wherein said base enclosure exhibits an encircling track and said collar exhibits an encircling shoulder arranged to fit within said encircling track of said base enclosure for enabling said rotation of said collar relative to said base enclosure.
4. The device of Claim 2 further comprising a plurality of intersecting slots defined in said collar for accommodating a plurality of pencil sizes.
5. The device of Claim 1 further comprising an open section defined in said base enclosure for allowing the exit of debris.
6. The device of Claim 1 wherein said blade curvature is a single radius curve with a radius of approximately 2 1/4 inches.
7. The device of Claim 5 wherein said centering means comprises a collar having a slot therein for receiving the pencil, and wherein said collar is mounted for selective rotation of the pencil and said collar relative to said base enclosure.

8. The device of Claim 7 wherein said base enclosure exhibits an encircling track and said collar exhibits an encircling shoulder arranged to fit within said encircling track of said base enclosure for enabling said rotation of said collar relative to said base enclosure.
9. The device of Claim 7 further comprising a plurality of intersecting slots defined in said collar for accommodating a plurality of pencil sizes.
10. The device of Claim 9 wherein said collar is selectively removable from said base enclosure.
11. The device of Claim 10 wherein said blade is mounted to present said cutting edge tangentially to said contour surface.
12. A pencil sharpening device for cutting a point on the extremity of a pencil comprising:
 - a base enclosure having a pencil point contour surface defined therein,
 - said contour surface being defined about a central axis and
 - presenting a narrow portion near the point extremity of the pencil;

a blade mounted within said base enclosure, said blade exhibiting a plurality of sections and having a cutting edge positioned along said contour surface for cutting against the pencil when the pencil is rotated about said central axis; and centering means for centering the pencil along said central axis.

13. The device of Claim 12 wherein said base enclosure exhibits an encircling track and said collar exhibits an encircling shoulder arranged to fit within said encircling track of said base enclosure for enabling said rotation of said collar relative to said base enclosure.
14. The device of Claim 13 further comprising a plurality of intersecting slots defined in said collar for accommodating a plurality of pencil sizes.
15. The device of Claim 12 wherein said blade is mounted to present said cutting edge tangentially to said contour surface.
16. The device of Claim 12 wherein said blade exhibits two straight sections.

17. The device of Claim 12 wherein said centering means comprises a collar having a slot therein for receiving the pencil, and wherein said collar is mounted for selective rotation of the pencil and said collar relative to said base enclosure.
18. The device of Claim 17 wherein said base enclosure exhibits an encircling track and said collar exhibits an encircling shoulder arranged to fit within said encircling track of said base enclosure for enabling said rotation of said collar relative to said base enclosure.
19. The device of Claim 18 further comprising a plurality of intersecting slots defined in said collar for accommodating a plurality of pencil sizes.
20. The device of Claim 19 wherein said blade exhibits two straight sections.

1/4

FIG. 1

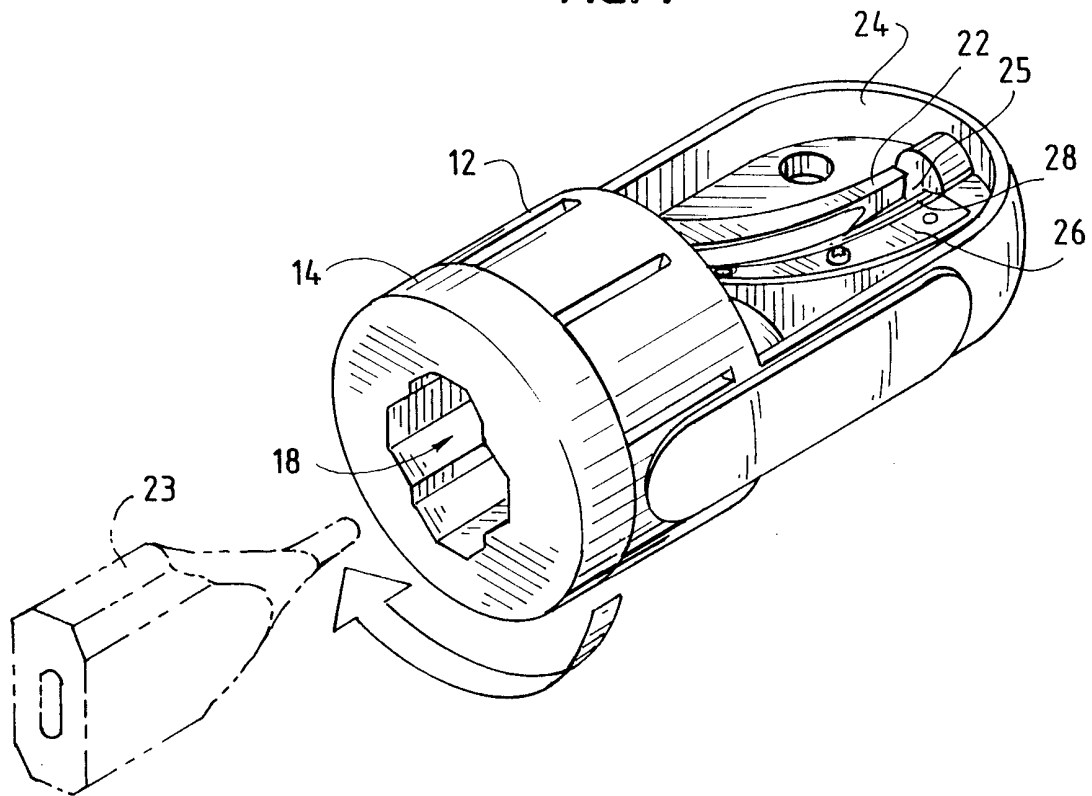


FIG. 2


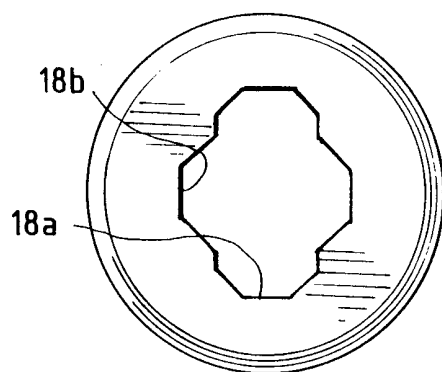


FIG. 3

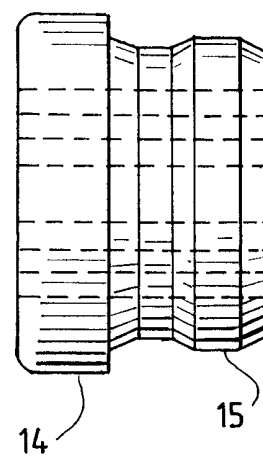

2/4

FIG. 4



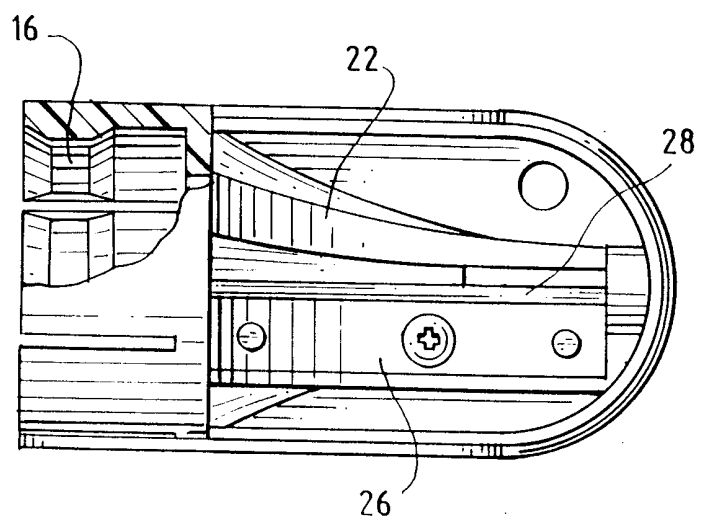


FIG. 5

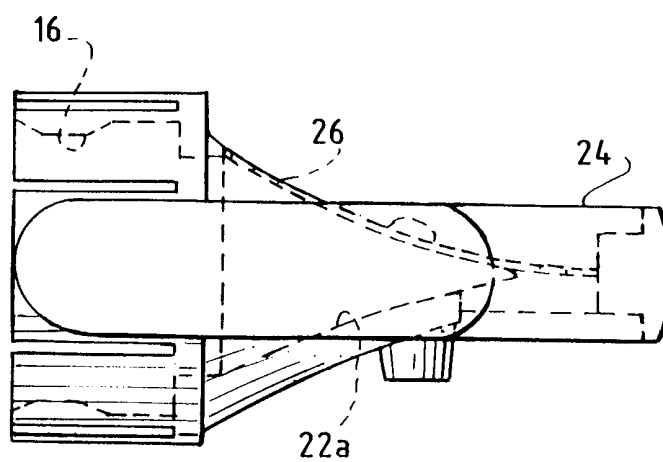

3/4

FIG. 6

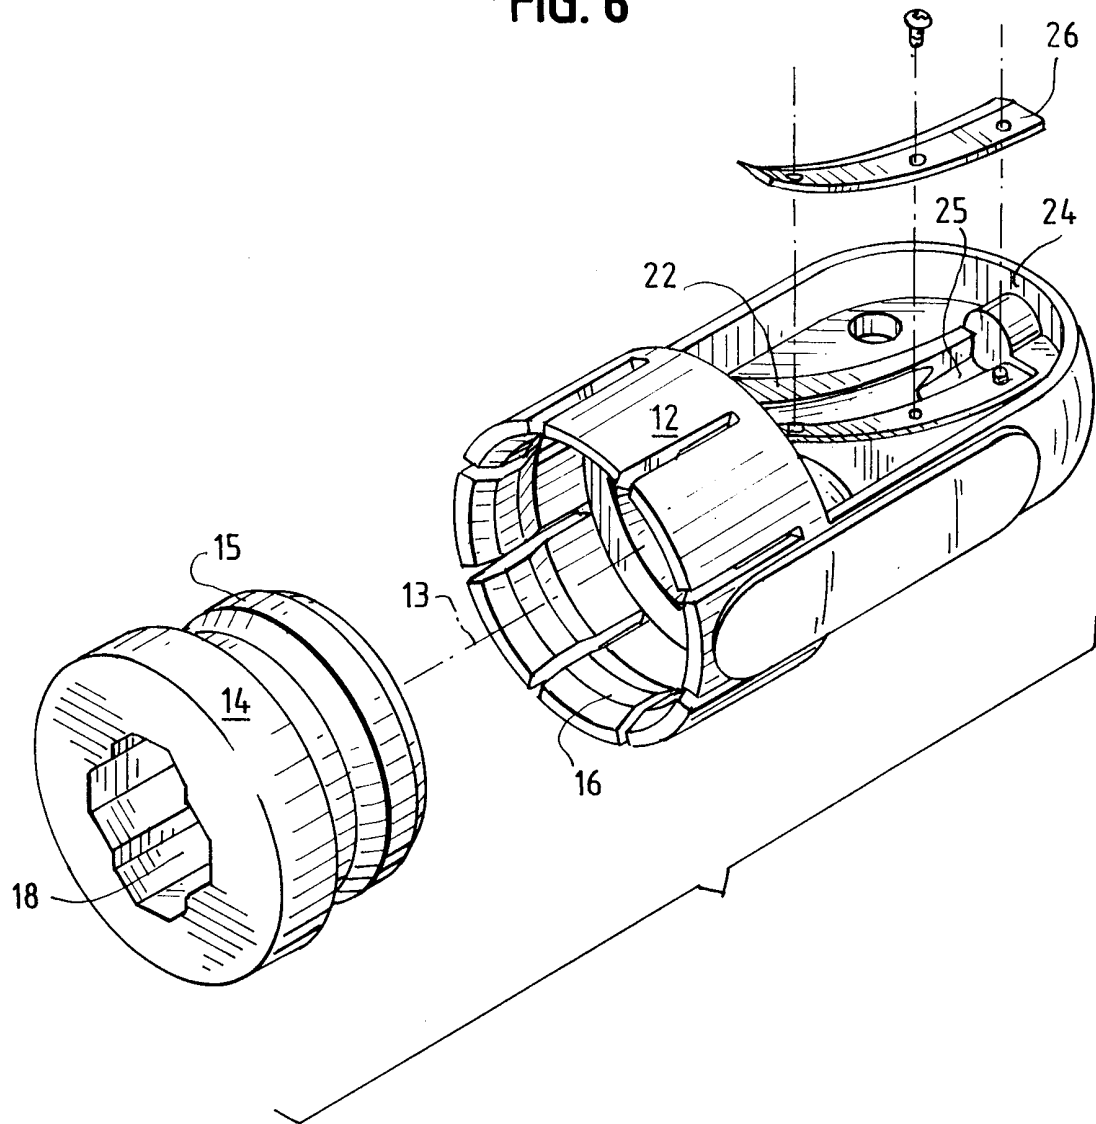

4/4

FIG. 7

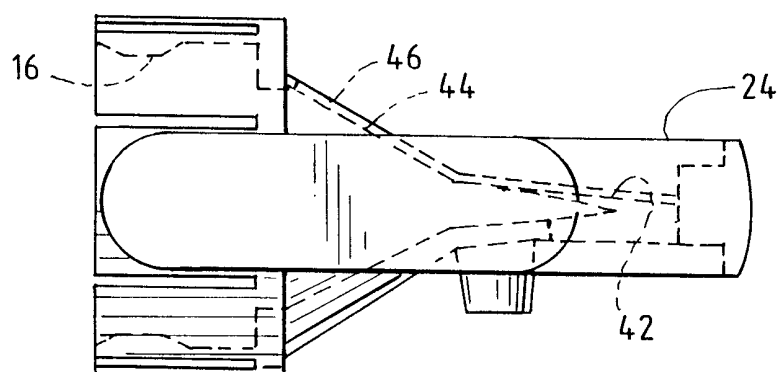


FIG. 8

