

United States Patent [19]

Reinhardt et al.

[11] 3,742,566

[45] July 3, 1973

[54] **PROCESSING OF FINELY DIVIDED PARTICULATE MATERIALS**

[75] Inventors: **Helmut Reinhardt**, Weiss near Cologne; **Bernd Brandt**; **Albert Peters**, both of Wesseling-Berzdorf, all of Germany

[73] Assignee: **Deutsche Gold- Und Silber-Scheideanstalt vormals Roessler**, Frankfurt am Main, Germany

[22] Filed: July 12, 1971

[21] Appl. No.: 161,791

Related U.S. Application Data

[62] Division of Ser. No. 874,654, Nov. 6, 1969.

[30] **Foreign Application Priority Data**

Nov. 8, 1968 Germany P 18 07 714.0

[52] U.S. Cl. 29/132, 162/357, 162/374

[51] Int. Cl. B21b 31/08

[58] **Field of Search** 29/124, 132, 130, 51/266, 267; 425/335, 337, 373, 374; 162/357, 372, 374

[56] **References Cited**

UNITED STATES PATENTS

1,933,154 10/1933 Spencer 29/130 X

2,062,317	12/1936	Joseph	29/132 X
2,151,048	3/1939	Rowe	29/130 X
3,609,931	10/1971	Voorhies	51/267

FOREIGN PATENTS OR APPLICATIONS


111,464	9/1940	Australia	425/85
628,118	2/1963	Belgium	162/374

Primary Examiner—Alfred R. Guest
Attorney—Michael S. Striker

[57] **ABSTRACT**

A mass of finely divided material is confined in a chamber. Two rollers are arranged for rotation in the chamber in axial parallelism with one another and define with each other a narrow longitudinally extending gap. At least one of the rollers has a circumferential wall composed of gas-permeable porous material. This one roller is hollow and arranged to communicate with a source of underpressure so that, as the roller rotates, the particulate material is attracted onto its outer surface forming a layer thereon which is subjected to substantial compaction when it passes through the gap between the two rollers. The compacted material is removed from the outer surface of the roller or rollers and subdivided into portions of desired size. A roller for use in the apparatus is disclosed.

12 Claims, 2 Drawing Figures

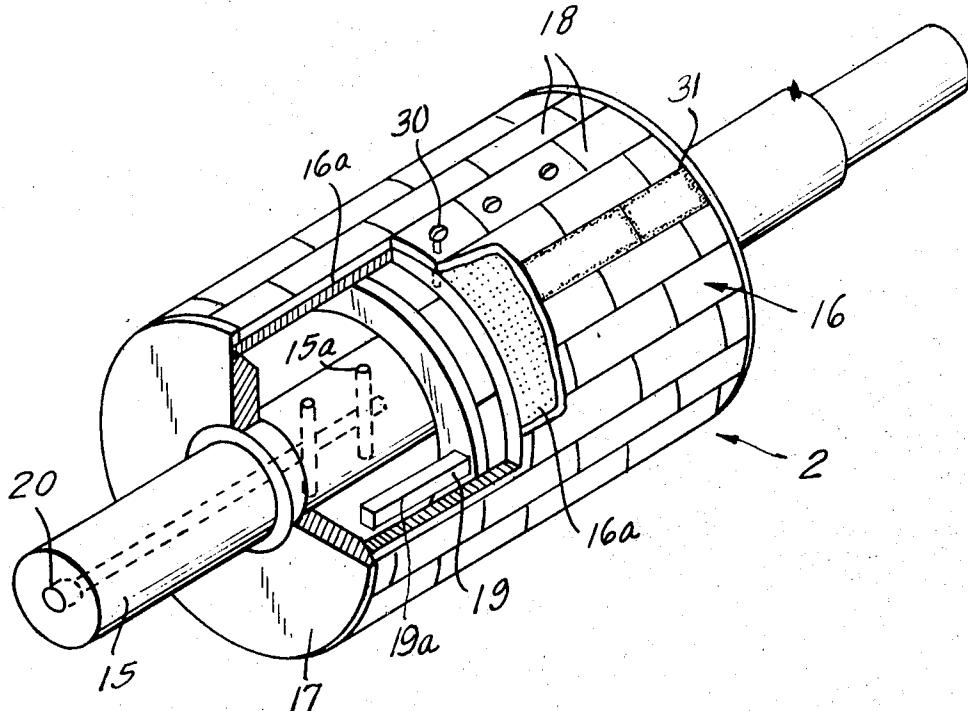


PATENTED JUL 3 1973

3,742,566

SHEET 1 OF 2

FIG. 1

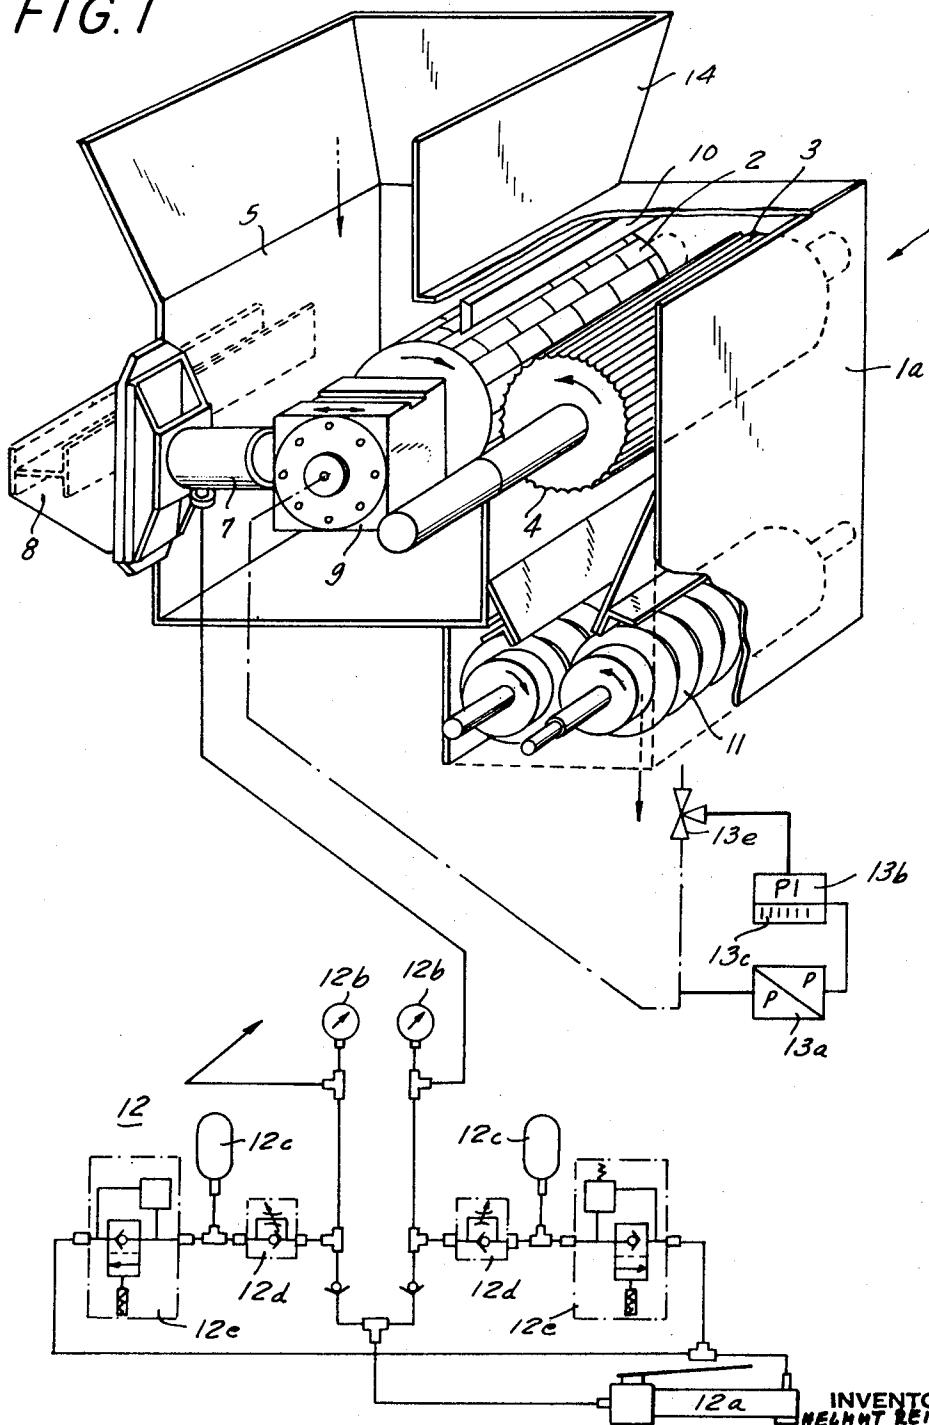

INVENTOR
WILHELM REINHARDT
BERND BRANDT
ALFRED PETERS

Michael S. Stricker
ATTORNEY

PATENTED JUL 3 1973

3,742,566

SHEET 2 OF 2

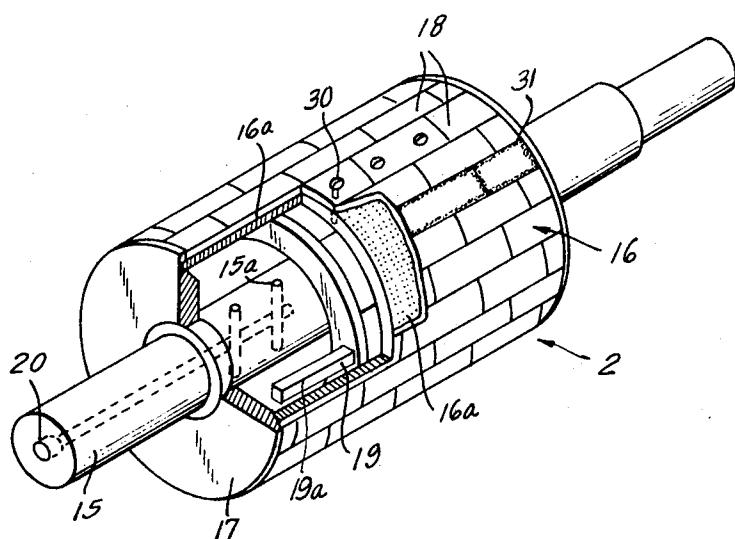


FIG. 2

INVENTOR
HELMUT REINHOLD
REINHOLD BRANDT
ALBERT PETER S
Michael S. Stricker
ATTORNEY

PROCESSING OF FINELY DIVIDED PARTICULATE MATERIALS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a division of our application Ser. No. 874,654, filed Nov. 6, 1969 and entitled "Processing of Finely Divided Particulate Materials."

BACKGROUND OF THE INVENTION

The present invention relates generally to the processing of finely divided particulate materials, and more specifically to the processing of such materials which requires pre-condensing and subsequent compacting of such materials into desired shapes. The invention relates to an apparatus for effecting such processing and to a roller for use in the apparatus.

In many instances the processing of finely divided particulate material, such as pulverulent or fine-crystalline and organic materials, frequently depends upon the possibility of increasing the volumetric weight of such materials without destroying or adversely influencing their specific characteristics which depend upon the fine division of such materials. This is particularly true of highly dispersed surface-active filler materials, such as silicium oxide, carbon black, aluminum oxide, aluminum silicates and calcium silicates, all materials which are used in very large quantities in various industries.

The problems involved in the processing of these materials are not insignificant. On the one hand, in their finely divided state they require relatively large amounts of space for storage and transportation, an obvious disadvantage. Furthermore, they tend to "dust" and to undergo uncontrollable caking, both of which are of course characteristics of their finely divided state which are clearly detrimental to economic handling and proper processing.

Industry has attempted to find solutions to these problems, and particularly to impart to such finely divided materials a state in which their specific characteristics—such as the ability to disperse in the case of finely divided active filler materials—are fully retained while the space required for storage and transportation is substantially reduced, and dusting during filling, metering and processing is largely eliminated. It has been proposed to achieve this by transforming the finely divided materials into agglomerates of certain configuration and dimension by subjecting them to mechanical pressure. This has been found to be practical in a continuous operation only if the significant quantities of gases present in highly dispersed materials are first removed, because otherwise it is not possible to obtain agglomerates with sufficient adhesion under mechanical pressure. It has been found, for instance, that it is impossible to obtain the desired compaction and adhesion simply by passing such materials between two metal rollers which subject them to mechanical compression. Therefore, gas removal and pre-condensing has been resorted to, utilizing in known continuously operating apparatus of the type in question pressure-type conveyor screws, rollers or pairs of rollers provided with radial projections or provided on the surface of at least one roller with profiling. However, it has been found that the degassing or outgassing effect and compaction obtainable with such apparatus, which for the actual compaction utilizes a pair of pressure rollers,

is inadequate compared to the complexity and expense of the apparatus involved.

A further approach which has been tried is to deposit the material to be compacted onto hollow rollers, so-called filter rollers, whose circumferential wall is gas-permeable and whose interior is subjected to under-pressure. The gas is thereby withdrawn from the deposited material and the material is supplied by the filter rollers to the compacting gap between a pair of pressure rollers. Various modifications have been proposed for this basic approach but in each case the gap between the pressure rollers—in which the material is subjected to compaction—is fixed. This approach is limited in its applicability because it permits only the production of compressed blanks, as the compacted bodies made from the compacted finely divided particulate materials will hereafter be called for the sake of convenience, without specific form and only within a rather broad range of grain sizes. A further disadvantage is that the compacted blanks obtained in this manner have a widely varying breaking resistance, a fact which is of particular disadvantage if the compacted blanks are of filler material which is intended for certain applications, for instance for use in rubber mixtures, because with the mixing procedure used in the production of rubber mixtures the compacted blanks can be broken down only partially to the original grain size. The result of this is an inadequate dispersal of the filler material and the resulting typical formation of pockets and cavities in the vulcanized goods.

In addition certain materials, for instance light reinforcing filler materials such as SiO_2 , can be compacted only to a bulk density of approximately 250 g/l in the apparatus known from the prior art and utilizing the so-called filter rollers, because the low mechanical strength of the fabrics used for the circumferential walls of the filter rollers makes it impossible to utilize higher compacting pressures. This is quite aside from the fact that even at these lowered operating pressures the fabrics must be very frequently replaced.

SUMMARY OF THE INVENTION

It is, accordingly, an object of the present invention to overcome the aforementioned disadvantages.

A more particular object of the invention is to provide an apparatus for processing finely divided particulate materials which is not subject to the disadvantages outlined before.

A concomitant object of the invention is to provide such an apparatus which enables continuous operation and the production of compacted blanks of specific desired shape and size with a defined narrow range of breaking resistance and increased bulk weight.

Still a further object of the invention is to provide a roller construction for use in such apparatus.

In pursuance of the above objects, and others which will become apparent hereafter, one feature of the invention resides in the novel apparatus in which, briefly stated, a mass of finely divided material is confined adjacent to the gas-permeable circumferential wall of a rotatable roller having a hollow interior. The roller is thereupon rotated and subjected in its interior to underpressure so as to attract the material by suction to the exterior of the circumferential wall of the roller for forming a continuous layer of the material thereon. An other roller is rotated in axial parallelism with the rotatable roller and with such a spacing from the exterior of

the same as to define with the latter a gap wherein the layer is subjected to compacting.

The roller having the gas-permeable circumferential wall, hereafter for the sake of convenience called the filter roller, may rotate partially or completely in the material to be compacted, and the same is true of the other roller. The thickness of the layer may be maintained constant by removing excess attracted material from the layer before increments of the layer enter into the gap between the two rollers. In accordance with the invention, one of the two rollers is biased towards the other with a biasing force which is preferably maintained at constant level. The other roller may also be a filter roller or it may be a roller having a known gas-impermeable circumferential wall. In any case, the layer is compacted on passage of the gap between the two rollers so as to be reduced by at least one half of its original volume and is deformed—by profiling provided on the circumferential wall of at least one of the rollers—into compacted blanks of desired shape and configuration and defined range of breaking strength.

It is desired and advantageous according to the present invention that the dwell time of the material of the layer, that is of the material of which each successive increment of the layer is composed which enters into the gap between the two rollers, be below approximately 5 seconds, a time value which of course depends upon the roller circumference and the speed of rotation of the rollers.

In accordance with the invention it is not necessary that two rollers be provided having a gas-permeable or porous circumferential wall, or that even two rollers of the same type be rotated oppositely one another. However, for granulating purposes it is desirable and preferable that one of the two rollers has a profiled surface of circumferential wall. Depending upon the profiling, compacted blanks of certain configuration are obtained, for instance granules, little rods, tablets and the like. For instance, if the profile is half-moon shaped, then the compacted blanks will be similarly configurated. These compacted blanks may then be reduced to the desired dimensions in a cutting device of known construction, for instance in a so-called rotary disc breaker. Because of the profiling on at least one of the rollers, at least two dimensions of the resulting product are already established before the cutting device acts upon the compacted blanks.

The novel features which are considered as characteristic of the invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connecting with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a partially sectioned diagrammatic perspective view of an apparatus according to the present invention; and

FIG. 2 is a partly sectioned somewhat diagrammatic perspective view illustrating one embodiment of a roller for use in the apparatus of FIG. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in FIG. 1, the apparatus comprises a hous-

ing 1 having two transversely spaced walls 1a. Mounted in the housing 1 is a filter roller 2, for instance of the type which will be discussed more specifically with reference to FIG. 2. The roller 2 is hollow, and arranged for rotation in axial parallelism with the roller 2 is the roller 3 rotating in the direction opposite to the roller 2, as indicated by the arrows respectively associated with the two rollers. The circumferential wall of the roller 3 is not gas-permeable, and the roller 3 is therefore not designated as a filter roller as is the case with the roller 2. Instead, the circumferential wall of the roller 3 is provided on its exterior with a half-moon shaped longitudinal profile 4, shown in cross-section.

According to the invention the dimensions of the housing 1 are so selected that the spacing between the filter roller 2 and the housing walls 1 in direction normal to the longitudinal axis of the filter roller 2 is substantially greater than the gap between the rollers 2 and 3.

15 The shaft 15 about which the filter roller 2 rotates is hollow and a suitable source of underpressure may be connected with it in order to obtain underpressure in the interior of the filter roller 2.

20 A measuring transducer 13a and a PI regulator which 25 is coupled with an indicator device 13c, permit regulation of the value of underpressure applied to the interior of the filter roller 2, via a valve 13e.

25 Slide bearings 9 journal the shaft 15 of the filter roller 2, permitting movement of the latter in the direction 30 towards and away from the roller 3. Biasing devices 7,

which here are illustrated as being of hydraulic type but which could be mechanically or pneumatically operated, act upon the bearings 9 and bear upon a support structure which is located exteriorly of the wall 1a of 35 the housing. A hydraulic pump 12a provides the necessary biasing force whose value is registered on the indicators 12b. If a pressure increase takes place in the system as a result of changes in the size of the gap between the rollers 2 and 3, caused by increased thickness of the layer of material as it enters the gap or by other factors, the increased pressure can yield and fluid escapes into the two reservoir bulbs 12c which are provided. Two pressure relief valves 12d are provided intermediate the reservoirs 12c and the biasing devices

40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995 1000 1005 1010 1015 1020 1025 1030 1035 1040 1045 1050 1055 1060 1065 1070 1075 1080 1085 1090 1095 1100 1105 1110 1115 1120 1125 1130 1135 1140 1145 1150 1155 1160 1165 1170 1175 1180 1185 1190 1195 1200 1205 1210 1215 1220 1225 1230 1235 1240 1245 1250 1255 1260 1265 1270 1275 1280 1285 1290 1295 1300 1305 1310 1315 1320 1325 1330 1335 1340 1345 1350 1355 1360 1365 1370 1375 1380 1385 1390 1395 1400 1405 1410 1415 1420 1425 1430 1435 1440 1445 1450 1455 1460 1465 1470 1475 1480 1485 1490 1495 1500 1505 1510 1515 1520 1525 1530 1535 1540 1545 1550 1555 1560 1565 1570 1575 1580 1585 1590 1595 1600 1605 1610 1615 1620 1625 1630 1635 1640 1645 1650 1655 1660 1665 1670 1675 1680 1685 1690 1695 1700 1705 1710 1715 1720 1725 1730 1735 1740 1745 1750 1755 1760 1765 1770 1775 1780 1785 1790 1795 1800 1805 1810 1815 1820 1825 1830 1835 1840 1845 1850 1855 1860 1865 1870 1875 1880 1885 1890 1895 1900 1905 1910 1915 1920 1925 1930 1935 1940 1945 1950 1955 1960 1965 1970 1975 1980 1985 1990 1995 2000 2005 2010 2015 2020 2025 2030 2035 2040 2045 2050 2055 2060 2065 2070 2075 2080 2085 2090 2095 2100 2105 2110 2115 2120 2125 2130 2135 2140 2145 2150 2155 2160 2165 2170 2175 2180 2185 2190 2195 2200 2205 2210 2215 2220 2225 2230 2235 2240 2245 2250 2255 2260 2265 2270 2275 2280 2285 2290 2295 2300 2305 2310 2315 2320 2325 2330 2335 2340 2345 2350 2355 2360 2365 2370 2375 2380 2385 2390 2395 2400 2405 2410 2415 2420 2425 2430 2435 2440 2445 2450 2455 2460 2465 2470 2475 2480 2485 2490 2495 2500 2505 2510 2515 2520 2525 2530 2535 2540 2545 2550 2555 2560 2565 2570 2575 2580 2585 2590 2595 2600 2605 2610 2615 2620 2625 2630 2635 2640 2645 2650 2655 2660 2665 2670 2675 2680 2685 2690 2695 2700 2705 2710 2715 2720 2725 2730 2735 2740 2745 2750 2755 2760 2765 2770 2775 2780 2785 2790 2795 2800 2805 2810 2815 2820 2825 2830 2835 2840 2845 2850 2855 2860 2865 2870 2875 2880 2885 2890 2895 2900 2905 2910 2915 2920 2925 2930 2935 2940 2945 2950 2955 2960 2965 2970 2975 2980 2985 2990 2995 3000 3005 3010 3015 3020 3025 3030 3035 3040 3045 3050 3055 3060 3065 3070 3075 3080 3085 3090 3095 3100 3105 3110 3115 3120 3125 3130 3135 3140 3145 3150 3155 3160 3165 3170 3175 3180 3185 3190 3195 3200 3205 3210 3215 3220 3225 3230 3235 3240 3245 3250 3255 3260 3265 3270 3275 3280 3285 3290 3295 3300 3305 3310 3315 3320 3325 3330 3335 3340 3345 3350 3355 3360 3365 3370 3375 3380 3385 3390 3395 3400 3405 3410 3415 3420 3425 3430 3435 3440 3445 3450 3455 3460 3465 3470 3475 3480 3485 3490 3495 3500 3505 3510 3515 3520 3525 3530 3535 3540 3545 3550 3555 3560 3565 3570 3575 3580 3585 3590 3595 3600 3605 3610 3615 3620 3625 3630 3635 3640 3645 3650 3655 3660 3665 3670 3675 3680 3685 3690 3695 3700 3705 3710 3715 3720 3725 3730 3735 3740 3745 3750 3755 3760 3765 3770 3775 3780 3785 3790 3795 3800 3805 3810 3815 3820 3825 3830 3835 3840 3845 3850 3855 3860 3865 3870 3875 3880 3885 3890 3895 3900 3905 3910 3915 3920 3925 3930 3935 3940 3945 3950 3955 3960 3965 3970 3975 3980 3985 3990 3995 4000 4005 4010 4015 4020 4025 4030 4035 4040 4045 4050 4055 4060 4065 4070 4075 4080 4085 4090 4095 4100 4105 4110 4115 4120 4125 4130 4135 4140 4145 4150 4155 4160 4165 4170 4175 4180 4185 4190 4195 4200 4205 4210 4215 4220 4225 4230 4235 4240 4245 4250 4255 4260 4265 4270 4275 4280 4285 4290 4295 4300 4305 4310 4315 4320 4325 4330 4335 4340 4345 4350 4355 4360 4365 4370 4375 4380 4385 4390 4395 4400 4405 4410 4415 4420 4425 4430 4435 4440 4445 4450 4455 4460 4465 4470 4475 4480 4485 4490 4495 4500 4505 4510 4515 4520 4525 4530 4535 4540 4545 4550 4555 4560 4565 4570 4575 4580 4585 4590 4595 4600 4605 4610 4615 4620 4625 4630 4635 4640 4645 4650 4655 4660 4665 4670 4675 4680 4685 4690 4695 4700 4705 4710 4715 4720 4725 4730 4735 4740 4745 4750 4755 4760 4765 4770 4775 4780 4785 4790 4795 4800 4805 4810 4815 4820 4825 4830 4835 4840 4845 4850 4855 4860 4865 4870 4875 4880 4885 4890 4895 4900 4905 4910 4915 4920 4925 4930 4935 4940 4945 4950 4955 4960 4965 4970 4975 4980 4985 4990 4995 5000 5005 5010 5015 5020 5025 5030 5035 5040 5045 5050 5055 5060 5065 5070 5075 5080 5085 5090 5095 5100 5105 5110 5115 5120 5125 5130 5135 5140 5145 5150 5155 5160 5165 5170 5175 5180 5185 5190 5195 5200 5205 5210 5215 5220 5225 5230 5235 5240 5245 5250 5255 5260 5265 5270 5275 5280 5285 5290 5295 5300 5305 5310 5315 5320 5325 5330 5335 5340 5345 5350 5355 5360 5365 5370 5375 5380 5385 5390 5395 5400 5405 5410 5415 5420 5425 5430 5435 5440 5445 5450 5455 5460 5465 5470 5475 5480 5485 5490 5495 5500 5505 5510 5515 5520 5525 5530 5535 5540 5545 5550 5555 5560 5565 5570 5575 5580 5585 5590 5595 5600 5605 5610 5615 5620 5625 5630 5635 5640 5645 5650 5655 5660 5665 5670 5675 5680 5685 5690 5695 5700 5705 5710 5715 5720 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850 5855 5860 5865 5870 5875 5880 5885 5890 5895 5900 5905 5910 5915 5920 5925 5930 5935 5940 5945 5950 5955 5960 5965 5970 5975 5980 5985 5990 5995 6000 6005 6010 6015 6020 6025 6030 6035 6040 6045 6050 6055 6060 6065 6070 6075 6080 6085 6090 6095 6100 6105 6110 6115 6120 6125 6130 6135 6140 6145 6150 6155 6160 6165 6170 6175 6180 6185 6190 6195 6200 6205 6210 6215 6220 6225 6230 6235 6240 6245 6250 6255 6260 6265 6270 6275 6280 6285 6290 6295 6300 6305 6310 6315 6320 6325 6330 6335 6340 6345 6350 6355 6360 6365 6370 6375 6380 6385 6390 6395 6400 6405 6410 6415 6420 6425 6430 6435 6440 6445 6450 6455 6460 6465 6470 6475 6480 6485 6490 6495 6500 6505 6510 6515 6520 6525 6530 6535 6540 6545 6550 6555 6560 6565 6570 6575 6580 6585 6590 6595 6600 6605 6610 6615 6620 6625 6630 6635 6640 6645 6650 6655 6660 6665 6670 6675 6680 6685 6690 6695 6700 6705 6710 6715 6720 6725 6730 6735 6740 6745 6750 6755 6760 6765 6770 6775 6780 6785 6790 6795 6800 6805 6810 6815 6820 6825 6830 6835 6840 6845 6850 6855 6860 6865 6870 6875 6880 6885 6890 6895 6900 6905 6910 6915 6920 6925 6930 6935 6940 6945 6950 6955 6960 6965 6970 6975 6980 6985 6990 6995 7000 7005 7010 7015 7020 7025 7030 7035 7040 7045 7050 7055 7060 7065 7070 7075 7080 7085 7090 7095 7100 7105 7110 7115 7120 7125 7130 7135 7140 7145 7150 7155 7160 7165 7170 7175 7180 7185 7190 7195 7200 7205 7210 7215 7220 7225 7230 7235 7240 7245 7250 7255 7260 7265 7270 7275 7280 7285 7290 7295 7300 7305 7310 7315 7320 7325 7330 7335 7340 7345 7350 7355 7360 7365 7370 7375 7380 7385 7390 7395 7400 7405 7410 7415 7420 7425 7430 7435 7440 7445 7450 7455 7460 7465 7470 7475 7480 7485 7490 7495 7500 7505 7510 7515 7520 7525 7530 7535 7540 7545 7550 7555 7560 7565 7570 7575 7580 7585 7590 7595 7600 7605 7610 7615 7620 7625 7630 7635 7640 7645 7650 7655 7660 7665 7670 7675 7680 7685 7690 7695 7700 7705 7710 7715 7720 7725 7730 7735 7740 7745 7750 7755 7760 7765 7770 7775 7780 7785 7790 7795 7800 7805 7810 7815 7820 7825 7830 7835 7840 7845 7850 7855 7860 7865 7870 7875 7880 7885 7890 7895 7900 7905 7910 7915 7920 7925 7930 7935 7940 7945 7950 7955 7960 7965 7970 7975 7980 7985 7990 7995 8000 8005 8010 8015 8020 8025 8030 8035 8040 8045 8050 8055 8060 8065 8070 8075 8080 8085 8090 8095 8100 8105 8110 8115 8120 8125 8130 8135 8140 8145 8150 8155 8160 8165 8170 8175 8180 8185 8190 8195 8200 8205 8210 8215 8220 8225 8230 8235 8240 8245 8250 8255 8260 8265 8270 8275 8280 8285 8290 8295 8300 8305 8310 8315 8320 8325 8330 8335 8340 8345 8350 8355 8360 8365 8370 8375 8380 8385 8390 8395 8400 8405 8410 8415 8420 8425 8430 8435 8440 8445 8450 8455 8460 8465 8470 8475 8480 8485 8490 8495 8500 8505 8510 8515 8520 8525 8530 8535 8540 8545 8550 8555 8560 8565 8570 8575 8580 8585 8590 8595 8600 8605 8610 8615 8620 8625 8630 8635 8640 8645 8650 8655 8660 8665 8670 8675 8680 8685 8690 8695 8700 8705 8710 8715 8720 8725 8730 8735 8740 8745 8750 8755 8760 8765 8770 8775 8780 8785 8790 8795 8800 8805 8810 8815 8820 8825 8830 8835 8840 8845 8850 8855 8860 8865 8870 8875 8880 8885 8890 8895 8900 8905 8910 8915 8920 8925 8930 8935 8940 8945 8950 8955 8960 8965 8970 8975 8980 8985 8990 8995 9000 9005 9010 9015 9020 9025 9030 9035 9040 9045 9050 9055 9060 9065 9070 9075 9080 9085 9090 9095 9100 9105 9110 9115 9120 9125 9130 9135 9140 9145 9150 9155 9160 9165 9170 9175 9180 9185 9190 9195 9200 9205 9210 9215 9220 9225 9230 9235 9240 9245 9250 9255 9260 9265 9270 9275 9280 9285 9290 9295 9300 9305 9310 9315 9320 9325 9330 9335 9340 9345 9350 9355 9360 9365 9370 9375 9380 9385 9390 9395 9400 9405 9410 9415 9420 9425 9430 9435 9440 9445 9450 9455 9460 9465 9470 9475 9480 9485 9490 9495 9500 9505 9510 9515 9520 9525 9530 9535 9540 9545 9550 9555 9560 9565 9570 9575 9580 9585 9590 9595 9600 9605 9610 9615 9620 9625 9630 9635 9640 9645 9650 9655 9660 9665 9670 9675 9680 9685 9690 9695 9700 9705 9710 9715 9720 9725 9730 9735 9740 9745 9750 9755 9760 9765 9770 9775 9780 9785 9790 9795 9800 9805 9810 9815 9820 9825 9830 9835 9840 9845 9850 9855 9860 9865 9870 9875 9880 9885 9890 9895 9900 9905 9910 9915 9920 9925 9930 9935 9940 9945 9950 9955 9960 9965 9970 9975 9980 9985 9990 9995 9995 9995 9995 9995 9995 999

of the gap between the rollers 2 and 3, and downstream of the gap it is cut to desired lengths by the cutting device provided, here illustrated as a known disc breaker or rotary disc breaker 11.

FIG. 2 illustrates a specific embodiment of a filter roller for use in the apparatus according to the present invention. Reference numeral 15 identifies the hollow shaft a portion of which is provided with bores 15a. There are provided two side walls or end walls 17 of disc-shape which are gas-tight with the hollow shaft 15 at the opposite axial sides of the region in which the bores 15a are provided. There is further provided a circumferential wall 16 of cylindrical configuration which is provided with a plurality of small bores or other apertures 16a. The wall 16 is fluid-tightly connected with the end walls 17, for instance by welding, and in the same manner the walls 17 may be connected with the shaft 15.

Provided on the exterior of the cylindrical circumferential wall, which may also be called the inner circumferential wall 16, is an outer circumferential wall composed of a plurality of plates 18 of sintered material, for instances metallic sintered material, synthetic plastic sintered material or ceramic sintered material. These plates 18 abut one another and, insofar as they are composed of weldable material, are welded to the inner circumferential wall 16 as well as to one another where they abut the welded seams 31. However, screw means 30 may also be provided for securing the plates 18 to the inner circumferential wall 16. The inner circumferential wall 16 is provided with interior radial reinforcing ribs 19 for increasing the strength and stability of the roller, but helically convoluted ribs or axially extending ribs 19a may also be provided, or any combination of the three. Reference numeral 20 identifies the inlet opening of the hollow shaft 15 at which under-pressure may be applied.

It has been found that the production of compacted blanks with defined range of break resistance is facilitated by maintaining a constant level of biassing pressure of the rollers 2 and 3 towards one another. In order to obtain only small fluctuations of this range it is advisable to mount one or both of the rollers in the manner shown in FIG. 1, that is in such a manner that the gap width can change automatically in dependence upon the thickness of the layer carried by the filter roller, or the compaction of the material in the gap, or other factors, thereby assuring that the compacting and compression is always effected with identical mechanical pressure. Furthermore, such a construction of course reduces the possibility of breakdown of the apparatus.

The level of this "isodynamic pressure" depends in each individual case upon the particulate material to be compacted, its moisture content and the degree of compacting which is desired. In the case of white filter materials, such as silicium dioxide, the moisture content is for instance desirably not below 1 percent.

The optimum break resistance of the compacted blanks made from a given particulate material depends upon the intended use and can readily be determined by empirical means. For instance, it has been found that SiO_2 granulates produced in accordance with the present invention have adequate transport stability and maximum dispersion characteristics in a test rubber mixture if a break resistance to pressure between 100 and 500 pond (p) is obtained in the compacted blanks,

measured with the hardness tester according to German Auslegeschrift 1,374,254. The term "breaking pressure" is intended to mean the pressure in ponds which is necessary to abruptly destroy a granulate of 2 1/2 - 3 mm grain size.

The dispersion characteristics of SiO_2 compacted blanks made in accordance with the present invention may for instance be determined in a test mixture colored with ferrous oxide red. In this case, the test mixture is introduced into a mixer of the internal type and under identical circumstances one bath of test mixture has admixed therewith silicium dioxide granulate made according to the present invention whereas another batch has admixed therewith for comparison purposes a silicium dioxide powder. After the two batches are mixed a simple optical comparison indicates if and to what extent dispersion has been improved. It has been found, surprisingly, that if the breaking pressure of the compacted silicium dioxide blanks is set to between 200 and 250 ponds, the dispersion in the test mixture is substantially better than in the test mixture to which the silicium dioxide powder was added.

For instance, if the original finely divided particulate material is a SiO_2 powder with primary particle sizes 25 smaller than 50 μ and with a bulk weight of approximately 100 g/l, then a SiO_2 granulate according to the present invention and having breaking pressure values between 200 and 250 ponds may be produced under approximately the following circumstances:

30	roller pressure roller gap	approximately 0.1 - 0.5 t/cm ² approximately 1 - 6 mm, up to approximately 4 mm play in direction normal to the roller axes
35	dwell time in the gap underpressure applied to filter roller gas permeability of the filter roller surface	approximately 0.01 - 0.1 sec. approximately 0.3 - 0.95 kg/cm ² approximately 6 m ³ /cm ² \times 1

40 If the roller diameter is for instance 200 mm and the length of the rollers is 300 mm, the production amounts to approximately 250 kg/h granulate having a bulk weight of approximately 330 g/l. During the transportation of the particulate material on the surface of the filter roller into the roller gap, that is prior to the compacting which takes place in the roller gap itself, a pre-compact or precompressing to a bulk weight of approximately 250 g/l is obtained in this case.

45 If for instance one of the rollers has a half-moon shaped longitudinal profile in its outer circumferential surface with dimensions of 6 \times 2 mm, then a finished granulate with approximately the following screen analysis is obtained by breaking the rod-shaped SiO_2 compacted blanks falling out of the gap between the rollers in a conventional rotary disc breaker and subjecting them subsequently to screen removal of the fines smaller than 0.5 mm;

60	Particle Size mm	%
3 - 5		30
2 - 3		35
1 - 2		25
0.5 - 1		10

65 Enlarged photographs of the individual sieve or screen fractions of the finished granulate show that the form obtained for the compacted blanks during compacting in the gap between the rollers is readily visible

in case of the fraction 3 - 5 mm, and that it is still readily identifiable in case of the fraction 2 - 3 mm. This means that the identifiably shaped granulate quantity amounts to 65 percent, that is the total of the fractions 3 - 5 mm and 2 - 3 mm.

It will be appreciated that unlike the embodiment illustrated in FIG. 1, it is possible to mount the filter roller 2 for rotation but not for shifting movement, and to mount the roller 3 for such shifting movement. However, the embodiment illustrated in FIG. 1 is preferred.

It is advantageous in accordance with the present invention that the pores of the material of which the outer circumferential wall of the filter roller is composed be so dimensioned that at a predetermined operational load of the suction device an underpressure of constant value in the interior of the filter roller, irrespective of whether the filter roller is partly or completely immersed in the material to be compacted.

If, as illustrated in the embodiment of FIG. 1, a rotary disc breaker is arranged below the gap between the rollers 2 and 3, then it is advantageous that the cutting edges of the rotary discs of the breaker extend in planes transversely to the elongation of the gap. This is particularly advantageous if the apparatus according to the present invention produces compacted blanks in profiling which extends longitudinally of the rollers.

The material for the porous outer circumferential wall of the filter roller is a suitable sinter material, such as sinter metal, sintered synthetic plastic or sintered ceramic. It is of course not necessary that the outer circumferential wall consist of the plate-shaped portions illustrated in FIG. 2, but this enhances the stability.

It is advantageous, but not absolutely necessary, that the spacing of the filter roller from the bottom wall of the housing 1 be at least equal to half the roller diameter, and that the lateral spacing between the sinter roller and the housing wall be equal to at least one roller diameter. The doctor blade mentioned before may be adjustably mounted so as to movable towards and away from the circumferential wall of the filter roller, and it may also be so mounted that its angle with respect to the circumferential wall can be adjusted.

The pores of the porous material of the outer circumferential wall of the filter roller may have a diameter of approximately 0 - 200 μ , preferably between 0 - 35 μ . The thickness of the outer circumferential wall should be at least approximately 1 mm. At underpressures of 0.01 - 1.0 kg/cm² the gas permeability of the outer circumferential wall of the filter roller may be in the region between approximately 0.1 and 7 m³/cm² \times h.

The roller for utilization in the apparatus according to the present invention, has certain very definite advantages over the roller used in known apparatus, namely a long life irrespective of whether it is rotated at low or high rotational speeds, resistance to much higher pressure than are possible with the known constructions, and retention of its shape, that is resistance to being deformed so it is out-of-round in cross-section.

The following examples will further aid in an understanding of the invention.

EXAMPLE 1

In an apparatus according to FIGS. 1 and 2 compacted blanks of highly dispersed surface active silicium dioxide were produced. The starting material, obtained by precipitation from an aqueous silicate solution, had the following characteristics:

5	Dry loss (105°)	approximately 6%
	Specific weight	1.9 - 2.0
	Bulk weight	80 - 110 g/l
	Vibratory weight	160 - 200 g/l
	BET-surface	240 m ²
	Primary particle diameter	16 μ

The apparatus utilized an isodynamically biased filter roller and a non-adjusted rotatable non-gas permeable counter roller having half-moon shaped longitudinal profiling. Both rollers were 300 mm long and had a diameter of 100 mm. The outer circumferential wall of the filter roller was 5 mm thick and consisted of sinter metal "Sipermet R" (Remanit) having a maximum pore width of 35 μ . The profile of the counter roller had the dimensions 6 \times 2. Arranged below the gap between these rollers was a rotary disc type breaker with a spacing between the disc of 3 mm.

Prior to operation of the device the housing was filled via the hopper to approximately two-thirds with the pulverulent material to be compacted, a roller pressure of 0.35 t/cm was set and an underpressure of 0.6 kg/cm² was applied to the filter roller. The doctor blade arranged above the filter roller was set at a distance of 15 mm from the circumferential wall of the filter roller. Thereupon, both rollers and the disc type breaker were simultaneously started. The rotation of the rollers was so regulated that the medium dwell time of the material to be compacted in the gap between the rollers was approximately 0.15 sec. The width of the gap was approximately 1 mm. The movements of the filter roller in direction normal to the axes of the two rollers, which occurred during the compacting operation, were in the range of between 1 - 3 mm.

The bulk weight of the precompacted particulate material forming a layer on the filter roller prior to entering into the gap was 255 g/l. The output obtained was approximately 260 kg/h granulate having a bulk weight of 330 g/l. The breaking pressure of the compacted blanks was between 200 and 250 pond.

After screening and classification to particle sizes between 0.5 - 5 mm, only a fine smaller than 0.5 mm amounting to 15 percent was left.

Sieve analysis on a laboratory sieve or screen of commercially available type showed the following values in the final product:

50	Particle Size	%
	mm	
	> 5	0.4
	3 - 5	30.9
	2 - 3	31.3
	1 - 2	21.8
	0.5 - 1	11.5
	< 0.5	3.8

The granulate portion having an identifiable shape (fractions 5, 3 - 5 mm and 2 - 3 mm) correspond to 62.6 percent of the total.

The dispersion ability of the granulates was tested in a red colored test rubber mixture free of vulcanizing additives. A Brabender-Plastograph was used as dispersion apparatus.

TEST MIXTURE AND DISPERSION CONDITIONS

65	Components	quantities	Vessel	Utili-	rpm	Temp.	Mixing
		g	ml	ml %		°C	time
	Butyl rubber (*)	28	28	50 90	50	100	10
	Iron oxide batch (**)	5	5				

Kp 140 (***)	1.7	1.7
Granulate	20	10

54.7 44.7

(*) Polyaarbutyl 301 (Polysar Co., Belgium), type non-staining, isopren content of 1.6 Mol-%; Monney-viscosity ML 8 : 85 (at 212°F)

(**) Consisting of 100 parts polysarbutyl 301 and 50 parts iron oxide red

(***) Softener (Tributoxyethylphosphat) Manufacturer: Food Machinery and Chemicals Corporation, New York.

The mixtures thus obtained were subsequently passed at 95°C and at a gap setting of 1 mm three times through a laboratory two-roller frame and then rolled out to a thickness of 5 – 8 mm. The quantity of dispersion was thereupon determined under a light microscope, based upon top-lighted photographs of microtome cuts taken of the rolled-out skin. No pockets or similar irregularities were found. Surprisingly, the degree of dispersion obtained with the SiO_2 granulates produced according to the present invention was even distinctly better than that obtained in test mixtures which were made with pulverulent starting material.

EXAMPLE 2 (COMPARISON TEST)

The starting SiO_2 material used in the Example 1 for producing granulates was pressed with a known apparatus of comparable dimensions. Precompression took place via a vertically operated screw and compacting took place in the gap between two oppositely rotating metal rollers whose circumferential walls were provided with wave-shaped serrations. In order to be able to at all obtain a granulate break resistance on the order of 200 pond it was necessary to pass the SiO_2 repeatedly through the gap between the rollers. The production output was only 50 kg/h. The granulate dispersion in the test mixture produced in accordance with Example 1 was significantly poorer than that of the test mixture utilizing the pulverulent starting material. It was a particular disadvantage that the fines < 0.5 mm obtained on classification in the range between 0.5 – 5 mm was 50 percent after the first compacting, and could be reduced to approximately 15 percent only by repeated compacting.

It will be understood that each of the elements described above, or two or more together, may also find a useful application in other types of apparatus differing from the types described above.

While the invention has been illustrated and described as embodied in an apparatus for processing finely divided particulate matter, it is not intended to be limited to the details shown, since various modifications and structural changes may be made without departing in any way from the spirit of the present invention.

Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can by applying current knowledge readily adapt it for various applications without omitting features that, from

the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention and, therefore, such adaptations should and are intended to be comprehended within the meaning and range of equivalence of the following claims.

What is claimed as new and desired to be protected by Letters Patent is set forth in the appended claims:

1. A roller for use in an apparatus for processing finely divided particulate materials, said roller comprising a hollow shaft having an elongated apertured portion; a pair of disk-shaped end walls fluid-tightly mounted on said shaft at opposite axial ends of said apertured portion; an apertured inner circumferential wall extending from one to the other of said end walls concentric with said portion of said shaft and fluid-tightly connected with said end walls; and a porous outer circumferential wall mounted on and exteriorly surrounding said inner circumferential wall and at least predominantly consisting of sintered material.
- 15 2. A roller as defined in claim 1, wherein said material of said outer wall is selected from the group consisting of sintered metal, sintered synthetic plastics and sintered ceramics.
- 20 3. A roller as defined in claim 1, wherein said outer wall is composed of a plurality of abutting sections; and further comprising screw means securing said sections to said inner wall.
- 25 4. A roller as defined in claim 1, wherein said outer wall is composed of a plurality of abutting sections which are welded to one another and to said inner wall.
- 30 5. A roller as defined in claim 1; and further comprising a plurality of reinforcing ribs provided on said inner wall.
- 35 6. A roller as defined in claim 5, wherein at least some of said reinforcing ribs extend axially of said inner wall.
- 40 7. A roller as defined in claim 5, wherein at least some of said reinforcing ribs extend radially of said inner wall.
- 45 8. A roller as defined in claim 6, wherein at least some others of said reinforcing ribs extend radially of said inner wall.
9. A roller as defined in claim 1, wherein said porous material comprises pores having diameters in the range between substantially 0–200 μ .
- 45 10. A roller as defined in claim 10, wherein said pores have diameters in the range between substantially 0–35 μ .
11. A roller as defined in claim 1, said outer circumferential wall having a thickness of at least 1 mm.
- 50 12. A roller as defined in claim 1, said outer circumferential wall having a gas-permeability of between substantially 0.1 and 7 m^3/cm^2 when subjected at one side to an underpressure of between substantially 0.01–1.0 55 kg/cm^2 .

* * * * *