



US00RE49939E

(19) **United States**
(12) **Reissued Patent**
Abe

(10) **Patent Number:** **US RE49,939 E**
(45) **Date of Reissued Patent:** **Apr. 23, 2024**

- (54) **ILLUMINATION DEVICE AND DISPLAY UNIT**
- (71) Applicant: **SATURN LICENSING LLC**, New York, NY (US)
- (72) Inventor: **Yoshihiro Abe**, Kanagawa (JP)
- (73) Assignee: **SATURN LICENSING LLC**, New York, NY (US)
- (21) Appl. No.: **16/859,277**
- (22) Filed: **Apr. 27, 2020**

Related U.S. Patent Documents

Reissue of:

- (64) Patent No.: **10,073,215**
Issued: **Sep. 11, 2018**
Appl. No.: **15/686,494**
Filed: **Aug. 25, 2017**

U.S. Applications:

- (63) Continuation of application No. 14/176,427, filed on Feb. 10, 2014, now Pat. No. 9,772,441.

(30) **Foreign Application Priority Data**

Feb. 27, 2013 (JP) 2013-037225

(51) **Int. Cl.**

G02F 1/1335 (2006.01)
B82Y 20/00 (2011.01)
F21V 8/00 (2006.01)

(52) **U.S. Cl.**

CPC **G02B 6/0088** (2013.01); **G02B 6/0023** (2013.01); **G02B 6/0091** (2013.01); **B82Y 20/00** (2013.01); **Y10S 977/834** (2013.01)

- (58) **Field of Classification Search**
CPC ... **G02B 6/0023**; **G02B 6/0026**; **G02B 6/0085**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,812,974	B1 *	11/2004	Hinata	G02F 1/13338	349/158
7,876,489	B2 *	1/2011	Gandhi	G02B 6/0055	359/290
8,454,219	B2	6/2013	Byoun			
9,121,977	B2 *	9/2015	Park	G02F 1/133615	
9,835,785	B2 *	12/2017	Roh	G02B 6/009	
10,240,750	B2	3/2019	Ishino			
RE47,964	E *	4/2020	Lee	G02B 6/0026	
2006/0285362	A1 *	12/2006	Cho	F21V 29/74	362/633

(Continued)

FOREIGN PATENT DOCUMENTS

CN	102235621	A	11/2011
CN	10233914	A	1/2012

(Continued)

OTHER PUBLICATIONS

Office Action issued in Chinese Application No. 201410057171.8 dated Apr. 26, 2017. With English translation (19 pages).


Primary Examiner — James A Menefee

(74) *Attorney, Agent, or Firm* — Richard LaPeruta

(57) **ABSTRACT**

An illumination device includes: a light source; an optical component provided separately from the light source; a holding member holding the light source and the optical component; and a variable pressing member variably pressing the optical component against the holding member.

19 Claims, 29 Drawing Sheets

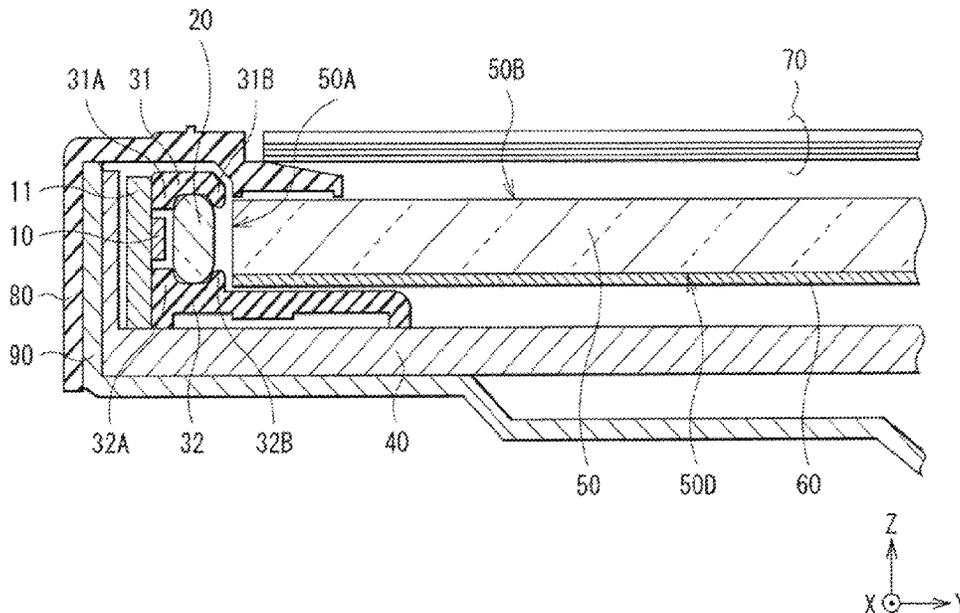

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0049445 A1* 2/2008 Harbers G02B 6/0025
362/615
2010/0053997 A1* 3/2010 Teng G02B 6/0038
362/617
2010/0128465 A1 5/2010 Byoun et al.
2011/0090426 A1 4/2011 Choi
2011/0141769 A1* 6/2011 Lee G02B 6/0026
362/629
2011/0273642 A1 11/2011 Kweon
2011/0309325 A1* 12/2011 Park H01L 25/0753
257/E33.005
2012/0188747 A1 7/2012 Mine
2012/0320607 A1 12/2012 Kinomoto et al.
2013/0050612 A1* 2/2013 Hur G02F 1/133603
349/62
2013/0336003 A1 12/2013 Yang
2015/0015798 A1 1/2015 Masuda

FOREIGN PATENT DOCUMENTS

CN 102330914 A * 1/2012 F21K 9/61
CN 102606960 A 7/2012
CN 102798038 A 11/2012
JP 2006-324407 11/2006
JP 2014165116 A * 9/2014 G02B 6/0023

* cited by examiner

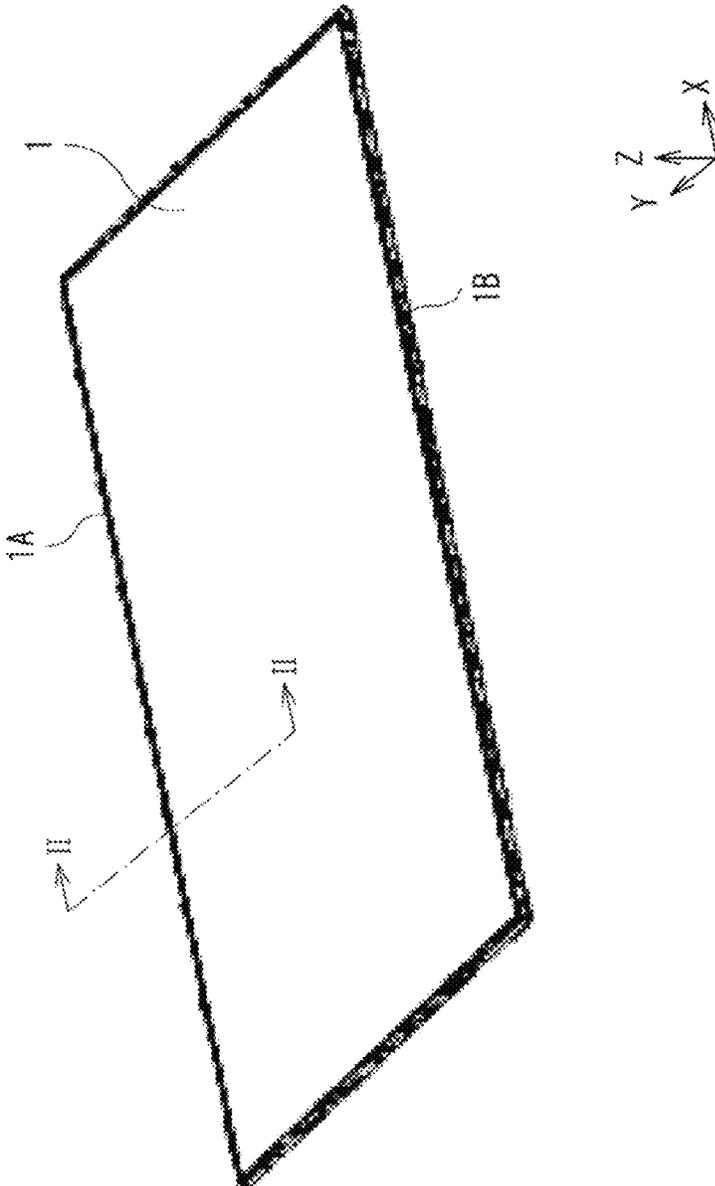


FIG. 1

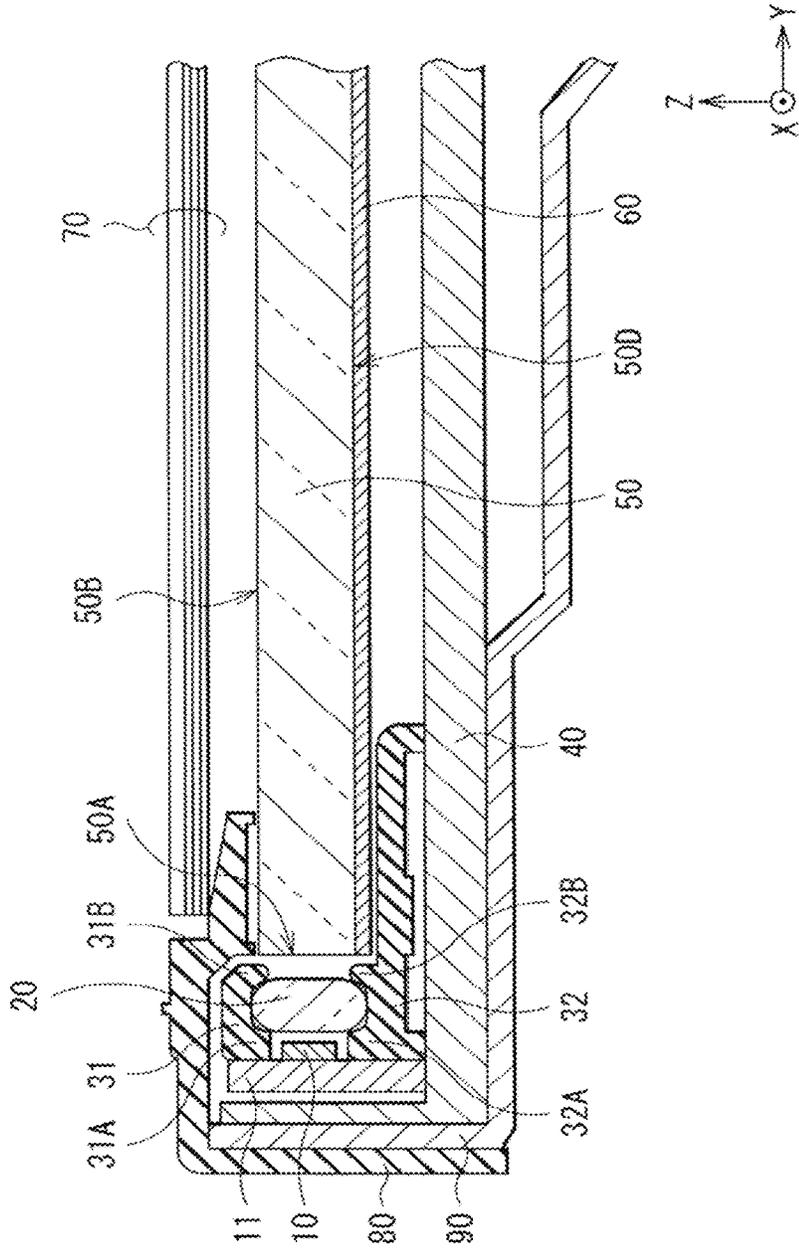


FIG. 2

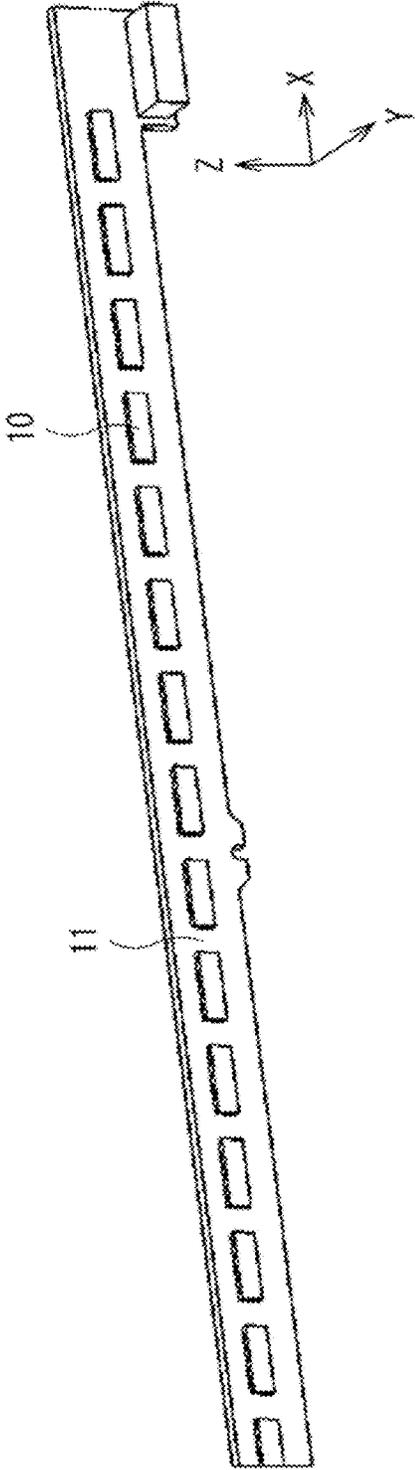


FIG. 3

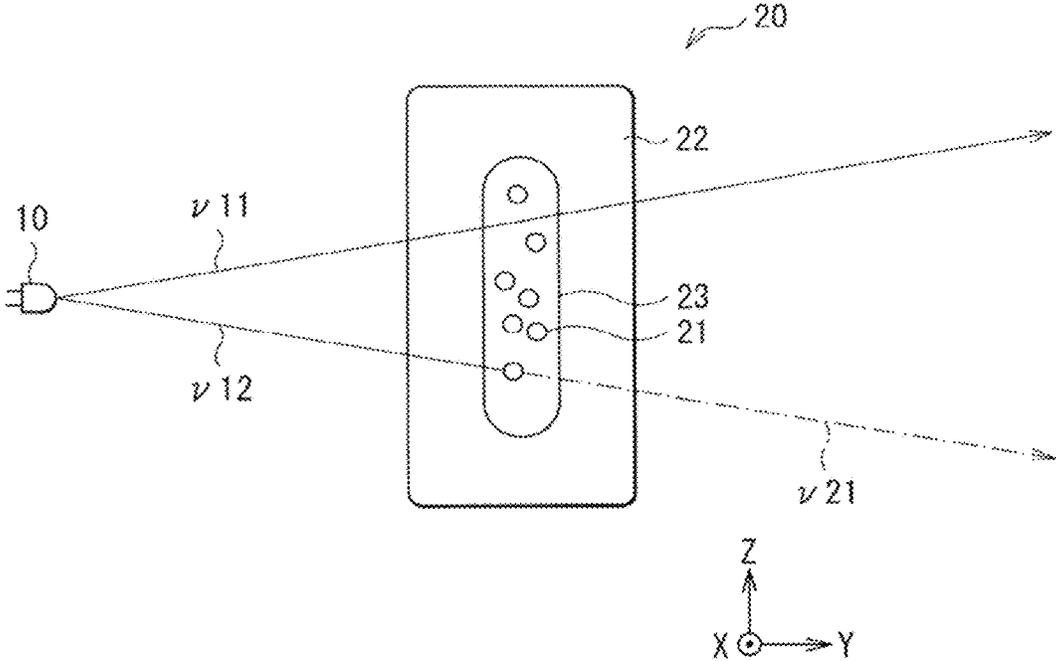


FIG. 4

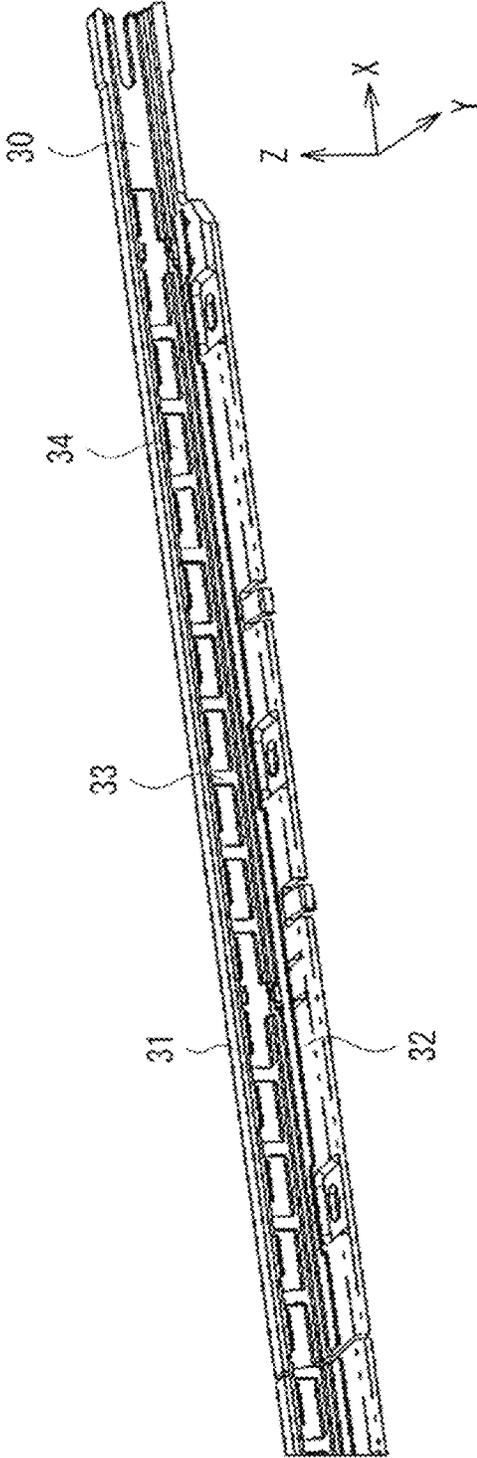


FIG. 5

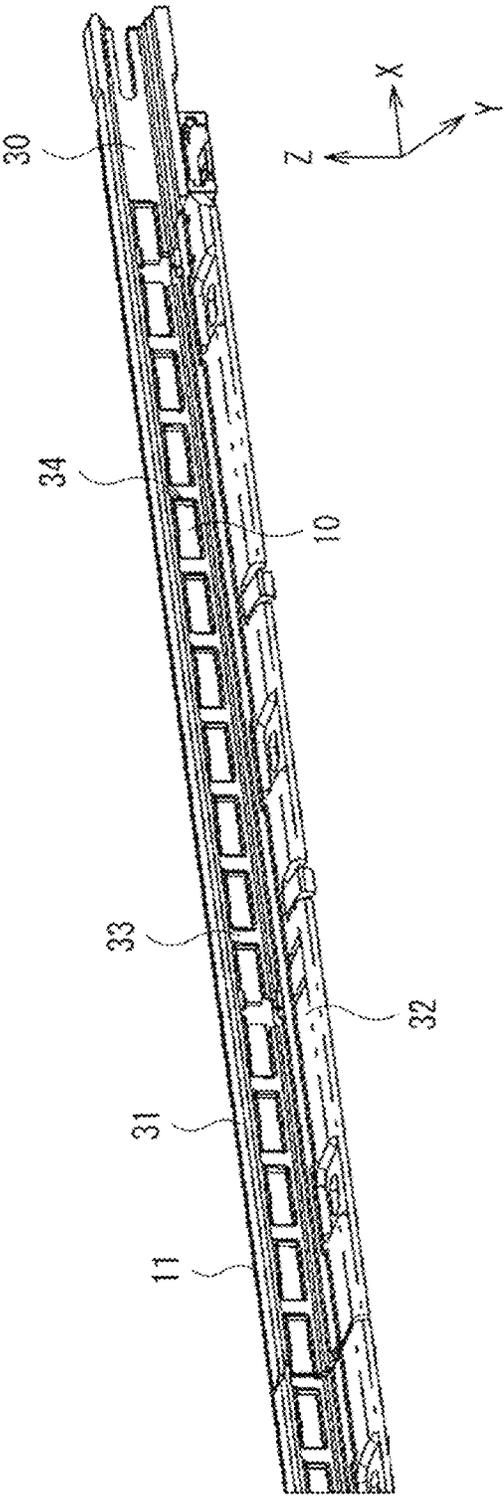


FIG. 6

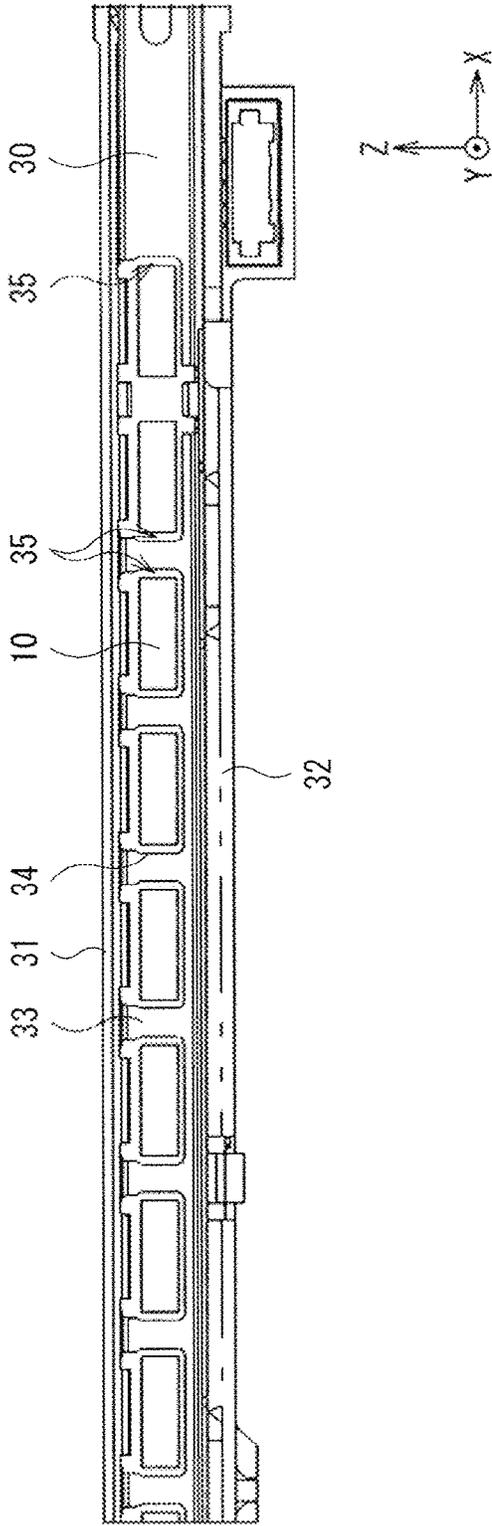


FIG. 7

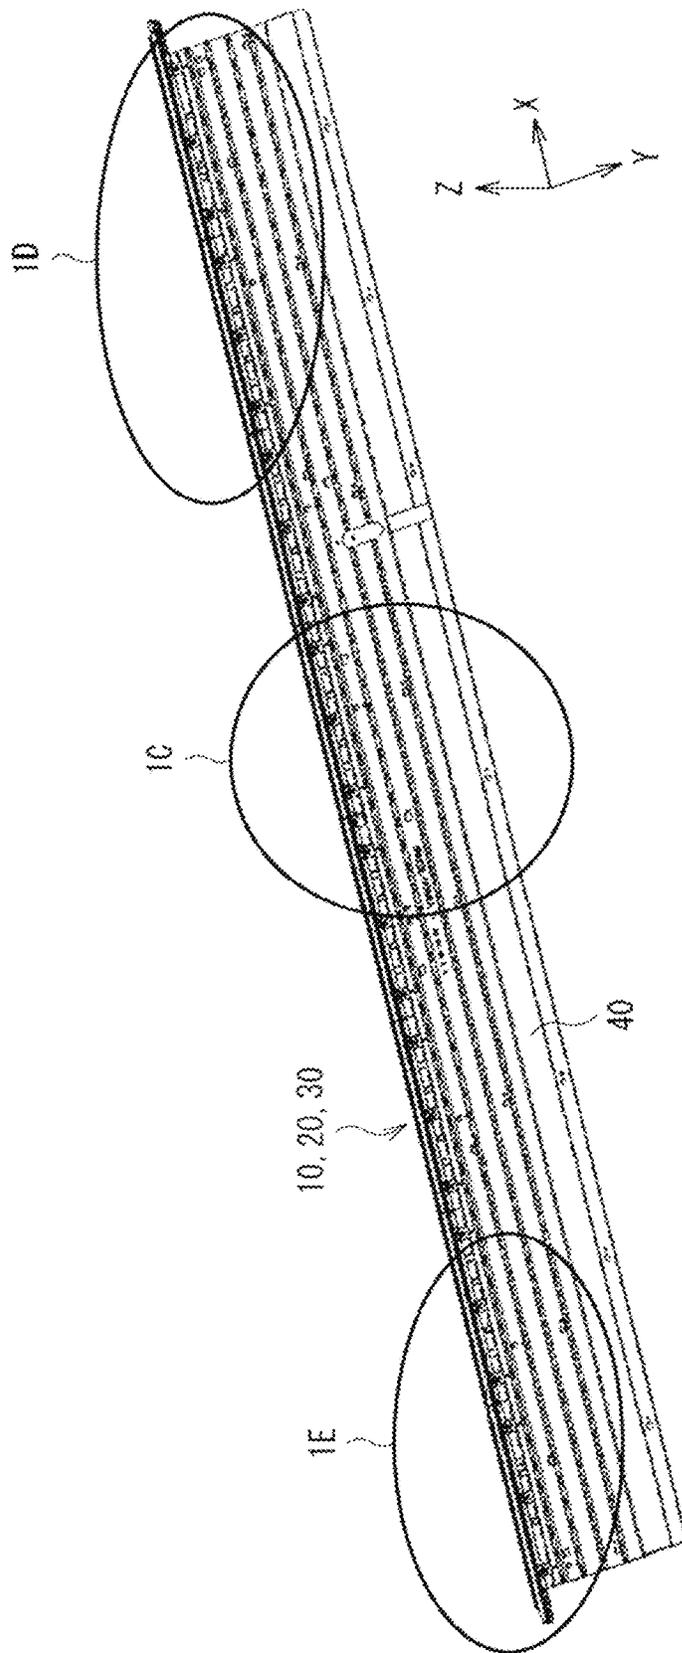


FIG. 8

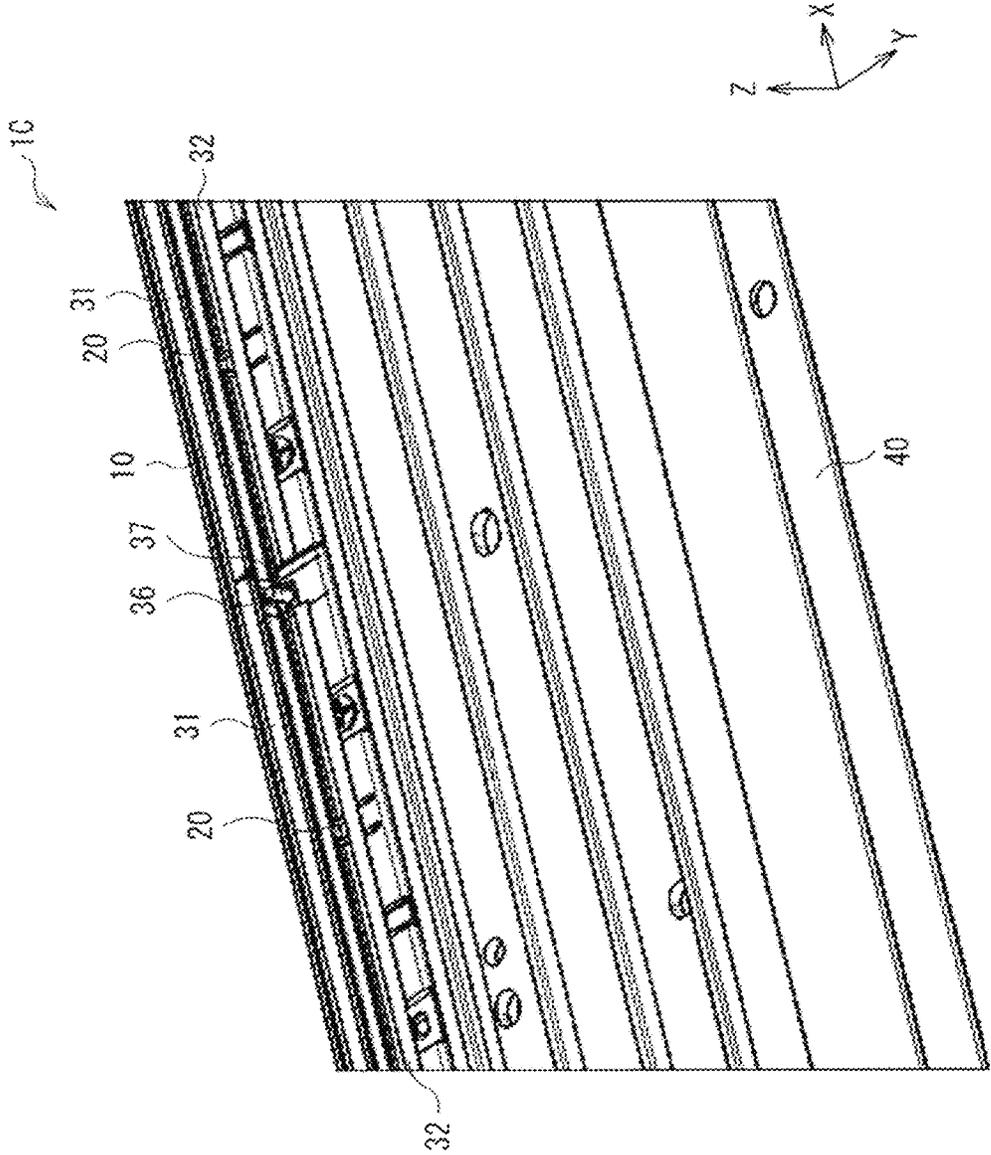


FIG. 9

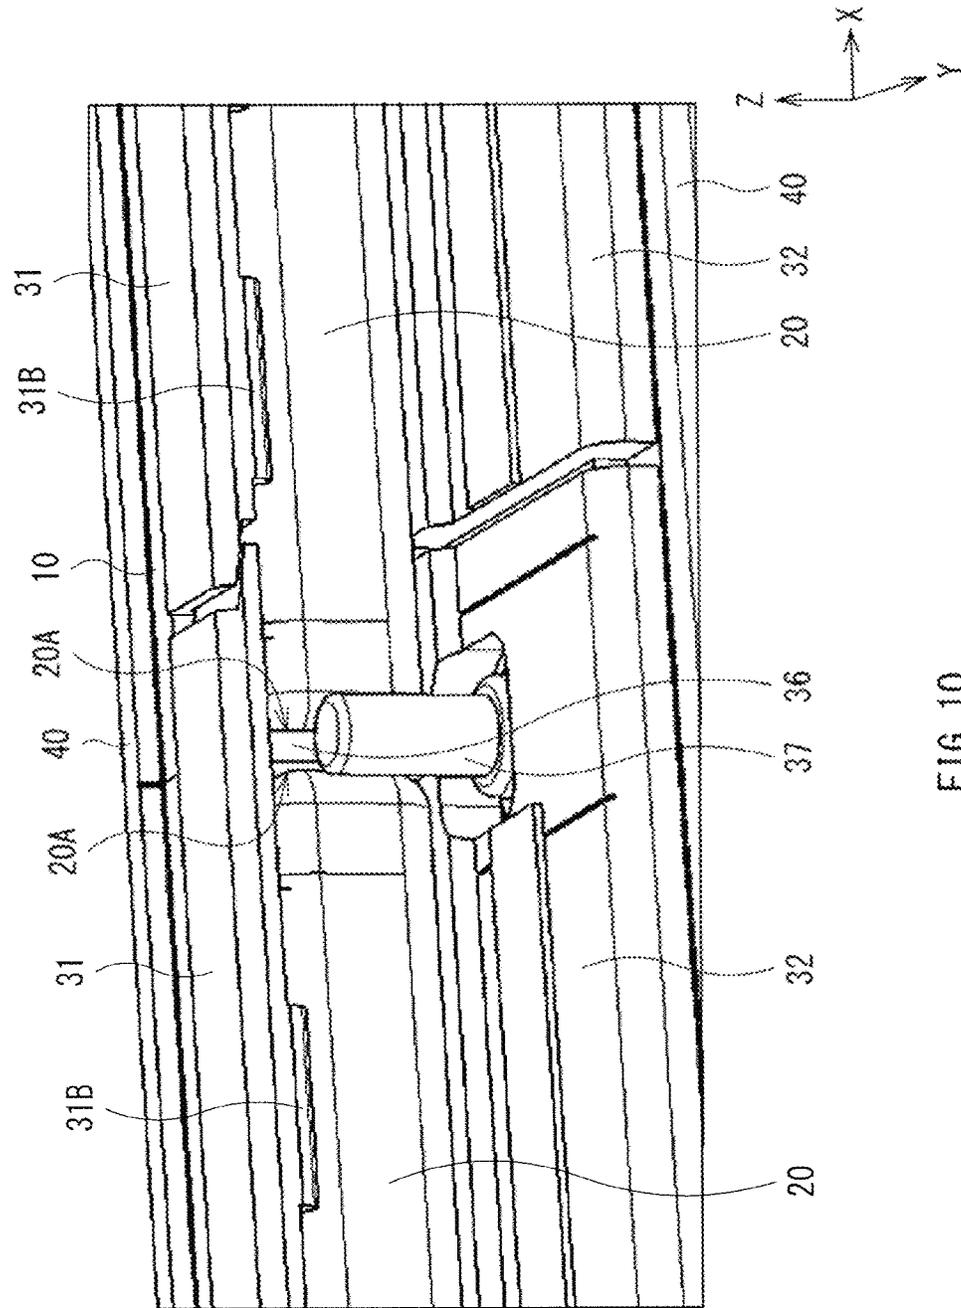


FIG. 10

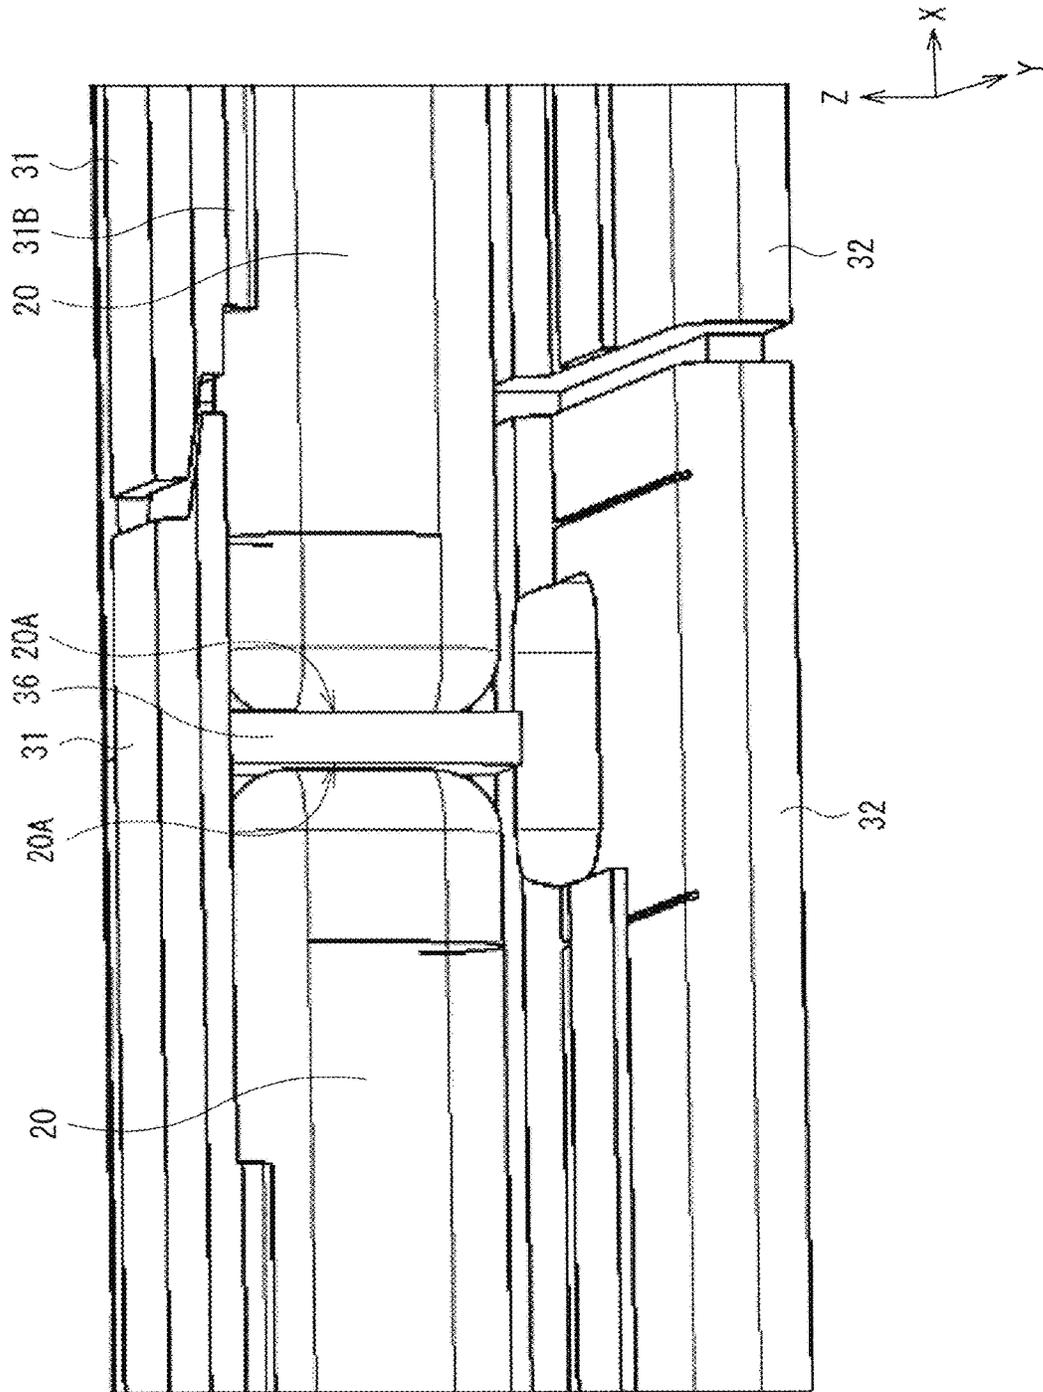


FIG. 11

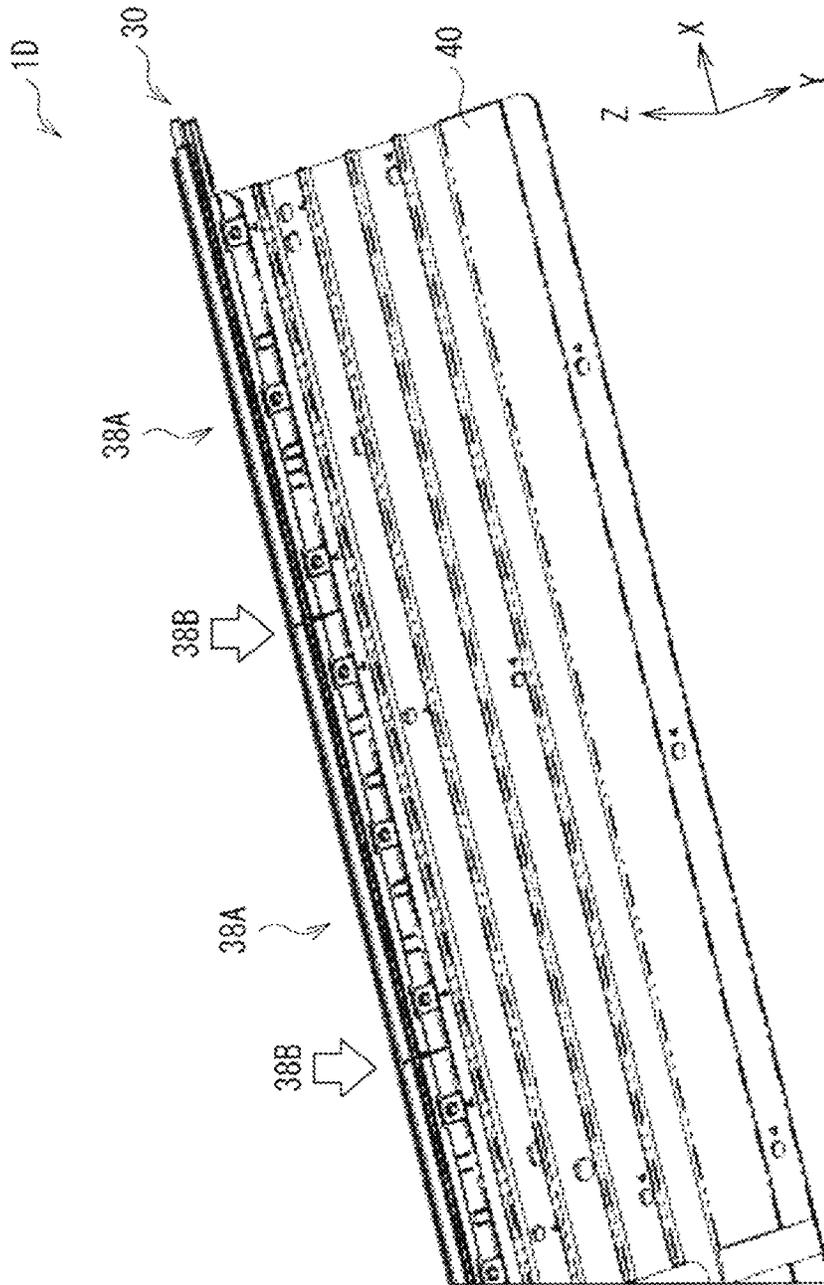


FIG. 12

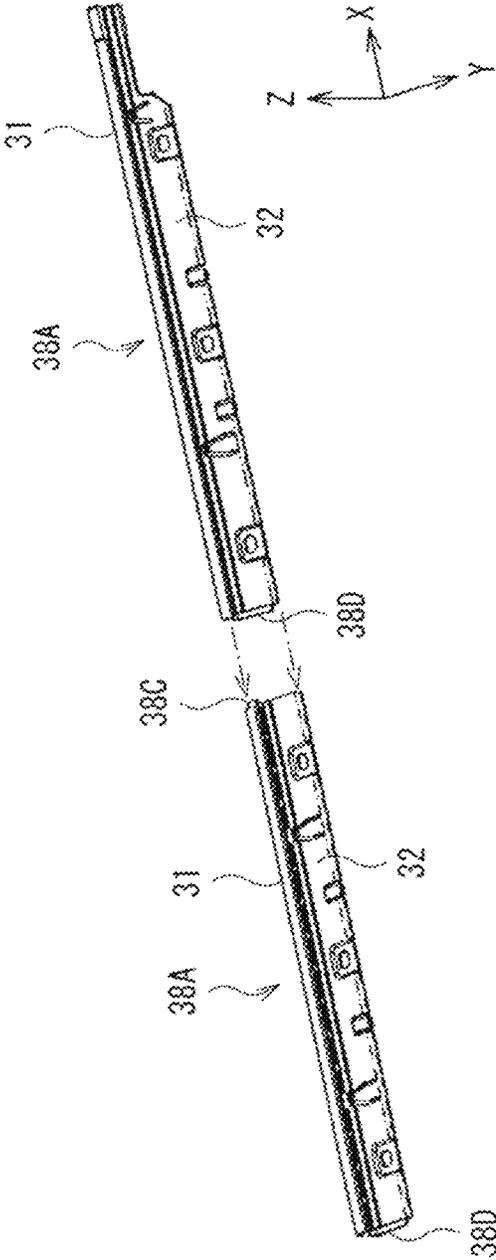


FIG. 13

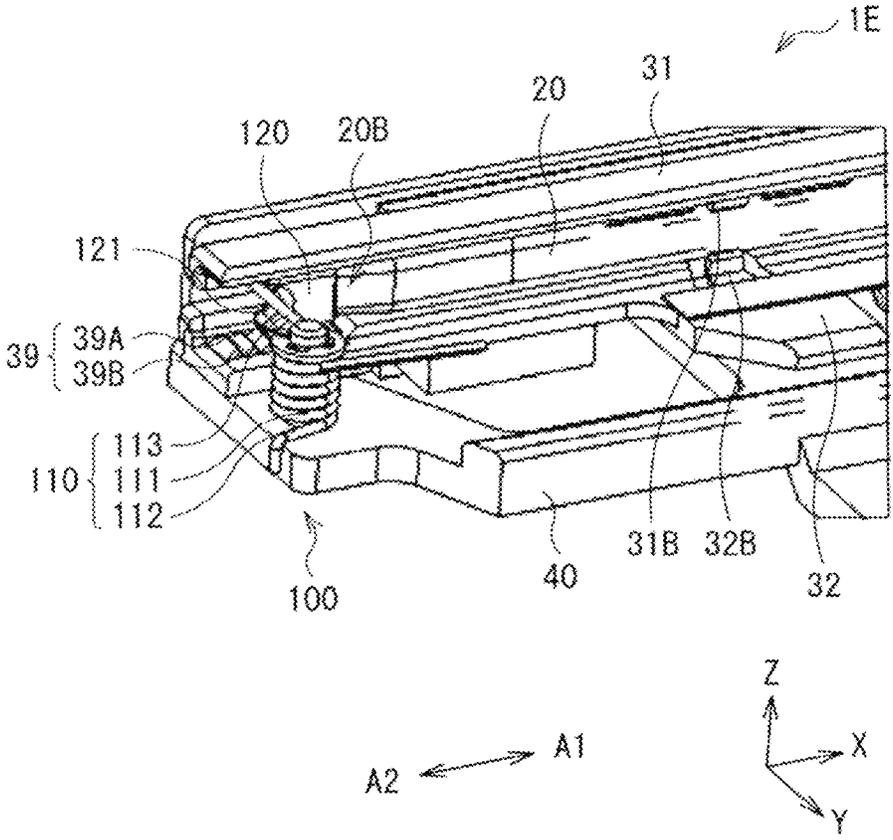


FIG. 14

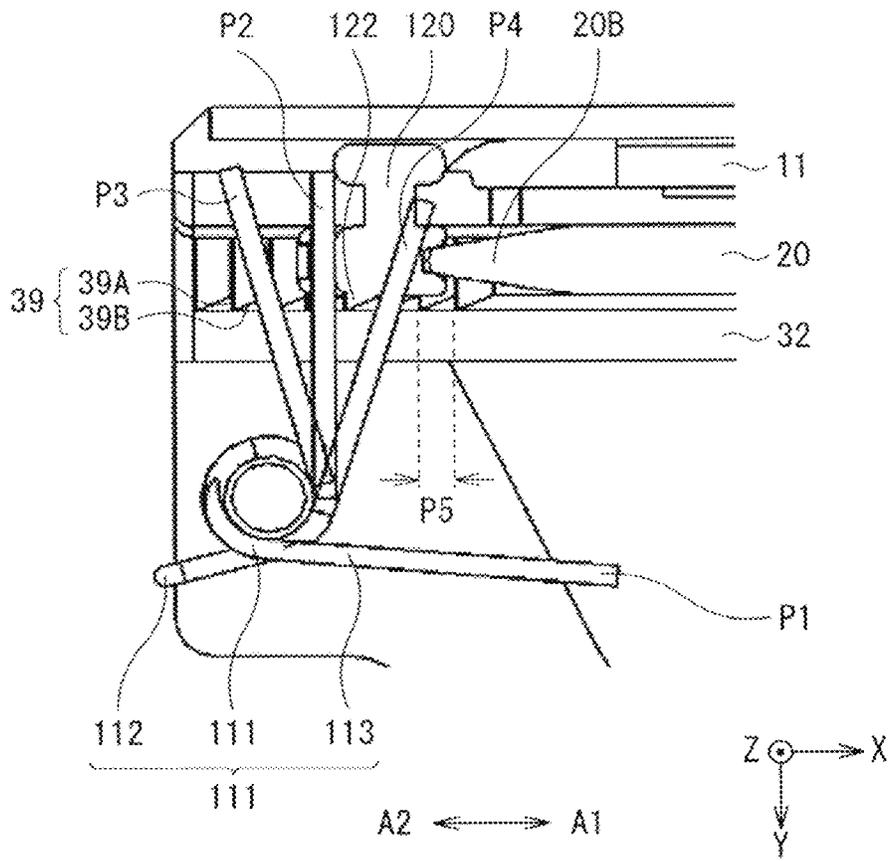


FIG. 15

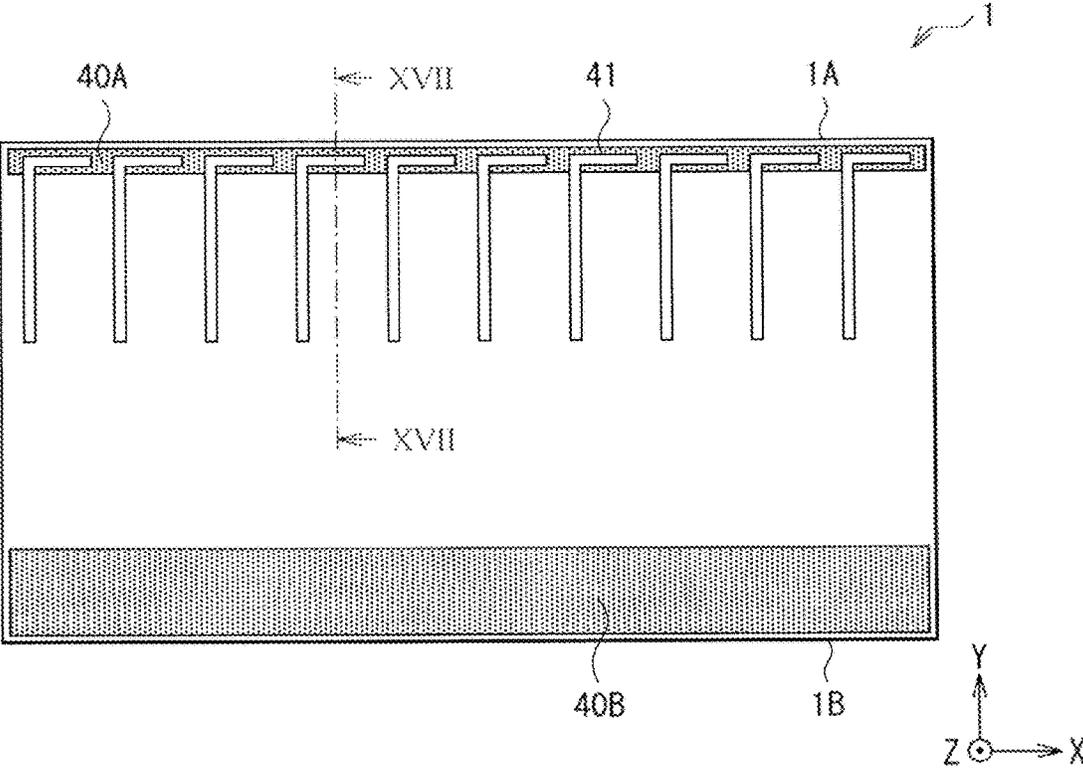


FIG. 16

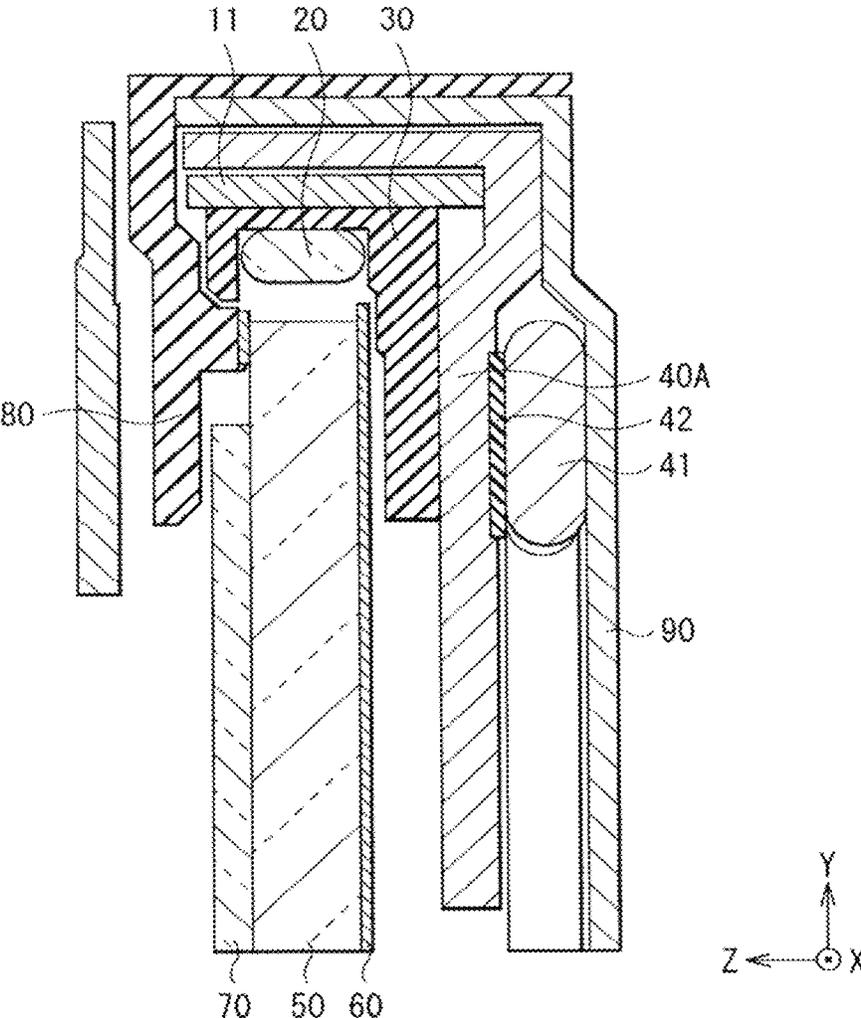


FIG. 17

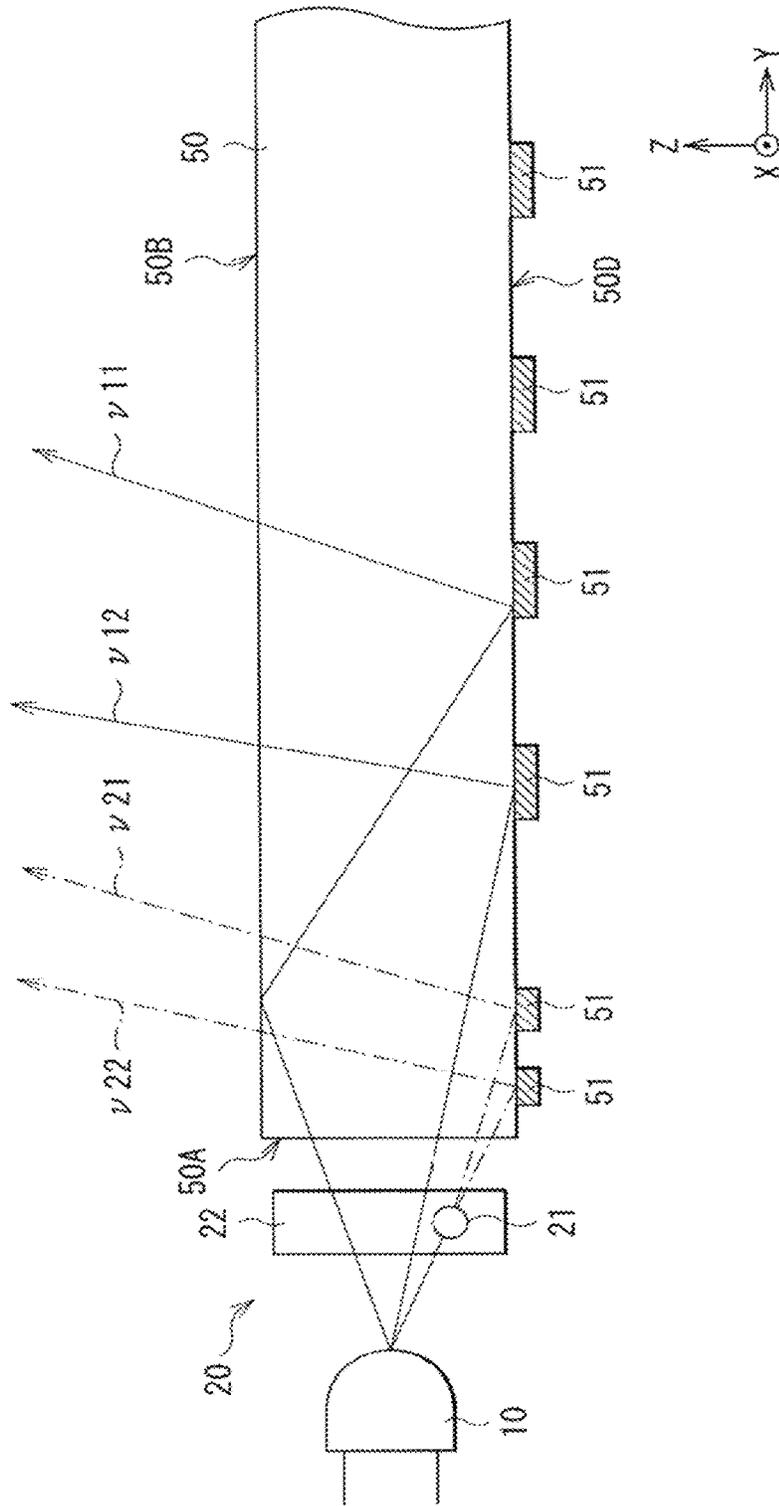


FIG. 18

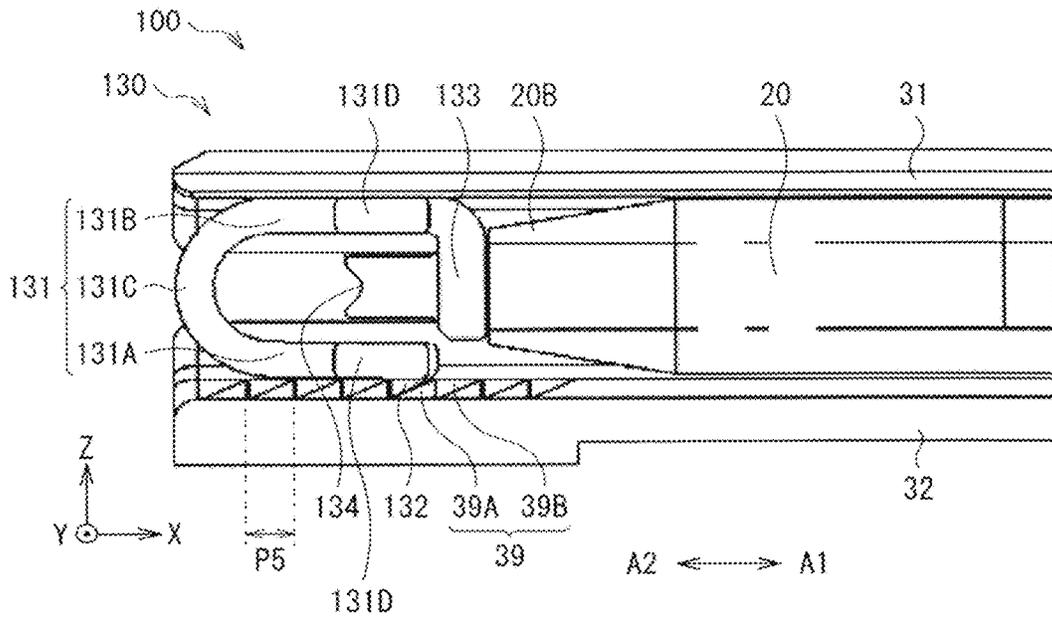


FIG. 19

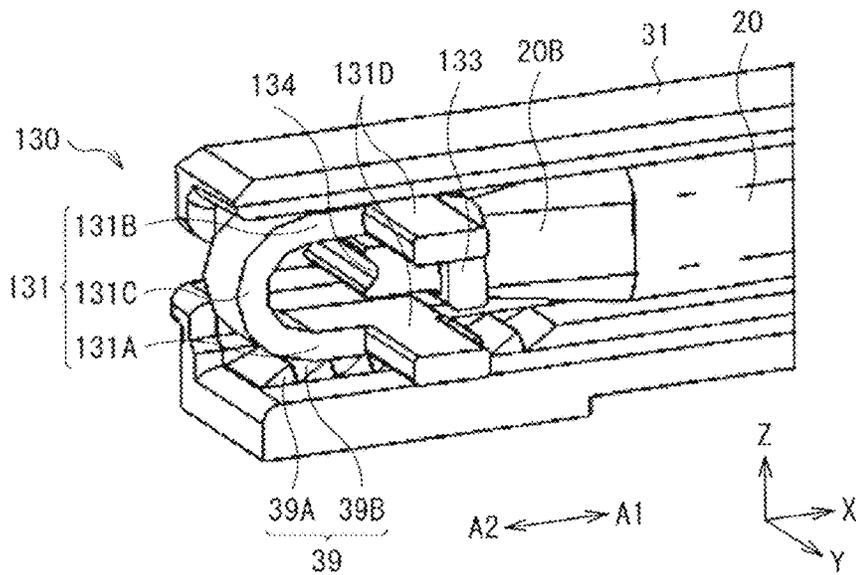


FIG. 20

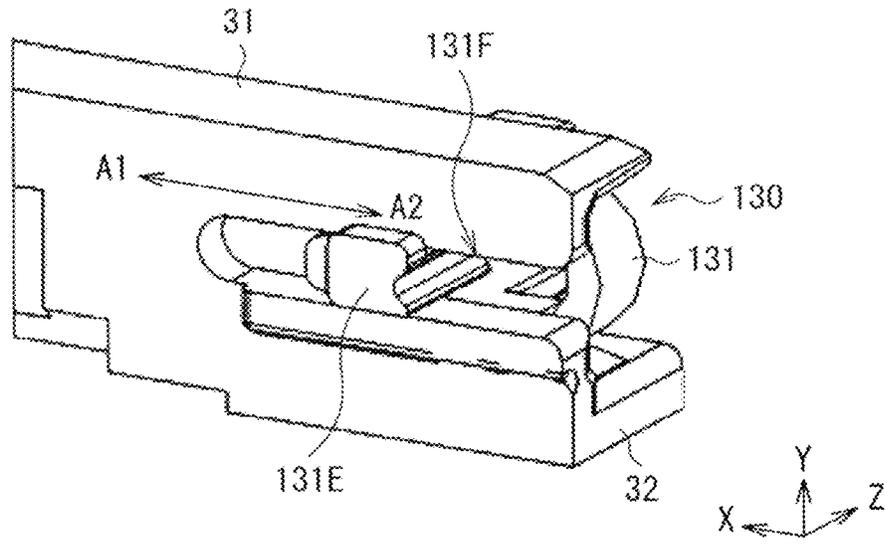


FIG. 21

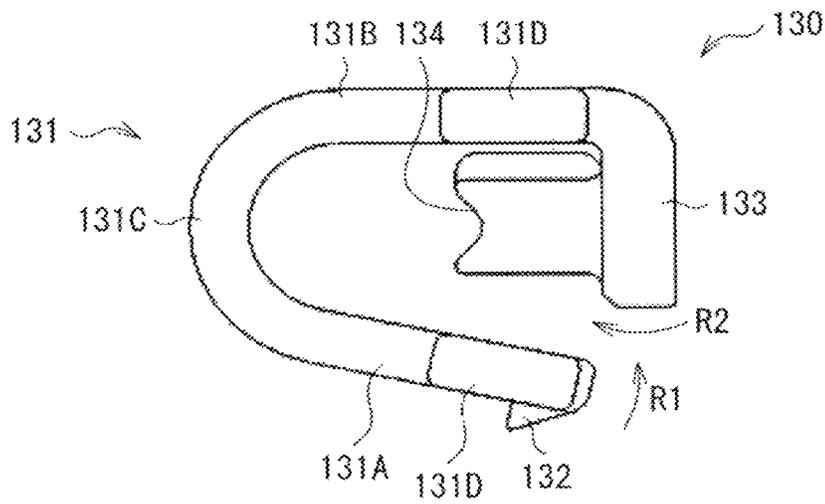


FIG. 22

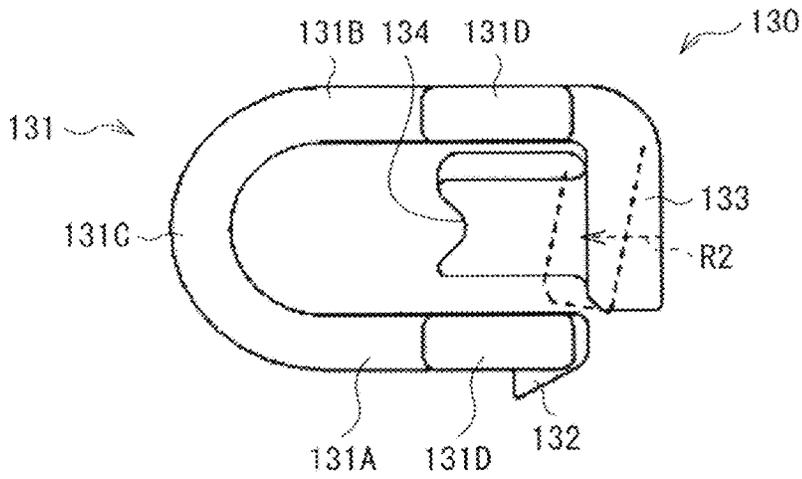


FIG. 23

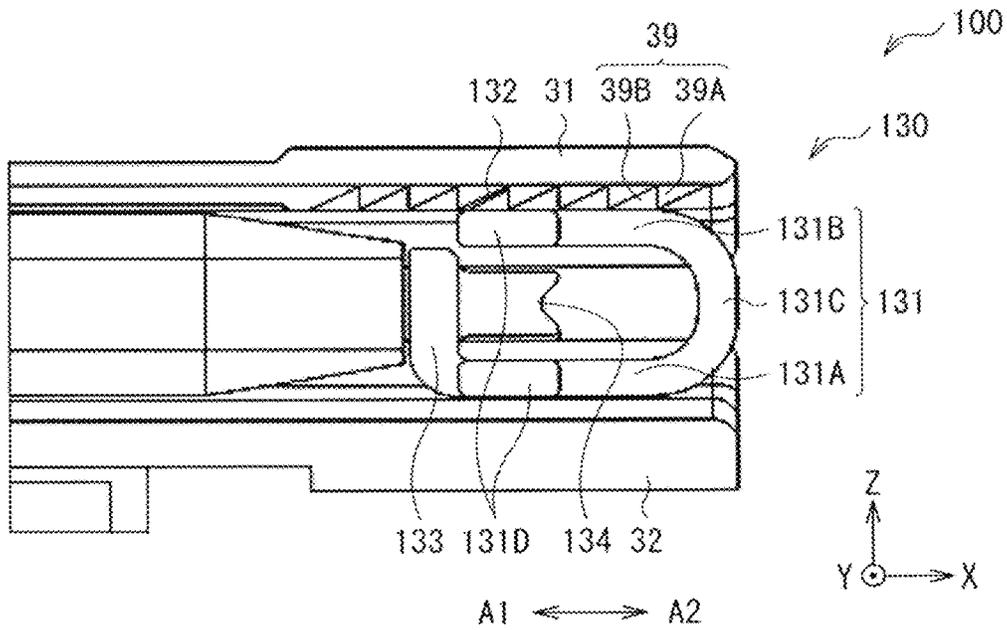


FIG. 24

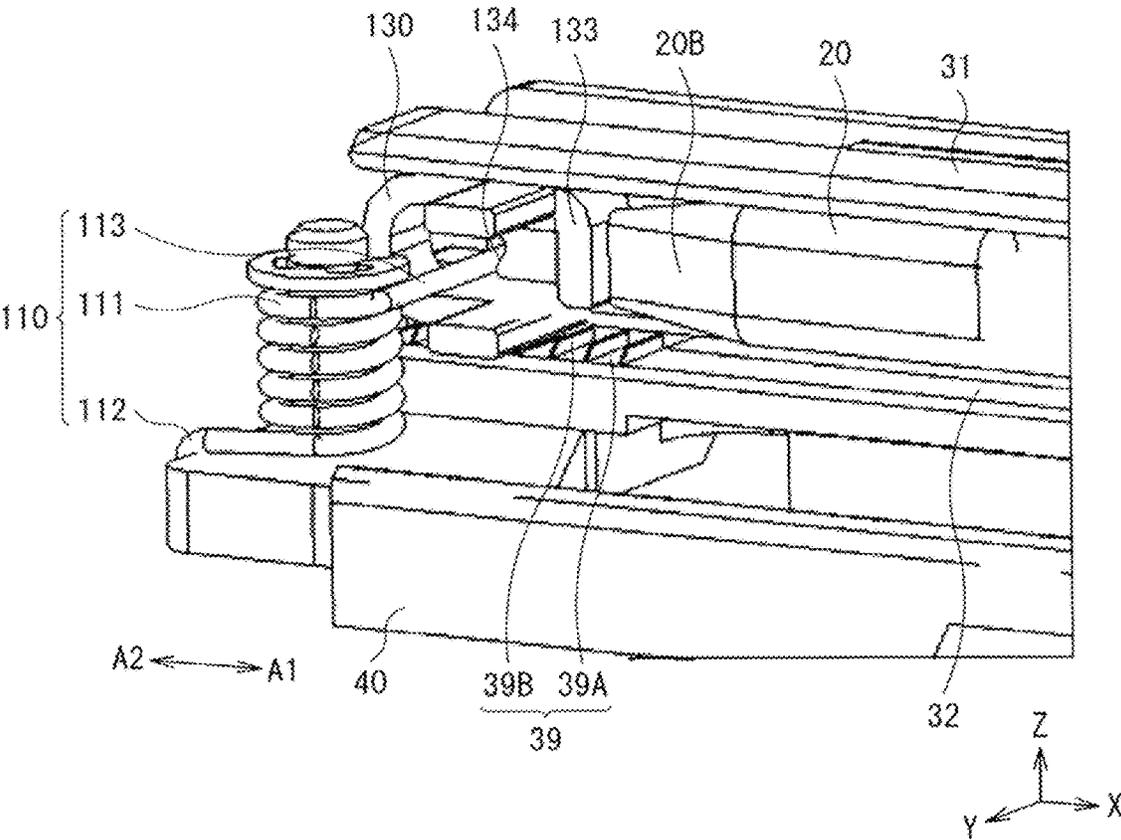


FIG. 25

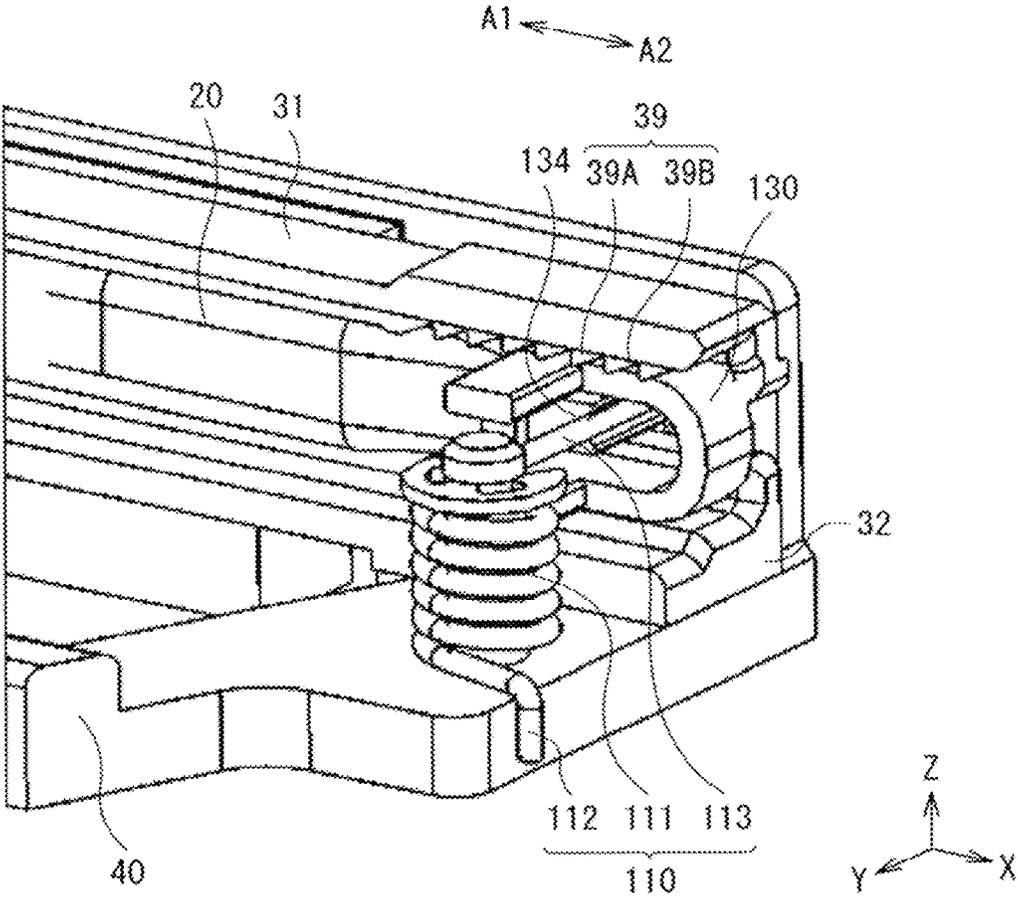


FIG. 26

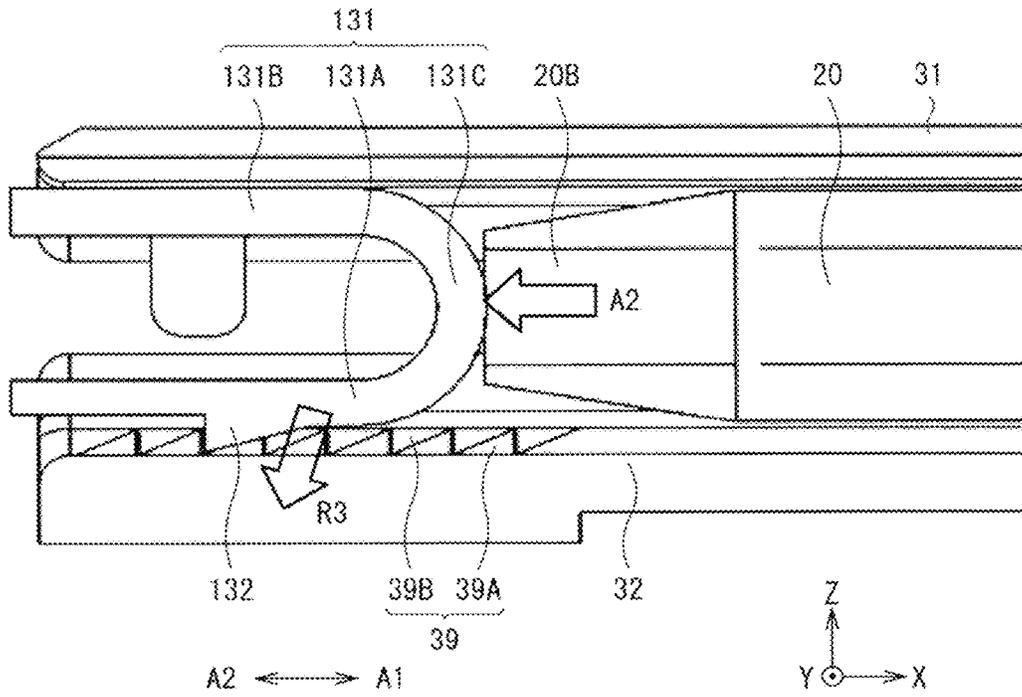


FIG. 27

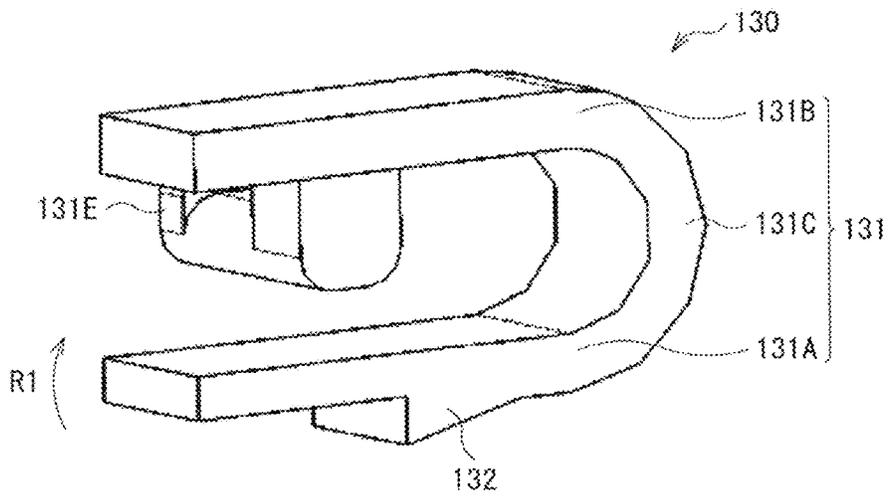


FIG. 28

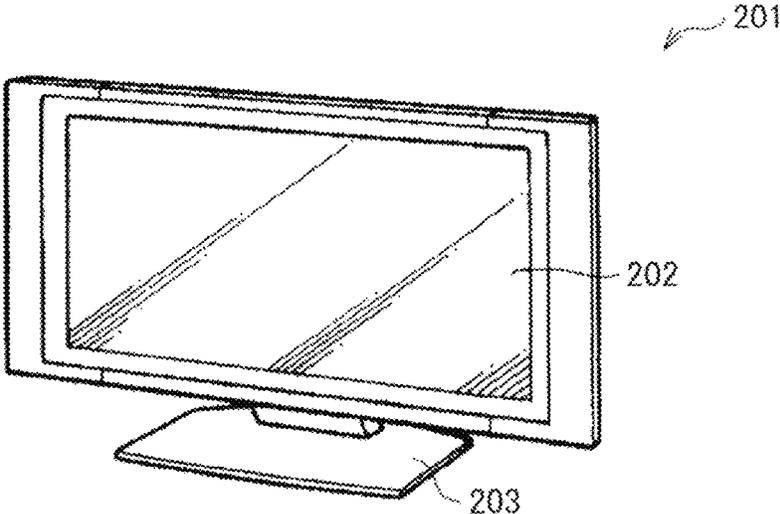


FIG. 29

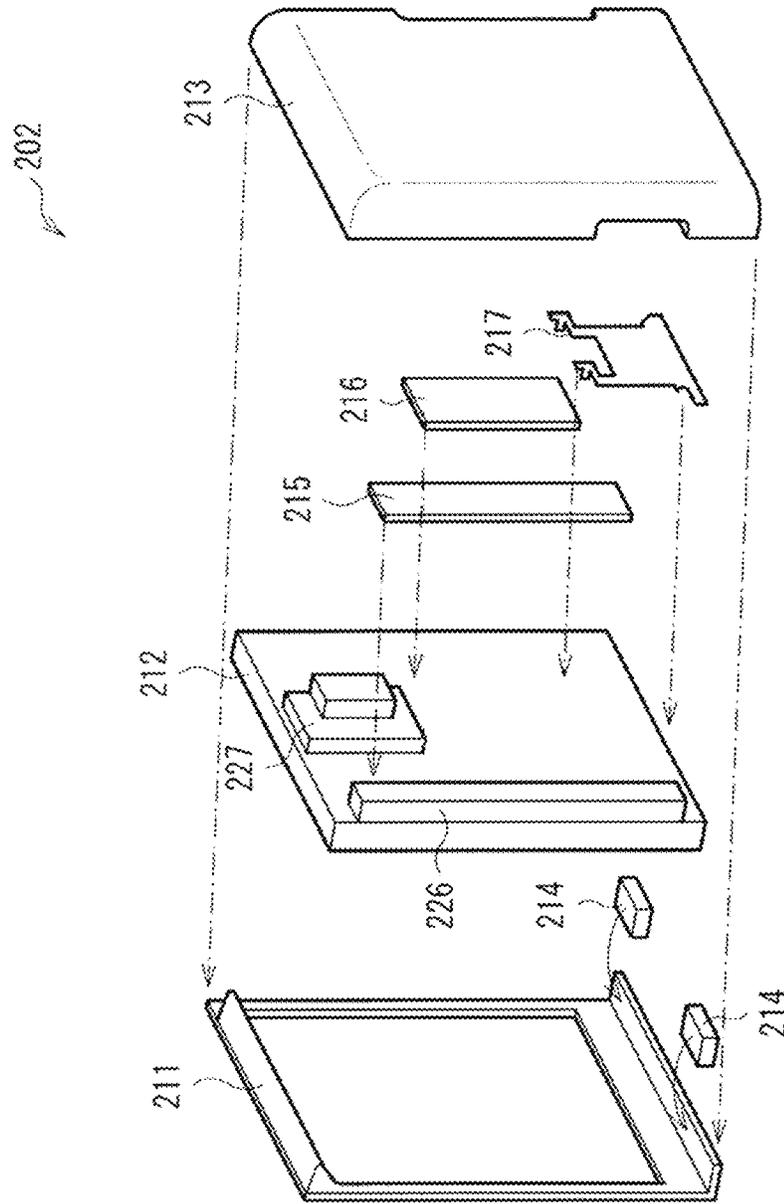


FIG. 30

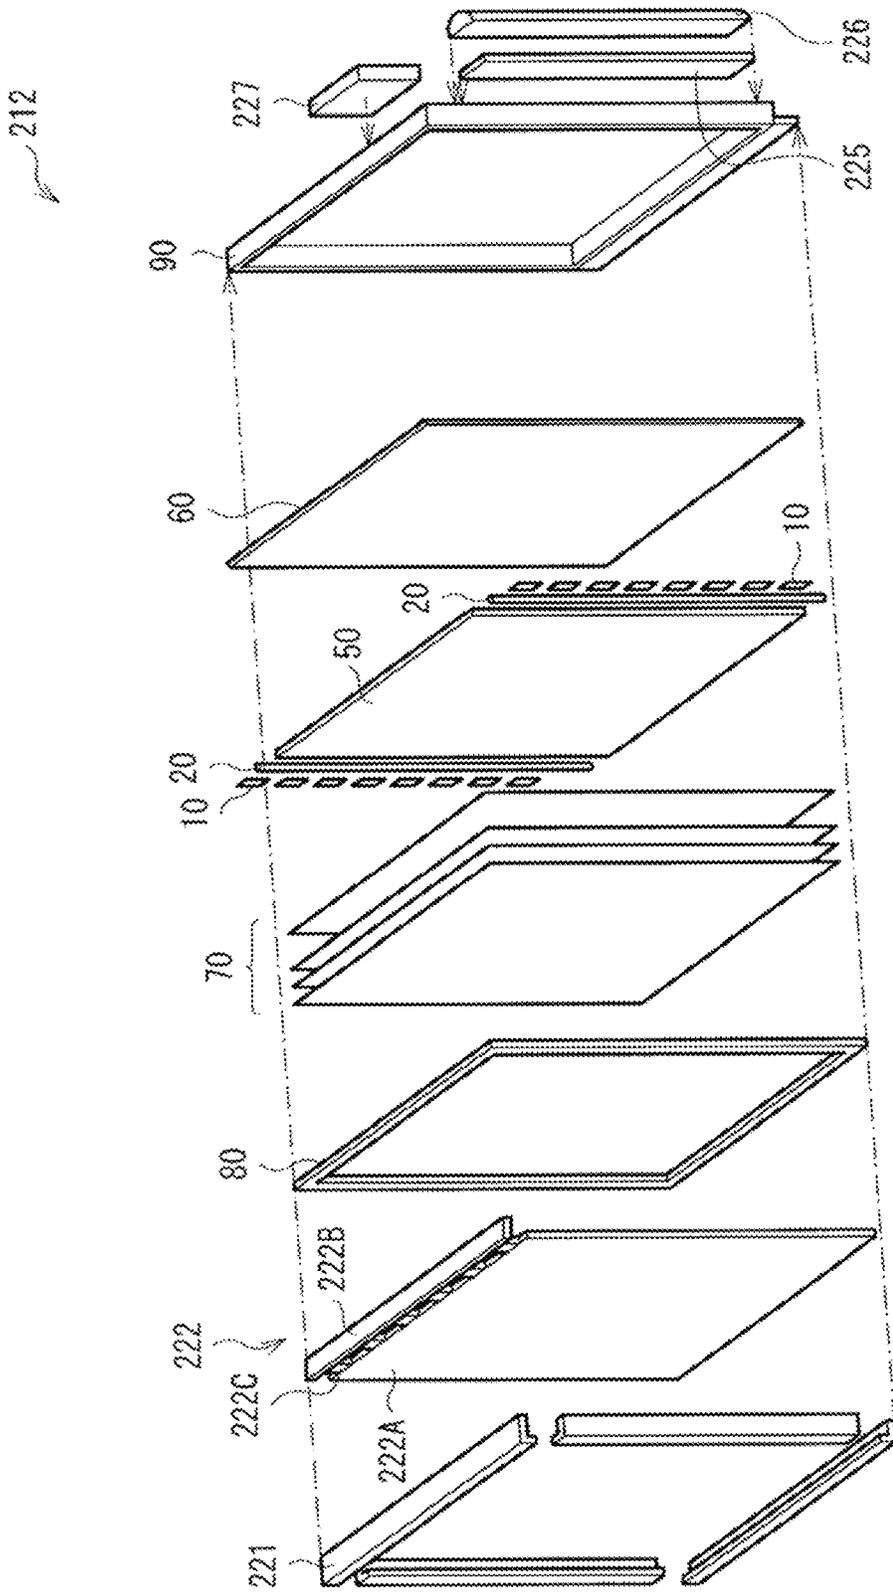


FIG. 31

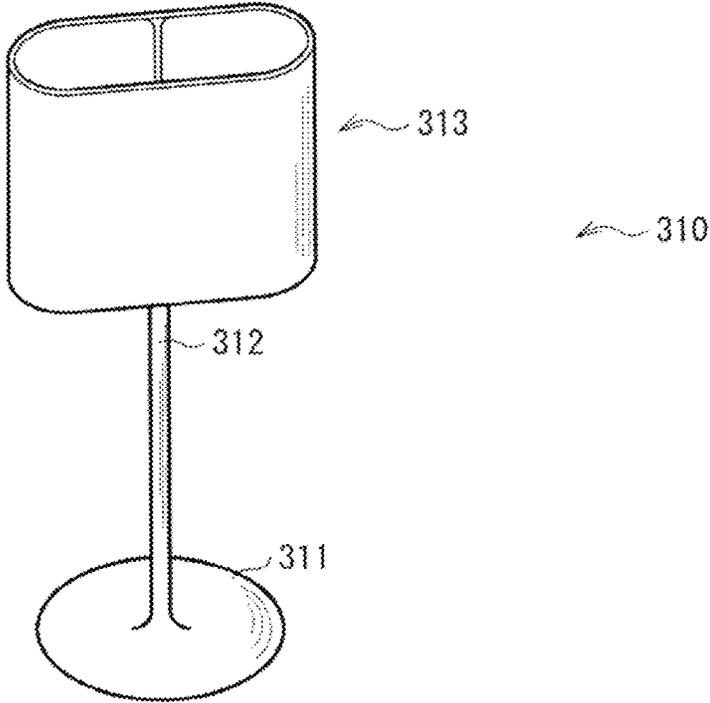


FIG. 32

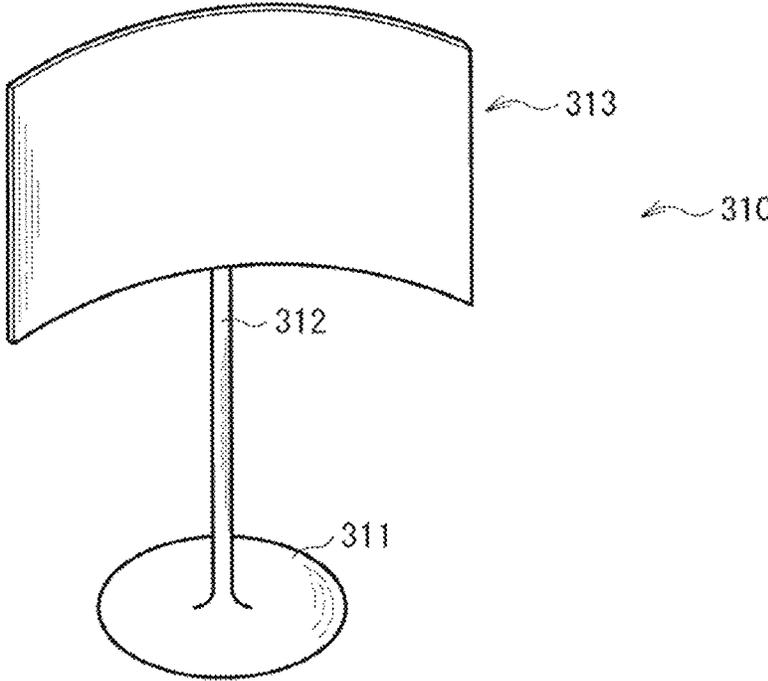


FIG. 33

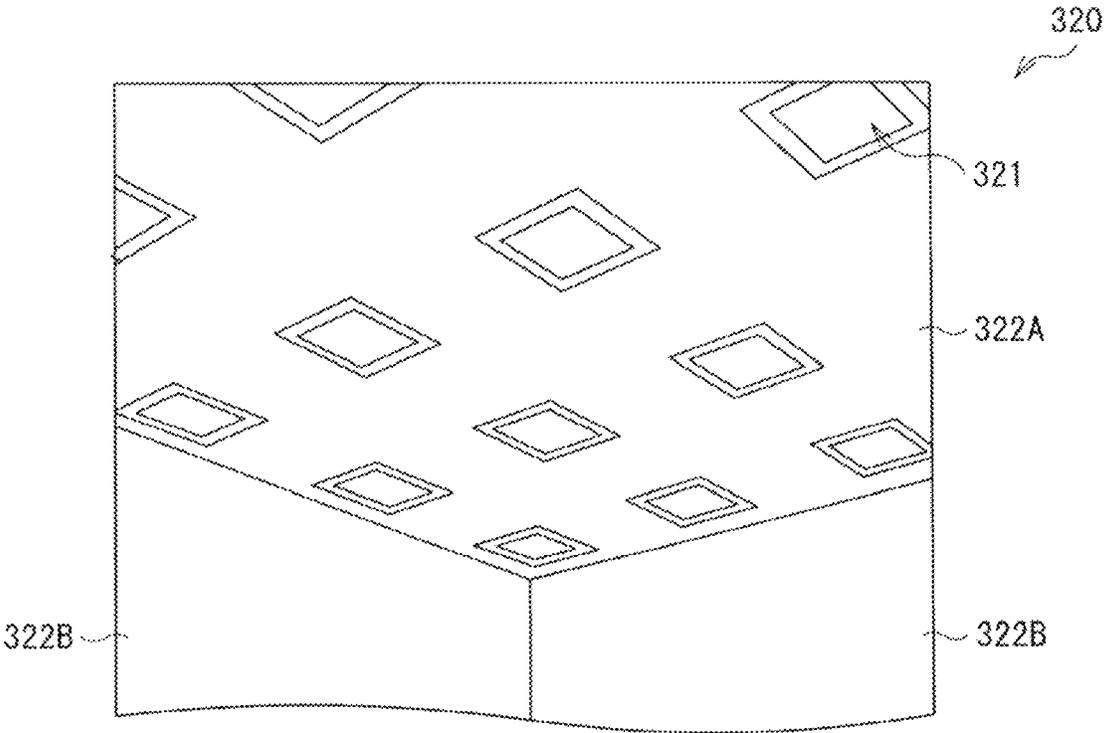


FIG. 34

ILLUMINATION DEVICE AND DISPLAY UNIT

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS REFERENCE TO RELATED APPLICATION(S)

This application is a broadening Reissue of U.S. Pat. No. 10,073,215, issued Sep. 11, 2018, which is [a continuation of] based upon and claims the benefit of priority from U.S. patent application Ser. No. 14/176,427, filed Feb. 10, 2014, [now pending.] which claims the benefit of Japanese Priority Patent Application [JP] No. 2013-037225, filed Feb. 27, 2013, the entire contents of both of which are hereby incorporated [herein] by reference.

BACKGROUND

The present disclosure relates to an illumination device suitable for a planar light source, and a display unit including the illumination device.

In recent years, along with reduction in thickness of a television monitor, a display unit including a combination of a liquid crystal panel and an illumination device (a backlight unit) has become a mainstream. Further, in addition to the thickness reduction, the display unit includes an edge emitting diode (LED) type illumination device in which the number of LEDs occupying a large proportion of material cost is reduced.

In the edge LED type illumination device, LED light sources are arranged in one end of the illumination device, and a light guide plate is disposed over an entire region desired to emit light. Therefore, even if the LEDs are arranged only on the one end of the illumination device, the entire screen is allowed to be brightened. In addition, displacing an optical sheet between the light guide plate and the liquid crystal panel causes uniform light emission over the entire surface.

For example, in Japanese Unexamined Patent Application Publication No. 2006-324407, as an example of the LED light source, surroundings of a blue LED element is filled with a sealing resin, and the sealing resin contains a yellow fluorescent substance and a green fluorescent substance in a dispersed state to expand color gamut as compared with the color gamut of white obtained based on complementary color for relation between blue and yellow.

SUMMARY

However, color developing characteristics of an existing illumination device is substantially determined depending on characteristics of an LED light source. Therefore, a technique of changing structure of a fluorescent substance in the sealing resin has a limit in improvement of color developing characteristics.

It is desirable to provide an illumination device capable of obtaining more favorable color developing characteristics, and a display unit including the illumination device.

According to an embodiment of the present disclosure, there provided an illumination device including: a light

source; an optical component provided separately from the light source; a holding member holding the light source and the optical component; and a variable pressing member variably pressing the optical component against the holding member.

In the illumination device according to the embodiment of the present disclosure, the optical component is provided separately from the light source. The optical component is held together with the light source by the holding member, and is variably pressed against the holding member by the variable pressing member. Therefore, when the tolerance of the optical component is large, or when a coefficient of thermal expansion of the optical component is different from that of the holding member, the optical component is held with high positional accuracy in the holding member. Accordingly, appropriate positional relationship between the light source and the optical component is maintained., and optical integrity is ensured even when the light source and the optical component are provided separately from each other, and thus property of the optical component favorably exerted.

According to an embodiment of the present disclosure, there is provided a display unit provided with a liquid crystal panel and an illumination device provided on a back surface side of the liquid crystal panel. The illumination device includes: a light source; an optical component provided separately from the light source; a holding member holding the light source and the optical component; and a variable pressing member variably pressing the optical component against the holding member.

In the display unit according to the embodiment of the present disclosure, image display is performed by allowing light from the illumination device to selectively pass through the liquid crystal panel.

In the illumination device of the embodiment of the present disclosure or the display unit according to the embodiment of the present disclosure, the optical component is provided separately from the light source, the light source and the optical component are held by the holding member, and the variable pressing member that variably presses the optical component against the holding member is provided. Therefore, the optical component is held with high positional accuracy in the holding member, the property of the optical component is favorably exerted, and more favorable color developing characteristics are obtained without limitation by the characteristics of the light source.

It is to be understood that both the foregoing general description and the following detailed description are exemplary, and are intended to provide further explanation of the technology as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are included to provide a further understanding of the disclosure, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments and, together with the specification, serve to explain the principles of the technology.

FIG. 1 is a perspective view illustrating an appearance of an illumination device according to a first embodiment of the present disclosure.

FIG. 2 is a sectional diagram illustrating the illumination device illustrated in FIG. 1 taken along II-II line.

FIG. 3 is a perspective view illustrating a part of light sources illustrated in FIG. 2.

FIG. 4 is a sectional diagram illustrating a configuration of an optical component illustrated in FIG. 2.

FIG. 5 is a perspective view illustrating a part of a holding member illustrated in FIG. 2.

FIG. 6 is a perspective view illustrating a configuration in which the light sources are held by the holding member illustrated in FIG. 5.

FIG. 7 is a front view illustrating a configuration of the holding member and the light sources illustrated in FIG. 6 as viewed from a side close to a light guide plate.

FIG. 8 is a perspective view illustrating an entire configuration of the light sources, the optical component, the holding member, and a heat dissipation member that are illustrated in FIG. 2.

FIG. 9 is an enlarged perspective view illustrating a middle part of FIG. 8.

FIG. 10 is an enlarged perspective view illustrating a boundary between two adjacent containers illustrated in FIG. 9.

FIG. 11 is an enlarged perspective view illustrating a wall illustrated in FIG. 10.

FIG. 12 is an enlarged perspective view illustrating a right end part of FIG. 8.

FIG. 13 is an exploded perspective view illustrating holding members illustrated in FIG. 12.

FIG. 14 is an enlarged perspective view illustrating a left end part of FIG. 8.

FIG. 15 is a plan view for describing operation of a torsion coil spring illustrated in FIG. 14.

FIG. 16 is a plan view of the illumination device illustrated in FIG. 1.

FIG. 17 is a sectional diagram taken along XVII-XVII line in FIG. 16.

FIG. 18 is a diagram for describing a function of the illumination device illustrated in FIG. 1.

FIG. 19 is an enlarged front view illustrating a left end part of an optical component and a holding member of an illumination device according to a second embodiment of the present disclosure.

FIG. 20 is a perspective view illustrating a configuration of a stopper illustrated in FIG. 19 as viewed from a side close to a light guide plate.

FIG. 21 is a perspective view illustrating a configuration of the stopper illustrated in FIG. 19 as viewed from a side close to a light source.

FIG. 22 is a front view illustrating the configuration of the stopper illustrated in FIG. 19.

FIG. 23 is a front view for describing operation of the stopper illustrated in FIG. 19.

FIG. 24 is an enlarged front view illustrating a state where the stopper illustrated in FIG. 19 is attached to a right end part of the optical component and the holding member.

FIG. 25 is an enlarged perspective view illustrating a left end part of an optical component and a holding member of an illumination device according to a third embodiment of the present disclosure.

FIG. 26 is an enlarged perspective view illustrating a right end part of the optical component and the holding member illustrated in FIG. 25.

FIG. 27 is an enlarged front view illustrating a left end part of an optical component and a holding member of an illumination device according to a fourth embodiment of the present disclosure.

FIG. 28 is a perspective view illustrating a configuration of a stopper illustrated in FIG. 27.

FIG. 29 is a perspective view illustrating an appearance of a display unit according to a fifth embodiment of the present disclosure.

FIG. 30 is an exploded perspective view illustrating a main body section illustrated in FIG. 29.

FIG. 31 is an exploded perspective view illustrating a panel module illustrated in FIG. 30.

FIG. 32 is a perspective view illustrating an appearance of an application example 1 of the illumination device.

FIG. 33 is a perspective view illustrating an appearance of an application example 2 of the illumination device.

FIG. 34 is a perspective view illustrating an appearance of an application example 3 of the illumination device.

DETAILED DESCRIPTION

Hereinafter, sonic embodiments of the present disclosure will be described in detail with reference to drawings. Note that description will be given in the following order:

1. First embodiment (an illumination device: an example of using a torsion coil spring as a variable pressing member)

2. Second embodiment (an illumination device: an example of using a U-shaped stopper as a variable pressing member)

3. Third embodiment (an illumination device: an example of using a torsion coil spring together with a stopper)

4. Fourth embodiment (an illumination device: an example of using an inverted U-shaped stopper as a variable pressing member)

5. Fifth embodiment (a display unit: a liquid crystal display unit)

6. Illumination apparatuses (application examples of an illumination device)

(First Embodiment)

FIG. 1 illustrates an appearance of an illumination device 1 according to a first embodiment of the present disclosure. The illumination device 1 is used as a backlight illuminating a transmissive liquid crystal panel from a backside thereof, or as an illumination apparatus in a room or the like. The shape of the illumination device 1 is modified depending on a purpose, and for example, in a case of a liquid crystal television, the illumination device 1 may have a rectangular plate shape as illustrated in FIG. 1.

In the following description, a direction (a front-back direction) perpendicular to a main surface (a widest surface) of the illumination device 1 is referred to as Z direction, and a lateral direction (a long-side direction) and a vertical direction (a short-side direction) on the main surface of the illumination device 1 are referred to as X direction and Y direction, respectively.

FIG. 2 illustrates a sectional configuration of a top side 1A of the illumination device 1 illustrated in FIG. 1. For example, the illumination device 1 may include light sources 10, an optical component 20, a holding member 30, a heat dissipation member 40, a light guide plate 50, a reflective member 60, an optical sheet 70, a middle chassis 80, and a back chassis 90. Note that the light sources 10, the optical component 20, the holding member 30, and the heat dissipation member 40 may be disposed one or both of the top side 1A or a bottom side 1B. Alternatively, these components may be disposed one or both of right and left sides.

Each of the light sources 10 may be, for example, a point light source, and specifically, is configured of a light emitting diode (LED). For example, as illustrated in FIG. 3, the light sources 10 may be arranged in line on a light source substrate 11 that is formed of aluminum (Al). In other words, the plurality of light sources 10 as the point light sources is arranged side by side to configure a linear light source.

The optical component 20 is disposed between the light sources 10 and the light guide plate 50 to improve color

5

developing characteristics. Although the optical component **20** is provided separately from the light sources **10**, the optical component **20** has a linear shape corresponding to the light sources **10**. Specifically, the optical component **20** may be a wavelength conversion member in which a wavelength conversion material **21** is enclosed in a tubular container **22** as illustrated in FIG. 4, for example.

The wavelength conversion material **21** contains a fluorescent substance (a fluorescent material) such as a fluorescent pigment and a fluorescent dye, or a luminous body having a wavelength conversion function, such as a quantum dot. The wavelength conversion material **21** is excited by light **v11** and **v12** each having a first wavelength from the light source **10**, and, based on the principle of fluorescence emission and the like, converts the wavelength of the light **v11** and **v12** having the first wavelength into a wavelength of light **v21** having a wavelength (a second wavelength) different from the first wavelength to emit light. In FIG. 4, the light **v11** and **v12** each having the first wavelength are illustrated by solid lines, and the light **v21** having the second wavelength is illustrated by an alternate long and short dash line.

The first wavelength and the second wavelength are not particularly limited, however, for example, in a case of being used in a display unit, the light **v11** and **v12** each having the first wavelength is blue light (for example, wavelength of about 440 nm to about 460 nm both inclusive), and the light **v21** having the second wavelength is red light (for example, wavelength of about 620 nm to about 750 nm both inclusive) or green light (for example, wavelength of about 495 nm to 570 nm both inclusive). In other words, each of the light sources **10** is a blue light source, and the wavelength conversion material **21** converts the wavelength of the blue light to the wavelength of red light or green light.

The wavelength conversion material **21** may preferably contain a quantum dot. The quantum dot is a particle having a diameter of about 1 nm to about 100 nm both inclusive, and has a discrete energy level. The energy state of the quantum dot depends on the size thereof. Therefore, an emission wavelength is allowed to be freely selected by changing the size. In addition, a light beam emitted from the quantum dot has a narrow spectrum width. A color gamut is enlarged by combining such light beams each having a steep peak. Accordingly, using the quantum dot in the wavelength conversion material **21** enables enlargement of the color gamut with ease. Further, the quantum dot has high responsiveness, which makes it possible to efficiently use the light from the light sources **10**. In addition, the quantum dot has high stability. For example, the quantum dot may be a compound of a group **12** element and a group **16** element, a compound of a group **13** element and a group **16** element, or a compound of a group **14** element and a group **16** element, and examples of the quantum dot may include CdSe, CdTe, ZnS, CdS, PdS, PbSe, and CdHgTe.

Incidentally, in FIG. 4, although the wavelength conversion material **21** is illustrated as a particle like a quantum dot for simplification, it is needless to say that the wavelength conversion material **21** is not limited to a particle.

The container **22** is a tubular container (a capillary) that contains and seals the wavelength conversion material **21** and is formed of a glass or the like. Providing the container **22** enables suppression in characteristic change of the wavelength conversion material **21** caused by moisture and oxygen in the air, and facilitates handling.

The container **22** has a rectangular parallelepiped shape (including as substantially rectangular parallelepiped shape having fine modification such as a rounded side), and is

6

disposed so that one surface of the rectangular parallelepiped faces the light source **10**. The container **22** has a cavity inside thereof. The cavity is a containing section **23** of the wavelength conversion material **21**.

Note that the optical component **20** is allowed to be manufactured, for example, in the following way: a fluorescent material or quantum dots is/are kneaded with an ultraviolet curable resin; an obtained mixture is put in the container **22** such as a glass tube; a side of the container **22** is sealed; ultraviolet ray is irradiated to the mixture to cure the resin; and resinous wavelength conversion material **21** having viscosity of a certain degree is formed.

The holding member **30** is a holder to fix and hold the light sources **10** and the optical component **20** in a predetermined positional relationship. As illustrated in the sectional diagram of FIG. 2, the holding member **30** is configured of an upper surface section **31** and a bottom surface section **32** that are separated from each other, and the light generated by the light source **10** travels between the upper surface section **31** and the bottom surface section **32** in the Y direction. The upper surface section **31** and the bottom surface section **32** each extend in the direction (the X direction) same as the extending direction of the light sources **10** and the optical component **20** (the container **22**). The distance (in the Z direction) between the upper surface section **31** and the bottom surface section **32** may be preferably equal to (or substantially equal to) the length of the major axis of the container **22**.

The upper surface section **31** and the bottom surface section **32** of the holding member **30** are coupled with each other by coupling sections **33** (not illustrated in FIG. 2, see FIG. 5), and are accordingly configured integrally. The positional relationship between the upper surface section **31** and the bottom surface section **32** of the holding member **30** is fixed by such coupling sections **33**. As illustrated in FIG. 5, openings **34** are provided between respective adjacent coupling sections **33**. As illustrated in FIG. 6, the light sources **10** are loosely inserted into the respective openings **34**. Each of the openings **34** has a size larger than that of each of the light sources **10** so that a clearance **35** is generated between each of the openings **34** and each of the light sources **10** as illustrated in FIG. 7.

An upper first locking part **31A** is provided on the light source **10** side of the upper surface section **31**, and an upper second locking part **31B** is provided on a side opposite thereto. A lower first locking part **32A** is provided on the light source **10** side of the bottom surface section **32**, and a lower second locking part **32B** is provided on a side opposite thereto. A distance between the upper first locking part **31A** and the upper second locking part **31B** may be preferably equal to (or substantially equal to) the thickness (a size in the Y direction) of the container **22**. Likewise, a distance between the lower first locking part **32A** and the lower second locking part **32B** may be preferably equal to (or substantially equal to) the thickness (a size in the Y direction) of the container **22**.

The light source substrate **11** of the light sources **10** is fixed to the outside of the upper first locking part **31A** and the lower first locking part **32A** so that the light sources **10** are loosely fitted between the upper first locking part **31A** and the lower first locking part **32A**. Therefore, the upper first locking part **31A** and the lower first locking part **32A** also function as spacers intervening between the light sources **10** (the light source substrate **11**) and the optical component **20** (the container **22**). In other words, the light sources **10** (the light source substrate **11**) and the optical component **20** (the container **22**) are distanced from each

other by an amount of the thickness (the size in the Y direction) of the upper first locking part 31A and the lower first locking part 32A.

Such a holding member 30 is formed of a highly reflective polycarbonate resin, a polyamide-based resin (for example, "Genestar (trade name)" manufactured by Kuraray Co., Ltd.).

The heat dissipation member 40 diffuses and dissipates heat generated by the light sources 10, and may be configured of, for example, an aluminum (Al) plate. The heat dissipation member 40 is provided from a backside of the light source substrate 11 to below the holding member 30 and the light guide plate 50, and has a disposing section (not illustrated) to dispose the bottom surface section 32 of the holding member 30.

The light guide plate 50 guides the light generated by the light sources 10 from a light incident surface 50A to a light emission surface 50B, and may contain a transparent thermoplastic resin such as a polycarbonate resin (PC) and an acrylic resin (for example, polymethyl methacrylate (PMMA)). For example, the light guide plate 50 may have a rectangular parallelepiped shape configured of a pair of main surfaces (a front surface and a bottom surface) and top, bottom, right, and left end surfaces (side surfaces). The main surfaces are opposed to each other in the front-back direction (the Z direction), and the four end surfaces are in contact with the main surfaces.

The top end surface and the bottom end surface of the light guide plate 50 are the light incident surfaces 50A receiving the light from the light sources 10 as described above. Note that the light incident surface 50A may be one of the top and bottom end surfaces of the light guide plate 50. In addition, the three end surfaces or all of the four end surfaces of the light guide plate 50 may be the light incident surfaces 50A.

The front surface of the light guide plate 50 is the light emission surface 50B allowing the light incident from the light incident surface 50A to be emitted. Each of the light emission surface 50B (the front surface) and the bottom surface of the light guide plate 50 may have, for example, a planar shape corresponding to an object to be illuminated (for example, a liquid crystal panel 222 described later) that is disposed on a side dose to the light emission surface 50B of the light guide plate 50.

A pattern 51 (not illustrated in FIG. 2, see FIG. 18) having irregular reflection characteristics is printed on the bottom surface 50D of the light guide plate 50. The pattern 51 reflects, toward the light emission surface 50B of the light guide plate 50, the light that travels toward the bottom surface 50D of the light guide plate 50.

The reflective member 60 is a plate-like or sheet-like member provided on the bottom surface 50D side of the light guide plate 50. The reflective member returns, toward the light guide plate 50, light leaked from the light sources 10 to the bottom surface 50D side of the light guide plate 50 or light emitted from the inside of the light guide plate 50 to the bottom 50D side. For example, the reflective member 60 may have functions such as reflection, diffusion, and scattering, which enables efficient use of the light from the light source 10 to enhance a front luminance.

The reflective member 60 may be configured of, for example, foamed polyethylene terephthalate (PET), an evaporated silver film, a multilayer reflective film, or white PET. In the case where a function of regular reflection (mirror reflection) is provided to the reflective member 60, the surface of the reflective member 60 may be preferably subjected to treatment such as silver evaporation, aluminum

evaporation, and multilayer film reflection. In the case where fine shape is added to the reflective member 60, the reflective member 60 may be integrally formed by techniques such as thermal press molding using a thermoplastic resin, and melt extrusion molding, or may be formed by applying an energy ray (for example, ultraviolet ray) curable resin on a base material formed of PET or the like, and then transferring the shape to the energy ray curable resin. In this case, examples of the thermoplastic resin may include an acrylic resin such as a polycarbonate resin and polymethyl methacrylate (PMMA) resin, a polyester resin such as polyethylene terephthalate, an amorphous copolymerized polyester resin such as a copolymer of methyl methacrylate and styrene (MS), a polystyrene resin, and a polyvinylchloride resin. In addition, in the case where the shape is transferred to an energy ray (for example, ultraviolet ray) curable resin, the base material may be glass.

The optical sheet 70 is provided on a side close to the light emission surface 50B (the front surface) of the light guide plate 50, and may include, for example, a diffuser plate, a diffuser sheet, a lens film, and a polarization separation sheet. Providing such an optical sheet 70 allows the light emitted from the light guide plate 50 in an oblique direction to rise up in the front direction, which enables further enhancement of the front luminance.

The middle chassis 80 is a frame-like resin component holding the optical sheet 70 and the liquid crystal panel 222 which will be described later. In addition, an end of the light guide plate 50 and an end of the reflective member 60 are sandwiched and held between an end of the middle chassis 80 and an end of the holding member 30. Note that it is sufficient for the holding member 30 to sandwich at least the upper end and the lower end the container 22, and the end of the light guide plate 50 and the end of the reflective member 60 may be held by another member.

The back chassis 90 houses and holds the light sources 10 to the optical sheet 70, and is configured of a metallic plate formed of aluminum or the like.

FIG. 8 illustrates an overall configuration of the light sources 10, the optical component 20, the holding member 30, and the heat dissipation member 40 that are illustrated in FIG. 2. FIG. 9 illustrates a middle part 1C of FIG. 8 in an enlarged manner. The optical components 20 includes a plurality of (for example, two) optical components 20, and the plurality of optical components 20 is arranged along a longitudinal direction (X direction) of the optical components 20 so that ends in the longitudinal direction of the respective optical components 20 are abutted on one another. The configuration in which the optical components 20 includes the plurality of optical components 20 is suitable for a case where it is difficult to fabricate the optical component 20 covering the entire top side 1A (or the entire bottom side 1B) in the illumination device 1 having a large area.

FIG. 10 illustrates a boundary between two adjacent containers 22 of the optical components 20 illustrated in FIG. 9 in an enlarged manner. The holding member 30 has a wall 36 at a boundary between the two adjacent optical components 20. The wall 36 is a partition wall between the two adjacent optical components 20, and as illustrated in FIG. 11 in an enlarged manner, first ends 20A in the longitudinal direction of the respective two optical components 20 are in contact with both side surfaces of the wall 36. In addition, as illustrated in FIG. 10, a pillar 37 may be provided near the wall 36. The pillar 37 receives the light incident surface 50A of the light guide plate 50 (see FIG. 2)

to avoid damage of the container **22** due to contact of the light guide plate **50** and the optical component **20**.

FIG. **12** illustrates a right end part **1D** of FIG. **8** in an enlarged manner. The holding member **30** may be preferably divided into a plurality of divided holding members in the longitudinal direction (X direction) of the optical component **20**. Such a configuration makes it possible to suppress contact of the holding member **30** and the light source **10** due to difference in coefficient of thermal expansion between the aluminum light source substrate **11** and the resin holding member **30**.

Specifically, as illustrated in FIG. **7**, the clearance **35** is provided between each of the openings **34** and each of the light sources **10**. The clearance **35** may preferably have a size as small as possible because the use efficiency of the light from the light sources **10** is more enhanced. However, it is difficult to eliminate the clearance **35** because there are tolerances of respective components and differences in coefficients of the thermal expansion between the components. Since the holding member **30** is more extended or more shrunk as compared with the light sources **10** depending on the temperature, if the clearance **35** corresponding to the difference therebetween is not provided, the holding member **30** may contact with the light sources **10**. Further, effects such as heat are increased as the dimension in the longitudinal direction (the X direction) of each of the components is larger. Therefore, the holding member **30** having a large coefficient of thermal expansion is divided into the plurality of divided holding members in the longitudinal direction (the X direction) of the optical component **20** so that the clearance **35** is allowed to be decreased in size and effect such as heat is allowed to be suppressed.

Specifically, the holding member **30** is divided into a plurality of divided holding members **38A**, and the plurality of divided holding members **38A** is joined with one another at dividing parts **38B**. For example, as illustrated in FIG. **13**, each of the plurality of divided holding members **38A** has a projection **38C** on a first end of the top surface section **31**, and a step part (not illustrated) corresponding to the projection **38C** on a second end of the top surface section **31**. In addition, each of the plurality of divided holding members **38A** has a projection **38D** on a second end of the bottom surface section **32**, and a step part (not illustrated) corresponding to the projection **38D** on a first end of the bottom surface section **32**. The plurality of divided holding members **38A** is coupled with one another by overlapping the step parts and the corresponding projections **38C** and **38D**. Note that the holding member **30** may be divided into, for example, four divided holding members **38A** with respect to one optical component **20**, namely, eight divided holding members **38A** as a total., however, the divided number is not limited thereto.

FIG. **14** illustrates a left end part **1E** of FIG. **8** in an enlarged manner. The illumination device **1** has a variable pressing member **100** variably pressing the optical component **20** against the holding member **30**. Therefore, the illumination device **1** is capable of obtaining more favorable color developing characteristics.

Specifically, the optical component **20** is provided to improve the color developing characteristics as described above. On the other hand, the use efficiency of the light from the light sources **10** is increased as the distance between the light sources **10** and the light guide plate **50** is shorter. Therefore, to dispose the optical component **20** between the light sources **10** and the light guide plate **50**, it is desirable to hold the optical component **20** with high accuracy in a narrow space. However, in the case where the tolerance of

the optical component **20** is large and the length thereof in the longitudinal direction (the X direction) is varied, or in the case where the coefficient of thermal expansion of the optical component **20** is different from that of the holding member **30**, it is difficult to hold the optical component **20** constantly at the same position.

When the tolerance of the optical component **20** is large and the length thereof in the longitudinal direction (the X direction) is varied, or when the length of the optical component **20** is fluctuated due to thermal expansion, the variable pressing member **100** absorbs the variation and the fluctuation to hold the optical component **20** with high positional accuracy in the holding member **30**. Accordingly, appropriate positional relationship between the light sources **10** and the optical component **20** is maintained, optical integrity is ensured even when the light sources **10** and the optical component **20** are provided separately from each other, which makes it possible to favorably exert the property of the optical component **20**.

Further, in particular when the optical component **20** includes the two optical components **20**, the variable pressing members **100** press the respective optical components **20** against the wall **36**, which makes it possible to suppress that brightness and the like at the boundary between the two optical components **20** are different from those of its surroundings. Therefore, color developing characteristics with little unevenness are obtainable. In addition, it is possible to absorb the variation and the fluctuation in dimensions of the optical component **20**, and it is possible to constantly press the optical component **20** against the wall **36**. Accordingly it is possible to prevent the first end **20A** in the longitudinal direction of the optical component **20** from departing from the wall **36**, and to improve continuity and integrity of the two optical components **20** in the longitudinal direction (the X direction).

More specifically, the variable pressing member **100** may be preferably an elastic component capable of pressing the optical component **20** in a first direction **A1** (in a direction approaching the wall **36**) in the holding member **30**. The elastic component may be preferably formed of one or more of a metal spring, a resin, a foamed product, and elastomer. Examples of the metal spring may include a torsion coil spring, a coil spring, and a plate spring. Among them, the torsion coil spring may be preferable because the torsion coil spring provides stable load within a function range in a small space. The coil spring may desirably have a large space in the longitudinal direction (the X direction) in order to provide similar load between when the optical component **20** has a maximum length in tolerance and when the optical component **20** has a minimum length in tolerance. Likewise, the plate spring may desirably have a large space in the Y direction. The torsion coil spring has intermediate characteristics between the coil spring and the plate spring, and is capable of reducing the dimensions in the XYZ direction with best balance in a usable space. Examples of the resin may include polyacetal (POM). Examples of the foamed product may include urethane foam. The elastomer includes rubber and rubbery elastic industrial materials. Specific example of the rubber may include chloroprene rubber (CR rubber).

Further, the elastic component may be preferably formed of a metal spring, for example, a torsion coil spring **110** and a non-metal optical component cover provided between the metal spring and the optical component **20**, for example, a cap **120**. The torsion coil spring **110** and the cap **120** correspond to a specific example of "variable pressing member" in the present disclosure.

11

The torsion coil spring 110 has a first arm 112 and a second arm 113 at both ends of a coil section 111. For example, the coil section 111 may be mounted on the heat dissipation member 40, but may be disposed on the bottom surface section 32 of the holding member 30 or on the back chassis 90. The first arm 112 is folded as well as locked and fixed to the heat dissipation member 40. The second arm 113 pressurizes the optical component 20 in the first direction A1 through the cap 120.

FIG. 15 illustrates the vicinity of the torsion coil spring 110 and the cap 120 illustrated in FIG. 14, in an enlarged manner. For example, the second arm 113 of the torsion coil spring 110 may operate from a no-load position P1 in a winding direction, and is allowed to be reciprocated between a plus position P3 and a minus position P4 with reference to a center position P2, according to the tolerance, thermal expansion, and shrinkage of the optical component 20.

A first end of the cap 120 covers a second end 20B in the longitudinal direction of the optical component 20, and a second end of the cap 120 is provided with a concave part 121 that receives the second arm 113 of the torsion coil spring 110.

Moreover, the cap 120 engages with the holding member 30 in a movable state in the first direction A1. More specifically, a sawtooth section 39 is provided on the bottom surface section 32 of the holding member 30. The sawtooth section 39 has a latch structure in which a plurality of grooves 39B is arranged in the first direction A1 with ridges 39A in between. Each of the ridges 39A has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined upward (becoming gradually higher) along the first direction A1. On the other hand, the cap 120 has a claw 122 (see FIG. 15) outside thereof. The claw 122 has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined downward (becoming gradually lower) from a front end of the perpendicular plane along the first direction A1. The perpendicular plane of the claw 122 is locked with the perpendicular plane of the ridge 39A by engagement of the claw 122 and the groove 39B so that the cap 120 is regulated in position, and the claw 122 climbs over the ridge 39A and engages with the groove 39B adjacent to the ridge 39A so that the cap 120 is movable in the first direction A1.

Since the cap 120 moves in stages on the sawtooth section 39, the position of the cap 120 changes discretely according to the pitch P5 of the ridges 39A and the grooves 39B. When the pitch P5 of the ridges 39A and the grooves 39B is coarse, the grooves 39B are allowed to be deeper to increase holding power for the claw 122. In contrast, when the pitch P5 is dense, the positional accuracy of the cap 120 is allowed to be enhanced. Therefore, the cycle (pitch) P5 of the ridges 39A and the grooves 39B is set within an optically correctable range through adjustment of the positional density of the pattern 51, or the like.

In addition, by using the torsion coil spring 110 together with the cap 120, fine adjustment is allowed to be performed by reciprocation of the torsion coil spring 110 after rough positioning of the optical component 20 by engagement of the cap 120 and the sawtooth section 39. Accordingly, the operation range of the torsion coil spring 110 is allowed to be narrowed, which makes design of the torsion coil spring 110 easy.

The above-described configuration is symmetrical about the wall 36 in the lateral direction (the X direction). In other words, although not illustrated, the variable pressing member 100 configured of the torsion coil spring 110 and the cap 120 is provided at the second end 20B of the optical

12

component 20 on the opposite right end part 1D. Thus, the two optical components 20 are constantly pressed against the center wall 36, which suppresses that the brightness and the like at the boundary between the two optical components 20 are different from those of its surroundings.

FIG. 16 illustrates a planar configuration of the illumination device 1, and FIG. 17 illustrates a sectional configuration taken along line of FIG. 16. In the case where the light sources 10, the optical component 20, the holding member 30, and the heat dissipation member 40 are provided on both of the top side 1A and the bottom side 1B, a heat dissipation member 40B of the bottom side 1B may preferably have a width larger than that of a heat dissipation member 40A of the top side 1A. In addition, heat pipes 41 may be preferably provided on the top side 1A in addition to the narrow heat dissipation member 40A.

Specifically, in the case where the light sources 10 are disposed on both of the top side 1A and the bottom side 1B there is a tendency that the top side 1A is more disadvantageous in heat dissipation than the top side 1B, and when the heat dissipation member 40A of the top side 1A is increased in size, the cost and the weight thereof may be increased. When the narrow heat dissipation member 40A and the heat pipes 41 are provided on the top side 1A, and an optimal heat dissipation structure is applied according to a temperature distribution, it is possible to obtain advantages such as temperature reduction of the light sources 10, cost reduction, and weight reduction.

The plurality of heat pipes 41 is provided and is arranged side by side along the top side 1A in the lateral direction (the X direction). For example, each of the heat pipes 41 may have an inverted-L-shaped planar shape configured of a short leg part 41A and a long leg part 41B. The short leg part 41A extends in the lateral direction (the X direction), and the long leg part 41B extends in the vertical direction (the Y direction). A heat conductive grease 42 is provided between each of the heat pipes 41 and the narrow heat dissipation member 40A.

As illustrated in FIG. 18, in the illumination device 1, when the light source 10 generates the light v11 and v12 each having the first wavelength, the light v11 and v12 enter the container 22 and travel toward the wavelength conversion material 21. The light v11 and v12 that have entered the container 22 but have not collided with the wavelength conversion material 21 pass through the container 22 and then enter the light guide plate 50. Since the pattern 51 having irregular reflection characteristics is provided on the bottom surface 50D of the light guide plate 50, the light v12 is reflected by the pattern 51, travels toward the upper side of the light guide plate 50, and then is emitted from the light emission surface 50B. The light v11 is totally reflected by the light emission surface 50B of the light guide plate 50 before reaching the pattern 51, travels toward the bottom surface 50D, and is reflected by the pattern 51 and then emitted from the light emission surface 50B. These emitted light beams pass through the optical sheet 70 to be observed as light emission.

On the other hand, light v13 that has entered the container 22 and has collided with the wavelength conversion material 21 is converted in wavelength by the wavelength conversion material 21, and thus becomes light v21 and v22 each having a second wavelength $\lambda 2$. The light v21 and v22 pass through the container 22, enter the light incident surface 50A of the light guide plate 50, are reflected by the pattern 51, and are then emitted from the light emission surface 50B. These emitted light beams pass through the optical sheet 70 to be observed as light emission.

13

In this case, the optical component 20 is provided separately from the light sources 10. The optical component 20 is held together with the light sources 10 by the holding member 30, as well as is variably pressed against the holding member 30 by the variable pressing member 100, that is, the cap 120 and the torsion coil spring 120. Accordingly, in the case where the tolerance of the optical component 20 is large and the length in the longitudinal direction (the X direction) thereof is varied, or in the case where the length of the optical component 20 is fluctuated due to thermal expansion, the variation and the fluctuation are absorbed. Thus, the optical component 20 is held in the holding member 30 with high positional accuracy. Consequently, appropriate positional relationship between the light sources 10 and the optical component 20 is maintained, optical integrity is ensured even when the light sources 10 and the optical component 20 are provided separately from each other, and thus the property of the optical component 20 is favorably exerted.

Furthermore, in particular when the optical component 20 includes the two optical components 20, pressing the optical components 20 against the wall 36 by the variable pressing members 100 suppresses that the brightness and the like at the boundary between the two optical components 20 are different from those of its surroundings. Therefore, it is possible to obtain color developing characteristics with little unevenness. Moreover, the variation and the fluctuation in dimensions of the optical component 20 are absorbed, and the optical components 20 are constantly pressed against the wall 36. Therefore, the first end 20A in the longitudinal direction of the optical component 20 is prevented from being distanced from the wall 36, which improves continuity and integrity of the two optical components 20 in the longitudinal direction (the X direction).

Note that the density distribution of the pattern 51 is increased near the boundary between the two optical components 20 so that variation in brightness at the boundary between the two optical components 20 is further decreased as described above.

As described above, in the first embodiment, the optical component 20 is provided separately from the light sources 10, the light sources 10 and the optical component 20 are held by the holding member 30, and the variable pressing member 100 variably pressing the optical component 20 against the holding member 30 is provided. Therefore, the optical component 20 is held in the holding member 30 with high positional accuracy, the property of the optical component 20 is favorably exerted, and more favorable color developing characteristics are obtainable without limitation by the characteristics of the light sources 10.

(Second Embodiment)

FIG. 19 to FIG. 21 each illustrate the left end part 1E of the optical component 20 and the holding member 30 of the illumination device 1 according to a second embodiment of the present disclosure in an enlarged manner. In the second embodiment, a U-shaped stopper 130 is provided as the variable pressing member 100 in place of the torsion coil spring 110 and the cap 120. The stopper 130 is movable in stages in the first direction A1 (in a direction approaching the wall 36), and the movement of the stopper 130 in the second direction A2 (in a direction away from the wall 36) opposite to the first direction A1 is restrained.

For example, the stopper 130 may be integrally formed of a resin material or the like as a whole, and is capable of improving mass productivity as compared with the torsion coil spring 110. As the resin material, a resin having high sliding property, high flexibility, and high heat resistance, for

14

example, a polycarbonate resin or a high heat resistance acrylonitrile butadiene styrene (ABS) resin may be preferable.

Specifically, the stopper 130 has a U-shaped body 131, a claw 132, and an extension part 133.

The U-shaped body 131 has a U-shape in which a first leg part 131A and a second leg part 131B are connected by a curving part 131C. A front end of each of the first leg part 131A and the second leg part 131B on a side close to the light guide plate 50 is provided with a knob 131D. A front end of the second leg part 131B on a side close to the light sources 10 is provided with a locking part 131E. The locking part 131E is engaged with a guide groove 131F that is provided on a back surface of the holding member 30, and restricts a moving direction of the stopper 130 to the longitudinal direction (the X direction) of the optical component 20 as well as prevents the stopper 130 from dropping off.

As illustrated in FIG. 22, the U-shaped body 131 alone is in a state where the first leg part 131A is opened outward, and has elasticity. Thus, the first leg part 131A has a hinge structure pivotable about the curving part 131C in a direction approaching the second leg part 131B (in a closing direction, an arrow R1 in FIG. 22).

The claw 132 is provided outside the first leg part 131A, and has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined downward (becoming gradually lower) from a front end of the perpendicular plane along the first direction A1. In addition, the inclined plane of the claw 132 becomes high toward the curving part 131C. The claw 132 has a function corresponding to the claw 122 of the cap 120 in the first embodiment.

Specifically, as with the first embodiment, the sawtooth section 39 is provided on the bottom surface section 32 of the holding member 30. The sawtooth section 39 has a latch structure in which the plurality of grooves 39B is arranged in the first direction with the ridges 39A in between. Each of the ridges 39A has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined upward (becoming gradually higher) along the first direction A1. The perpendicular plane of the claw 132 is locked with the perpendicular plane of the ridge 39A by engagement of the claw 132 and the groove 39B so that the stopper 130 is regulated in position, and the claw 132 climbs over the ridge 39A and engages with the groove 39B adjacent to the ridge 39A so that the stopper 130 is movable in the first direction A1.

The extension part 133 extends from the front end of the second leg part 131B, has a clearance with the front end of the first leg part 131A, and has elasticity. Therefore, the extension part 133 has a hinge structure pivotable about the front end of the second leg part 131B toward the curving part 131C (an arrow R2 in FIG. 22). Incidentally, a projection having a groove 134 is provided inside the extension part 133. The groove 134 will be described in a third embodiment.

The second end 20B in the longitudinal direction of the optical component 20 is in contact with the extension part 133. As illustrated in FIG. 23, when the extension part 133 is pressed in the second direction A2 by the second end 20B in the longitudinal direction of the optical component 20, the extension part 133 pivots in the arrow R2 direction to come into between the first leg part 131A and the second leg part 131B the U-shaped body 131, which restrains the claw 132 from climbing over the ridge 39A to engage with the groove 39B adjacent to the ridge 39A. This restricts movement of the stopper 130 in the second direction A2.

15

As with the first embodiment, the above-described configuration is symmetrical about the wall 36 in the lateral direction (the X direction). In other words, as illustrated in FIG. 24, the variable pressing member 100 configured of the stopper 130 is provided at the second end 20B of the optical component 20 on the opposite right end part 1D. Accordingly, the two optical components 20 are constantly pressed against the center wall 36, which suppresses that the brightness and the like at the boundary between the two optical components 20 are different from those of its surroundings.

In addition, as illustrated in FIG. 24, the sawtooth section 39 is provided on the top surface section 31 of the holding member 30 on the right end part 1D. Therefore, the stopper 130 illustrated in FIG. 19 is allowed to be vertically inverted and attached to the right end part 1D, and thus the stopper 130 having the same shape is allowed to be used on both of the left end part 1E and the right end part 1D.

in the illumination device 1, in FIG. 19, when the stopper 130 is inserted in the first direction A1 (in the right direction in FIG. 19), the claw 132 is locked with the ridge 39A for every cycle P5 of the sawtooth section 39, and thus the stopper 130 does not move in the second direction A2. When the stopper 130 comes in the first direction A1, and the claw 132 is engaged with the groove 39B at the position where the extension part 133 is in contact with the second end 20B in the longitudinal direction of the optical component 20, the stopper 130 stops at that position, and displacement thereof in the second direction A2 is restrained. Therefore, is possible to absorb variation in length of the optical component

When the stopper 130 is removed, the knob 131D is grasped to release the claw 132 from the sawtooth section 39, and then the stopper 130 is removed.

Moreover, in the case where the optical component 20 receives force in the longitudinal direction (the X direction) by impact or the like, as illustrated in FIG. 23, the extension part 133 pivots in the arrow R2 direction to be bent and absorbs the impact. In addition, the extension part 133 comes into between the first leg part 131A and the second leg part 131B of the U-shaped body 131, and thus the second leg part 131B is floated to restrict the claw 132 not to climb over the ridge 39A and not to engage with the groove 39B adjacent to the ridge 39A. This suppresses movement of the stopper 130 in the second direction A2 and dropping out thereof from the sawtooth section 39.

As described above, in the second embodiment, as the variable pressing member 100, the stopper 130 that is movable in stages in the first direction A1 and is restrained in movement in the second direction A2 is provided. Therefore, as with the first embodiment, the optical component 20 is allowed to be held with high positional accuracy in the holding member 30, the property of the optical component 20 is allowed to be favorably exerted, and more favorable color developing characteristics are allowed to be obtained without limitation by the characteristics of the light sources 10.

(Third Embodiment)

FIG. 25 and FIG. 26 illustrate the left end part 1E and the right end part 1D, respectively, of the optical component 20 and the holding member 30 in the illumination device 1 according to a third embodiment of the present disclosure in an enlarged manner. The third embodiment combination of the first embodiment and the second embodiment. Specifically, the second arm 113 of the torsion coil spring 110 is locked with the groove 134 inside the extension part 133 of the stopper 130. The second arm 113 pressurizes the optical component 20 in the first direction A1 through the stopper 130.

16

In the third embodiment, the variation and the fluctuation of the dimensions of the optical component 20 are smaller than the pitch P5 of the sawtooth section 39, and when allowance occurs between the optical component 20 and the stopper 130, the allowance is absorbed by fine adjustment by the torsion coil spring in the first embodiment to suppress backlash of the optical component 20.

(Fourth Embodiment)

FIG. 27 illustrates the left end part 1E of the optical component 20 and the holding member 30 in the illumination device 1 according to a fourth embodiment of the present disclosure in an enlarged manner. In the fourth embodiment, the claw 132 of the U-shaped stopper 130 described in the second embodiment is inversely provided to allow the stopper 130 to be attachable in a reverse direction from that of the second embodiment. As with the second embodiment, the stopper 130 is movable in stages in the first direction A1 (in the direction approaching the wall 36), and the movement of the stopper 130 in the second direction A2 (in the direction away from the wall 36) opposite to the first direction A1 is restrained.

FIG. 28 illustrates the configuration of the stopper 130 illustrated in FIG. 27. The stopper 130 has the U-shaped body 131 and the claw 132. The resin material of the stopper 130 is similar to that in the second embodiment.

The U-shaped body 131 has a U-shape in which the first leg part 131A and the second leg part 131B are connected by the curving part 131C. The front end of each of the first leg part 131A and the second leg part 131B on a side close to the light guide plate 50 is provided with the knob 131D (omitted in FIG. 27 and FIG. 28). The front end of the second leg part 131B on a side close to the light sources 10 is provided with the locking part 131E.

Although not illustrated, as with the second embodiment, the U-shaped body 131 alone is in a state where the first leg part 131A is opened outward, and has elasticity. Thus, the first leg part 131A has a hinge structure pivotable about the curving part 131C in the direction approaching the second leg part 131B (in the closing direction, an arrow R1 in FIG. 28).

The claw 132 is provided outside the first leg part 131A, and has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined downward (becoming gradually lower) from a front end of the perpendicular plane along the first direction A1. In the fourth embodiment, the inclined plane of the claw 132 is provided opposite to that in the second embodiment, and becomes lower toward the curving part 131C.

As with the second embodiment, the sawtooth section 39 is provided on the bottom surface section 32 of the holding member 30. The sawtooth section 39 has a latch structure in which the plurality of grooves 39B is arranged in the first direction A1 with the ridges 39A in between. Each of the ridges 39A has a cross section of a right triangle formed of a perpendicular plane and an inclined plane inclined upward (becoming gradually higher) along the first direction A1. The perpendicular plane of the claw 132 is locked with the perpendicular plane of the ridge 39A by engagement of the claw 132 and the groove 39B so that the stopper 130 is regulated in position, and the claw 132 climbs over the ridge 39A and engages with the groove 39B adjacent to the ridge 39A so that the stopper 130 is movable in the first direction A1.

The second end 20B in the longitudinal direction of the optical component 20 is in contact with the curving part 131C. As illustrated in FIG. 27, when the curving part 131C is pressed in the second direction A2 by the second end 20B

in the longitudinal direction of the optical component **20**, the second leg part **131B** intends to open outward in an arrow **R3** direction, and the claw **132** further locks with the groove **39B**, which makes the claw **132** difficult to be released. Therefore, this restrains the claw **132** from climbing over the ridge **39A** and engages the groove **39B** adjacent to the ridge **39A**, which restrains the movement of the stopper **130** in the second direction **A2**.

As described above, in the fourth embodiment, as the variable pressing member **100**, the stopper **130** that is provided with inverted claw **132** and is attachable in a reverse direction from the second embodiment is used. Therefore, as with the first embodiment, the optical component **20** is allowed to be held in the holding member **30** with high positional accuracy, the property of the optical component **20** is allowed to be favorably exerted, and more favorable color developing characteristics are allowed to be obtained without limitation by the characteristics of the light sources **10**.

(Fifth Embodiment)

FIG. **29** illustrates an appearance of a display unit **201** according to a fifth embodiment of the present disclosure. The display unit **201** may be used as a flat-screen television, for example, and may have a configuration in which a plate-like main body section **202** for image display is supported by a stand **203**. Note that the display unit **201** is used as a stationary display unit in a state where the stand **203** is attached to the main body section **202** and is placed on a flat surface such as a floor, a shelf, and a table. However, the display unit **201** may be used as a wall-hanging, display unit in a state where the stand **203** is detached from the main both section **202**.

FIG. **30** illustrates the main body section **202** illustrated in FIG. **29** in an exploded manner. For example, the main body section **202** may include a front bezel **211**, a panel module **212**, and rear cover **213** in this order from a front surface side (a viewer side). The front bezel **211** is a frame member covering a front periphery of the panel module **212**, and a pair of speakers **214** is provided at a lower part of the front bezel **211**. The panel module **212** is fixed to the front bezel **211**, and a power source substrate **215** and a signal substrate **216** are mounted on a back surface of the panel module **212** and an attachment bracket **217** is fixed thereto. The attachment bracket **217** is to attach a wall-hanging bracket, to attach substrates and the like, and to attach the stand **203**. The rear cover **213** covers the back surface and side surfaces of the panel module **212**.

FIG. **31** illustrates the panel module **212** illustrated in FIG. **30** in an exploded manner. For example, the panel module **212** may include a top chassis **221**, a liquid crystal panel **222**, the middle chassis **80**, the optical sheet **70**, the light guide plate **50**, the reflective member **60**, the back chassis **90**, a balancer substrate **225**, a balancer cover **226**, and a timing controller substrate **227** in this order from the front surface side (the viewer side).

The top chassis **221** is a frame-like meal component covering the front periphery of the liquid crystal panel **222**. For example, the liquid crystal panel **222** may include a liquid crystal cell **222A**, a source substrate **222B**, and a flexible substrate **22C** such as chip on film (COF). The flexible substrate **22C** connects the liquid crystal cell **222A** with the source substrate **222B**. The middle chassis **80** is a frame-like resin component holding the liquid crystal panel **222** and the optical sheet **70**. The back chassis **90** is a metal component that houses the liquid crystal panel **222** and the illumination device **1** and is formed of iron (Fe) or the like. The balancer substrate **225** controls the illumination device

1, and is mounted on the back surface of the back chassis **90** as well as is covered with the balancer cover **226** as illustrated in FIG. **31**. The timing controller substrate **227** is also mounted on the back surface of the back chassis **90**.

In the display unit **201**, light from the illumination device **1** is allowed to selectively pass through the liquid crystal panel **222**, and thus image display is performed. In this case, as described in the first embodiment, since the illumination device **1** with improved color developing characteristics is provided, display quality of the display unit **201** is improved.

Note that, in the above-described fifth embodiment, the case where the display unit **201** includes the illumination device **1** according to the first embodiment has been described. However, it is needless to say that the display unit **201** may include the illumination device **1** according to any of the second to fourth embodiments, in place of the illumination device **1** according to the first embodiment.

(Application Examples of Illumination Device)

FIG. **32** and FIG. **33** each illustrate an appearance of a tabletop illumination apparatus **310** to which the illumination device **1** according to any of the above-described embodiments is applied. For example, the illumination apparatus **310** may be configured by attaching an illumination section **313** to a supporting post **312** provided on a base **311**. The illumination section **313** is configured of the illumination device **1** according to any of the above-described embodiments. The illumination section **313** may have an arbitrary shape such as a tubular shape illustrated in FIG. **32**, a curved surface shape illustrated in FIG. **33**, or the like by forming the light guide plate **50** in a curved shape.

FIG. **34** illustrates an appearance of a room illumination apparatus **320** to which the illumination device **1** according to any of the above-described embodiments is applied. The illumination apparatus **320** may include, for example, illumination sections **321** each configured of the illumination device **1** according to any of the above-described embodiments. The appropriate number of illumination sections **321** are arranged with appropriate distances on a ceiling **322A** of a building. Note that the illumination sections **321** may be disposed on an arbitrary place such as walls **322B** or a floor (not illustrated) without limitation on the ceiling **322A**, depending on the purpose.

In the illumination apparatuses **310** and **320**, illumination is performed by the light from the illumination device **1**. In this example, as described in the above-described embodiments, since the illumination apparatuses **310** and **320** each include the illumination device **1** having favorable color developing characteristics, illumination quality is improved.

Hereinbefore, although the present disclosure has been described with referring to the embodiments, the present disclosure is not limited to the above-described embodiments, and various modifications may be made. For example, in the above-described embodiments, the case where the optical component **20** includes the two optical components **20**, and the two optical components **20** are pressed against the center wall **36** by the variable pressing members **100** has been described. However, the present disclosure is applicable to a case where only one optical component **20** is provided. In such a case, for example, the first end **20A** in the longitudinal direction of the optical component **20** is pressed against the wall **36**, and the second end **20B** in the longitudinal direction is provided with the variable pressing member **100** to absorb variation and fluctuation of the dimensions. Consequently, the optical component **20** is allowed to be pressed against the wall **36** with

high accuracy in a small space, which is effective to downsizing of the illumination device 1.

In addition., for example, in the above-described embodiments, the case where each of the light sources 10 is an LED has been described. However, each of the light sources 10 may be configured of a semiconductor laser or the like.

Further, for example, although the specific configurations of the illumination device 1 and the display unit 201 (the television) has been described in the above-described embodiments, all of the components are not necessarily provided, and other components may be further provided.

Moreover, for example, the materials and the thicknesses of the respective components described in the above-described embodiments are not limited, and other materials and other thicknesses may be used.

The present disclosure is applicable to other display units such as a monitor, in addition to the television described in the above-described embodiment.

Note that the present technology may be configured as follows.

(1) An illumination device including:

a light source;

an optical component provided separately from the light source;

a holding member holding the light source and the optical component; and

a variable pressing member variably pressing the optical component against the holding member.

(2) The illumination device according to (1), wherein the variable pressing member is a stopper that is movable in stages in a first direction, and is restrained in movement in a second direction, the second direction being opposite to the first direction.

(3) The illumination device according to (2), wherein the stopper includes a U-shaped body and a claw, the U-shaped body including a first leg part a second leg part, and a curving part coupling the first leg part and the second leg part, and the claw being provided outside the first leg part.

(4) The illumination device according to (3), wherein the holding member has a sawtooth section in which a plurality of grooves is arranged in the first direction with ridges in between, and

the stopper is regulated in position by engagement of the claw and the groove, and the claw climbs over the ridge and engages with the groove adjacent to the ridge to allow the stopper to be movable in the first direction.

(5) The illumination device according to (4), wherein

the stopper has an extension part extending from a front end of the second leg part, the extension part having a clearance with a front end of the first leg part,

a first end of the optical component is in contact with the extension part, and

when the extension part is pressed in the second direction by the first end of the optical component, the extension part comes into between the first leg part and the second leg part of the U-shaped body to restrain the claw from climbing over the ridge.

(6) The illumination device according to (4), wherein

a first end of the optical component is in contact with the curving part, and

when the curving part is pressed in the second direction by the first end of the optical component., the first leg part and the second leg part of the U-shaped body are opened outward to restrain the claw from climbing over the ridge.

(7) The illumination device according to (1), wherein the variable pressing member is an elastic component capable of pressing the optical component in a first direction in the holding member.

(8) The illumination device according to (7), wherein the elastic component is formed of one or more of a metal spring, a resin, a foamed body, and elastomer.

(9) The illumination device according to (8), wherein the elastic component is configured of a torsion coil spring.

(10) The illumination device according to (8), wherein the elastic component is configured of a metal spring and a non-metal optical component cover provided between the metal spring and the optical component.

(11) The illumination device according to (10), wherein the holding member has a sawtooth section in which a plurality of grooves is arranged in the first direction with ridges in between, and

the optical component cover has a claw outside thereof, is regulated in position by engagement of the claw and the groove, and when the claw climbs over the ridge to engage the groove adjacent to the ridge, the optical component cover is movable in the first direction.

(12) The illumination device according to any one of (1) to (11), wherein the optical component is a wavelength conversion member configured by sealing a wavelength conversion material in a tubular container.

(13) The illumination device according to (12), wherein the optical component includes a plurality of optical components,

the plurality of optical components is arranged in line with one another,

the holding member has a wall at a boundary between the adjacent two optical components, the wall receiving a second end in the longitudinal direction of each of the optical components, and

the variable pressing member is provided on a first end of the longitudinal direction of the respective optical components.

(14) The illumination device according to (12) or (13), wherein the wavelength conversion material contains a quantum dot.

(15) The illumination device according to (14), wherein the light source is a blue light source, and

the wavelength conversion material converts a wavelength of blue light into a wavelength of red light or green light.

(16) The illumination device according to any one of (1) to (15), wherein the light source is a light emitting diode (LED).

(17) The illumination device according to any one of (1) to (16), wherein the holding member is divided into a plurality of divided holding members in a longitudinal direction of the optical component.

(18) A display unit provided with a liquid crystal panel and an illumination device provided on a back surface side of the liquid crystal panel, the illumination device including:

a light source;

an optical component provided separately from the light source;

a holding member holding the light source and the optical component; and

a variable pressing member variably pressing the optical component against the holding member.

It should be understood by those skilled in the art that various modifications, combinations, sub-combinations, and alterations may occur depending on design requirements and

21

other factors insofar as they are within the scope of the appended claims or the equivalents thereof.

What is claimed is:

[1. An illumination device comprising:

a light source;

an optical component;

a holding member holding the light source and the optical component with respect to one another, wherein the holding member is divided into a plurality of divided holding members, adjacent ones of the plurality of divided holding members having end portions for coupling adjacent divided holding members to one another, an end portion having at least one of a projection and a step part by which the end portion couples to the end portion of an adjacent divided holding member; and a variable pressing member variably pressing the optical component against the holding member.]

[2. The illumination device according to claim 1, wherein each divided holding member comprises a projection at one end portion and a step at the opposing end portion.]

[3. The illumination device according to claim 1, wherein each end portion is provided with a projection and a step portion.]

[4. The illumination device according to claim 1, wherein the variable pressing member is a stopper that is movable in a first direction, and is restrained in movement in a second direction, the second direction being opposite to the first direction.]

[5. The illumination device according to claim 4, wherein the stopper includes a U-shaped body and a claw, the U-shaped body including a first leg part, a second leg part, and a curving part coupling the first leg part and the second leg part, and the claw being provided outside the first leg part.]

[6. The illumination device according to claim 5, wherein the holding member has a sawtooth section in which a plurality of grooves is arranged in the first direction with ridges in between, and

the stopper is regulated in position by engagement of the claw and the groove, and the claw climbs over the ridge and engages with the groove adjacent to the ridge to allow the stopper to be movable in the first direction.]

[7. The illumination device according to claim 6, wherein the stopper has an extension part extending from a front end of the second leg part, the extension part having a clearance with a front end of the first leg part, a first end of the optical component is in contact with the extension part, and

when the extension part is pressed in the second direction by the first end of the optical component, the extension part comes into between the first leg part and the second leg part of the U-shaped body to restrain the claw from climbing over the ridge.]

[8. The illumination device according to claim 6, wherein a first end of the optical component is in contact with the curving part, and

when the curving part is pressed in the second direction by the first end of the optical component, the first leg part and the second leg part of the U-shaped body are opened outward to restrain the claw from climbing over the ridge.]

[9. The illumination device according to claim 1, wherein the variable pressing member is an elastic component capable of pressing the optical component in a first direction in the holding member.]

22

[10. The illumination device according to claim 9, wherein the elastic component is formed of one or more of a metal spring, a resin, a foamed body, and elastomer.]

[11. The illumination device according to claim 9, wherein the elastic component is configured of a torsion coil spring.]

[12. The illumination device according to claim 9, wherein the elastic component is configured of a metal spring and a non-metal optical component cover provided between the metal spring and the optical component.]

[13. The illumination device according to claim 12, wherein

the holding member has a sawtooth section in which a plurality of grooves are arranged in the first direction with ridges in between, and

the optical component cover has a claw outside thereof, is regulated in position by engagement of the claw and a groove from the plurality of grooves, and in case the claw climbs over a ridge of the ridges to engage the groove adjacent to the ridge, the optical component cover is movable in the first direction.]

[14. The illumination device according to claim 1, wherein the optical component is a wavelength conversion member configured by sealing a wavelength conversion material in a tubular container.]

[15. The illumination device according to claim 14 wherein the wavelength conversion material contains a quantum dot.]

[16. The illumination device according to claim 14, wherein the light source is a blue light source, and the wavelength conversion material converts a wavelength of blue light into a wavelength of red light or green light.]

[17. The illumination device according to claim 1, wherein the optical component includes a plurality of optical components,

the plurality of optical components are arranged in line with one another,

the holding member has a wall at a boundary between adjacent two optical components, the wall receiving a second end in the longitudinal direction of each of the optical components, and

the variable pressing member is provided on a first end of the longitudinal direction of the respective optical components.]

[18. The illumination device according to claim 1, wherein the light source is a light emitting diode (LED).]

[19. A display unit provided with a liquid crystal panel and an illumination device provided on a back surface side of the liquid crystal panel, the illumination device comprising:

a light source;

an optical component;

a holding member holding the light source and the optical component with respect to one another, wherein the holding member is divided into a plurality of divided holding members, adjacent ones of the plurality of divided holding members having end portions for coupling adjacent divided holding members to one another, an end portion having at least one of a projection and a step part by which the end portion couples to the end portion of an adjacent divided holding member; and a variable pressing member variably pressing the optical component against the holding member.]

20. A display device comprising:
at least one light source configured to emit light of a first wavelength range;

23

a light guide plate having a light incident surface that faces the at least one light source, a light emission surface orthogonal to the light incident surface, and a bottom surface parallel to the light emission surface, the bottom surface having a pattern that irregularly reflects light toward the light emission surface;

a heat dissipating member disposed on a backside of the at least one light source;

a luminescent body comprising wavelength conversion material provided in a resin and positioned to receive the light of the first wavelength range, the luminescent body is positioned such that the at least one light source is between the luminescent body and the heat dissipating member;

a reflective member having a planar surface disposed to face the bottom surface, the reflective member having light reflecting and light scattering functions;

a holding member being divided into at least two divided holding members and the holding member having at least one surface section; and

an elastic component that causes the at least one surface section to engage the at least one light source and the luminescent body;

wherein the luminescent body is configured such that a portion of the light of the first wavelength range is converted to light of at least a second wavelength range and is configured to transmit light of the first wavelength range through the luminescent body without colliding with the wavelength conversion material, the light of the first wavelength range that transmits through the luminescent body without colliding with the wavelength conversion material includes light incident at oblique angles.

21. The display device of claim 20, further comprising at least one light source substrate;

wherein the at least one light source comprises multiple light sources and multiple light sources are mounted on the at least one light source substrate.

22. The display device of claim 21, wherein the wavelength conversion material is quantum dot material.

23. The display device of claim 21, further comprising a back chassis that supports the at least one light source substrate.

24. The display device of claim 23, wherein the wavelength conversion material is quantum dot material.

25. A display device comprising:

a liquid crystal panel having a backside;

light sources configured to emit light of a first wavelength range;

light source substrates on which the light sources are mounted perpendicular to the backside of the liquid crystal panel;

a heat dissipating member disposed on a backside of the light source substrates;

a luminescent body comprising wavelength conversion material provided in a resin and positioned to receive the light of the first wavelength range, the luminescent body is positioned such that the light sources are between the luminescent body and the light source substrates;

a reflective member having a planar surface disposed to face the backside, the reflective member having light reflecting and light scattering functions;

a holding member being divided into at least two divided holding members and the holding member having at least one surface section; and

24

an elastic component that causes the at least one surface section to engage at least one of the light sources and the luminescent body;

wherein the luminescent body is configured such that a portion of the light of the first wavelength range is converted to light of at least a second wavelength range and is configured to transmit light of the first wavelength range through the luminescent body without colliding with the wavelength conversion material, the light of the first wavelength range that transmits through the luminescent body without colliding with the wavelength conversion material includes light incident at oblique angles, and

wherein the luminescent body is disposed between at least one of the light sources and the backside of the liquid crystal panel.

26. The display device of claim 25, wherein the heat dissipating member is disposed to have a portion perpendicular to the liquid crystal panel and is bent to have a portion parallel with the liquid crystal panel.

27. The display device of claim 26, wherein a plurality of the light sources are mounted on the light source substrates.

28. The display device of claim 26, wherein the wavelength conversion material is quantum dot material.

29. The display device of claim 26, wherein the wavelength conversion material is quantum dot material.

30. The display device of claim 25, wherein the wavelength conversion material is quantum dot material.

31. The display device of claim 30, further comprising a back chassis that supports a heat dissipating member.

32. The display device of claim 30, further comprising a back chassis that supports the heat dissipating member.

33. A display device comprising:

a liquid crystal panel having a backside;

light sources configured to emit light of a first wavelength range;

a heat dissipating member on which the light sources are disposed thereover;

a luminescent body comprising wavelength conversion material provided in a resin and positioned to receive the light of the first wavelength range, the luminescent body is positioned such that the light sources are between the luminescent body and light source substrates;

a reflective member having a planar surface disposed to face the backside, the reflective member having light reflecting and light scattering functions;

a holding member being divided into at least two divided holding members and the holding member having at least one surface section; and

an elastic component that causes the at least one surface section to engage the at least one light source and the luminescent body;

wherein the luminescent body is configured such that a portion of the light of the first wavelength range is converted to light of at least a second wavelength range and is configured to transmit light of the first wavelength range through the luminescent body without colliding with the wavelength conversion material, the light of the first wavelength range that transmits through the luminescent body without colliding with the wavelength conversion material includes light incident at oblique angles, and

wherein the luminescent body is disposed between the light sources and the backside of the liquid crystal panel.

25

34. The display device of claim 33, wherein the heat dissipating member is disposed to have a portion perpendicular to the liquid crystal panel and is bent to have a portion parallel with the liquid crystal panel.

35. The display device of claim 34, wherein the display device is an edge-type backlit display. 5

36. The display device of claim 33, wherein the wavelength conversion material is quantum dot material.

37. A display device comprising:

a liquid crystal panel having a backside; 10

light sources configured to emit light of a first wavelength range;

a light guide plate having a light incident surface that faces the light sources, a light emission surface orthogonal to the light incident surface and facing the backside of the liquid crystal panel, and a bottom surface parallel to the light emission surface, the bottom surface having a pattern that irregularly reflects light toward the light emission surface; 15 20

a heat dissipating member on which the light sources are disposed thereover;

a luminescent body comprising wavelength conversion material provided in a resin and positioned to receive the light of the first wavelength range, the luminescent body is positioned such that the light sources are between the luminescent body and light source substrates that the light sources are mounted thereon; 25

26

a reflective member having a planar surface disposed to face the bottom surface, the reflective member having light reflecting and light scattering functions;

a holding member being divided into at least two divided holding members and the holding member having at least one surface section; and

an elastic component that causes the at least one surface section to engage the at least one light source and the luminescent body;

wherein the luminescent body is disposed between the light sources and the backside of the liquid crystal panel,

wherein the luminescent body is configured such that a portion of the light of the first wavelength range is converted to light of at least a second wavelength range and is configured to transmit light of the first wavelength range through the luminescent body without colliding with the wavelength conversion material, the light of the first wavelength range that transmits through the luminescent body without colliding with the wavelength conversion material includes light incident at oblique angles, and

wherein the heat dissipating member is disposed to have a portion perpendicular to the liquid crystal panel and is bent to have a portion parallel with the liquid crystal panel.

38. The display device of claim 37, wherein the wavelength conversion material is quantum dot material.

* * * * *