



(86) Date de dépôt PCT/PCT Filing Date: 1993/03/29

(87) Date publication PCT/PCT Publication Date: 1993/10/14

(45) Date de délivrance/Issue Date: 2002/05/21

(85) Entrée phase nationale/National Entry: 1994/09/26

(86) N° demande PCT/PCT Application No.: GB 1993/000640

(87) N° publication PCT/PCT Publication No.: 1993/020563

(30) Priorité/Priority: 1992/04/03 (9207330.3) GB

(51) Cl.Int.⁵/Int.Cl.⁵ H01B 7/08

(72) Inventeurs/Inventors:

Gellan, Andrea, GB;
Kippen, John Norquay, GB;
McNaughton, David, GB;
Wood, David, GB


(73) Propriétaire/Owner:

W. L. Gore & Associates (UK) Ltd., GB

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : CABLE PLAT

(54) Title: FLAT CABLE

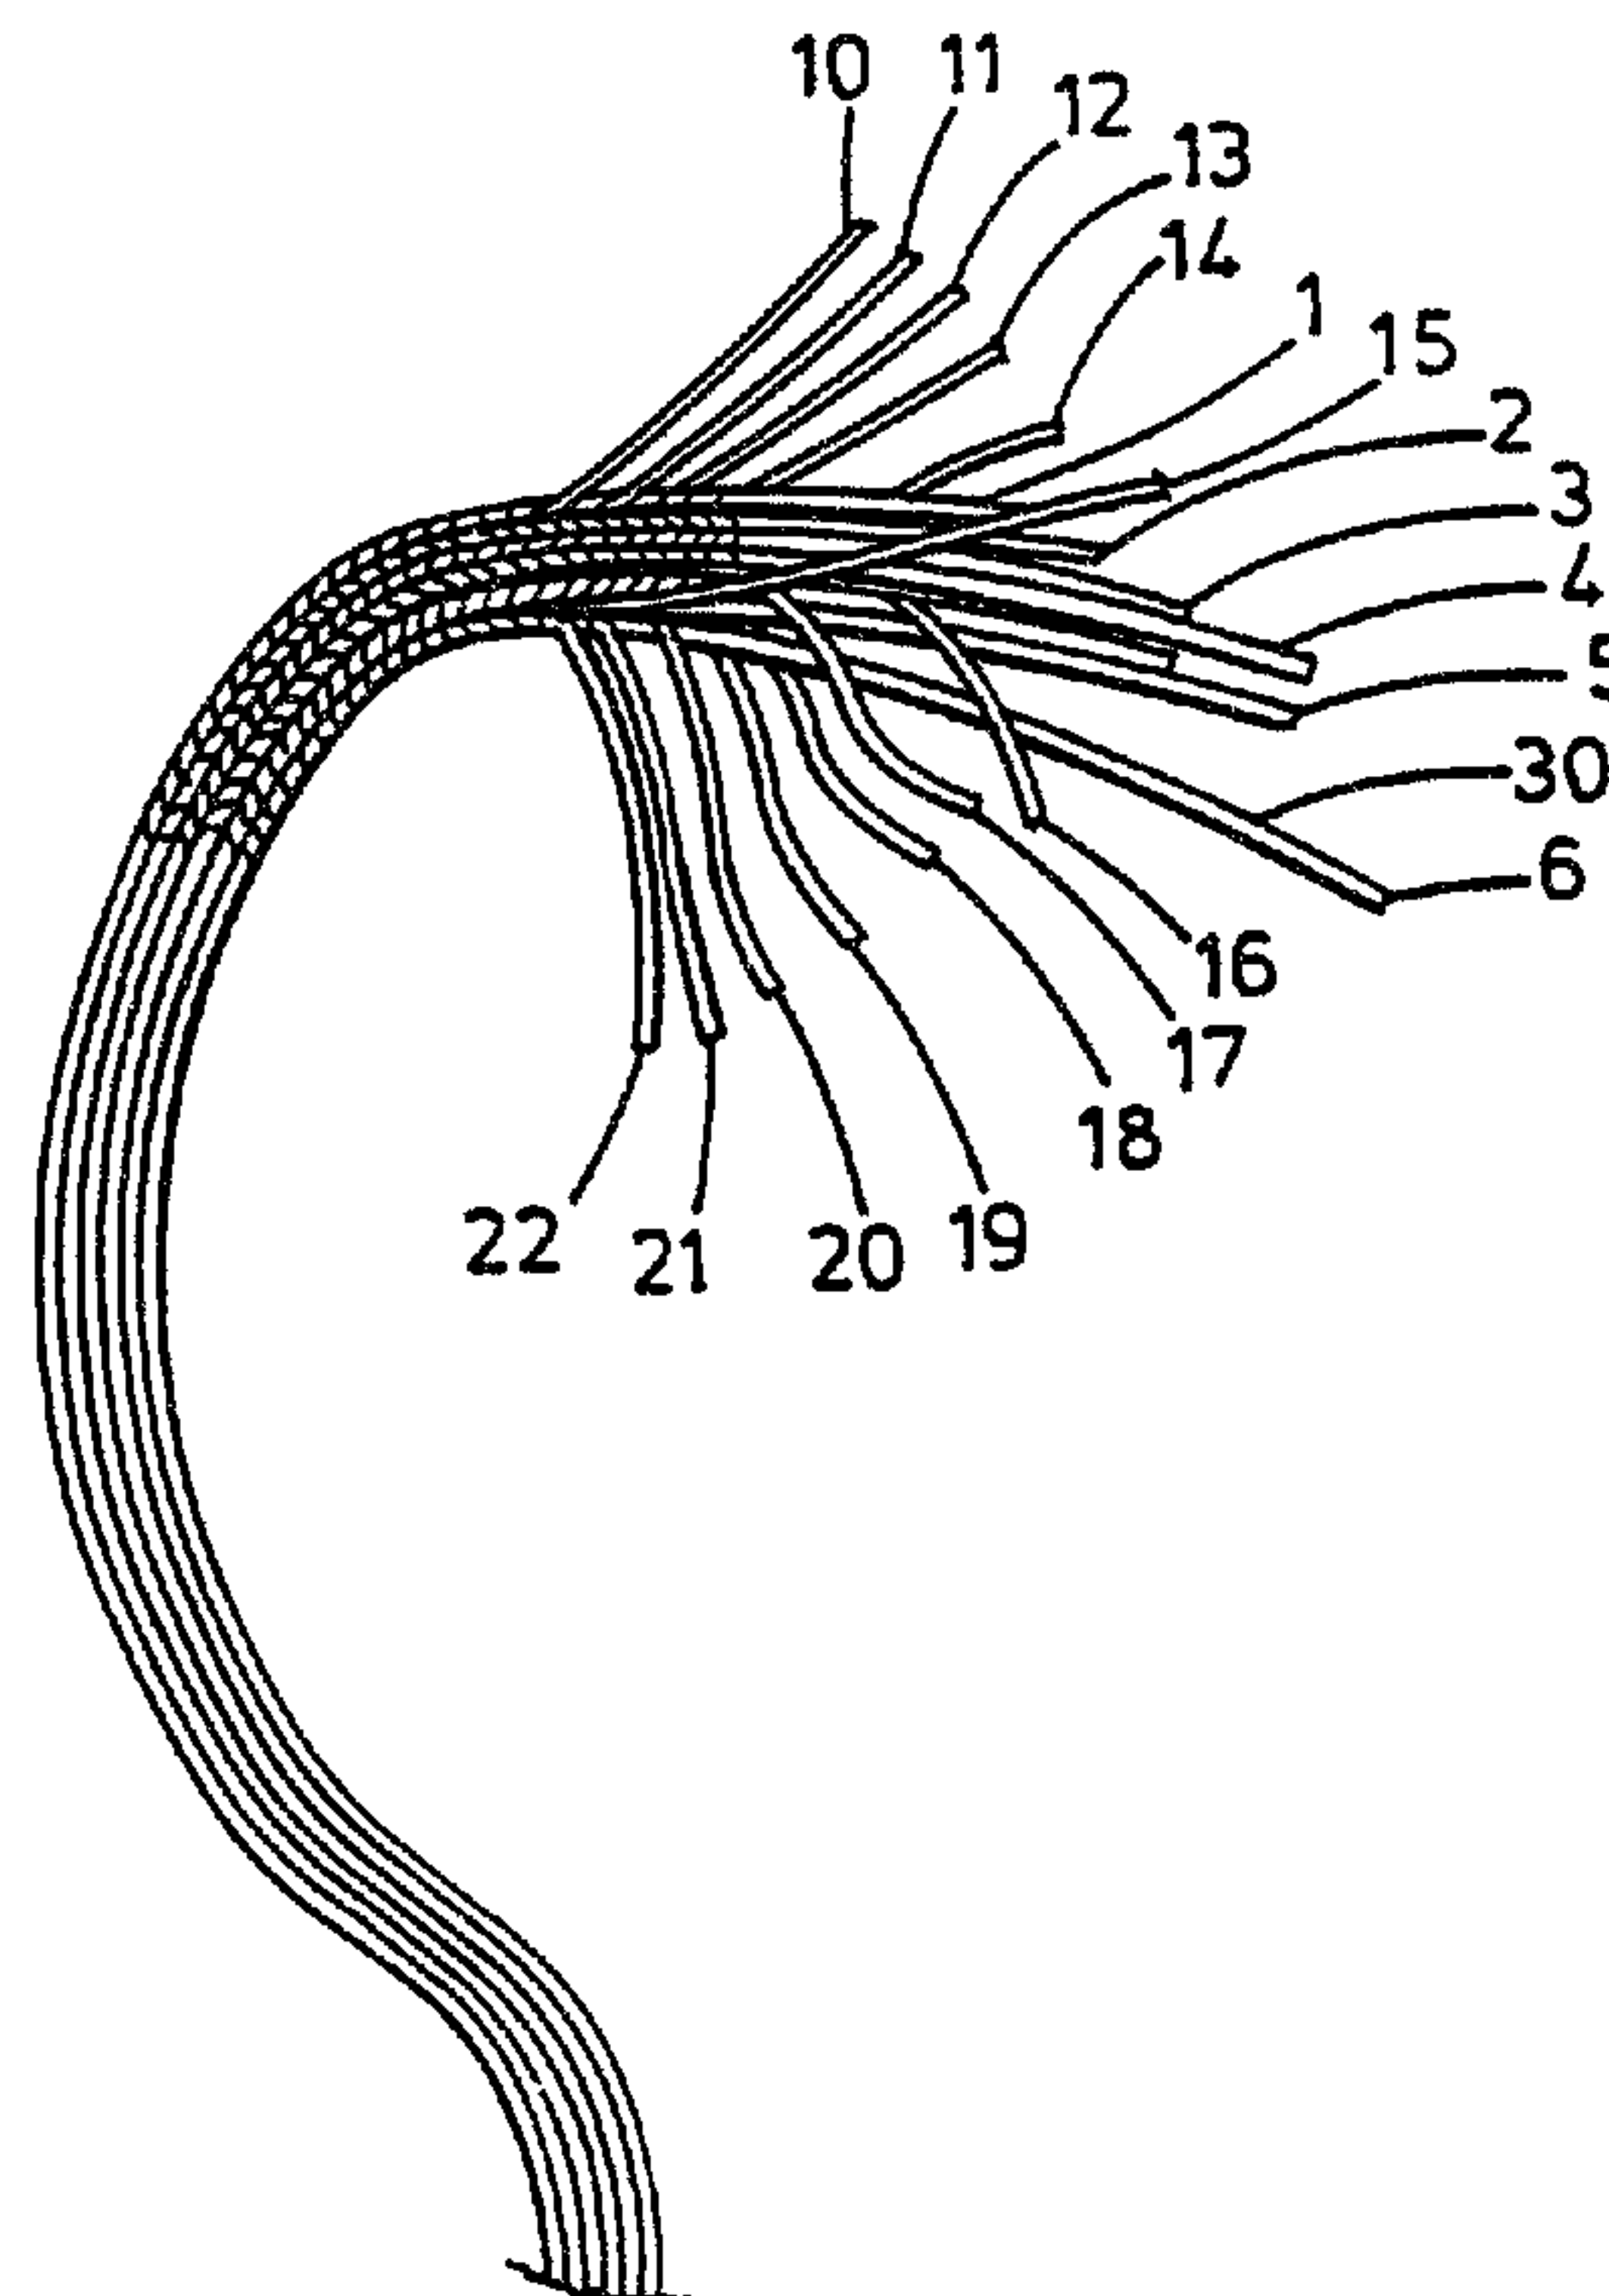

(57) Abrégé/Abstract:

A flat cable comprises a series of parallel electrical conductors (1 to 6) each carrying a spiral-wound tape insulation layer (30). The conductors are held together by braiding formed of a plurality of tapes (10 to 22) or fibres interwoven between the conductors. The braiding is preferably of a thermoplastic material which may be heat bonded to the insulation in order to set the cable in a desired shape e.g. for a wiring loom. The insulation and braiding is preferably formed from a mixture of polytetrafluoroethylene (PTFE) and a copolymer of tetrafluoroethylene and perfluoro(propylvinylether).




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H01B 7/08	A1	(11) International Publication Number: WO 93/20563 (43) International Publication Date: 14 October 1993 (14.10.93)
(21) International Application Number: PCT/GB93/00640 (22) International Filing Date: 29 March 1993 (29.03.93) (30) Priority data: 9207330.3 3 April 1992 (03.04.92) GB (71) Applicant (for all designated States except US): W.L. GORE & ASSOCIATES (UK) LTD. [GB/GB]; 1 Bell Yard, London WC2A 2JP (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : WOOD, David [GB/GB]; 9 St. Peters Court, Inverkeithing, Fife KY11 1QA (GB). McNAUGHTON, David [GB/GB]; 3 Abbots Wind, Kelty Bridge, Fife KY4 0JS (GB). KIPPEN, John, Norquay [GB/GB]; 178 South Street, Lochgelly, Fife KY5 9AB (GB). GELLAN, Andrea [GB/GB]; 9 Transy Grove, Dunfermline, Fife KY12 7QP (GB).		(74) Agents: McCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Sq., Glasgow G1 3AE (GB). (81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

2132980

(54) Title: FLAT CABLE**(57) Abstract**

A flat cable comprises a series of parallel electrical conductors (1 to 6) each carrying a spiral-wound tape insulation layer (30). The conductors are held together by braiding formed of a plurality of tapes (10 to 22) or fibres interwoven between the conductors. The braiding is preferably of a thermoplastic material which may be heat bonded to the insulation in order to set the cable in a desired shape e.g. for a wiring loom. The insulation and braiding is preferably formed from a mixture of polytetrafluoroethylene (PTFE) and a copolymer of tetrafluoroethylene and perfluoro(propylvinylether).

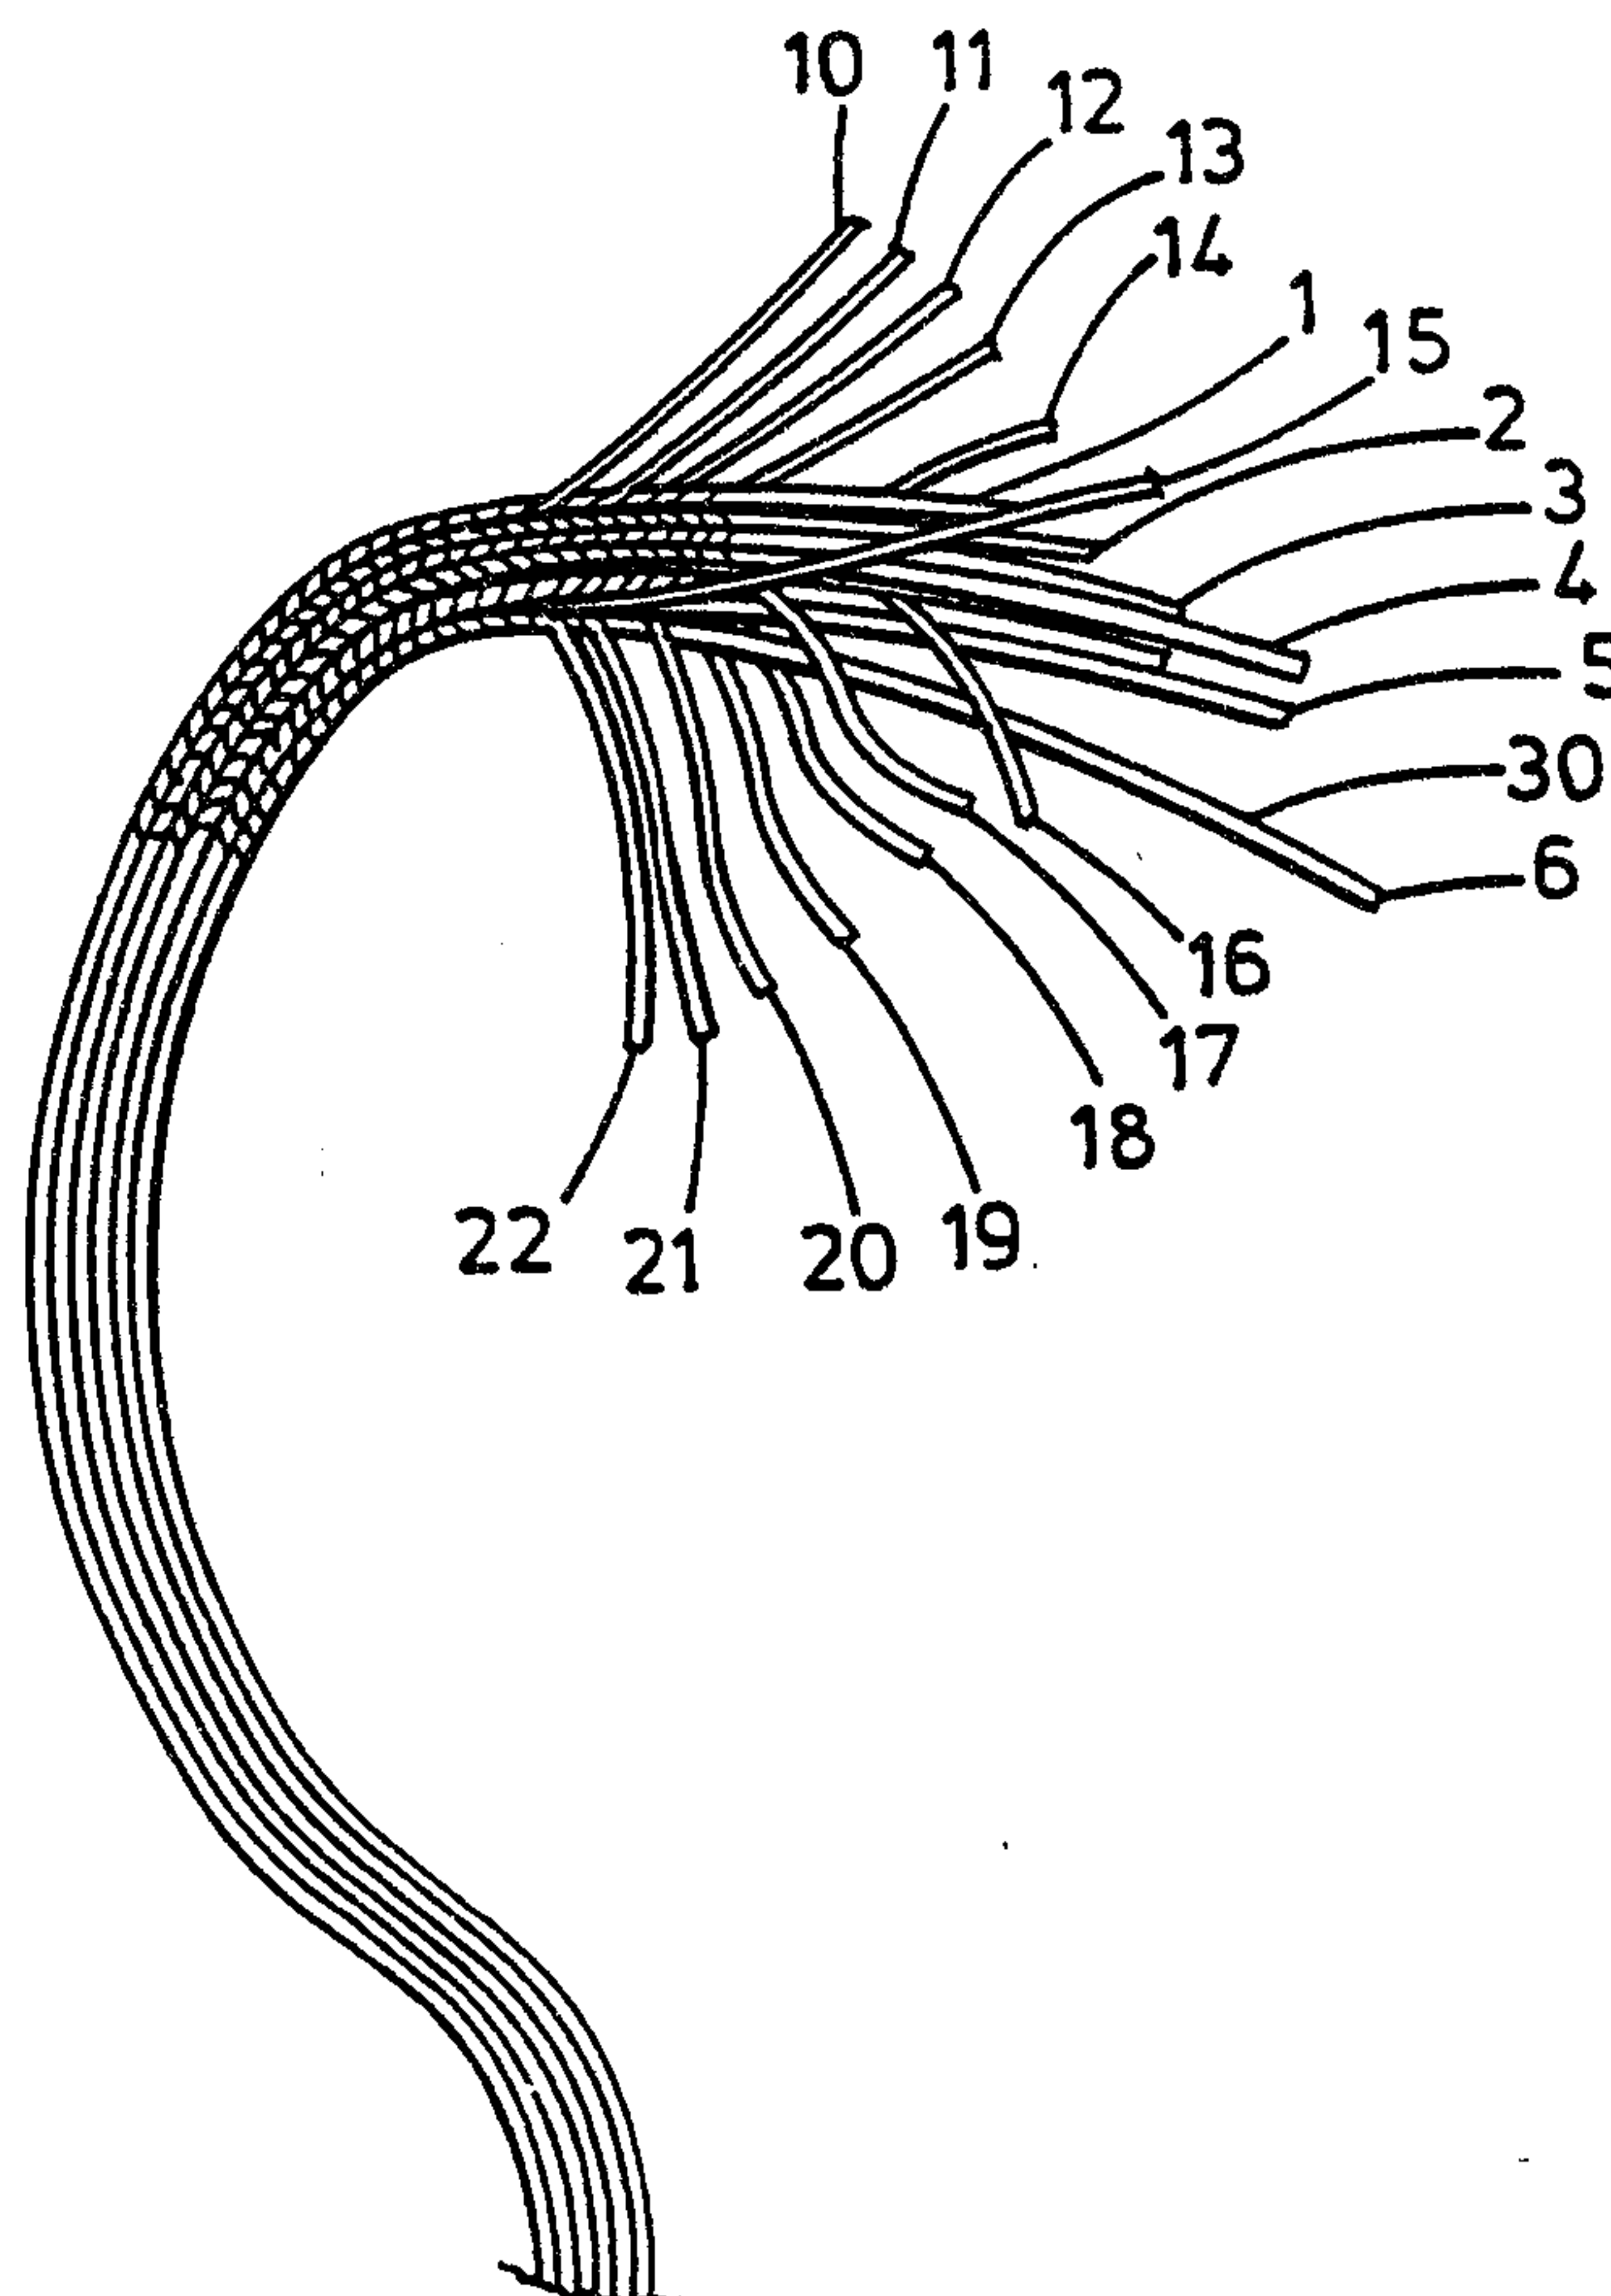

FLAT CABLETECHNICAL FIELD

The present invention relates to a flat cable construction comprising a series of parallel longitudinally extending electrical conductors arranged side-by-side.

BACKGROUND OF THE INVENTION

Flat cables are well known and are used in a variety of applications where multiple electrical connections are to be made between pieces of electrical equipment. The flat orientation of the conductors allows individual conductors to be readily identified when connections are being made or when end connectors are being attached. Conventionally, flat cables are made by extruding the insulating material onto the parallel conductors.

Conventional extrusion suffers from a number of disadvantages, particularly where high performance insulation is required, e.g. in the defence industry. Firstly, extruded flat cables are very resistant to bending in a direction parallel to the plane of the cable. This makes it difficult to form conventional flat cables into pre-configured wiring harnesses, and means that the flat cable must be routed in situ. It would be desirable to be able to produce a flat cable construction which could be bent in any direction, such as to allow the

production of "drop-in" pre-configured wiring harnesses, particularly where it is difficult to route cables in situ due to restricted access or space limitations.

A second disadvantage is that such extruded insulation material does not necessarily give the best mechanical and electrical insulation properties. Also in order to safeguard the integrity of the insulation, the thickness of extruded insulation tends to be greater than, for example, that of tape-wound insulation. Insulating tapes can be processed, such as by pre-stretching in order to provide the desired mechanical and electrical properties.

It would therefore be desirable to provide a flat cable construction which mitigates some or all of these disadvantages.

US-A-3 582 537 discloses a woven ribbon cable wherein a woven lattice structure holds a plurality of insulated conductor wires in a given spaced parallel relationship and has its warp and weft members bonded to each other at the intersections thereof.

WO91/17551 discloses an electrical insulating composite material comprising an intimate admixture of a thermoplastic copolymer of tetrafluoroethylene and perfluoro (propyl vinyl ether) and coagulated dispersion type polytetrafluoroethylene (PTFE), or of porous expanded PTFE. Tape made from the composite material may be wrapped around a conductor and sintered to fuse the

overlapping areas of the tape together.

US-A-3 654 381 discloses a flat cable woven with a warp consisting solely of conductors. The weft threads are woven directly into the conductors to form the final woven cable.

SUMMARY OF THE INVENTION

The present invention provides a flat cable which comprises a series of parallel longitudinally extending electrical conductors arranged side-by-side, each conductor having an electrically insulating covering, the parallel conductors being held together by braiding comprising at least one filament interwoven between the conductors, wherein the braiding is thermoplastic and is heat-bonded to the insulating covering on the conductors.

As used herein, the term "conductor" relates to a single conductor or wire or a group of two or more conductors or wires twisted together.

Whilst the electrically insulating covering can be extruded onto each conductor, where thin high performance insulations are required it is preferred to wrap one or more layers of an insulating tape in a spiral manner around the conductor. Preferably, the spirally wound turns of tape overlap by up to 50% of the width of the tape in order to maintain integrity of the insulation. Typically, from 1 to 5, usually 2 or 3 layers of tape are applied. The tape is preferably formed from a mixture of

polytetrafluoroethylene (PTFE) and PFA copolymer of tetrafluoroethylene (TFE) and perfluoro(propylvinylether) (PPVE) as disclosed in our international application PCT/GB91/00661. In particular, it is preferred that the insulation shall be formed of alternating layers of porous expanded material and non-porous material. Such tape wrap constructions show good abrasion and cut-through resistance and good electrical insulation properties, whilst being of relatively low thickness, and thus allowing compact cable constructions.

In an alternative embodiment, the insulating tape may be a polyester film, such as Mylar (trademark), Melenex (trademark), Hostaphan (trademark) or Milene (trademark). Such films include a polyester base film with a heat sealable thermoplastic polyester resin coating thereon which may be fused at relatively low temperatures e.g. 200-210°C. The insulation is formed as before by tape-wrapping the conductor and heating to adhere the tape layers.

- 4 -

Typically, the cable comprises 2 to 12, typically 6, conductors. The conductors may comprise twisted pairs.

The parallel conductors are held together by braiding comprising at least one filament interwoven between the conductors. This allows the flat cable to be bent in any direction, including the direction parallel to the plane of the cable, which imparts good flexibility. It also allows the cable to be bent into a pre-configured harness configuration. Usually, the braiding will comprise a plurality of filaments, for example 2 to 25 filaments, preferably 6 to 16 filaments. Typical braiding machines apply 13 filaments.

The filaments are preferably formed of an electrically insulating material. For some applications, the braiding is formed of a plastics material which becomes bonded to the electrically insulating covering around the conductors upon the application of heat. In particular, the braiding may be formed of the same or similar material to that used for the electrical insulation (e.g. the outer layer of tape-wrapped electrical insulation) around the conductors. Thus, when the insulating covering around the conductors is formed of a material comprising PTFE and TFE/PPVE copolymer as disclosed in the above mentioned international patent application, then the braiding is formed of the same or similar adherable material. The material may be bonded to itself by heating to a sintering temperature.

In order to provide a braiding material of high tensile strength, an expanded porous material of the type disclosed in the international patent application PCT/GB91/00661 may be used. Such porous expanded materials may have a matrix tensile strength of up to 3515 kg/cm^2 (50,000 pounds per square inch), and are preferably drawn down to form flat fibres. The matrix tensile strength is defined as the tensile strength divided by the porosity of the expanded porous material.

Analogously, if a polyester insulating material is used on the conductors, the braiding is preferably formed of the same material or a similar material which can be adhered thereto under the effect of heat.

In this way, the flat cable may be bent into the desired three-dimensional configuration, and then heat-set by heating to a sintering or fusing temperature.

The braiding filaments are preferably in the form of slit tapes of width 1 to 4 mm, and thickness 5 to 20 microns.

Alternatively, the braiding filaments may be in the form of fibres or round monofilaments (such as nylon or polyester).

Preferably, the filaments are interwoven by passing a filament over one conductor and under the adjacent conductor. Alternatively, groups of conductors, for example 2 to 4 conductors twisted together, may be interconnected by passing the filament over one group and under the adjacent group.

- 6 -

Thus, the present invention allows the production of a flat cable which can be bent in any direction in three dimensions so as to allow the pre-fabrication of a routed wiring harness. The harness configuration may then be heat-set. The flat cable construction allows both flat and round terminal connectors to be used. The flat cable is simply rolled up in a transverse direction if a circular connector terminal is to be attached. A reduced thickness of insulation may be used, leading to increased signal density and reduced cable weight.

PREFERRED EMBODIMENT

An embodiment of the present invention will now be described by way of example only in conjunction with the drawing wherein:

Figure 1 shows a flat braided cable construction.

The figure shows a flat cable comprising six parallel insulated conductors 1 to 6 which lie side-by-side in a single plane, and which are held together by thirteen strips of braiding 10 to 22 interwoven between the conductors.

Each filament of braiding is woven over one conductor and under the adjacent conductor.

Each conductor has an electrically insulating covering 30 around it. Typically, the insulated covering comprises a first layer of a spirally wound porous expanded tape; a second layer of a non-porous spirally

wound tape; and a third outer layer of a porous expanded spirally wound tape. The tapes are wound in overlapping (and possibly counter-rotatory) overlapping turns. The porous and non-porous tapes are typically formed of a composite material as disclosed in PCT/GB91/00661 (W091/17551). The non porous material typically comprises an intimate admixture of 5 to 40 wt.% of a thermoplastic copolymer of tetrafluoroethylene and perfluoro(propylvinylether) and 60 to 95 wt.% of coagulated dispersion type polytetrafluoroethylene, the composite material having been extruded and calendered to form a tape. The porous expanded composite material typically is formed of an intimate admixture of 50 to 90 wt.% of a thermoplastic copolymer of tetrafluoroethylene and perfluoro(propylvinylether) and 90 to 5 wt.% of polytetrafluoroethylene. Usually, the porous expanded material comprises 50 to 95 wt.% of copolymer.

The filaments of braiding are formed of the same porous expanded tape and have a width 2 mm and thickness 12 microns. The matrix tensile strength is 5624 to 7030 kg/cm² (80 to 100,000 pounds per square inch). The material is typically formed as Example 3 of W091/17551. The flat cable as shown in Figure 1 may then be bent to shape in any direction. Due to the fact that the conductors are held together by braiding, the conductors may move along side each other, thereby enabling the cable to be bent in a direction parallel to the plane of the flat cable. As shown in

2132980

- 8 -

Figure 1, in so doing the ends of the conductors become displaced longitudinally relative to one another. Once the cable has been formed into the desired configuration, it may be heat-set by sintering, typically by heat treating in air at 350°C for about 1 minute.

In an alternative embodiment six twisted pairs of insulated conductors are braided into a flat cable. The conductor insulation is a heat-sealable polyester film and the braiding is formed of the same polyester material, which is heat-settable at about 200-210°C.

Other heat-settable insulating materials may be used for the insulation and braiding, and the present invention is not limited to any particular material.

CLAIMS

1. A flat cable which comprises a series of parallel longitudinally extending electrical conductors (1-6) arranged side-by-side, each conductor having an electrically insulating covering (30), the parallel conductors being held together by braiding comprising at least one filament (10-22) interwoven between the conductors, wherein the braiding is thermoplastic and is heat-bonded to the insulating covering on the conductors.
2. A cable according to claim 1 wherein the electrically insulating covering is in the form of spirally wound overlapping tape.
3. A cable according to claim 2 wherein the insulating covering comprises a mixture of polytetrafluoroethylene (PTFE) and a copolymer of tetrafluoroethylene (TFE) and perfluoro(propylvinylether) (PPVE).
4. A cable according to claim 3 wherein the insulating covering comprises porous and non-porous tape formed from said mixture.
5. A cable according to any preceding claim wherein the braiding filament is in the form of a tape.

6. A cable according to any of claims 1 to 4 wherein the braiding filament is in the form of a fibre or monofilament.

7. A cable according to claim 6 wherein the braiding filament is in the form of a PTFE fiber of substantially round cross-section which has been formed from a continuous sheet of PTFE which has been helically rolled and adhered to itself.

8. A cable according to any preceding claim comprising a plurality of conductors and a plurality of braiding filaments, each filament passing over one conductor and under an adjacent conductor.

1 / 1

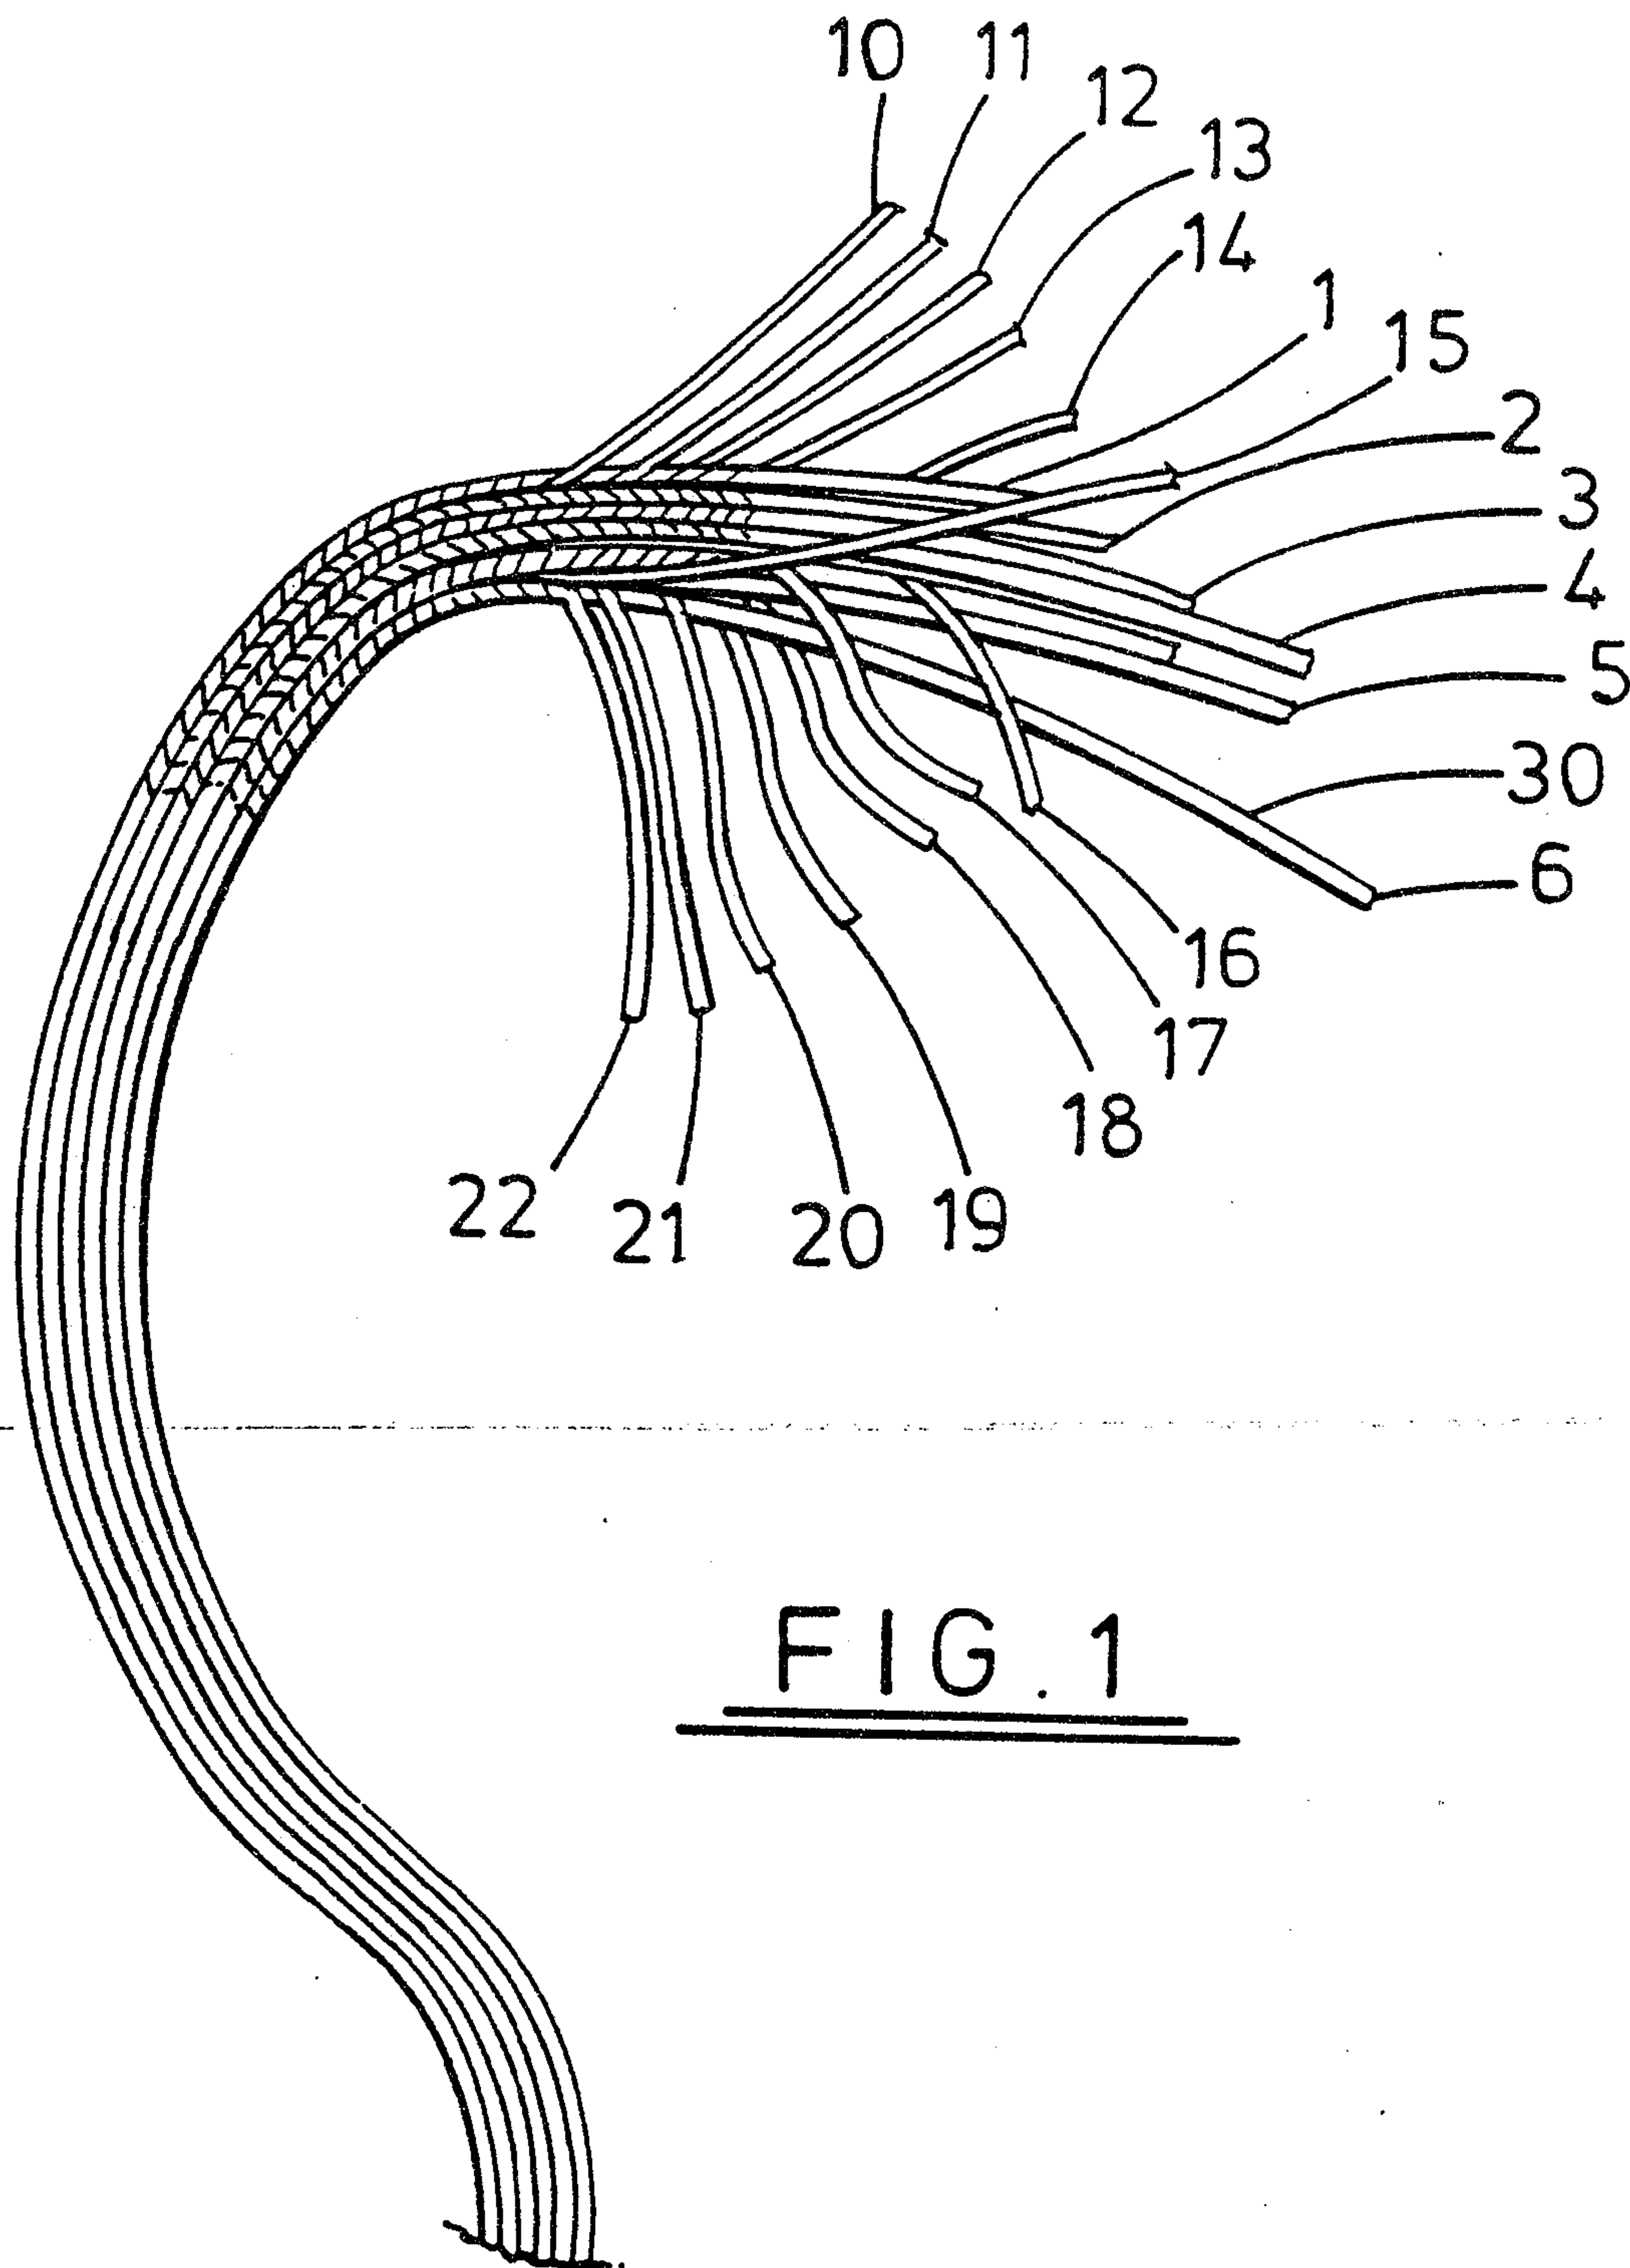


FIG. 1

SUBSTITUTE SHEET

