



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.08.2020 Bulletin 2020/32

(51) Int Cl.:
E01C 7/18 (2006.01) E01C 23/08 (2006.01)

(21) Application number: **19216982.9**

(22) Date of filing: **17.12.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **Stracqualursi, Giuseppe**
00128 Roma (IT)
• **Pesci, Danilo**
00128 Roma (IT)
• **Gigli, Gabriele**
00128 Roma (IT)
• **Collepari, Vittorio**
00128 Roma (IT)

(30) Priority: **28.12.2018 IT 201800021352**

(71) Applicant: **Bridgestone Europe NV/SA**
1932 Zaventem (BE)

(74) Representative: **Marchetti, Alessio**
Bridgestone Technical Center Europe S.p.A.
Via Fosso del Salceto, 13/15
00128 Roma (IT)

(54) **PROCESS AND APPARATUS FOR THE TREATMENT OF THE ROUGHNESS OF A ROAD SURFACE**

(57) The present invention relates to a process and an apparatus for the treatment of the roughness of a road surface, in particular of an asphalt road surface, in par-

ticular with regard to the problems of the control and/or reduction of noise due to the rolling of the tyres of vehicles transiting upon the road surface.

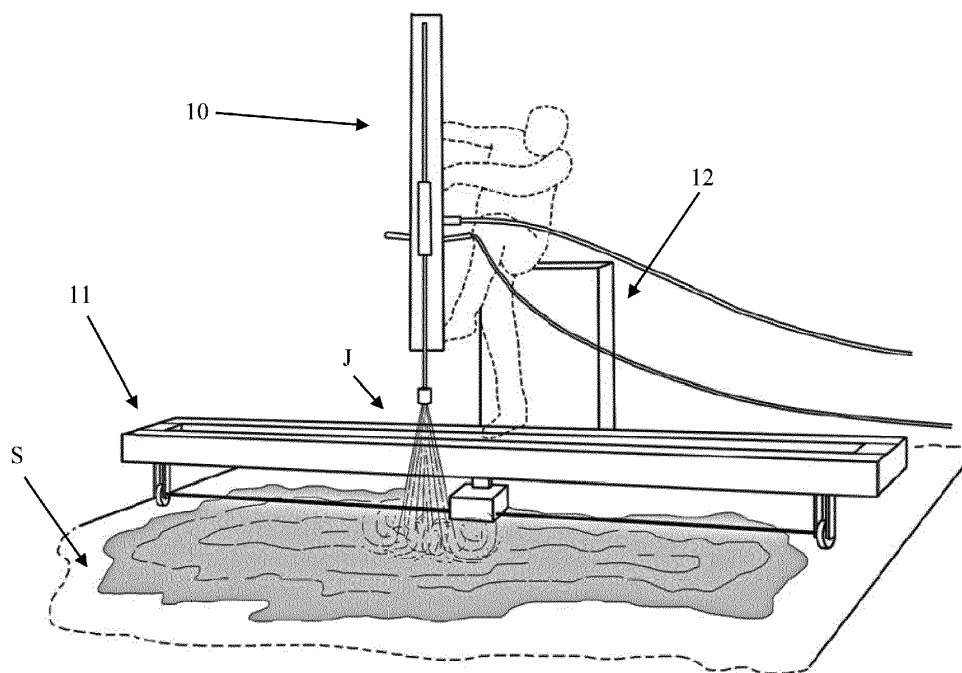


FIG. 7

Description

[0001] The present invention relates to a process and an apparatus for the treatment of the roughness (in particular of the macro-roughness) of a road surface, in particular of an asphalt road surfacing.

[0002] The roughness depends upon the asperities present upon the rolling surface of a pavement (road surface). These asperities can be classified into micro-roughness and macro-roughness. The macro-roughness depends upon the entirety of the intergranular surface asperities; the micro-roughness is instead linked to the roughness of the individual stone elements of which the mixture is composed.

[0003] The measurement and characterization of the roughness is performed by means of the analysis and measurement of the surface profile of the pavement.

Background

[0004] The present invention lies in the construction of road surfaces sector. More particularly, the invention is relevant with regard to the problems of the control and/or reduction of noise due to the rolling of the tyres of vehicles transiting upon the road surface.

[0005] It is well known that the emission of noise on the part of the tyres depends strongly upon the type of road surface upon which the vehicle moves. It is for this purpose that standards (for example ISO10844) are provided for that regulate these aspects and also for the purposes of the type-approval of tyres.

[0006] Therefore, an aspect of particular importance is that of being able to construct a road surface that can reduce the noise emitted by certain types of tyres, and it is a strongly felt problem.

[0007] WO2004/067847 discloses a method for repairing defects due to the wear of a road surface, in particular permanent deformations and losses in roughness.

[0008] US2008/193214 discloses an apparatus for road reconstruction and, in particular, a method for the depositing of road surface reconditioning material.

[0009] The purpose of the present invention is, therefore, to resolve the problems left open by the prior art in providing a process as defined in claim 1.

[0010] A further object of the present invention is an apparatus as defined in claim 7.

[0011] Further characteristics of the present invention are defined in the corresponding dependent claims.

[0012] The present invention involves numerous and evident advantages over the known art that, together with the characteristics and usage of the present invention, will become clear from the following detailed description of preferred embodiments thereof, given purely by way of non-limiting examples.

Brief description of the figures

[0013] Reference will be made to the drawings shown

in the attached figures, wherein:

- Figure 1A schematically illustrates a profile of a road surface prior to the application of a process according to the present invention;
- Figure 1B schematically illustrates a profile of a road surface after the first step of a process according to the present invention;
- Figure 1C schematically illustrates a profile of a road surface and a plane on which to perform the second stage (smoothing) of a process according to the present invention;
- Figure 1D schematically illustrates a profile of a road surface at the termination of a process according to the present invention (after the smoothing);
- Figure 2 shows a diagram of the Helmholtz Resonator Model;
- Figure 3 illustrates a progression of the profile of the road surface after treatment with a process according to the present invention;
- Figure 4 is a graph that shows the values of the mean profile depth (MPD) before, during and after treatment with a process according to the present invention, with three different types of asphalt;
- Figure 5 illustrates a progression of the MPD value along a section of road surface following treatment with a process according to the present invention;
- Figure 6 shows values of the coefficient of absorption (or CA) measured on a road surface after treatment with a process according to the present invention as a function of varying the frequency band;
- Figure 7 shows examples of means for increasing the mean profile depth (MPD) in a treatment apparatus according to the present invention; and
- Figure 8 shows, by way of example, means for reducing the mean profile depth (MPD) in a treatment apparatus according to the present invention.

Detailed description of possible embodiments of the invention

[0014] The present invention will hereinafter be described with reference to the above indicated figures.

[0015] The term mean profile depth, or MPD, refers to the average depth of the road surface calculated as the arithmetic mean of the individual depths of such a surface. A road surface, which is the object of the treatment according to the present invention, is characterized by a mean profile depth (MPD) of a predetermined value.

[0016] The term coefficient of absorption, or CA, refers to the ability of a material to absorb sound energy and wherein the value is between 0 and 1.00, where zero represents an absolute lack of absorption (complete reflection) and 1.00 represents the total absorption of incident sound.

[0017] Overall, the Figures from 1A to 1 D schematically illustrate the steps of a treatment process of a road surface S according to the present invention; these steps

are:

- increasing the mean profile depth MPD of the surface S in generating new cavities V and/or in accentuating pre-existing cavities V on the surface S; and
- reducing the mean profile depth MPD of the surface S in order to return it to approximately the predetermined value in performing the smoothing of said surface S such as to reduce the asperities that emerge from the surface S.

[0018] These cavities V function according to the Helmholtz Resonator model illustrated in Figure 2, resulting in an increase in the acoustic coefficient of absorption CA of the surface S. The system described by this model is equivalent to that comprising an oscillating mass (air within the neck D), an elastic element (air within the cavity V) and a damping element (the friction of the air against the walls of the neck D). Such a system behaves as a set of Helmholtz resonators insofar as it is the holes that are producing a sound absorption effect based upon the principle of Helmholtz. Such a resonator is able to dissipate acoustic energy as heat by the effect of viscous friction, which is generated due to the oscillations of the air contained within the neck D and of the friction of the air with the walls of the neck D itself.

[0019] With initial reference to Figure 1A, this shows schematically a formation of the road surface before applying the method according to the present invention. As is known, the laying of asphalt results in an irregular alternation of ridges and valleys upon the surface profile of the road surface S; the valleys correspond to the profile view of the cavities V within the road surface S.

[0020] According to the present invention, the first part of the methodology consists in increasing the mean profile depth MPD of the surface S and this can be implemented by accentuating the pre-existing cavities V upon the surface S and/or in generating new cavities T.

[0021] According to a preferred embodiment of the invention, such a result can be obtained in directing a jet of fluid J at high pressure and thereby generating cavities V, and/or in accentuating pre-existing cavities V within the texture of the surface S. Such cavities V have the function of absorbing the acoustic waves according to the Helmholtz Resonator model explained above.

[0022] As can in fact be appreciated from Figure 1B, the pre-existing cavities V show a greater depth, therefore a greater MPD value, due to the jet of fluid J. The dotted line indicates the initial profile of each cavity V, i.e., the profile shown in Figure 1A.

[0023] Preferably, the jet of fluid J is at a pressure of between about 1,500 bar and 3,500 bar. More preferably a pressure of about 2500 bar is used.

[0024] According to a most preferred embodiment, the fluid used is water; in this case, this first step of the process will be called "*Jet water*." It is however to be understood that such an indication should not be considered in a limiting sense.

[0025] In Figure 1C, the dotted line P indicates the plane on which the second step of the treatment is performed, i.e., the smoothing. This process renders the surface S completely planar, making it contemporaneously possible to maintain the cavities V obtained by means of the first treatment, for example the *jet water*.

[0026] The result of this step of the process is appreciable in Figure 1D: having cut away part of the surface asperities of the surface S, the mean profile depth MPD has been accordingly reduced. In this way, one part of the acoustic waves will be absorbed by the cavities V of the surface S and the other part will be reflected by the "flat" part (the cut part).

[0027] This effect produces acoustic absorption at high frequencies and reflection of the lower frequencies. From the graph of Figure 3, the measurement can be observed of a progression of the profile of the surface S along a section X of road surface, similarly to that exemplified in Figures 1A to 1D.

[0028] A graph is shown in Figure 4 that instead reports the MPD values: three curves A, B and C are shown here that vary depending upon the type of asphalt; for each type of asphalt, prior to being treated, the respective MPD value is measured subsequent to the first step (for example, after the *water jet*) and at the end of the second step of smoothing (i.e., at the end of the complete treatment process); the dotted line represents the limiting MPD value imposed by the ISO 10844 standard.

[0029] In Figure 5 it is possible to appreciate the progression of the MPD value measured along a section X of road surface traveled by a vehicle for a road surface treated with a process according to the present invention; it can be seen how the MPD value falls entirely within the range of values accepted by the aforementioned ISO standard (between 0.3 and 0.7 mm).

[0030] In Figure 6, instead, the CA values are shown measured as a function of varying the frequency band of the stress exerted by the tyre, for a vehicle that travels along a road surface treated with a process according to the present invention; these also are falling within the limits of acceptability (<8%) according to the aforementioned ISO standard.

[0031] A process according to the present invention, as described heretofore in the possible embodiments thereof, may also envisage that both the increase and the reduction in the mean profile depth (MPD) are between 60% and 120% of the initial predetermined value.

[0032] More particularly, the process described, according to the present invention, can provide for both the increase and the reduction in the mean profile depth (MPD) being approximately 100% of the initial predetermined value.

[0033] A further object of the present invention is that of describing an apparatus for the treatment of a road surface S having a mean profile depth MPD of a predetermined value. Such an apparatus is able to perform a treatment process as described thus far and comprises:

- means for increasing the mean profile depth MPD of the surface S generating new cavities V and/or accentuating pre-existing cavities V upon the surface S;
- means for reducing the mean profile depth MPD of the surface S in order to return it to approximately the predetermined value in performing the smoothing of said surface S such as to reduce the asperities that emerge from the surface S.

[0034] Figure 7 shows an exemplary design of a possible embodiment of the means for increasing the depth MPD for an apparatus according to the present invention. The means to increase the MPD may be a means of the type conventionally used within the industry. In the example shown in Figure 7, the means for increasing the MPD are implemented in the form of a lance 10 for delivering high pressure fluid onto the asphalt in order to generate new cavities V and/or to accentuate pre-existing cavities V upon the surface S.

[0035] In a preferred embodiment according to a treatment apparatus of the present invention, the means for increasing the MPD comprise a movement mechanism 11 which allows the lance 10 for high pressure fluid to slide along at least one axis on a plane parallel to the surface S of the road surface to be treated.

[0036] In an even more preferred embodiment according to a treatment apparatus of the present invention, the means for increasing the MPD comprise a movement mechanism 11 which allows the lance 10 for high pressure fluid to be independently, and possibly also contemporaneously, moved along two axes orthogonal therebetween on a plane parallel to the surface S of the road surface to be treated. Moreover, such a movement mechanism 11, according to the latter two embodiments, may provide for an ergonomic seat 12 in order to accommodate the operator assigned to the maneuvering and operation of the lance for high pressure fluid in such a way as to facilitate the performance of tasks.

[0037] Figure 8 shows an exemplary design of a possible embodiment of the means for reducing the MPD for an apparatus according to the present invention. In the example shown in Figure 8, such means for reducing the MPD can be a sanding machine 13 of the type conventionally used within the industry.

[0038] In a further embodiment, a treatment apparatus according to the present invention comprises within a single system the means to increase the MPD and the means to reduce the MPD.

[0039] In a further preferred embodiment, a treatment apparatus according to the present invention comprises within a single system the means to increase the MPD illustrated in Figure 7 and the means to reduce the MPD illustrated in Figure 8. Purely by way of example, a treatment apparatus according to that described heretofore can be implemented in the form of a vehicle (such as, for example, a car or a truck), which, at the front, provides for means to increase the MPD, for example in the form

a lance 10 for high pressure fluid, and, at the rear, means for reducing the MPD and for performing smoothing processes, for example in the form of a sanding machine 13.

[0040] The present invention has heretofore been described with reference to the preferred embodiments thereof. It is intended that each of the technical characteristics implemented in the preferred embodiments described herein, purely by way of example, can advantageously be combined, in ways other than that described heretofore, also with other characteristics in order to give form to other embodiments which also belong to the same inventive nucleus and that all fall within the scope of protection afforded by the claims recited hereinafter.

Claims

1. Treatment process for the roughness of a road surface (S) having a mean profile depth (MPD) of a predetermined value for increasing the acoustic coefficient of absorption of the road surface (S), comprising the following steps:

- increasing the mean profile depth (MPD) of said surface (S) in generating new cavities (V) and/or in accentuating pre-existing cavities (V) upon the surface (S);
- reducing the mean profile depth (MPD) of said surface (S), in order to return it to approximately the predetermined value, in performing a smoothing of said surface (S) such as to reduce the asperities that emerge from said surface (S).

wherein said cavities (V), functioning as Helmholtz resonators, determine an increase in the acoustic coefficient of absorption (CA) of the surface (S), wherein said step of increasing the mean profile depth (MPD) comprises the directing of a jet of fluid (J) at high pressure towards said surface (S), wherein said mean profile depth (MPD) is defined by the arithmetic mean of individual values of depth of said road surface (S).

2. Process according to claim 1, wherein said increase and said reduction in the mean profile depth (MPD) are between 60% and 120% of the initial predetermined value.
3. Process according to claim 2, wherein said increase and said reduction in the mean profile depth (MPD) are approximately 100% of the initial predetermined value.
4. Process according to one of claims 1 to 3, wherein said jet of fluid (J) is at a pressure of between 1,500 bar and 3,500 bar, preferably equal to about 2500 bar.

5. Process according to one of the claims from 1 to 4, wherein said fluid is water.
6. Treatment apparatus according to a process of one of the claims from 1 to 5, for the roughness of a road surface (S) having a mean profile depth (MPD) of a predetermined value, comprising: 5
- means for increasing the mean profile depth (MPD) of said surface (S) in generating new cavities (V) and/or in accentuating pre-existing cavities (V) upon the surface (S); 10
 - means for reducing the mean profile depth (MPD) of said surface S, in order to return it to approximately the predetermined value, in implementing a smoothing of said surface (S) such as to reduce the asperities that emerge from said surface (S). 15
7. Apparatus according to claim 6, wherein said means for increasing the mean profile depth (MPD) comprise a lance (10) for high pressure fluid. 20
8. Apparatus according to claim 7, wherein said lance (10) is suitable for producing a jet of fluid at a pressure of between about 1,500 bar and 3,500 bar, preferably equal to about 2,500 bar. 25
9. Apparatus according to one of the claims from 6 to 8, wherein said means for reducing the mean profile depth (MPD) comprise a sanding machine (13). 30

35

40

45

50

55

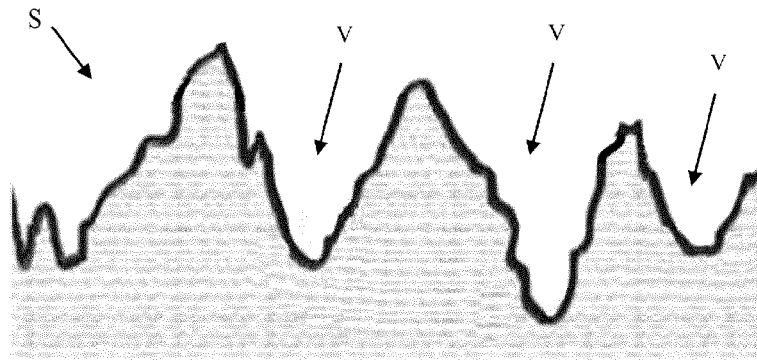


FIG. 1A

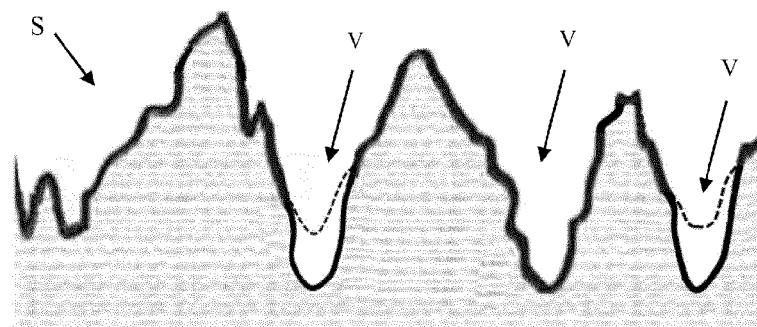


FIG. 1B

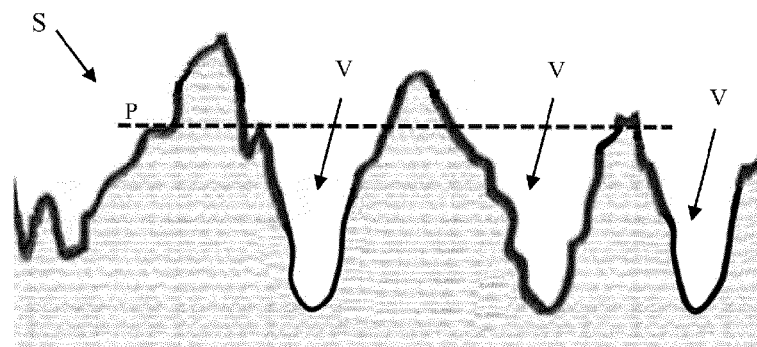


FIG. 1C

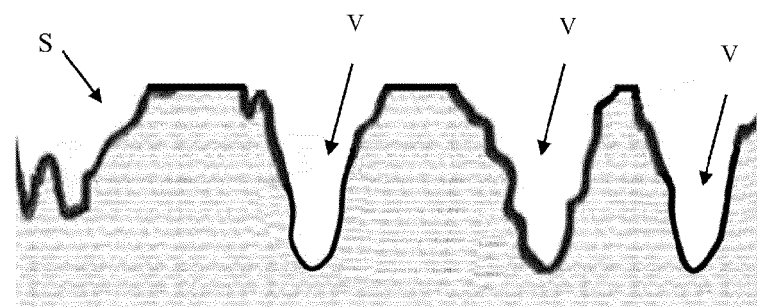



FIG. 1D

$$f_r = \frac{CD}{4} \sqrt{\frac{1}{\pi V [L + 0.75D]}}$$

f_r: resonant frequency of the resonator [Hz]
 V: volume of the resonant cavity [mm³]
 D: diameter of the acoustic emission hole [mm]
 L: depth of the acoustic emission hole [mm]
 C: speed of sound = 344000 approx. [mm/sec]



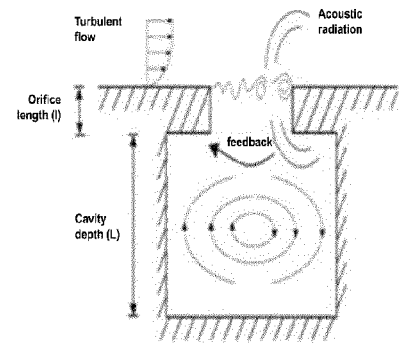


FIG. 2

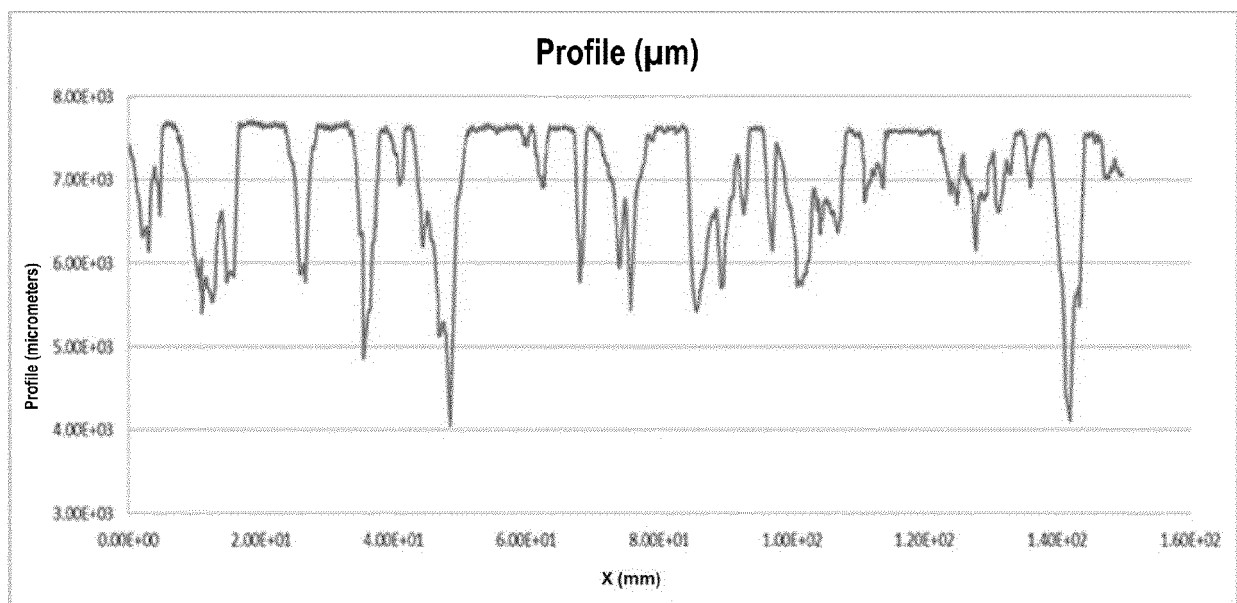


FIG. 3

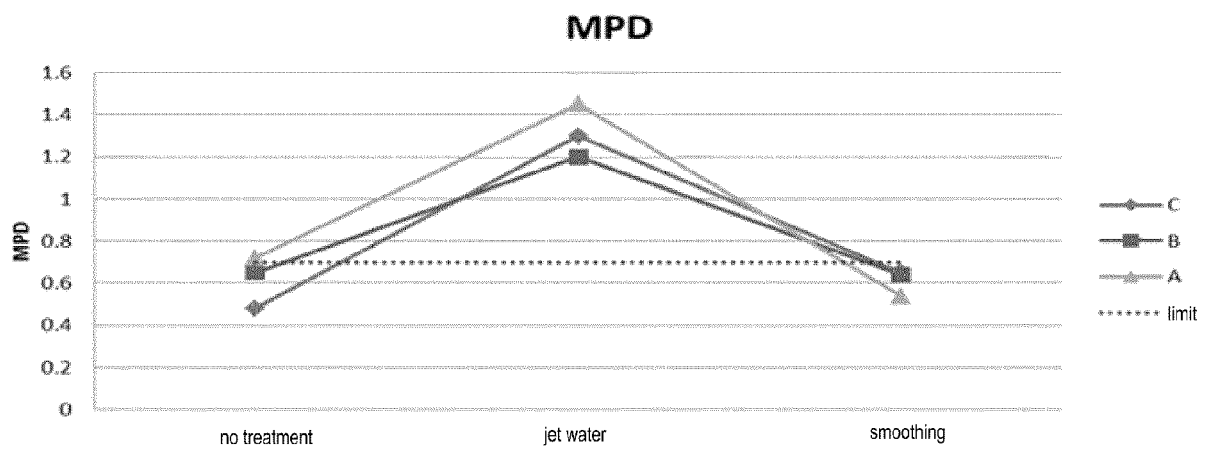


FIG. 4

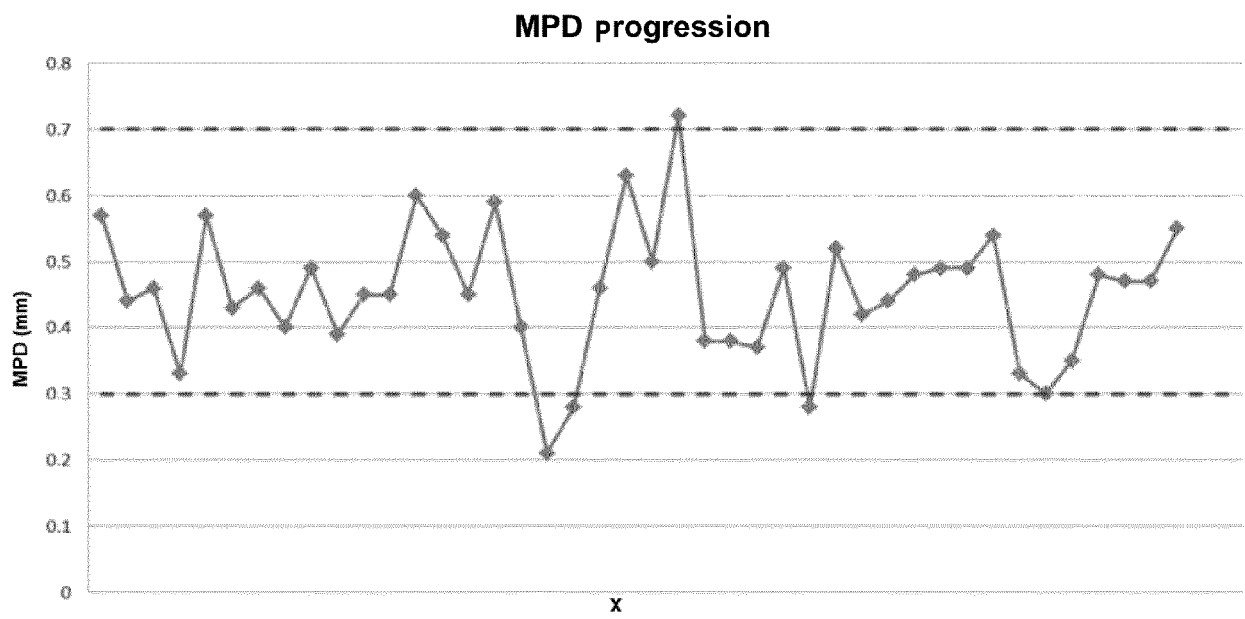


FIG. 5

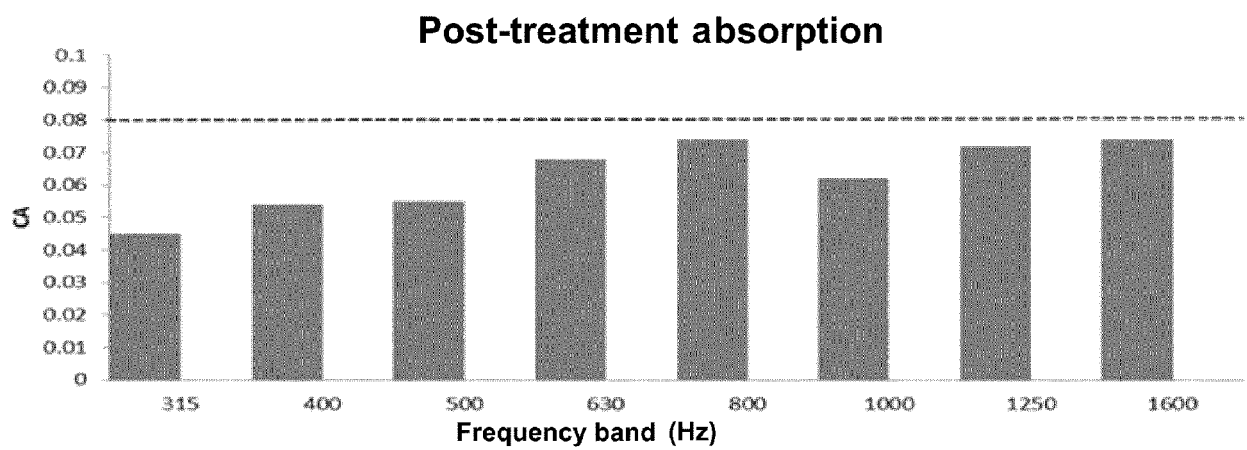


FIG. 6

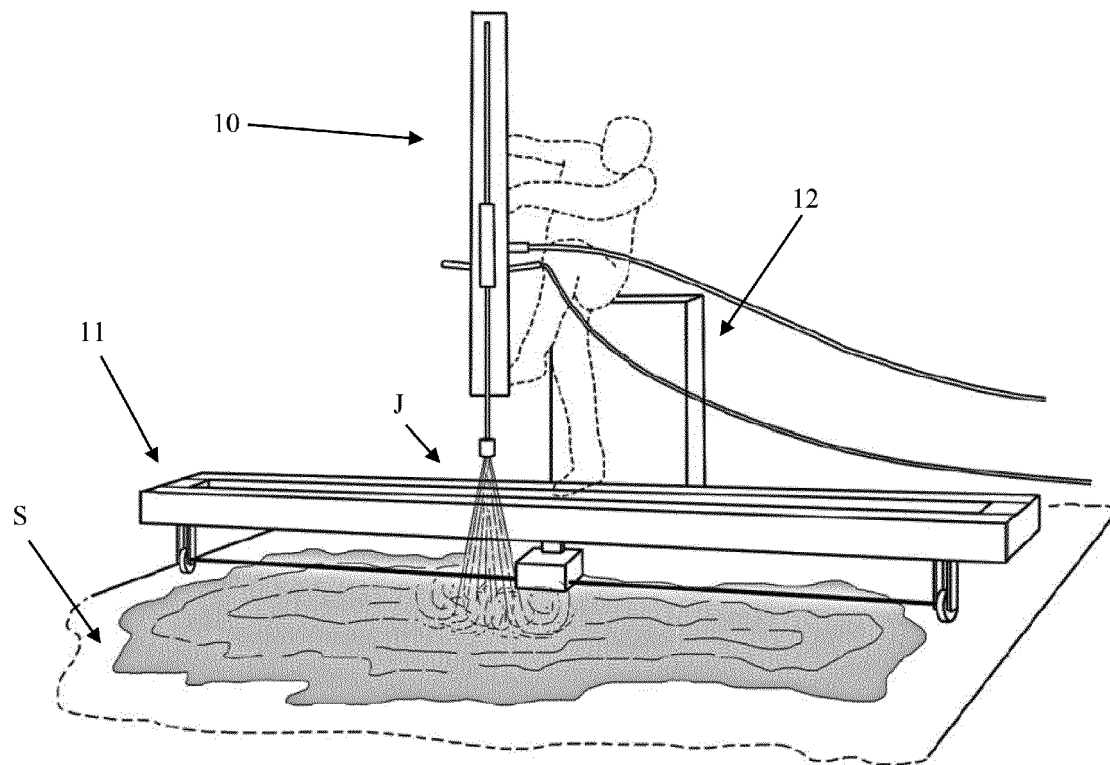


FIG. 7

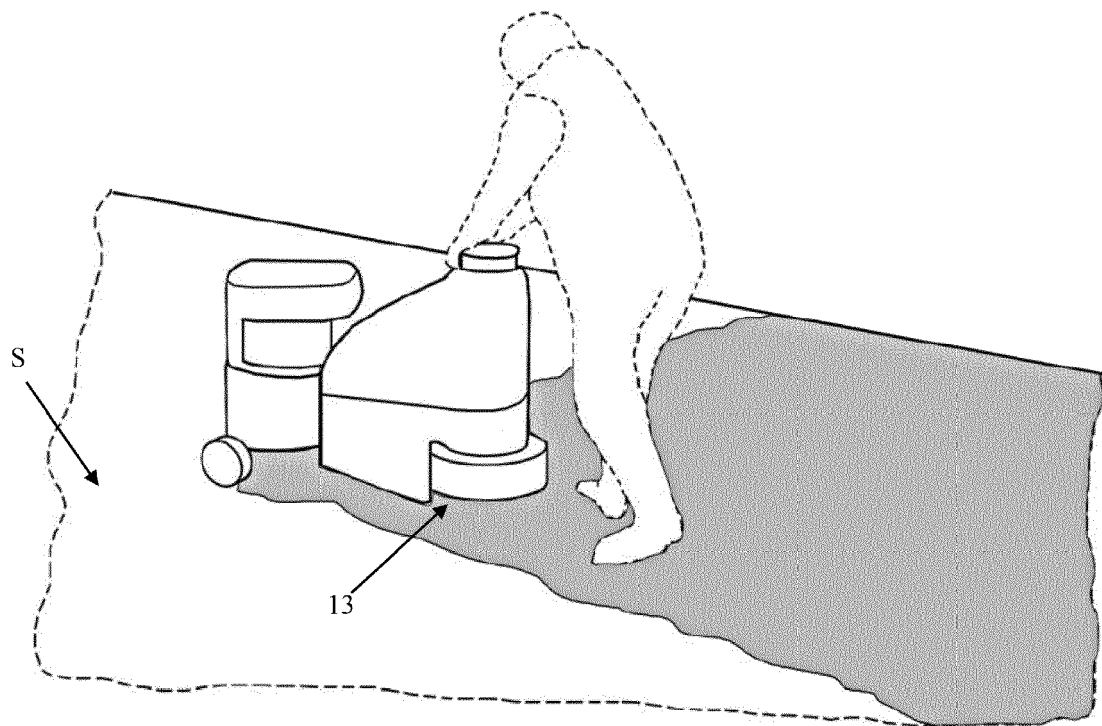


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 19 21 6982

5

10

15

20

25

30

35

40

45

5

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2004/067847 A1 (BLASTRAK MORAVA SPOL S R O [CZ]; RUZICKA MOJMIR [CZ]) 12 August 2004 (2004-08-12) * page 1, paragraph 1 - page 2, line 17 * * page 4, lines 3-15,22-26 * * page 7, lines 5-22 * * page 8, lines 11-20 * * page 9, lines 5-16 * * figures 1-4,12 *	1-9	INV. E01C7/18 E01C23/08
A	US 2008/193214 A1 (HALL DAVID R [US] ET AL) 14 August 2008 (2008-08-14) * paragraphs [0001], [0006], [0020], [0024], [0025], [0026], [0033], [0043] * * figures 1-3,6-8 *	1-9	
A	DE 299 22 773 U1 (BLASTRAK MORAVA SPOL S R O [CZ]) 25 May 2000 (2000-05-25) * page 2, paragraph 2 * * page 3, paragraphs 2,3 * * page 4, paragraph 3 - page 5, paragraph 3 * * figures 2-7 *	1-9	TECHNICAL FIELDS SEARCHED (IPC) E01C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 June 2020	Examiner Kremsler, Stefan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 21 6982

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-06-2020

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2004067847 A1	12-08-2004	SK 2612003 A3 WO 2004067847 A1	02-06-2005 12-08-2004
US 2008193214 A1	14-08-2008	NONE	
DE 29922773 U1	25-05-2000	AT 4242 U1 CA 2306690 A1 CZ 290399 B6 DE 29922773 U1 PL 337585 A1 SI 20139 A2 SK 153099 A3	25-04-2001 26-10-2001 17-07-2002 25-05-2000 03-07-2000 30-06-2000 14-08-2000

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2004067847 A [0007]
- US 2008193214 A [0008]