




(86) Date de dépôt PCT/PCT Filing Date: 2012/01/31	(51) Cl.Int./Int.Cl. <i>H04N 19/513</i> (2014.01), <i>H04N 19/30</i> (2014.01), <i>H04N 19/44</i> (2014.01)
(87) Date publication PCT/PCT Publication Date: 2012/08/09	
(45) Date de délivrance/Issue Date: 2019/09/24	(72) Inventeurs/Inventors: LIM, SUNG CHANG, KR; KIM, HUI YONG, KR; JEONG, SE YOON, KR; CHO, SUK HEE, KR; JUN, DONG SAN, KR; KIM, JONG HO, KR; ...
(85) Entrée phase nationale/National Entry: 2013/07/30	(73) Propriétaire/Owner: ELECTRONICS AND TELECOMMUNICATIONS RESEARCH INSTITUTE, KR
(86) N° demande PCT/PCT Application No.: KR 2012/000770	
(87) N° publication PCT/PCT Publication No.: 2012/105807	(74) Agent: SMART & BIGGAR
(30) Priorités/Priorities: 2011/01/31 (KR10-2011-0009636); 2011/03/03 (KR10-2011-0019166); 2011/05/27 (KR10-2011-0050853); 2011/07/01 (KR10-2011-0065707); 2012/01/31 (KR10-2012-0010096)	

(54) Titre : PROCÉDE ET APPAREIL DE CODAGE/DECODAGE D'IMAGES A L'AIDE D'UN VECTEUR DE MOUVEMENT
(54) Title: METHOD AND APPARATUS FOR ENCODING/DECODING IMAGES USING A MOTION VECTOR

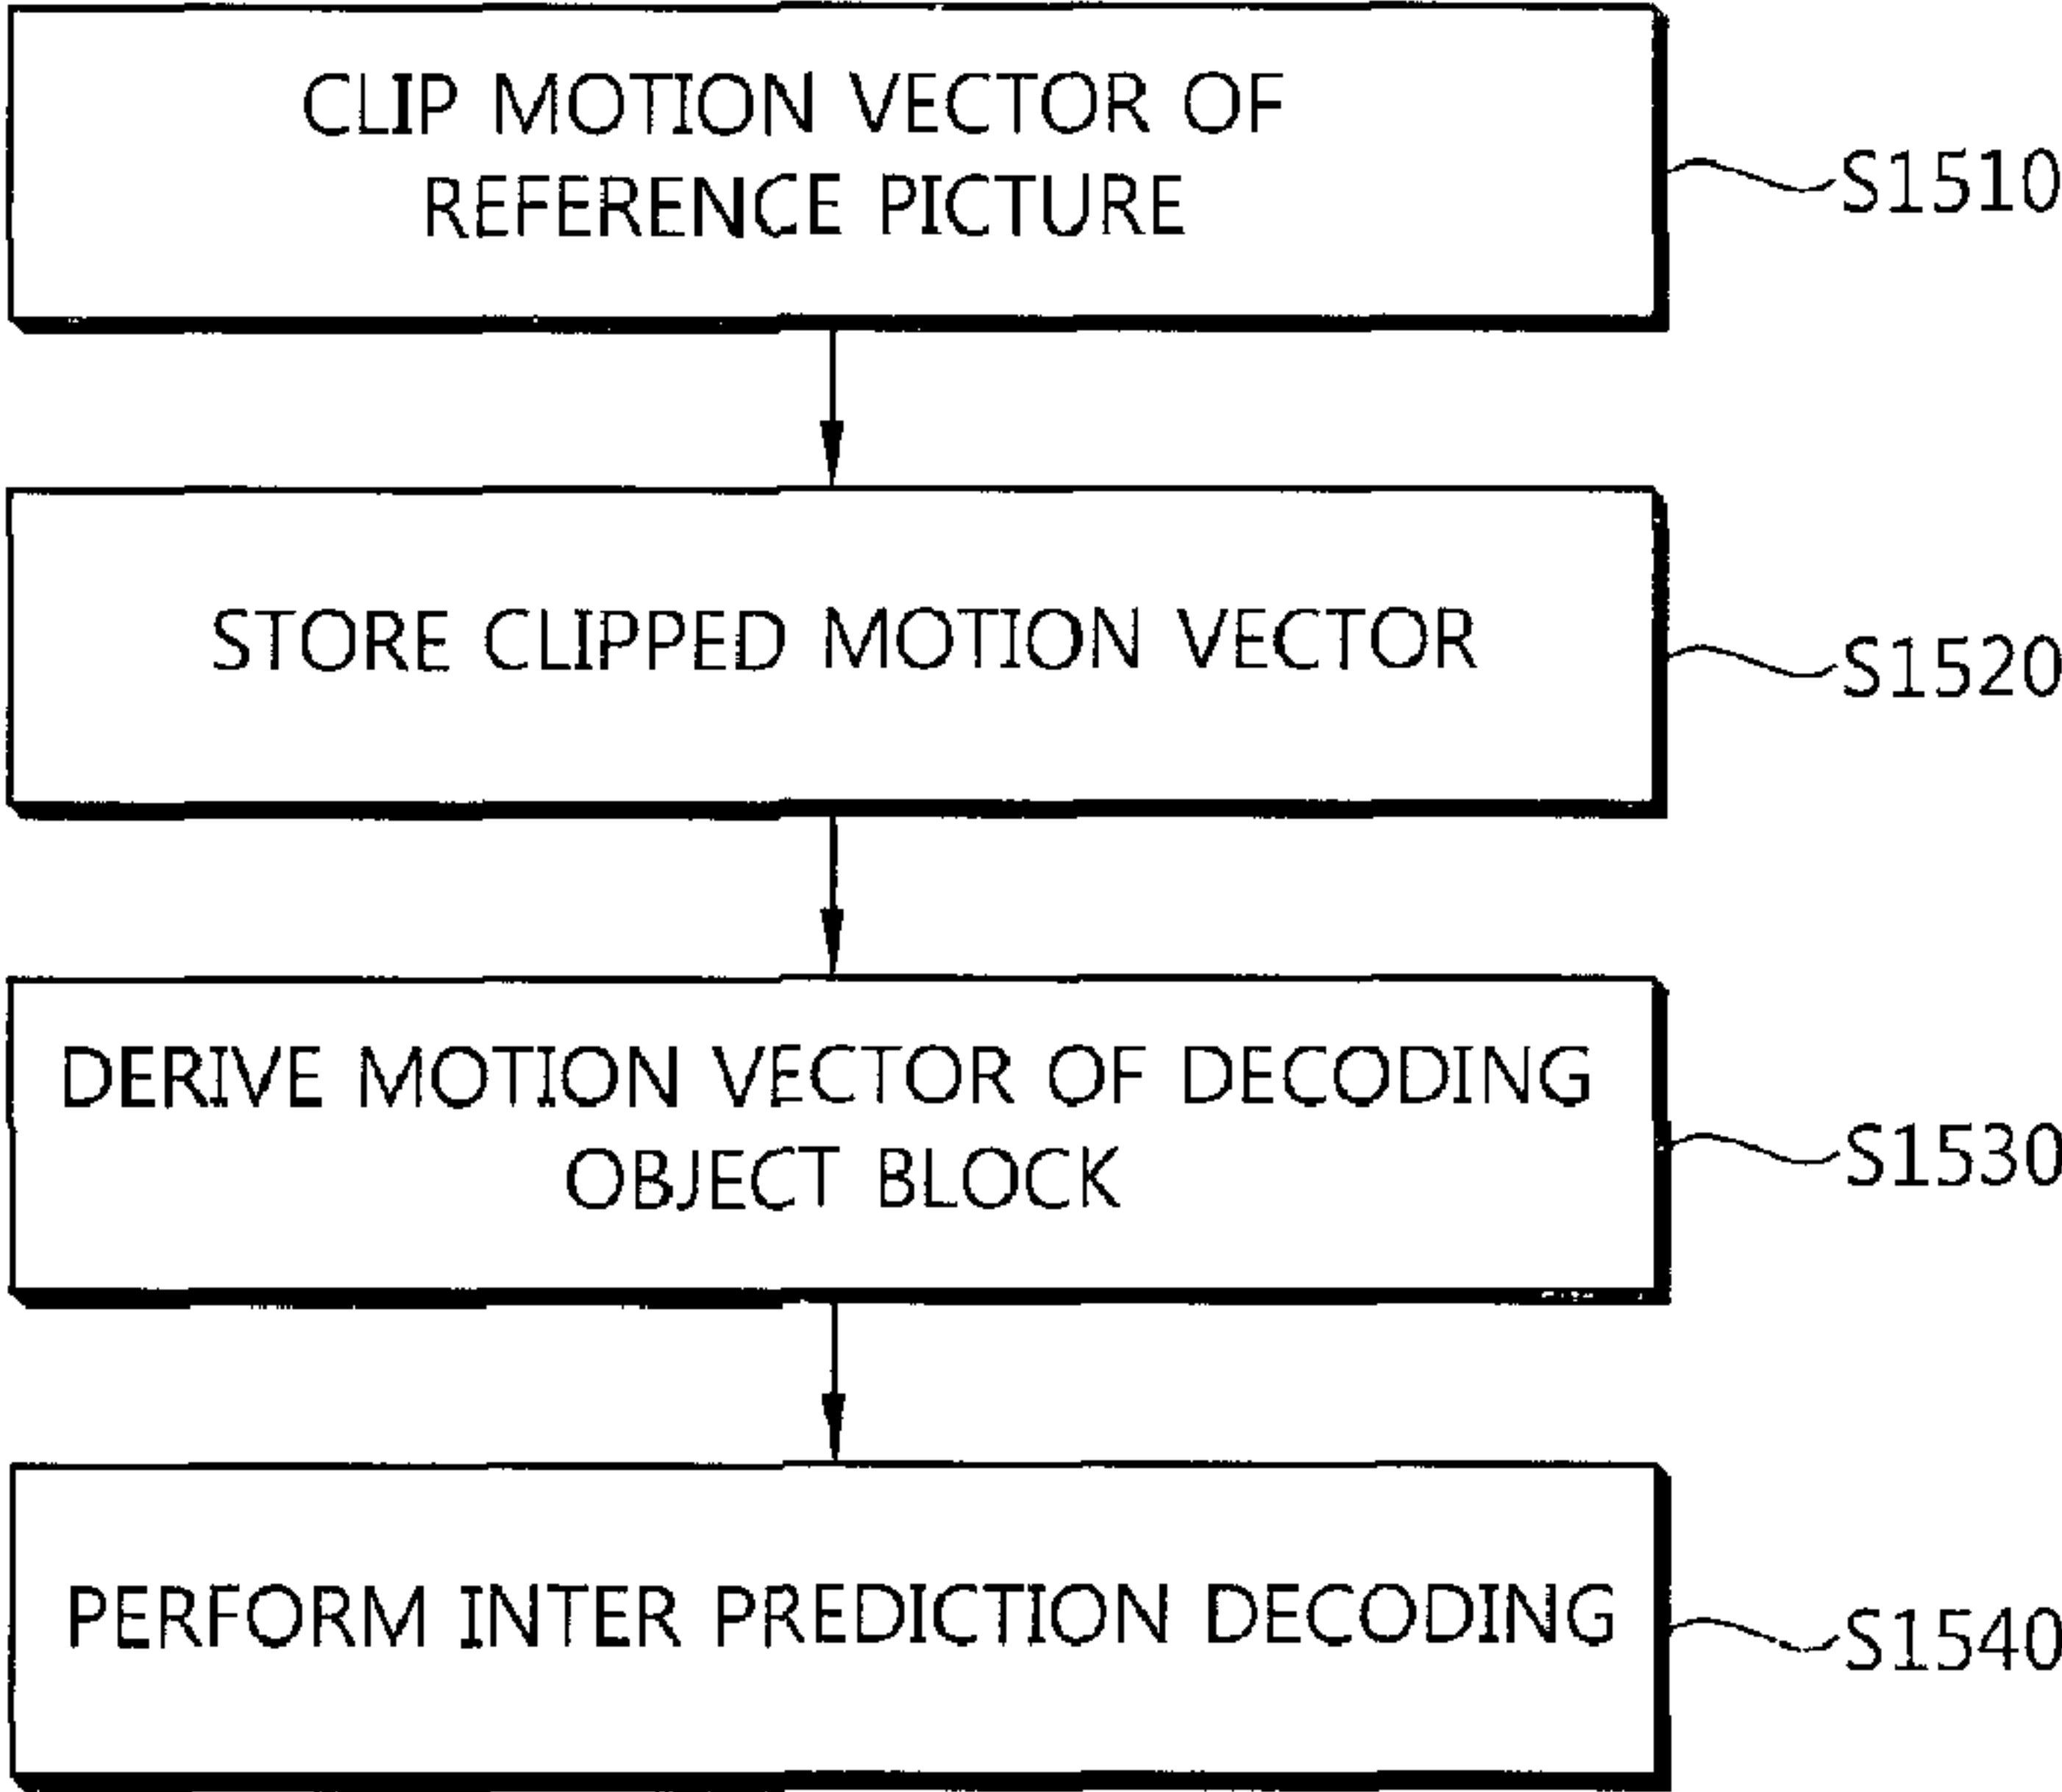

(57) **Abrégé/Abstract:**
The present invention relates to a method and apparatus for encoding/decoding image using a motion vector. According to one embodiment of the present invention, an image-decoding method is provided. The image-decoding method comprises the

(72) **Inventeurs(suite)/Inventors(continued):** LEE, HA HYUN, KR; LEE, JIN HO, KR; CHOI, JIN SOO, KR;
KIM, JIN WOONG, KR

(57) **Abrégé(suite)/Abstract(continued):**

following steps: clipping a motion vector of a reference picture with a predetermined dynamic range so as to generate a clipped motion vector; storing the clipped motion vector in a buffer; deriving a motion vector of a block to be decoded using the motion vector stored in the buffer; and performing inter-prediction decoding using the motion vector of the block to be decoded. According to the present invention, the size of a memory space required to store a motion vector may be reduced.

【ABSTRACT】

The present invention relates to a method and apparatus for encoding/decoding image using a motion vector. According to one embodiment of the present invention, an image-decoding method is provided. The image-decoding method comprises the following

5 steps: clipping a motion vector of a reference picture with a predetermined dynamic range so as to generate a clipped motion vector; storing the clipped motion vector in a buffer; deriving a motion vector of a block to be decoded using the motion vector stored in the buffer; and performing inter-prediction decoding using the motion vector of the block to be decoded. According to the present invention, the size of a memory space required to

10 store a motion vector may be reduced.

【DESCRIPTION】**【Invention Title】****METHOD AND APPARATUS FOR ENCODING/DECODING IMAGES
USING A MOTION VECTOR**

5

【Technical Field】

The present invention relates to image processing, and more particularly, to a video coding/decoding method using a clipped motion vector and an apparatus thereof.

10 **【Background Art】**

Recently, in accordance with the expansion of a broadcasting system supporting high definition (HD) resolution in the country and around the world, many users have been accustomed to a high resolution and definition image, such that many organizations have conducted many attempts to develop the next-generation video devices. In addition,
15 as the interest in HDTV and ultra high definition (UHD) having a resolution four times higher than that of HDTV has increased, a compression technology for a higher-resolution and higher-definition video has been demanded.

For image compression, an inter prediction technology of predicting pixel values included in a current picture from a picture before and/or after the current picture, an intra
20 prediction technology of predicting pixel values using pixel information in the picture, an entropy coding technology of allocating a short code to a symbol having a high appearance frequency and a long code to a symbol having a low appearance frequency, or the like, may be used.

[Disclosure]

One aspect of the present disclosure provides a video coding/decoding method using a clipped motion vector and an apparatus thereof.

Another aspect of the present disclosure provides a method for clipping a
5 motion vector of a reference picture.

Another aspect of the present disclosure provides a method for transmitting information on a motion vector.

According to an aspect of the present invention, there is provided an image decoding apparatus, comprising: a reference picture buffer for storing a reference picture; and
10 a motion compensating unit for generating a prediction block using the reference picture and a motion vector of the reference picture, wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled, wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture
15 is a motion vector of a collocated block in the reference picture, and wherein the collocated block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided an
20 image decoding method, comprising: clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled; deriving a motion vector of a block to be decoded using the motion vector; and performing inter-prediction decoding using the motion vector of the block to be decoded,
25 wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and wherein the collocated

block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided an
5 image encoding apparatus, comprising: a reference picture buffer for storing a reference picture; and a motion compensating unit for generating a prediction block using the reference picture and a motion vector of the reference picture, wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled, wherein the scaling of the motion vector of the reference picture is
10 performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and wherein the collocated block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

15 According to another aspect of the present invention, there is provided an image encoding method, comprising: clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled; deriving a motion vector of a block to be encoded using the motion vector;
20 and performing inter-prediction encoding using the motion vector of the block to be encoded, wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and wherein the collocated block is determined by performing calculating a position corresponding to a right-bottom
25 position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided a

computer readable recording medium having recorded thereon a computer program comprising instructions for executing an image decoding method, the image decoding method comprising: clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped
5 in the predetermined range after the motion vector of the reference picture is scaled; deriving a motion vector of a block to be decoded using the motion vector; and performing inter-prediction decoding using the motion vector of the block to be decoded, wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture is a motion vector of
10 a collocated block in the reference picture, and wherein the collocated block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided a
15 computer readable recording medium having recorded thereon a computer program comprising instructions for executing an image encoding method, the image encoding method comprising: clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled; deriving
20 a motion vector of a block to be encoded using the motion vector; and performing inter-prediction encoding using the motion vector of the block to be encoded, wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and wherein the collocated block is determined by
25 performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided a computer readable medium storing a bitstream generated by an image encoding method, wherein the image encoding method comprises performing inter-prediction encoding using a motion vector of a block to be encoded; clipping a motion vector of a reference picture in a
5 predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled; and encoding the motion vector of a block to be encoded using the motion vector of the reference picture, wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, wherein the
10 motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and wherein the collocated block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided a non-
15 transitory computer readable storage medium storing a bitstream that is received and decoded by an image decoding apparatus to reconstruct an image, wherein the bitstream comprises prediction information of a current block included in the image, and the image decoding apparatus comprises a reference picture buffer for storing a reference picture and a motion compensating unit, wherein: the prediction information of the current block, the reference
20 picture and a motion vector of the reference picture are used by the motion compensating unit to generate a prediction block of the current block, the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled, the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, the motion vector of the reference picture is a motion vector of
25 a collocated block in the reference picture, and the collocated block is determined by performing calculating a position corresponding to a right-bottom position of a current block in a current picture; and determining a block covering the calculated position in the reference picture.

According to another aspect of the present invention, there is provided an image

encoding apparatus, comprising: a reference picture buffer for storing a reference picture; a motion estimator for generating a motion vector of a current block and a prediction block of the current block based on the reference picture; and an encoding unit for generating a bitstream by encoding the motion vector of the current block based on a motion vector of the reference picture, wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled, the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture, the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and the collocated block is determined by performing calculating a position corresponding to a right-bottom position of the current block in a current picture; and determining a block covering the calculated position in the reference picture.

1. An embodiment of the present invention relates to a method of encoding an image. The method includes clipping a motion vector of a reference picture in a predetermined dynamic range to generate a clipped motion vector, storing the clipped motion vector in a buffer and encoding a motion vector of a coding treeblock using the motion vector stored in the buffer.

2. In 1, the dynamic range may be defined by a level of a video codec.

3. In 1, the dynamic range may be determined by a predetermined bit depth, and the bit depth may be defined by a level of a video codec.

4. In 1, X-component and Y-component of motion vector of the reference picture may be clipped in different dynamic ranges.

5. Another embodiment of the present invention relates to a method of decoding an image. The method includes clipping a motion vector of a reference picture in a predetermined dynamic range to generate a clipped motion vector, storing the clipped motion vector in a buffer, deriving a motion vector of a coding treeblock using the motion vector stored in the buffer, and performing inter prediction decoding process using the

motion vector of the coding treeblock.

6. In 5, the dynamic range may be defined by a level of a video codec.

7. In 5, the dynamic range may be determined by a predetermined bit depth, and the bit depth may be defined by a level of a video codec.

5 8. In 5, the dynamic range may be determined by a predetermined bit depth, and the bit depth may be obtained through a sequence parameter set transmitted from an apparatus of encoding an image.

9. In 8, the sequence parameter set may include a flag indicating whether the motion vector of the reference picture is clipped and a parameter for obtaining the bit
10 depth.

10. In 9, the method of decoding an image may include compressing the motion vector of the reference picture, wherein the sequence parameter set includes a flag indicating whether the motion vector of the reference picture is compressed and a parameter for obtaining a compression ratio of the motion vector of the reference picture.

15 11. In 5, the method of decoding an image may include limiting a representation resolution of the motion vector of the reference picture.

12. In 5, the clipped motion vector may be stored according to a priority.

13. In 5, the clipped motion vector may be a motion vector of a block coded in inter prediction mode.

20 14. In 5, the method of decoding an image may include performing scaling the motion vector of the reference picture.

15. In 5, X-component and Y-component of motion vector of the reference picture may be clipped in different dynamic ranges.

25 16. In 15, the dynamic range of the X-component and the dynamic range of the Y-component may be defined by a level of a video codec.

17. Yet another embodiment of the present invention relates to an apparatus of decoding an image. The apparatus includes a reference picture buffer storing a reference picture and a motion compensator generating a predicted block using the reference picture and a motion vector of the reference picture, wherein the motion vector of the reference picture is clipped in a predetermined dynamic range.

18. In 17, the dynamic range may be defined by a level of a video codec.

19. In 17, the dynamic range may be determined by a predetermined bit depth, and the bit depth may be defined by a level of a video codec.

20. In 17, the dynamic range may be determined by a predetermined bit depth, and the bit depth may be obtained through a sequence parameter set transmitted from an apparatus of encoding an image.

According to the exemplary embodiment of the present invention, the video may be coded using the clipped motion vector.

According to the exemplary embodiment of the present invention, a size of a memory required for storing motion vectors may be reduced.

According to the exemplary embodiment of the present invention, a memory access bandwidth required for fetching data from the memory may be reduced.

【Description of Drawings】

FIG. 1 is a block diagram showing an example of a structure of an encoder according to an exemplary embodiment of the present invention.

FIG. 2 is a block diagram showing an example of a structure of a decoder
5 according to an exemplary embodiment of the present invention.

FIG. 3 shows examples of a coding/decoding object picture and a reference picture.

FIG. 4 shows an example of limiting a dynamic range of a motion vector.

FIGS. 5 to 8 are flow charts showing a method of storing a motion vector of a
10 reference picture.

FIG. 9 shows an example of quantizing a motion vector.

FIGS. 10 to 13 show examples of fetching motion information from a reference picture.

FIG. 14 is a flow chart showing a method of encoding an image according to the
15 exemplary embodiment of the present invention.

FIG. 15 is a flow chart showing a method of decoding an image according to the exemplary embodiment of the present invention.

【Mode for Invention】

20 Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings. However, in describing exemplary embodiments of the present invention, well-known functions or constructions will not be described in detail since they may unnecessarily obscure the understanding of the present invention.

25 It is to be understood that when any element is referred to as being “connected

to” or “coupled to” another element, it may be connected directly to or coupled
directly to another element or be connected to or coupled to another element, having the
other element intervening therebetween. Further, in the present specification, in the case of
describing “including” a specific component, it is to be understood that additional
5 components other than a corresponding component are not excluded, but may be included
in exemplary embodiments or the technical scope of the present invention.

Terms used in the specification, ‘first’, ‘second’, etc., may be used to describe
various components, but the components are not to be construed as being limited to the
terms. That is, the terms are used to distinguish one component from another component.
10 For example, the ‘first’ component may be named the ‘second’ component, and vice versa,
without departing from the scope of the present invention.

In addition, components described in exemplary embodiments of the present
invention are independently shown only in order to indicate that they perform different
characteristic functions. Therefore, the components that are independently shown do not
15 mean that each of the components may not be implemented as one hardware or software.
That is, each of the components is divided for convenience of explanation, a plurality of
components may be combined with each other to thereby be operated as one component or
one component may be divided into a plurality components to thereby be operated as the
plurality of components, which are included in the scope of the present invention as long
20 as it departs from essential characteristics of the present invention.

In addition, some of components may not be indispensable components
performing essential functions of the present invention, but be selective components
improving only performance thereof. The present invention may also be implemented only
by a structure including the indispensable components except for the selective components,
25 and the structure including only the indispensable components is also included in the scope

of the present invention.

FIG. 1 is a block diagram showing an example of a structure of an encoder according to an exemplary embodiment of the present invention.

Referring to FIG. 1, the encoder 100 includes a motion predictor 111, a motion
5 compensator 112, an intra predictor 120, a switch 115, a subtracter 125, a transformer 130,
a quantizer 140, an entropy encoder 150, a dequantizer 160, an inverse transformer 170, an
adder 175, a filter unit 180, and a reference picture buffer 190.

The encoder 100 encodes input images in an intra prediction mode or an inter
prediction mode to encoder output a bitstream. The intra prediction means intra-picture
10 prediction and the inter prediction means inter-picture prediction. The encoder 100 is
switched between the intra prediction mode and the inter prediction mode through
switching of the switch 115. The encoder 100 generates a predicted block for an input
block of the input image and then encodes a residual between the input block and the
predicted block.

15 In the case of the intra prediction mode, the intra predictor 120 performs spatial
prediction using pixel values of neighboring blocks which are coded already to generate
predicted blocks.

In the case of the inter prediction mode, the motion predictor 111 searches a
reference block optimally matched with the input block in a reference picture stored in the
20 reference picture buffer 190 during a motion prediction process to obtain a motion vector.
The motion compensator 112 performs motion-compensation using the motion vector to
generate the predicted block. Here, the motion vector may be a two dimensional vector
used for inter prediction and represent an offset between a current coding treeblock and
the reference block.

25 The subtracter 125 generate a residual block based on the residual between the

input block and the predicted block, and the transformer 130 transforms the residual block to output a transform coefficient. The quantizer 140 quantizes the transform coefficient to output the quantized coefficient.

The entropy encoder 150 performs entropy encoding based on information
5 obtained during an encoding/quantizing process to output the bitstream. The entropy encoding represents frequently generated symbols as a small number of bits, thereby reducing a size of a bitstream for a coding symbol. Therefore, the compression performance of a video may be expected to be improved through the entropy encoding. The entropy encoder 150 may use an encoding method such as exponential golomb,
10 context-adaptive variable length coding (CAVLC), context-adaptive binary arithmetic coding (CABAC), or the like, for the entropy encoding.

A coded picture needs to be again decoded and stored in order to be used as a reference picture for performing the inter prediction coding. Therefore, the dequantizer 160 dequantizes the quantized coefficient, and the inverse transformer 170 inversely
15 transforms the dequantized coefficient to output a reconstructed residual block. The adder 175 adds the reconstructed residual block to the predicted block to generate a reconstructed block.

The filter unit 180 is also called an adaptive in-loop filter and applies at least one of deblocking filtering, sample adaptive offset (SAO) compensation, adaptive loop
20 filtering (ALF) to the reconstructed block. The deblocking filtering means that block distortion occurred in a boundary between blocks is removed, and the SAO compensation means that an appropriate offset is added to a pixel value in order to compensate for a coding error. In addition, the ALF means that filtering is performed based on a comparison value between a reconstructed image and an original image.

25 Meanwhile, the reference picture buffer 190 stores the reconstructed block

passing through the filter unit 180 therein.

FIG. 2 is a block diagram showing an example of a structure of a decoder according to an exemplary embodiment of the present invention.

Referring to FIG. 2, a decoder includes an entropy decoder 210, a dequantizer 220,
5 an inverse transformer 230, an intra predictor 240, a motion compensator 250, an adder 255, a filter unit 260, and a reference picture buffer 270.

The decoder 200 decodes the bitstream in the intra prediction mode or the inter prediction mode to output a reconstructed image. The decoder 200 is switched between the intra prediction mode and the inter prediction mode through switching of the switch.
10 The decoder 200 obtains a residual block from the bitstream to generate a predicted block and then adds the residual block and the predicted block to each other to generate a reconstructed block.

The entropy decoder 210 performs entropy decoding based on probability distribution. The entropy decoding process is a process opposite to the above-mentioned
15 entropy encoding process. That is, the entropy decoder 210 generates a symbol including a quantized coefficient from the bitstream in which a frequently generated symbol is represented as a small number of bits.

The dequantizer 220 dequantizes the quantized coefficient, and the inverse transformer 230 inversely transforms the dequantized coefficient to generate a residual
20 block.

In the case of the intra prediction mode, the intra predictor 240 performs spatial prediction using pixel values of neighboring blocks which are already coded to generate predicted blocks.

In the case of the inter prediction mode, the motion compensator 250 performs the
25 motion-compensation using the motion vector and the reference picture stored in the

reference picture buffer 270 to generate the predicted block.

The adder 255 adds the predicted block to the residual block, and the filter unit 260 applies at least one of deblocking filtering, SAO compensation, ALF to the block passing through the adder to output a reconstructed image.

5 The reconstructed image may be stored in the reference picture buffer 270 to thereby be used for the motion-compensation.

Hereinafter, a block means an encoding/decoding unit. In an encoding/decoding process, an image is divided at a predetermined size and then encoded/decoded. Therefore, a block may also be called a coding unit (CU), a prediction unit (PU), a transform unit
10 (TU), or the like, and a single block may also be divided into sub-blocks having a smaller size.

Here, a prediction unit means a basic unit in which prediction and/or motion-compensation is performed. A prediction unit may be divided into a plurality of partitions, and each of the partitions may also be called a prediction unit partition. When a prediction
15 unit is divided into the plurality of partitions, each of prediction unit partitions may become a basic unit in which prediction and/or motion-compensation are performed. Hereinafter, in the exemplary embodiment of the present invention, a prediction unit may also means prediction unit partitions.

Meanwhile, in high efficiency video coding (HEVC), a motion vector prediction
20 method based on advanced motion vector prediction (AMVP) is used.

In the motion vector prediction method based on advanced motion vector prediction, a motion vector (MV) of a block, existing in a position that is the same as or corresponds to that of a coding treeblock, in a reference picture as well as motion vectors of reconstructed blocks positioned around the coding treeblock may be used. Here, the
25 block, existing in a position that is the same as or spatially corresponds to that of the

coding treeblock, in the reference picture is called a collocated block, and a motion vector of the collocated block is called a collocated motion vector or a temporal motion vector. However, the collocated block may be a block, existing in a position similar to (that is, corresponding to) that of the coding treeblock, in the reference picture as well as a block
5 existing in the same position as that of the coding treeblock.

In a motion information merge method, motion information is estimated from the collocated block as well as reconstructed blocks positioned around the coding treeblock to thereby be used as motion information of the coding treeblock. Here, the motion information includes at least one of inter prediction mode information indicating a
10 reference picture index, a motion vector, a uni-direction, a bi-direction, or the like, required at the time of inter prediction, a reference picture list, and prediction mode information on whether encoding is performed in an intra prediction mode or in an inter prediction mode.

A predicted motion vector in the coding treeblock may be a motion vector of the
15 collocated block, which is a block temporally adjacent to the coding treeblock, as well as motion vectors of neighboring blocks spatially adjacent to the coding treeblock.

FIG. 3 shows examples of a coding/decoding object picture and a reference picture.

In FIG. 3, a block X indicates a coding treeblock in an encoding/decoding object
20 picture 310, and a block A, a block B, a block C, a block D, and a block E indicate reconstructed blocks positioned around the coding treeblock. In addition, a block T in the reference picture 320 indicates a collocated block existing in a position corresponding to that of the coding treeblock.

Which motion vector in the coding treeblock is used as the predicted motion
25 vector may be recognized through a motion vector predictor index.

[Table 1]

prediction_unit(x0, y0, log2PUWidth, log2PUHeight) {	Descriptor
if(skip_flag[x0][y0]) {	
if(NumMVPCand(L0) > 1)	
mvp_idx_l0[x0][y0]	ue(v) ae(v)
if(NumMVPCand(L1) > 1)	
mvp_idx_l1[x0][y0]	ue(v) ae(v)
} else if(PredMode == MODE_INTRA) {	
...	
} else { /* MODE_MERGE, MODE_INTER */	
if(merge_flag[x0][y0] && NumMergeCandidates > 1) {	
...	
} else {	
if(inter_pred_idc[x0][y0] != Pred_L1) {	
if(NumMVPCand(L0) > 1)	
mvp_idx_l0	ue(v) ae(v)
}	
if(inter_pred_idc[x0][y0] != Pred_L0) {	
if(NumMVPCand(L1) > 1)	
mvp_idx_l1	ue(v) ae(v)
}	
}	
}	
}	

As shown in Table 1, motion vector predictor indices mvp_idx_l0 and mvp_idx_l1 for each reference picture list are transmitted to a decoder, and the decoder
5 uses the same motion vector as a motion vector predicted by an encoder as a predicted motion vector.

In the case in which the coding treeblock is encoded/decoded using the motion vectors of the neighboring blocks spatially adjacent to the coding treeblock, the motion vector may be stored only with a memory having a relative small size. However, in the
10 case in which a temporal motion vector is used, since all motion vectors of the reference

picture needs to be stored in a memory, a memory having a relatively large size is required, and a size of a memory access bandwidth required to fetch data from the memory also increases. Therefore, there is a need to more efficiently store the temporal motion vector in an application environment in which a memory space of a portable terminal, or the like, is not sufficient or power consumption is minimized.

Meanwhile, as a technology of storing a motion vector in a memory, there is a method of reducing a spatial resolution of the motion vector. In this method, the motion vector is compressed in any ratio and then stored in the memory. For example, a motion vector stored in a 4x4 block unit is stored in a 4x4 or more block unit to reduce the number of stored motion vectors. Here, in order to adjust a block size of the stored motion vector, information on a compression ratio is transmitted. The information is transmitted through a sequence parameter set (SPS) as shown in Table 2.

[Table 2]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
motion_vector_buffer_comp_flag	0	u(1)
if (motion_vector_buffer_comp_flag)		
motion_vector_buffer_comp_ratio_log2	0	u(8)
rbp_trailing_bits()	0	
}		

Referring to Table 2, in the case in which motion_vector_buffer_comp_flag is 1, a motion vector buffer compressing process is performed.

motion_vector_buffer_comp_ratio_log2 indicates a compression ratio of the motion vector buffer compressing process. In the case in which the motion_vector_buffer_comp_ratio_log2 does not exist, motion_vector_buffer_comp_ratio_log2 is estimated to 0, and a motion vector buffer compressing ratio is represented by Equation 1.

[Equation 1]

$$MVBufferCompRatio = 1 \ll motion_vector_buffer_comp_ratio_log2$$

For example, in the case in which all 4x4 blocks of 1920x1080 pictures have different motion vectors and use two reference picture lists each using two reference pictures, a total memory space of 3.21 Mbytes is required to store a temporal motion vector as described below.

1. Bit depth of 26 bits per one motion vector

(1) Dynamic range of X component of motion vector: -252 to +7676 (bit depth: 13 bits)

(2) Dynamic range of Y component of motion vector: -252 to +4316 (bit depth: 13 bits)

(3) (The dynamic ranges of each component of the motion vector were calculated based on a first prediction unit in a corresponding picture.)

2. In the case in which all of 4x4 block units have different motion vectors: 480 x 270 = 129600 blocks

3. Use of two motion vectors per each block

4. The number of reference picture lists: 2

5. Use of two reference pictures per reference picture list

=> 26 bits x 129600 blocks x two motion vectors x two reference picture lists x two reference pictures = 26956800 bits = 3.21 Mbytes

According to the method of reducing a spatial resolution of a motion vector as described above, it is possible to reduce the size of the required memory space and the memory access bandwidth using spatial correlation of the motion vector. However, the method of reducing a spatial resolution of a motion vector does not limit the dynamic range of the motion vector.

When the size of the memory space is reduced to 1/4, a size of the memory space required in the above-mentioned example is reduced to about 0.8 Mbytes. Here, when only six bits of the bit depth required for storing the motion vector is used for each component of the motion vector by additionally limiting the dynamic range of the motion
5 vector, the size of the required memory space may be further reduced to 0.37 Mbytes.

Therefore, in the exemplary embodiment of the present invention, the dynamic range of the motion vector is limited in order to reduce a size of a memory space required for storing the motion vector and a memory access bandwidth required for fetching data from the memory. The motion vector of the reference picture of which the dynamic range
10 is limited may be used as a temporal motion vector in the coding treeblock.

Hereinafter, a dynamic range means a range between a minimum value and a maximum value of a negative component or a positive component of a motion vector based on 0, and a bit depth, which indicates a size of a space required for storing the motion vector, means a bit width. In addition, unless particularly described, the motion
15 vector means a motion vector of a reference picture, that is, a temporal motion vector.

In the case in which each component of the motion vector is out of the dynamic range, it is represented by the minimum value or the maximum value of the corresponding dynamic range. For example, in the case in which an X component of the motion vector
312 and a maximum value of a dynamic range of each component of the motion vector
20 256, the X component of the motion vector is limited to 256.

Likewise, in the case in which a bit depth of each component of the motion vector is 16 bits and the motion vector is (-36, 24), when the bit depth of each component of the motion vector is limited to 6 bits, each component of the motion vector has a dynamic range of -32 to +31, such that the motion vector is represented by (-32, 24), which is in its
25 dynamic range.

Further, in the case in which a bit depth of each component of the motion vector is 16 bits and the motion vector is (-49, 142), when the bit depth of each component of the motion vector is limited to 9 bits, each component of the motion vector has a dynamic range of -256 to +255, such that the motion vector is represented by (-49, 142) without a
 5 change.

FIG. 4 shows an example of limiting a dynamic range of a motion vector.

Referring to FIG. 4, when a dynamic range of a motion vector having a dynamic range of -4096 to +4095 is limited to -128 to +127, a bit depth may be reduced from 13 bits to 8 bits.

10 Each component of a temporal motion vector is clipped as represented by Equations 2 and 3 in order to be stored in a bit depth of N bit(s). Where N indicates a positive integer.

[Equation 2]

$$\text{clippedMV_X} = \min(1 \ll (N-1) - 1, \max(-1 \ll (N-1), \text{MV_X}))$$

15 [Equation 3]

$$\text{clippedMV_Y} = \min(1 \ll (N-1) - 1, \max(-1 \ll (N-1), \text{MV_Y}))$$

Where MV_X indicates an X component of the motion vector, MV_Y indicates a Y component of the motion vector, min(a,b) means an operation of outputting a smaller value in a and b, and max(a,b) means an operation of outputting a larger value in a and b.
 20 Each of clippedMV_X and clippedMV_Y indicates X and Y components of the clipped temporal motion vector and is stored in the memory to thereby be used as a temporal motion vector of the coding treeblock.

For example, as shown in Table 3, in the case in which a size of a memory space is 48 bytes and each component of the motion vector uses a bit depth of 16 bits, a total of
 25 twelve motion vectors may be stored.

[Table 3]

MV1-X	MV1-Y	MV2-X	MV2-Y	MV3-X	MV3-Y	MV4-X	MV4-Y
MV5-X	MV5-Y	MV6-X	MV6-Y	MV7-X	MV7-Y	MV8-X	MV8-Y
MV9-X	MV9-Y	MV10-X	MV10-Y	MV11-X	MV11-Y	MV12-X	MV12-Y

However, when each component of the motion vector uses only a bit depth of 8 bits, a total of twenty four motion vectors may be stored as shown in Table 4.

[Table 4]

MV1-X	MV1-Y	MV2-X	MV2-Y	MV3-X	MV3-Y	MV4-X	MV4-Y
MV5-X	MV5-Y	MV6-X	MV6-Y	MV7-X	MV7-Y	MV8-X	MV8-Y
MV9-X	MV9-Y	MV10-X	MV10-Y	MV11-X	MV11-Y	MV12-X	MV12-Y
MV13-X	MV13-Y	MV14-X	MV14-Y	MV15-X	MV15-Y	MV16-X	MV16-Y
MV17-X	MV17-Y	MV18-X	MV18-Y	MV19-X	MV19-Y	MV20-X	MV20-Y
MV21-X	MV21-Y	MV22-X	MV22-Y	MV23-X	MV23-Y	MV24-X	MV24-Y

5 Therefore, according to the exemplary embodiment of the present invention, when an image reconstructed in an encoder and/or a decoder is subjected to an in-loop filtering process such as a deblocking filter, an adaptive loop filter, or the like, and then stored in a decoded picture buffer (DPB), the dynamic range of the motion vector is limited, such that a motion vector of a reference picture is stored. The decoded picture buffer means the
10 reference picture buffer of FIG. 1 or FIG. 2.

I. Process of clipping motion vector

A process of clipping each component of a motion vector is invoked in the case in which a slice_type is not equal to I. The process of clipping a motion vector is performed in a treeblock or largest coding unit (LCU) after a filtering process is finished.

15 Inputs in the process of clipping a motion vector are a location (xP, yP) specifying

the top-left sample of the prediction unit relative to the top-left sample of the current picture, and motion vector matrices MvL0 and MvL1. Outputs in the process are the clipped motion vector matrices CMvL0 and CMvL1.

With respect to the matrices MvL0, MvL1, CMvL0, and CMvL1, operations of
 5 Equations 4 to 7 are performed.

[Equation 4]

$$mvLX = MvLX[xP, yP]$$

[Equation 5]

$$cmvLX[0] = Clip3(-1 \ll (TMVBitWidth - 1), 1 \ll (TMVBitWidth - 1) - 1, mvLX[0])$$

10 [Equation 6]

$$cmvLX[1] = Clip3(-1 \ll (TMVBitWidth - 1), 1 \ll (TMVBitWidth - 1) - 1, mvLX[1])$$

[Equation 7]

$$CMvLX [xP, yP] = cmvLX$$

Where TMVBitWidth indicates a bit depth of a motion vector, Clip3(a, b, c)
 15 means a function of clipping c so as to exist in a range between a and b.

II. Process of storing motion vector

FIGS. 5 to 8 are flow charts showing a method of storing a motion vector of a reference picture.

Referring to FIG. 5, the motion vector of the reference picture may be stored
 20 using both of an image buffer storing a reconstructed image and a motion vector buffer storing a motion vector. Here, the reconstructed image is subjected to an in-loop filtering process (S510) and the motion vector is subjected to a limiting dynamic range process (S520) and then stored (S540).

In addition, referring to FIG. 6, both of an image buffer and a motion vector buffer are used, and the motion vector is subjected to a limiting dynamic range process (S620) and a reducing spatial resolution process (S630) and then stored (S640).

Further, referring to FIG. 7, the reconstructed image is subjected to an in-loop
5 filtering process (S710) and then stored in an image buffer (S740), and the motion vector is subjected to a limiting dynamic range process (S720) and then stored in a motion vector buffer (S750).

Further, referring to FIG. 8, the reconstructed image is subjected to an in-loop
filtering process (S810) and then stored in an image buffer (S840), and the motion vector
10 is subjected to a limiting dynamic range process (S820) and a reducing spatial resolution process (S830) and then stored (S850).

Meanwhile, in the exemplary embodiments of FIGS. 6 and 8, a sequence of the limiting dynamic range process S620 or S820 and the reducing spatial resolution process S630 and S830 is not limited, but may be changed.

15 In addition, in order to further reduce a memory access bandwidth, dynamic ranges of each component of the motion vector may be differently limited. For example, only one of a dynamic range of an X component and a dynamic range of a Y component may be limited or the dynamic range of the Y component may be further limited as compared to the dynamic range of the X component.

20 The limited dynamic range of the motion vector is transmitted through a sequence parameter set, a picture parameter set (PPS), a slice header, or the like, and the decoder similarly performs limitation of a dynamic range of a temporal motion vector in the sequence, the picture, or the slice. In this case, a bit depth, which is a size of a memory space required for storing the motion vector represented in the dynamic range may also be
25 transmitted. In addition, it is possible to efficiently store the temporal motion vector so as

to be matched to motion characteristics of the image using the dynamic range transmitted through the sequence parameter set, the picture parameter set, the slice header, or the like, rather than storing the motion vector using a bit depth having a fixed size.

Meanwhile, the motion vector may be quantized and stored. In the case in which
5 the motion vector is quantized and stored, precision of the motion vector is reduced. As a quantizing method, there are uniform quantization in which step sizes are uniform, non-uniform quantization in which step sizes are non-uniform, and the like. The step size in the quantization is set to a fixed value predefined between the encoder and the decoder or is transmitted from the encoder to the decoder through the sequence parameter set, the
10 picture parameter set, the slice header, or the like. The decoder uses the quantized motion vector as it is or dequantizes and use the quantized motion vector. FIG. 9 shows an example of quantizing a motion vector. Referring to FIG. 9, in the case in which the motion vector has a component value of 32 to 48, the motion vector is quantized to 40.

In addition, the motion vector may be limited in a representation resolution and
15 the stored. The representation resolution means an integer pixel unit (1 pixel unit), a fraction pixel unit (a 1/2 pixel unit, a 1/4 pixel unit, or the like). For example, a resolution of the motion vector processed in a 1/4 pixel unit may be stored as an integer pixel. The representation resolution of the motion vector is set to a fixed value predefined between the encoder and the decoder or is transmitted from the encoder to the decoder through the
20 sequence parameter set, the picture parameter set, the slice header, or the like.

In addition, only with respect to some motion vectors among temporal motion vectors stored in a memory, a limiting dynamic range process, a reducing space resolution process, and a quantizing process of the motion vector may be performed.

In the case in which the dynamic range of the motion vector is limited and stored,
25 information on the dynamic range of the motion vector may be added and stored in the

memory. For example, in the case in which the dynamic range of the motion vector is -128 to +127, a flag of 1 may be additionally stored, and in the case in which the dynamic range of the motion vector is -32 to +31, a flag of 0 may be additionally stored. In this case, flag information may be stored together with the motion vector or be stored in a memory
5 different from the memory in which the motion vector is stored. In the case in which the flag information and the motion vector are stored in different memories, when in which dynamic range a specific motion vector is stored is recognized, arbitrary access to the flag information may be allowed. In addition, information on in which dynamic range some motion vectors are stored is transmitted through the sequence parameter set, the picture
10 parameter set, the slice header, or the like, thereby making it possible to allow a decoder to perform an operation similar to that of an encoder.

In the case in which the spatial resolution of the motion vector is reduced and stored, information on a block size of the motion vector may be added and stored in the memory. For example, in the case in which the block size of the motion vector is 4x4, a
15 flag of 1 may be additionally stored, and in the case in which the block size of the motion vector is 16x16, a flag of 0 may be additionally stored. In this case, flag information may be stored together with the motion vector or be stored in a memory different from the memory in which the motion vector is stored. In the case in which the flag information and the motion vector are stored in different memories, when in which block size a
20 specific motion vector is stored is recognized, arbitrary access to the flag information may be allowed. In addition, information on in which block size some motion vectors are stored is transmitted through the sequence parameter set, the picture parameter set, the slice header, or the like, thereby making it possible to allow a decoder to perform an operation similar to that of an encoder.

25 In the case in which the motion vector is quantized and stored, information on

precision of the motion vector may be added and stored in the memory. For example, in the case in which a step size of the quantization is 4, a flag of 1 may be additionally stored, and in the case in which the step size of the quantization is 1, a flag of 0 may be additionally stored. In this case, flag information may be stored together with the motion
5 vector or be stored in a memory different from the memory in which the motion vector is stored. In the case in which the flag information and the motion vector are stored in different memories, when at which step size a specific motion vector is quantized and stored is recognized, arbitrary access to the flag information may be allowed. In addition, information on at which step size some motion vectors are quantized and stored is
10 transmitted through the sequence parameter set, the picture parameter set, the slice header, or the like, thereby making it possible to allow a decoder to perform an operation similar to that of an encoder.

Further, in the case in which motion information is stored in the memory, the spatial resolution of the motion vector may be reduced and stored. Here, the motion
15 information includes at least one of inter prediction mode information indicating a reference picture index, a motion vector, a uni-direction, a bi-direction, or the like, required at the time of inter prediction, a reference picture list, and prediction mode information on whether an intra prediction mode is performed or an inter prediction mode is performed.

20 For example, motion information of a prediction unit having the largest partition size among a plurality of motion information of a specific region may be stored as representative motion information in the memory. Here, the specific region may include a region in the coding treeblock and regions of neighboring blocks of the coding treeblock. In addition, the specific region may be a region including a block in which the motion
25 information is stored in the case in which the entire picture or slice is divided at a

predetermined size.

For example, after motion information, which is coded in a motion information merge method, a coding information skip method, or the like, is excluded from the plurality of motion information included in the specific region, the representative motion
5 information may be stored in the memory.

For example, the most frequently generated motion information among the plurality of motion information included in the specific region may be stored as the representative motion information in the memory. In this case, the number of generation of the motion information for each size of the block, or the like, may be calculated.

10 For example, motion information at a specific position among the plurality of motion information included in the specific region may be stored. Here, the specific position, which is a position included in the specific region, may be a fixed position of the specific region. In addition, the specific position may be selected as one of a plurality of positions. When the plurality of positions are used, a priority for each position may be
15 determined, and the motion information may be stored in the memory according to the priority.

For example, when the plurality of motion information included in the specific region is stored in the memory, since the motion information does not exist outside a boundary of a block coded in an intra prediction mode, a block coded in a pulse coded
20 modulation (PCM) mode, a slice, or a picture, the motion information of the corresponding position may not be stored in the memory.

In the above-mentioned examples, when the motion information of the specific position is stored, in the case in which the motion information of the corresponding position does not exist, motion information of a collocated block, motion information of a
25 block coded already, or motion information of a neighboring block may be used as the

motion information of the corresponding position. Here, the specific position may be one sample position in a neighboring block or a position of the block. For example, in the case in which the motion information of the specific position does not exist, a medium value or average value among motion information of neighboring blocks which are coded in inter
5 prediction may be stored in the memory. For example, in the case in which the motion information of the specific position does not exist, an average value of motion information of neighboring blocks may be stored in the memory. When the medium value and the average value are calculated, in the case in which the motion information of the neighboring blocks is different from at least one of the reference picture index, the
10 reference picture list, and the inter prediction mode information, a size of the motion vector may be adjusted according to the reference picture index, the reference picture list, the inter prediction mode information, a picture order count, and the like.

III. Process of deriving motion vector

In the case in which the motion information is stored in the memory using the
15 above-mentioned motion information methods and the motion information of the reference picture is used in the motion vector prediction method, the advanced motion vector prediction method, or the motion information merge method, the stored motion information may be fetched.

For example, motion information of a position corresponding to that of the coding
20 treeblock in the reference picture may be fetched. In this case, the position corresponding to that of the coding treeblock in the reference picture may be a fixed position in a specific region or a relative position from the position of the coding treeblock.

FIGS. 10 to 13 show examples of fetching motion information from a reference picture.

25 In FIGS. 10 to 13, a block X indicates a coding treeblock in an encoding/decoding

object picture 1010, 1110, 1210, or 1310, and a block A, a block B, a block C, a block D, and a block E indicate reconstructed neighboring blocks. In addition, a block T in the reference picture 1020, 1120, 1220, and 1320 indicates a collocated block corresponding to the coding treeblock. A block Y in the reference picture 1320 of FIG. 13 indicates a
5 block corresponding to a position other than the encoding/decoding object block.

Referring to FIG. 10, motion information corresponding to a position corresponding to a top-left pixel position among positions of a coding treeblock X in a reference picture may be fetched.

Referring to FIG. 11, motion information corresponding to a position
10 corresponding to a central pixel position among positions of a coding treeblock X in a reference picture may be fetched.

Referring to FIG. 12, motion information corresponding to a position corresponding to a right-bottom pixel position among positions of a coding treeblock X in a reference picture may be fetched.

15 Referring to FIG. 13, motion information corresponding to a position corresponding to a pixel position other than a coding treeblock X in a reference picture may be fetched.

An encoding/decoding method such as motion vector prediction, advanced motion vector prediction, motion information merge, motion information merge skip, or the like,
20 may be performed using the motion information stored in the memory, that is, the motion information of the reference picture.

The motion vector may be stored in the memory using at least one of a method of limiting a dynamic range of a motion vector, a method of reducing a spatial resolution of a motion vector, a method of quantizing a motion vector, and a method of reducing a
25 representation resolution of a motion vector, and the stored motion vector may be used for

predicting a motion vector of the coding treeblock and merging motion information thereof.

A process of fetching the motion vector of the reference picture from the memory is called a process of deriving a temporal motion vector. In a process of deriving a
 5 temporal motion vector, TMVbitWidth indicates a bit width of a temporal motion vector stored in the memory.

Inputs in the process of deriving a temporal motion vector are a location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture, variables specifying the width and the height of the
 10 prediction unit for luma, nPSW and nPSH, the reference index of the current prediction unit partition refIdxLX (with X being 0 or 1). Outputs in the process are the motion vector prediction mvLXCol and the availability flag availableFlagLXCol.

The function RefPicOrderCnt(pic, refidx, LX) is specified by the value of PicOrderCnt of the picture that is the reference picture RefPicListX[refidx] of pic with X
 15 being 0 or 1. PicOrderCnt of the reference picture shall be maintained until the picture is marked as “non-existing.” Clip3(a, b, c) means a function of clipping c so as to exist in a range between a and b.

If slice_type is equal to B and collocated_from_l0_flag is equal to 0, the variable colPic specifies the picture that contains the co-located partition as specified by
 20 RefPicList1[0]. Otherwise (slice_type is equal to B and collocated_from_l0_flag is equal to 1 or slice_type is equal to P), the variable colPic specifies the picture that contains the co-located partition as specified by RefPicList0[0].

Variable colPu and its position (xPCol, yPCol) are derived in the following ordered steps:

25 1. Right-bottom luma position (xPRb, yPRb) of the current prediction unit is

defined as represented by Equations 8 and 9.

[Equation 8]

$$xPRb = xP + nPSW$$

[Equation 9]

5 $yPRb = yP + nPSH$

2. If colPu is coded in an intra prediction mode or colPu is unavailable,

(1) Central luma position of the current prediction unit is defined as represented by Equations 10 and 11.

[Equation 10]

10 $xPCtr = (xP + (nPSW \gg 1) - 1$

[Equation 11]

$$yPCtr = (yP + (nPSH \gg 1) - 1$$

(2) The variable colPu is set as the prediction unit covering the modified position given by $((xPCtr \gg 4) \ll 4, (yPCtr \gg 4) \ll 4)$ inside the colPic.

15 3. (xPCol, yPCol) is set equal to the top-left luma sample of the colPu relative to the top-left luma sample of the colPic.

The variables mvLXCol and availableFlagLXCol are derived as follows.

1. If colPu is coded in an intra prediction mode or colPu is unavailable, both components of mvLXCol are set equal to 0 and availableFlagLXCol is set equal to 0.

20 2. Otherwise (colPu is not coded in an intra prediction mode and colPu is available), the variables mvCol and refIdxCol are derived as follows,

(1) If $\text{PredFlagL0}[\text{xPCol}][\text{yPCol}]$ is equal to 0, the motion vector mvCol and the reference index refIdxCol are set equal to $\text{MvL1}[\text{xPCol}][\text{yPCol}]$ and $\text{RefIdxL1}[\text{xPCol}][\text{yPCol}]$, respectively.

(2) Otherwise ($\text{PredFlagL0}[\text{xPCol}][\text{yPCol}]$ is equal to 1), the following applies.

5 1) If $\text{PredFlagL1}[\text{xPCol}][\text{yPCol}]$ is equal to 0, the motion vector mvCol and the reference index refIdxCol are set equal to $\text{MvL0}[\text{xPCol}][\text{yPCol}]$ and $\text{RefIdxL0}[\text{xPCol}][\text{yPCol}]$, respectively.

2) Otherwise ($\text{PredFlagL1}[\text{xPCol}][\text{yPCol}]$ is equal to 1), the following applies.

a. The following assignments are made with X being 0 or 1.

10 i. $\text{RefIdxColLX} = \text{RefIdxLX}[\text{xPCol}][\text{yPCol}]$

ii. If $\text{PicOrderCnt}(\text{colPic})$ is less than $\text{PicOrderCnt}(\text{currPic})$ and $\text{RefPicOrderCnt}(\text{colPic}, \text{RefIdxColLX}, \text{LX})$ is greater than $\text{PicOrderCnt}(\text{currPic})$ or $\text{PicOrderCnt}(\text{colPic})$ is greater than $\text{PicOrderCnt}(\text{currPic})$ and $\text{RefPicOrderCnt}(\text{colPic}, \text{RefIdxColLX}, \text{LX})$ is less than $\text{PicOrderCnt}(\text{currPic})$, the variable MvXCross is equal to 1.

15 iii. Otherwise ($\text{PicOrderCnt}(\text{colPic})$ is less than $\text{PicOrderCnt}(\text{currPic})$ and $\text{RefPicOrderCnt}(\text{colPic}, \text{RefIdxColLX}, \text{LX})$ is less than or equal to $\text{PicOrderCnt}(\text{currPic})$ or $\text{PicOrderCnt}(\text{colPic})$ is greater than $\text{PicOrderCnt}(\text{currPic})$ and $\text{RefPicOrderCnt}(\text{colPic}, \text{RefIdxColLX}, \text{LX})$ is greater than or equal to $\text{PicOrderCnt}(\text{currPic})$), the variable MvXCross is equal to 0.

20 b. If one of the following conditions is true, the motion vector mvCol , the reference index refIdxCol and ListCol are set equal to $\text{MvL1}[\text{xPCol}][\text{yPCol}]$, RefIdxColL1 and L1 , respectively.

i. Mv0Cross is equal to 0 and Mv1Cross is equal to 1.

ii. Mv0Cross is equal to Mv1Cross and reference index list is equal to L1

25 c. Otherwise, the motion vector mvCol , the reference index refIdxCol and ListCol

are set equal to $MvL0[xPCol][yPCol]$, $RefIdxColL0$ and $L0$, respectively.

3) the variable $availableFlagLXCol$ is set equal to 1 and operations of Equation 12 or Equations 13 to 18 are applied.

- a. If $PicOrderCnt(colPic) - RefPicOrderCnt(colPic, refIdxCol, ListCol)$ is equal to
 5 $PicOrderCnt(currPic) - RefPicOrderCnt(currPic, refIdxLX, LX)$,

[Equation 12]

$$mvLXCol = Clip3(-1 \ll (TMVBitWidth - 1), 1 \ll (TMVBitWidth - 1) - 1, mvCol)$$

b. Otherwise,

[Equation 13]

10
$$tx = (16384 + Abs(td / 2)) / td$$

[Equation 14]

$$DistScaleFactor = Clip3(-1024, 1023, (tb * tx + 32) \gg 6)$$

[Equation 15]

$$mvLXCol = Clip3(-1 \ll (TMVBitWidth - 1), 1 \ll (TMVBitWidth - 1) - 1, mvCol)$$

15 [Equation 16]

$$mvLXCol = ClipMv((DistScaleFactor * mvLXCol + 128) \gg 8)$$

where td and tb are derived as Equations 17 and 18.

[Equation 17]

$$td = Clip3(-128, 127, PicOrderCnt(colPic) - RefPicOrderCnt(colPic, refIdxCol, ListCol))$$

20 [Equation 18]

$$tb = Clip3(-128, 127, PicOrderCnt(currPic) - RefPicOrderCnt(currPic, refIdxLX, LX))$$

That is, referring to Equations 13 to 16, $mvLXCol$ is derived as scaled version of the motion vector $mvCol$.

Meanwhile, even though the motion vector is clipped in a dynamic range, in the

case in which the clipped motion vector is scaled, the clipped motion vector may be again out of the dynamic range. Therefore, after the scaled motion vector is derived, the dynamic range of the motion vector may be limited. In this case, each of Equations 15 and 16 may be replaced with Equations 19 and 20.

5 [Equation 19]

$$mvLXCol = ClipMv((DistScaleFactor * mvLXCol + 128) >> 8)$$

[Equation 20]

$$mvLXCol = Clip3(-1 << (TMVBitWidth - 1), 1 << (TMVBitWidth - 1) - 1, mvCol)$$

IV. Method of transmitting information for clipping temporal motion vector in

10 decoder.

Hereinafter, a method of transmitting information required for clipping a temporal motion vector in a decoder using the same method as that of an encoder will be described.

TMVBitWidth in the process of deriving a temporal motion vector may be transmitted from the encoder to the decoder through a sequence parameter set, a picture parameter set, a slice header, or the like.

15

[Table 5]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
bit_width_temporal_motion_vector_minus8	0	se(v)
.....		
rbp_trailing_bits()	0	
}		

bit_width_temporal_motion_vector_minus8 of Table 5 specifies the bit width of the temporal motion vector component. When bit_width_temporal_motion_vector_minus8 is not present, it shall be inferred to be equal to 0. The bit width of temporal motion vector component is specified as follows:

20

[Equation 21]

$$TMVBitWidth = bit_width_temporal_motion_vector_minus8 + 8$$

1. Information transmitting method 1 – in the case in which motion vector is compressed and bit depth of motion vector is limited

5 [Table 6]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
motion_vector_buffer_comp_flag	0	u(1)
if(motion_vector_buffer_comp_flag)		
motion_vector_buffer_comp_ratio_log2	0	u(8)
bit_depth_temporal_motion_vector_constraint_flag	0	u(1)
if(bit_depth_temporal_motion_vector_constraint_flag)		
bit_depth_temporal_motion_vector_minus8	0	se(v)
.....		
rbp_trailing_bits()	0	
}		

Referring to Table 6, in the case in which motion_vector_buffer_comp_flag equals to 1 specifies the motion vector buffer compression process is applied.

10 motion_vector_buffer_comp_ratio_log2 specifies the compression ratio in the motion vector buffer compression process. When motion_vector_buffer_comp_ratio_log2 is not present, it shall be inferred to be equal to 0. The motion vector buffer compression ratio is specified as follows:

[Equation 22]

$$MVBufferCompRatio = 1 \ll motion_vector_buffer_comp_ratio_log2$$

15 Again referring to Table 6, in the case in which

bit_depth_temporal_motion_vector_constraint_flag equals to 1 specifies the temporal motion vector bit depth limiting constraint process is applied.

bit_depth_temporal_motion_vector_minus8 specifies the bit depth of the temporal

motion vector. When `bit_depth_temporal_motion_vector_minus8` is not present, it shall be inferred to be equal to 0. The bit depth of temporal motion vector is specified as follows:

[Equation 23]

$$TMVBitDepth = bit_depth_temporal_motion_vector_minus8 + 8$$

- 5
2. Information transmitting method 2 – in the case in which bit depth of motion vector is limited

[Table 7]

<code>seq_parameter_set_rbsp() {</code>	C	Descriptor
<code>.....</code>		
<code> bit_depth_temporal_motion_vector_constraint_flag</code>	0	u(1)
<code> if(bit_depth_temporal_motion_vector_constraint_flag)</code>		
<code> bit_depth_temporal_motion_vector_minus8</code>	0	se(v)
<code> </code>		
<code> rbsp_trailing_bits()</code>	0	
<code>}</code>		

Referring to Table 7, in the case in which

- 10
- `bit_depth_temporal_motion_vector_constraint_flag` equals to 1 specifies the temporal motion vector bit depth constraint process is applied.

`bit_depth_temporal_motion_vector_minus8` specifies the bit depth of the temporal motion vector. When `bit_depth_temporal_motion_vector_minus8` is not present, it shall be inferred to be equal to 0. The bit depth of temporal motion vector is specified as follows:

[Equation 24]

$$TMVBitDepth = bit_depth_temporal_motion_vector_minus8 + 8$$

- 15
3. Information transmitting method 3 – in the case in which bit depth of motion vector is limited

[Table 8]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
bit_depth_temporal_motion_vector_minus8	0	se(v)
.....		
rbsp_trailing_bits()	0	
}		

bit_depth_temporal_motion_vector_minus8 specifies the bit depth of the temporal motion vector. When bit_depth_temporal_motion_vector_minus8 is not present, it shall be inferred to be equal to 0. The bit depth of temporal motion vector is specified as follows:

5 [Equation 25]

$$TMVBitDepth = bit_depth_temporal_motion_vector_minus8 + 8$$

4. Information transmitting method 4 – in the case in which bit depth is limited

with respect to each of X and Y components of motion vector

[Table 9]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
bit_depth_temporal_motion_vector_constraint_flag	0	u(1)
if(bit_depth_temporal_motion_vector_constraint_flag) {		
bit_depth_temporal_motion_vector_x_minus8	0	se(v)
bit_depth_temporal_motion_vector_y_minus8	0	se(v)
}		
.....		
rbsp_trailing_bits()	0	
}		

10

Referring to Table 9, in the case in which

bit_depth_temporal_motion_vector_constraint_flag equals to 1 specifies the temporal motion vector bit depth constraint process is applied.

bit_depth_temporal_motion_vector_x_minus8 specifies the bit depth of the

15 temporal motion vector component x. When

bit_depth_temporal_motion_vector_x_minus8 is not present, it shall be inferred to be equal to 0. The bit depth of temporal motion vector component x is specified as follows:

[Equation 26]

$$TMVXBitDepth = bit_depth_temporal_motion_vector_x_minus8 + 8$$

5 bit_depth_temporal_motion_vector_y_minus8 specifies the bit depth of the temporal motion vector component y. When

bit_depth_temporal_motion_vector_y_minus8 is not present, it shall be inferred to be equal to 0. The bit depth of temporal motion vector component y is specified as follows:

[Equation 27]

10
$$TMVXBitDepth = bit_depth_temporal_motion_vector_y_minus8 + 8$$

5. Information transmitting method 5 – in the case in which motion vector is compressed and bit depth of motion vector is limited

[Table 10]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
motion_vector_buffer_comp_flag	0	u(1)
if(motion_vector_buffer_comp_flag) {		
motion_vector_buffer_comp_ratio_log2	0	u(8)
bit_depth_temporal_motion_vector_minus8	0	se(v)
}		
.....		
rbsp_trailing_bits()	0	
}		

15 Referring to Table 10, in the case in which motion_vector_buffer_comp_flag equals to 1 specifies the motion vector buffer compression process is applied.

motion_vector_buffer_comp_ratio_log2 specifies the compression ratio in the motion vector buffer compression process. When motion_vector_buffer_comp_ratio_log2 is not present, it shall be inferred to be equal to 0. The motion vector buffer compression

ratio is specified as follows:

[Equation 28]

$$MVBufferCompRatio = 1 \ll motion_vector_buffer_comp_ratio_log2$$

V. Definition of dynamic range through levels of video codec

- 5 The dynamic range of the temporal motion vector may be defined through a level of a video codec rather than being transmitted through the sequence parameter set, the picture parameter set, or the slice header. The encoder and the decoder may determine a limited dynamic range of the motion vector using level information.

- 10 Further, even in the levels, dynamic ranges and/or bit depths of each of the X and Y components of the motion vector may be differently defined, and minimum values and maximum values of each of the components may be defined.

Tables 11 and 12 show an example of a case in which TMVBitWidth in the process of deriving a temporal motion vector described above is defined in the levels.

[Table 11]

Level number	MaxTMVBitWidth (Max Temporal MV component bit width)
1	8
1b	8
1.1	8
1.2	8
1.3	8
2	8
2.1	8
2.2	8
3	8
3.1	10
3.2	10
4	10
4.1	10
4.2	10
5	10
5.1	10

Referring to Table 11, TMVBitWidth is set as MaxTMVBitWidth defined in the levels. Here, MaxTMVBitWidth indicates a maximum bit width of a temporal motion vector when the temporal motion vector is stored in the memory.

Meanwhile, TMVBitWidth may also be defined in the levels, and a difference
 5 from the defined value (a delta value) may be transmitted through the sequence parameter set, the picture parameter set, or the slice header. That is, TMVBitWidth may be set to as a value obtained by adding the difference transmitted through the sequence parameter set, the picture parameter set, or the slice header to MaxTMVBitWidth defined in the levels. Here, TMVBitWidth indicates a bit width of the temporal motion vector when the
 10 temporal motion vector is stored in the memory.

[Table 12]

Level number	MaxTMVBitWidth (Max Temporal MV component bit depth)
1	8
1b	8
1.1	8
1.2	8
1.3	8
2	8
2.1	8
2.2	8
3	8
3.1	10
3.2	10
4	10
4.1	10
4.2	10
5	10
5.1	10

[Table 13]

seq_parameter_set_rbsp() {	C	Descriptor
.....		
delta_bit_width_temporal_motion_vector_minus8	0	se(v)
.....		
rbsp_trailing_bits()	0	
}		

delta_bit_width_temporal_motion_vector_minus8 specifies the delta bit width of the temporal motion vector component. When delta_bit_width_temporal_motion_vector_minus8 is not present, it shall be inferred to be equal to 0. The bit width of temporal motion vector component is specified as follows:

[Equation 29]

$$TMVBitWidth = delta_bit_width_temporal_motion_vector_minus8 + MaxTMVBitWidth$$

In addition, as shown in Table 14, dynamic ranges of each component of the temporal motion vector may also be defined in levels.

[Table 14]

Level number	MaxMBPS (Max macroblock processing rate) (MB/s)	MaxFS (Max picture size) (MBs)	MaxDpbMbs (Max decoded picture buffer size) (MBs)	MaxBR (Max video bit rate) (1000 bits/s, 1200 bits/s, cpbBrVdFactor bits/s, or cpbBrNalFactor bits/s)	MaxCPB (Max CPB size) (1000 bits, 1200 bits, pbBrVclFactor bits, or cpbBrNalFactor bits)	MaxTmvR (Max Temporal MV component range) (luma picture samples)	MinCR (Min compression ratio)	MaxMvsPer2Mb (Max number of motion vectors per two consecutive MBs)
1	1 485	99	396	64	175	[-64,+63.75]	2	-
1b	1 485	99	396	128	350	[-64,+63.75]	2	-
1.1	3 000	396	900	192	500	[-128,+127.75]	2	-
1.2	6 000	396	2 376	384	1 000	[-128,+127.75]	2	-
1.3	11 880	396	2 376	768	2 000	[-128,+127.75]	2	-
2	11 880	396	2 376	2 000	2 000	[-128,+127.75]	2	-
2.1	19 800	792	4 752	4 000	4 000	[-256,+255.75]	2	-
2.2	20 250	1 620	8 100	4 000	4 000	[-256,+255.75]	2	-
3	40 500	1 620	8 100	10 000	10 000	[-256,+255.75]	2	32
3.1	108 000	3 600	18 000	14 000	14 000	[-512,+511.75]	4	16
3.2	216 000	5 120	20 480	20 000	20 000	[-512,+511.75]	4	16
4	245 760	8 192	32 768	20 000	25 000	[-512,+511.75]	4	16
4.1	245 760	8 192	32 768	50 000	62 500	[-512,+511.75]	2	16
4.2	522 240	8 704	34 816	50 000	62 500	[-512,+511.75]	2	16
5	589 824	22 080	110 400	135 000	135 000	[-512,+511.75]	2	16
5.1	983 040	36 864	184 320	240 000	240 000	[-512,+511.75]	2	16

In addition, as shown in Tables 15 to 17, bit widths of each component of the temporal motion vector may also be defined in levels.

[Table 15]

Level number	MaxMBPS (Max macroblock processing rate) (MB/s)	MaxFS (Max picture size) (MBs)	MaxDpbMbs (Max decoded picture buffer size) (MBs)	MaxBR (Max video bit rate) (1000 bits/s, 1200 bits/s, cpbBrVclFactor bits/s, or cpbBrNalFactor bits/s)	MaxCPB (Max CPB size) (1000 bits, 1200 bits, cpbBrVclFactor bits, or cpbBrNalFactor bits)	MaxTMVBitWidth (Max Temporal MV component bit width)	MinCR (Min compression ratio)	MaxMvsPer2Mb (Max number of motion vectors per two consecutive MBs)
1	1 485	99	396	64	175	8	2	-
1b	1 485	99	396	128	350	8	2	-
1.1	3 000	396	900	192	500	8	2	-
1.2	6 000	396	2 376	384	1 000	8	2	-
1.3	11 880	396	2 376	768	2 000	8	2	-
2	11 880	396	2 376	2 000	2 000	8	2	-
2.1	19 800	792	4 752	4 000	4 000	8	2	-
2.2	20 250	1 620	8 100	4 000	4 000	8	2	-
3	40 500	1 620	8 100	10 000	10 000	8	2	32
3.1	108 000	3 600	18 000	14 000	14 000	10	4	16
3.2	216 000	5 120	20 480	20 000	20 000	10	4	16
4	245 760	8 192	32 768	20 000	25 000	10	4	16
4.1	245 760	8 192	32 768	50 000	62 500	10	2	16
4.2	522 240	8 704	34 816	50 000	62 500	10	2	16
5	589 824	22 080	110 400	135 000	135 000	10	2	16
5.1	983 040	36 864	184 320	240 000	240 000	10	2	16

[Table 16]

Level number	MaxMBPS (Max macroblock processing rate) (MB/s)	MaxFS (Max picture size) (MBs)	MaxDpbMbs (Max decoded picture buffer size) (MBs)	MaxBR (Max video bit rate) (1000 bits/s, 1200 bits/s, cpbBrVclFactor bits/s, or cpbBrNalFactor bits/s)	MaxCPB (Max CPB size) (1000 bits, 1200 bits, cpbBrVclFactor bits, or cpbBrNalFactor bits)	MaxTMVBitWidth (Max Temporal MV component bit width)	MinCR (Min compression ratio)	MaxMvsPer2Mb (Max number of motion vectors per two consecutive MBs)
1	1 485	99	396	64	175	6	2	-
1b	1 485	99	396	128	350	6	2	-
1.1	3 000	396	900	192	500	7	2	-
1.2	6 000	396	2 376	384	1 000	7	2	-
1.3	11 880	396	2 376	768	2 000	7	2	-
2	11 880	396	2 376	2 000	2 000	7	2	-
2.1	19 800	792	4 752	4 000	4 000	8	2	-
2.2	20 250	1 620	8 100	4 000	4 000	8	2	-
3	40 500	1 620	8 100	10 000	10 000	8	2	32
3.1	108 000	3 600	18 000	14 000	14 000	10	4	16
3.2	216 000	5 120	20 480	20 000	20 000	10	4	16
4	245 760	8 192	32 768	20 000	25 000	10	4	16
4.1	245 760	8 192	32 768	50 000	62 500	10	2	16
4.2	522 240	8 704	34 816	50 000	62 500	10	2	16
5	589 824	22 080	110 400	135 000	135 000	10	2	16
5.1	983 040	36 864	184 320	240 000	240 000	10	2	16

[Table 17]

Level number	MaxTMVBitWidth(Max Temporal MV component bit width)
1	8
1b	8
1.1	8
1.2	8
1.3	8
2	8
2.1	8
2.2	8
3	8
3.1	10
3.2	10
4	10
4.1	10
4.2	10
5	10
5.1	10

In addition, as shown in Table 18, a bit width of a Y component of the temporal motion vector may also be defined in levels.

5 [Table 18]

Level number	MaxMBPS (Max macroblock processing rate) (Mb/s)	MaxFS (Max picture size) (MBs)	MaxDpbMbs (Max decoded picture buffer size) (MBs)	MaxBR (Max video bit rate) (1000 bits/s, 1200 bits/s, cpbBrVclFactor bits/s, or cpbBrNalFactor bits/s)	MaxCPB (Max CPB size) (1000 bits, 1200 bits, cpbBrVclFactor bits, or cpbBrNalFactor bits)	MaxTMVBitWidth (Max Vertical Temporal MV component bit depth)	MinCR (Min compression ratio)	MaxMvsPer2Mb (Max number of motion vectors per two consecutive MBs)
1	1 485	99	396	64	175	8	2	-
1b	1 485	99	396	128	350	8	2	-
1.1	3 000	396	900	192	500	8	2	-
1.2	6 000	396	2 376	384	1 000	8	2	-
1.3	11 880	396	2 376	768	2 000	8	2	-
2	11 880	396	2 376	2 000	2 000	8	2	-
2.1	19 800	792	4 752	4 000	4 000	8	2	-
2.2	20 250	1 620	8 100	4 000	4 000	8	2	-
3	40 500	1 620	8 100	10 000	10 000	8	2	32
3.1	108 000	3 600	18 000	14 000	14 000	10	4	16
3.2	216 000	5 120	20 480	20 000	20 000	10	4	16
4	245 760	8 192	32 768	20 000	25 000	10	4	16
4.1	245 760	8 192	32 768	50 000	62 500	10	2	16
4.2	522 240	8 704	34 816	50 000	62 500	10	2	16
5	589 824	22 080	110 400	135 000	135 000	10	2	16
5.1	983 040	36 864	184 320	240 000	240 000	10	2	16

In addition, the dynamic range of the temporal motion vector may be defined as a fixed value predefined between the encoder and the decoder without transmission of information on a limitation of the motion vector or be stored in a form of a fixed bit depth.

5 In the case in which TMVBitWidth is fixed to the same value and used in the encoder and the decoder, TMVBitWidth may be a positive integer such as 4, 6, 8, 10, 12, 14, 16, or the like. Here, TMVBitWidth indicates the bit width of the temporal motion vector when the temporal motion vector is stored in the memory.

FIG. 14 is a flow chart showing a method of encoding an image according to the exemplary embodiment of the present invention. Referring to FIG. 14, the method of encoding an image includes a clipping step (S1410), a storing step (S1420), and an encoding step (S1430).

An apparatus of encoding an image and/or an apparatus of decoding an image clip a motion vector of a reference picture in a predetermined dynamic range (S1410). “As

described above through “I. Process of clipping motion vector”, the motion vector that is out of the dynamic range is represented by a minimum value or a maximum value of the corresponding dynamic range. Therefore, as described above through “IV. Method of transmitting information for clipping temporal motion vector in decoder” and “V.

- 5 Definition of dynamic range through levels of video codec, the bit depth is limited through the level of the video codec, the sequence parameter set, and the like, or the dynamic range is limited through the level of the video codec, thereby making it possible to clip the motion vector of the reference picture in the predetermined dynamic range.

The apparatus of encoding an image and/or the apparatus of decoding an image
10 store the clipped motion vector of the reference picture in a buffer as described above through “II. Process of storing motion vector” (S1420). The motion vector may be stored in the buffer together with or separately from the reconstructed image.

The apparatus of encoding an image encodes a motion vector of a coding
treeblock using the stored motion vector of the reference picture (S1430). As described
15 above through “III. Process of deriving motion vector”, in the advanced motion vector prediction method used in the HEVC, a motion vector of a block existing in a position that is the same or corresponds to that of the coding treeblock in the reference picture as well as motion vectors of reconstructed blocks positioned around the coding treeblock may be used. Therefore, the motion vector of the coding treeblock may also be a motion vector of
20 the reference picture, that is, a temporal motion vector, as well as motion vectors of neighboring blocks adjacent to the coding treeblock.

Meanwhile, since dynamic range of X component and Y component of the motion vector of the reference picture may be differently defined, each component of the motion vector of the reference picture may be clipped in each dynamic range.

25 In addition, a method of compressing a motion vector of a reference picture as

well as a method of limiting a dynamic range of a motion vector of a reference picture may be used. In the case of limiting the dynamic range of the motion vector of the reference picture or compressing the motion vector of the reference picture, a flag indicating the dynamic range and the motion vector and a parameter related thereto may
5 be defined in a level of a video codec, a sequence parameter set, or the like.

In addition, an encoding method such as motion vector prediction, advanced motion vector prediction, motion information merge, motion information merge skip, or the like, may be performed using the motion information stored in the memory, that is, the motion information of the reference picture.

10 FIG. 15 is a flow chart showing a method of decoding an image according to the exemplary embodiment of the present invention. Referring to FIG. 15, the method of decoding an image includes a clipping step (S1510), a storing step (S1520), a deriving step (S1530), and a decoding step (S1540).

The clipping step (S1510) and the storing step (S1520) of FIG. 15 are similar to
15 the clipping step (S1410) and the storing step (S1420) of FIG. 14 using “I. Process of clipping motion vector” and “II. Process of storing motion vector” described above. In addition, the deriving step (S1530) of FIG. 15 uses “III. Process of deriving motion vector” described above and is symmetrical to the encoding step (S1430) of FIG. 14. Therefore, a detailed description thereof will be omitted.

20 An apparatus of decoding an image performs inter prediction decoding using a motion vector of a coding treeblock (S1540). The apparatus of decoding an image may store a motion vector in a memory using at least one of a method of limiting a dynamic range of a motion vector, a method of reducing a spatial resolution of a motion vector, a method of quantizing a motion vector, and a method of reducing a representation
25 resolution of a motion vector, and use the stored motion vector for predicting a motion

vector of the coding treeblock and merging motion information thereof.

In addition, the apparatus of decoding an image may perform a decoding method such as motion vector prediction, advanced motion vector prediction, motion information merge, motion information merge skip, or the like, using the motion information stored in
5 the memory, that is, the motion information of the reference picture.

Although the above-mentioned exemplary embodiments have described through flow charts represented by a series of steps or blocks, the present invention is not limited to a sequence of the steps described above. That is, some steps may be generated in a different sequence or simultaneously from or with other steps. In addition, it may be
10 understood by those skilled in the art to which the present invention pertains that the steps shown in the flow charts are non-exclusive, such that other steps may be included or some steps may be deleted.

In addition, the above-mentioned exemplary embodiments include examples of various aspects. Although all possible combinations for showing various aspects are not
15 described, it may be appreciated by those skilled in the art that other combinations may be made. Therefore, the present invention should be construed as including all other substitutions, alterations and modifications belong to the following claims.

CLAIMS:

1. An image decoding apparatus, comprising:

a reference picture buffer for storing a reference picture; and

5 a motion compensating unit for generating a prediction block using the reference picture and a motion vector of the reference picture,

wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled,

10 wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

wherein the collocated block is determined by performing

15 calculating a position corresponding to a right-bottom position of a current block in a current picture; and

determining a block covering the calculated position in the reference picture.

2. The image decoding apparatus of claim 1, wherein the motion vector is clipped in a predetermined fixed value range.

20

3. The image decoding apparatus of claim 1,

wherein the motion vector of the reference picture is stored in a predetermined block unit, and

25 wherein the motion compensating unit generates the prediction block using the motion vector of the reference picture stored in the predetermined block unit.

4. The image decoding apparatus of claim 2, wherein X and Y components of the motion vector are clipped in the same fixed value range.

5. The image decoding apparatus of claim 1, wherein the motion vector is a motion vector of a block decoded in an inter-prediction mode.

6. An image decoding method, comprising:

5 clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled;

 deriving a motion vector of a block to be decoded using the motion vector; and

 performing inter-prediction decoding using the motion vector of the block to be
10 decoded,

 wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

 wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

15 wherein the collocated block is determined by performing

 calculating a position corresponding to a right-bottom position of a current block in a current picture; and

 determining a block covering the calculated position in the reference picture.

20 7. The image decoding method of claim 6, wherein the motion vector is clipped in a predetermined fixed value range.

8. The image decoding method of claim 6,

 wherein the motion vector of the reference picture is stored in a predetermined block
25 unit, and

 wherein, in deriving the motion vector, the motion vector of the reference picture stored in the predetermined block unit is derived.

9. The image decoding method of claim 7, wherein X and Y components of the

motion vector are clipped in the same fixed value range.

10. The image decoding method of claim 6, wherein the motion vector is a motion vector of a block decoded in an inter-prediction mode.

5

11. An image encoding apparatus, comprising:

a reference picture buffer for storing a reference picture; and

a motion compensating unit for generating a prediction block using the reference picture and a motion vector of the reference picture,

10 wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled,

wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

15 wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

wherein the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of a current block in a current picture; and

determining a block covering the calculated position in the reference picture.

20

12. The image encoding apparatus of claim 11, wherein the motion vector is clipped in a predetermined fixed value range.

13. The image encoding apparatus of claim 11,

25 wherein the motion vector of the reference picture is stored in a predetermined block unit, and

wherein the motion compensating unit generates the prediction block using the motion vector of the reference picture stored in the predetermined block unit.

14. The image encoding apparatus of claim 12, wherein X and Y components of the motion vector are clipped in the same fixed value range.

15. The image encoding apparatus of claim 11, wherein the motion vector is a motion
5 vector of a block encoded in an inter-prediction mode.

16. An image encoding method, comprising:

clipping a motion vector of a reference picture in a predetermined range to generate a
clipped motion vector, wherein the motion vector of the reference picture is clipped in the
10 predetermined range after the motion vector of the reference picture is scaled;

deriving a motion vector of a block to be encoded using the motion vector; and
performing inter-prediction encoding using the motion vector of the block to be
encoded,

wherein the scaling of the motion vector of the reference picture is performed based
15 on a picture order count of the reference picture,

wherein the motion vector of the reference picture is a motion vector of a collocated
block in the reference picture, and

wherein the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of a current
20 block in a current picture; and

determining a block covering the calculated position in the reference picture.

17. The image encoding method of claim 16, wherein the motion vector is clipped in
a predetermined fixed value range.

25

18. The image encoding method of claim 16,

wherein the motion vector of the reference picture is stored in a predetermined block
unit, and

wherein, in deriving the motion vector, the motion vector of the reference picture

stored in the predetermined block unit is derived.

19. The image encoding method of claim 17, wherein X and Y components of the motion vector are clipped in the same fixed value range.

5

20. The image encoding method of claim 16, wherein the motion vector is a motion vector of a block encoded in an inter-prediction mode.

21. A computer readable recording medium having recorded thereon a computer
10 program comprising instructions for executing an image decoding method, the image decoding method comprising:

clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled;

15 deriving a motion vector of a block to be decoded using the motion vector; and
performing inter-prediction decoding using the motion vector of the block to be decoded,

wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

20 wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

wherein the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of a current block in a current picture; and

25 determining a block covering the calculated position in the reference picture.

22. The computer readable recording medium of claim 21, wherein the motion vector is clipped in a predetermined fixed value range.

23. The computer readable recording medium of claim 21,
wherein the motion vector of the reference picture is stored in a predetermined block
unit, and

5 wherein, in deriving the motion vector, the motion vector of the reference picture
stored in the predetermined block unit is derived.

24. The computer readable recording medium of claim 22, wherein X and Y
components of the motion vector are clipped in the same fixed value range.

10 25. The computer readable recording medium of claim 21, wherein the motion vector
is a motion vector of a block decoded in an inter-prediction mode.

26. A computer readable recording medium having recorded thereon a computer
program comprising instructions for executing an image encoding method, the image
15 encoding method comprising:

clipping a motion vector of a reference picture in a predetermined range to generate a
clipped motion vector, wherein the motion vector of the reference picture is clipped in the
predetermined range after the motion vector of the reference picture is scaled;

20 deriving a motion vector of a block to be encoded using the motion vector; and
performing inter-prediction encoding using the motion vector of the block to be
encoded,

wherein the scaling of the motion vector of the reference picture is performed based
on a picture order count of the reference picture,

25 wherein the motion vector of the reference picture is a motion vector of a collocated
block in the reference picture, and

wherein the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of a current
block in a current picture; and

determining a block covering the calculated position in the reference picture.

27. The computer readable recording medium of claim 26, wherein the motion vector is clipped in a predetermined fixed value range.

5 28. The computer readable recording medium of claim 26,
 wherein the motion vector of the reference picture is stored in a predetermined block unit, and
 wherein, in deriving the motion vector, the motion vector of the reference picture stored in the predetermined block unit is derived.

10 29. The computer readable recording medium of claim 27, wherein X and Y components of the motion vector are clipped in the same fixed value range.

 30. The computer readable recording medium of claim 26, wherein the motion vector
15 is a motion vector of a block encoded in an inter-prediction mode.

 31. A computer readable medium storing a bitstream generated by an image encoding method, wherein the image encoding method comprises
 performing inter-prediction encoding using a motion vector of a block to be encoded;
20 clipping a motion vector of a reference picture in a predetermined range to generate a clipped motion vector, wherein the motion vector of the reference picture is clipped in the predetermined range after the motion vector of the reference picture is scaled; and
 encoding the motion vector of a block to be encoded using the motion vector of the reference picture,
25 wherein the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,
 wherein the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and
 wherein the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of a current block in a current picture; and

determining a block covering the calculated position in the reference picture.

5 32. A non-transitory computer readable storage medium storing a bitstream that is received and decoded by an image decoding apparatus to reconstruct an image, wherein the bitstream comprises prediction information of a current block included in the image, and the image decoding apparatus comprises a reference picture buffer for storing a reference picture and a motion compensating unit, wherein:

10 the prediction information of the current block, the reference picture and a motion vector of the reference picture are used by the motion compensating unit to generate a prediction block of the current block,

the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled,

15 the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

the collocated block is determined by performing

20 calculating a position corresponding to a right-bottom position of a current block in a current picture; and

determining a block covering the calculated position in the reference picture.

33. An image encoding apparatus, comprising:

25 a reference picture buffer for storing a reference picture;

a motion estimator for generating a motion vector of a current block and a prediction block of the current block based on the reference picture; and

an encoding unit for generating a bitstream by encoding the motion vector of the current block based on a motion vector of the reference picture,

wherein the motion vector of the reference picture is clipped in a predetermined range after the motion vector of the reference picture is scaled,

the scaling of the motion vector of the reference picture is performed based on a picture order count of the reference picture,

5 the motion vector of the reference picture is a motion vector of a collocated block in the reference picture, and

the collocated block is determined by performing

calculating a position corresponding to a right-bottom position of the current block in a current picture; and

10 determining a block covering the calculated position in the reference picture.

FIG. 2

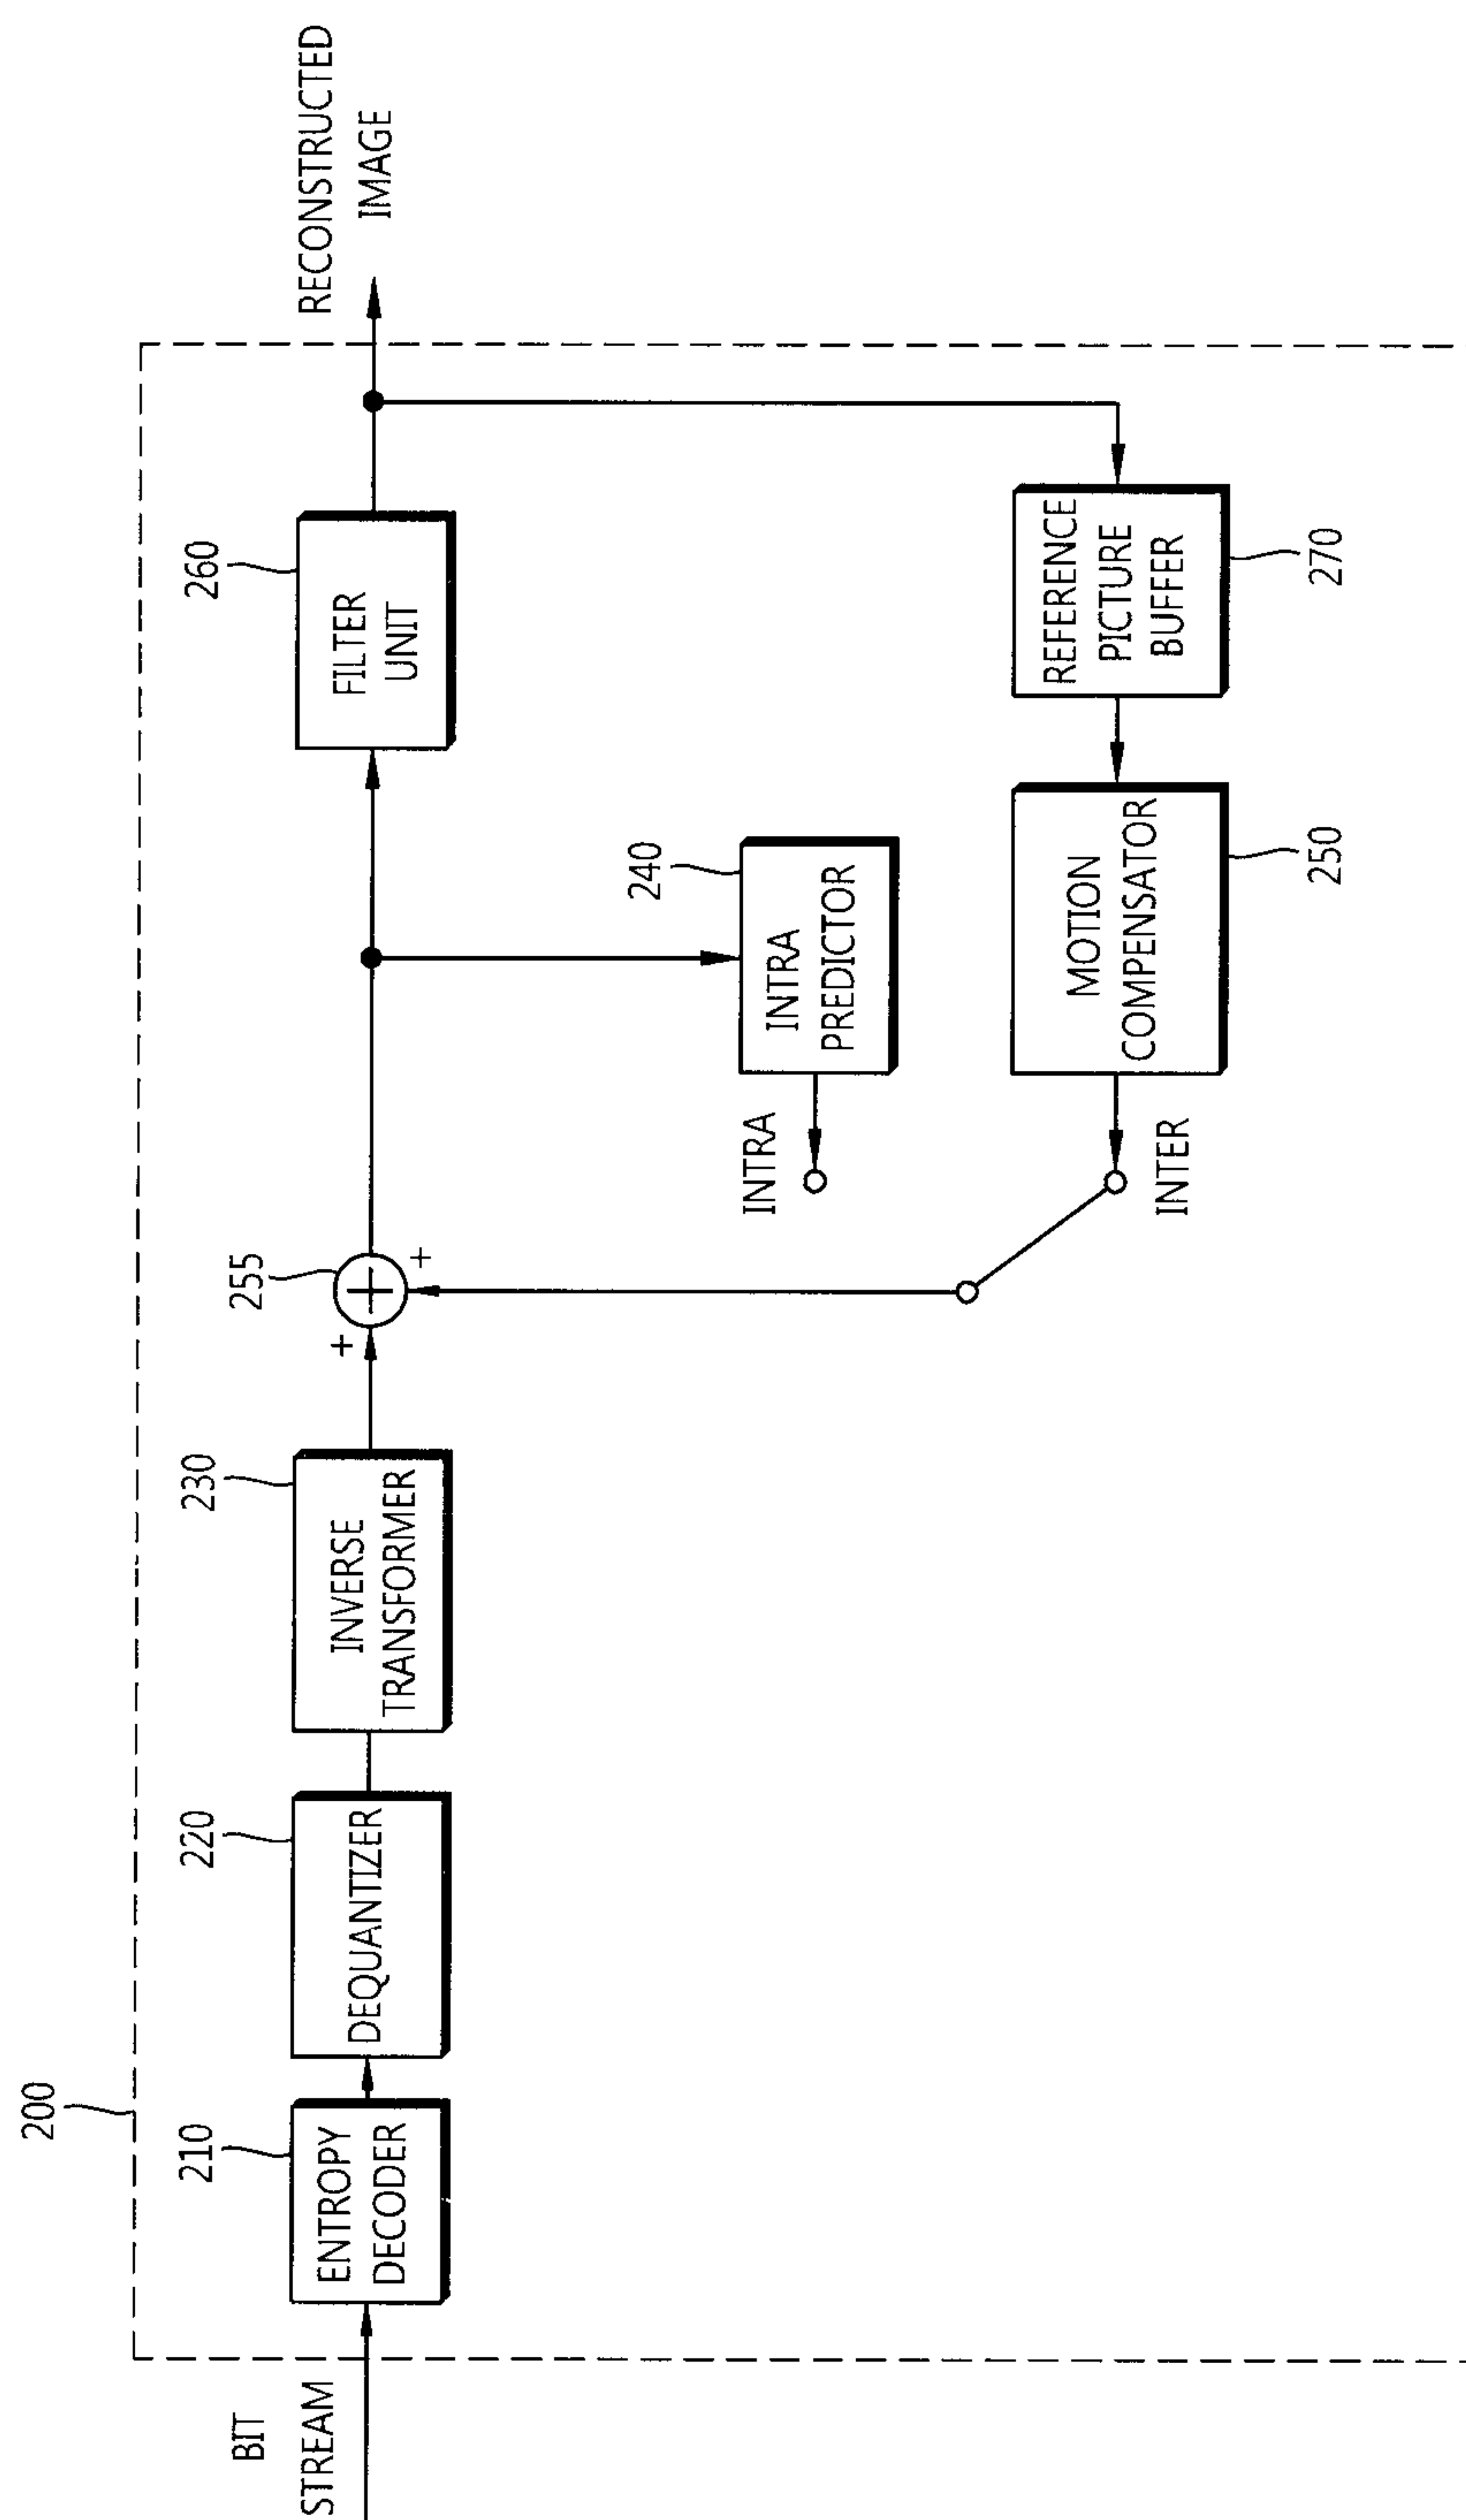


FIG. 3

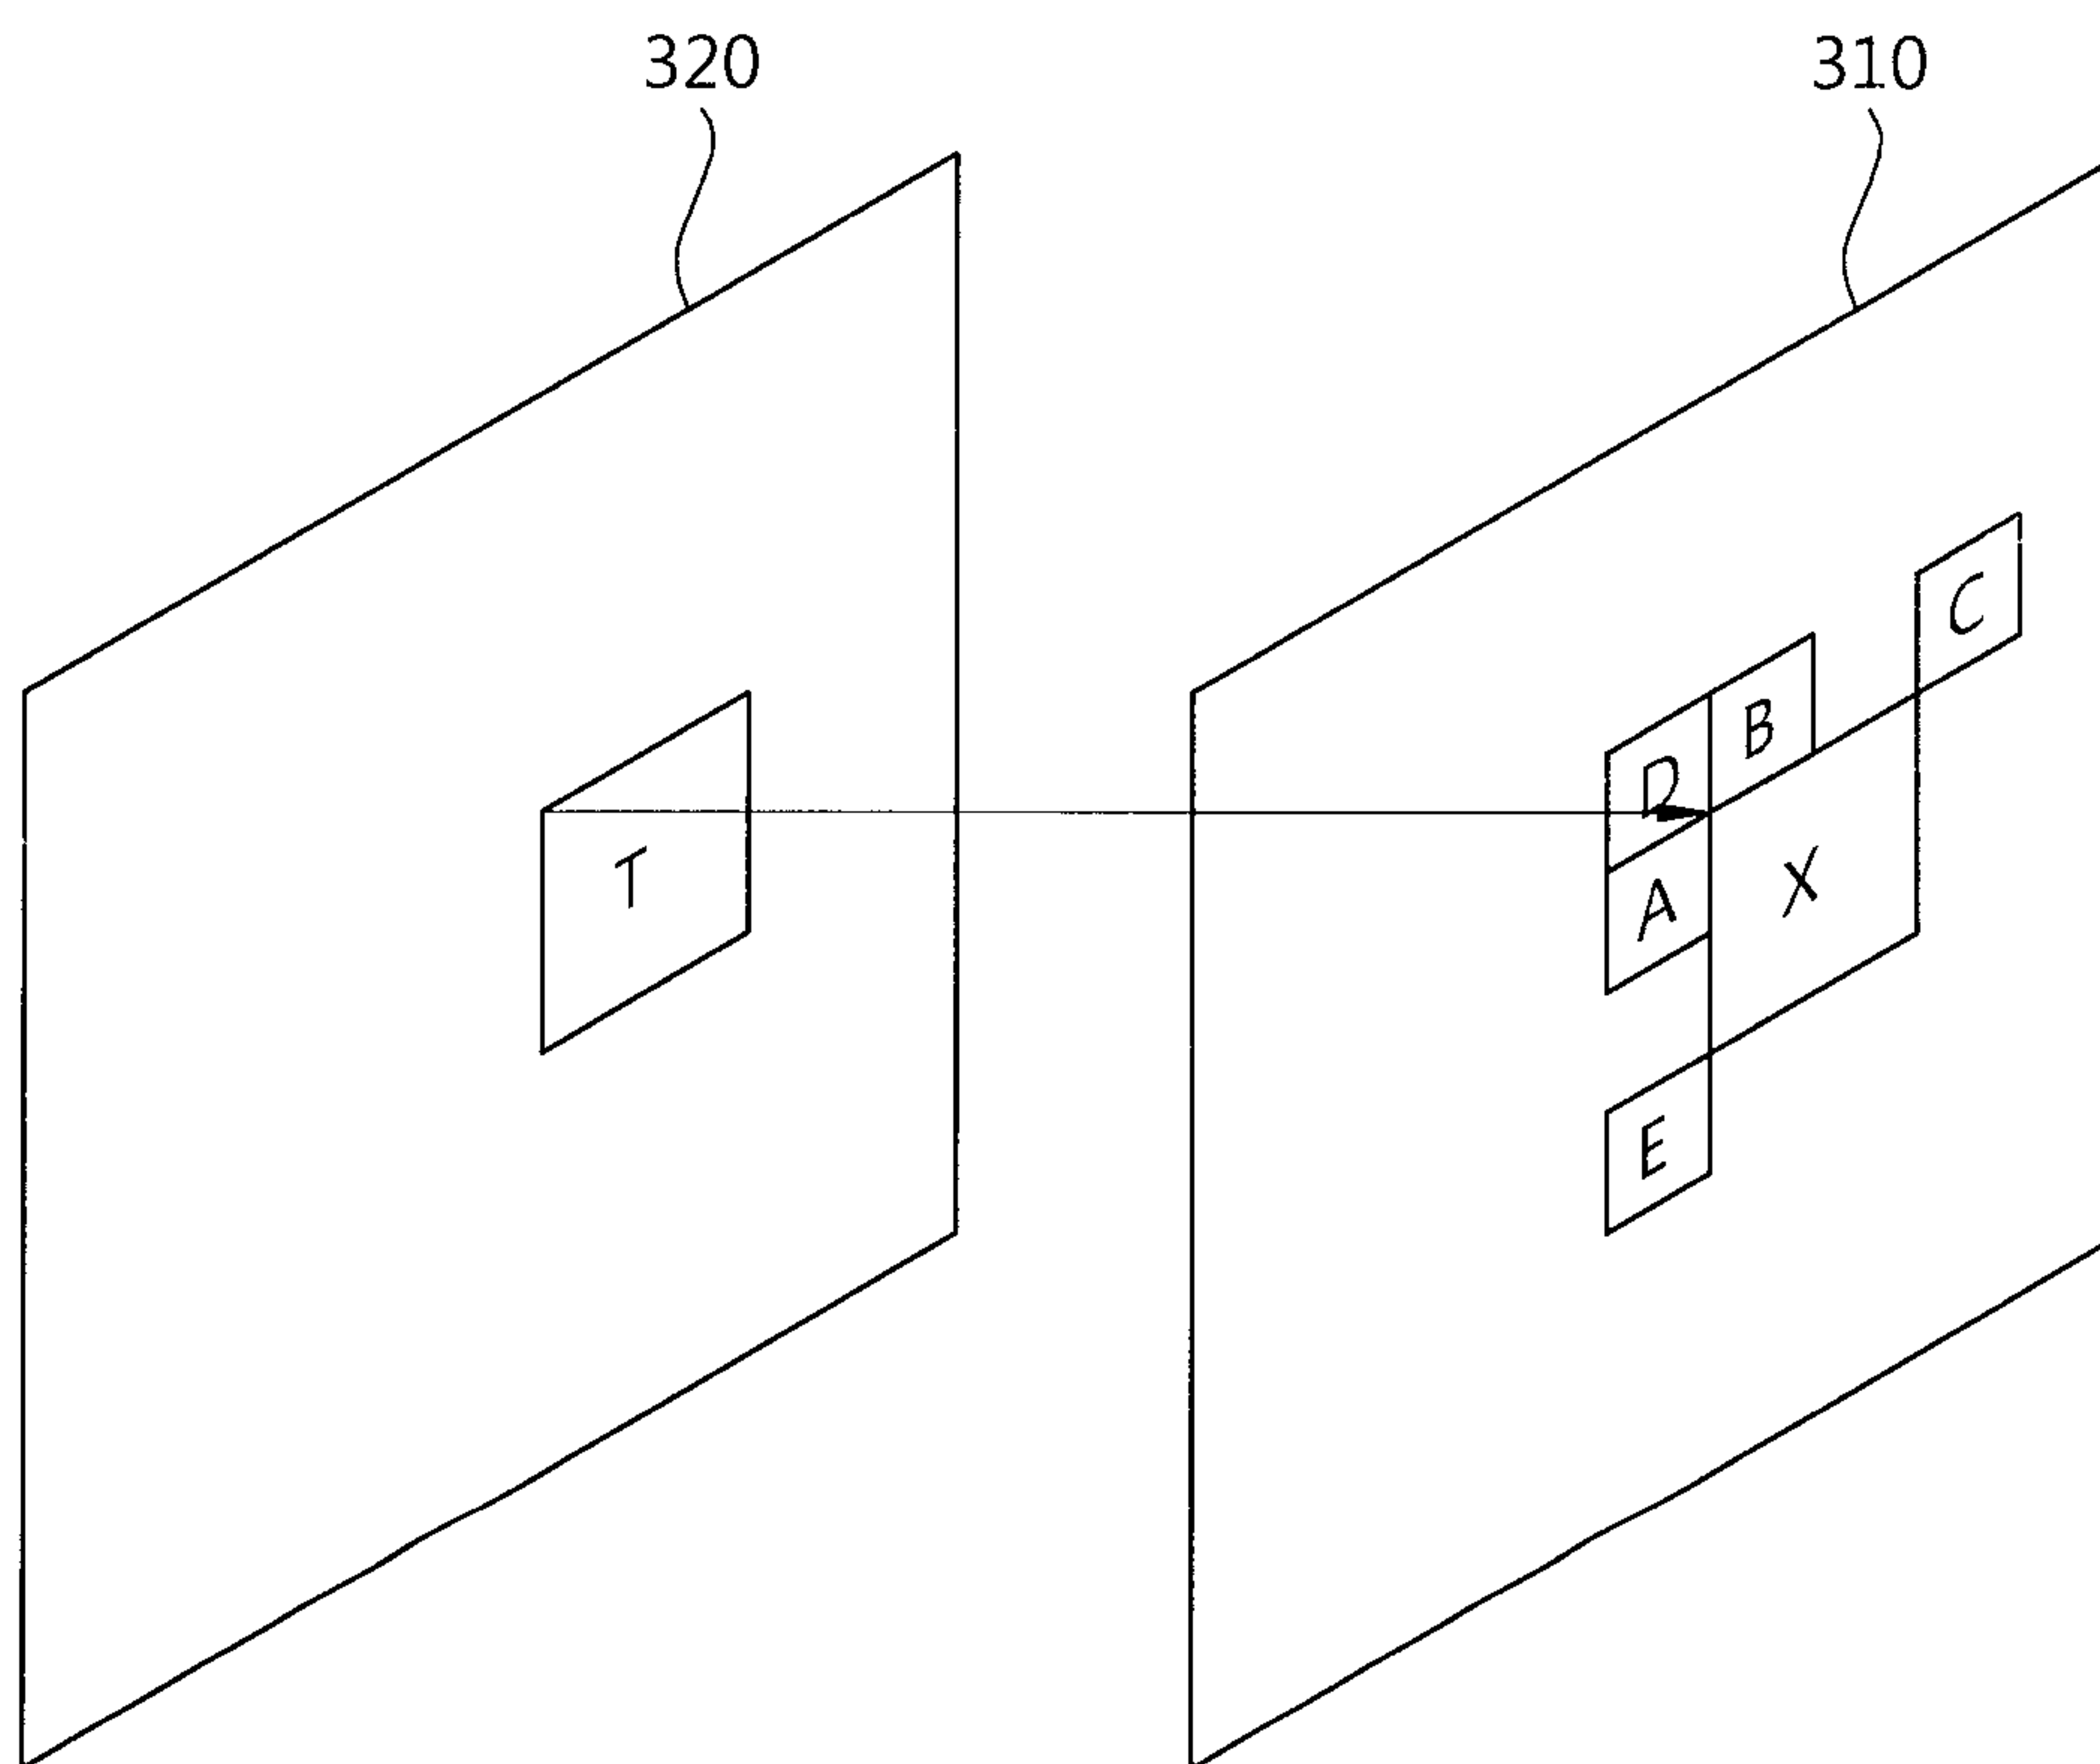


FIG. 4

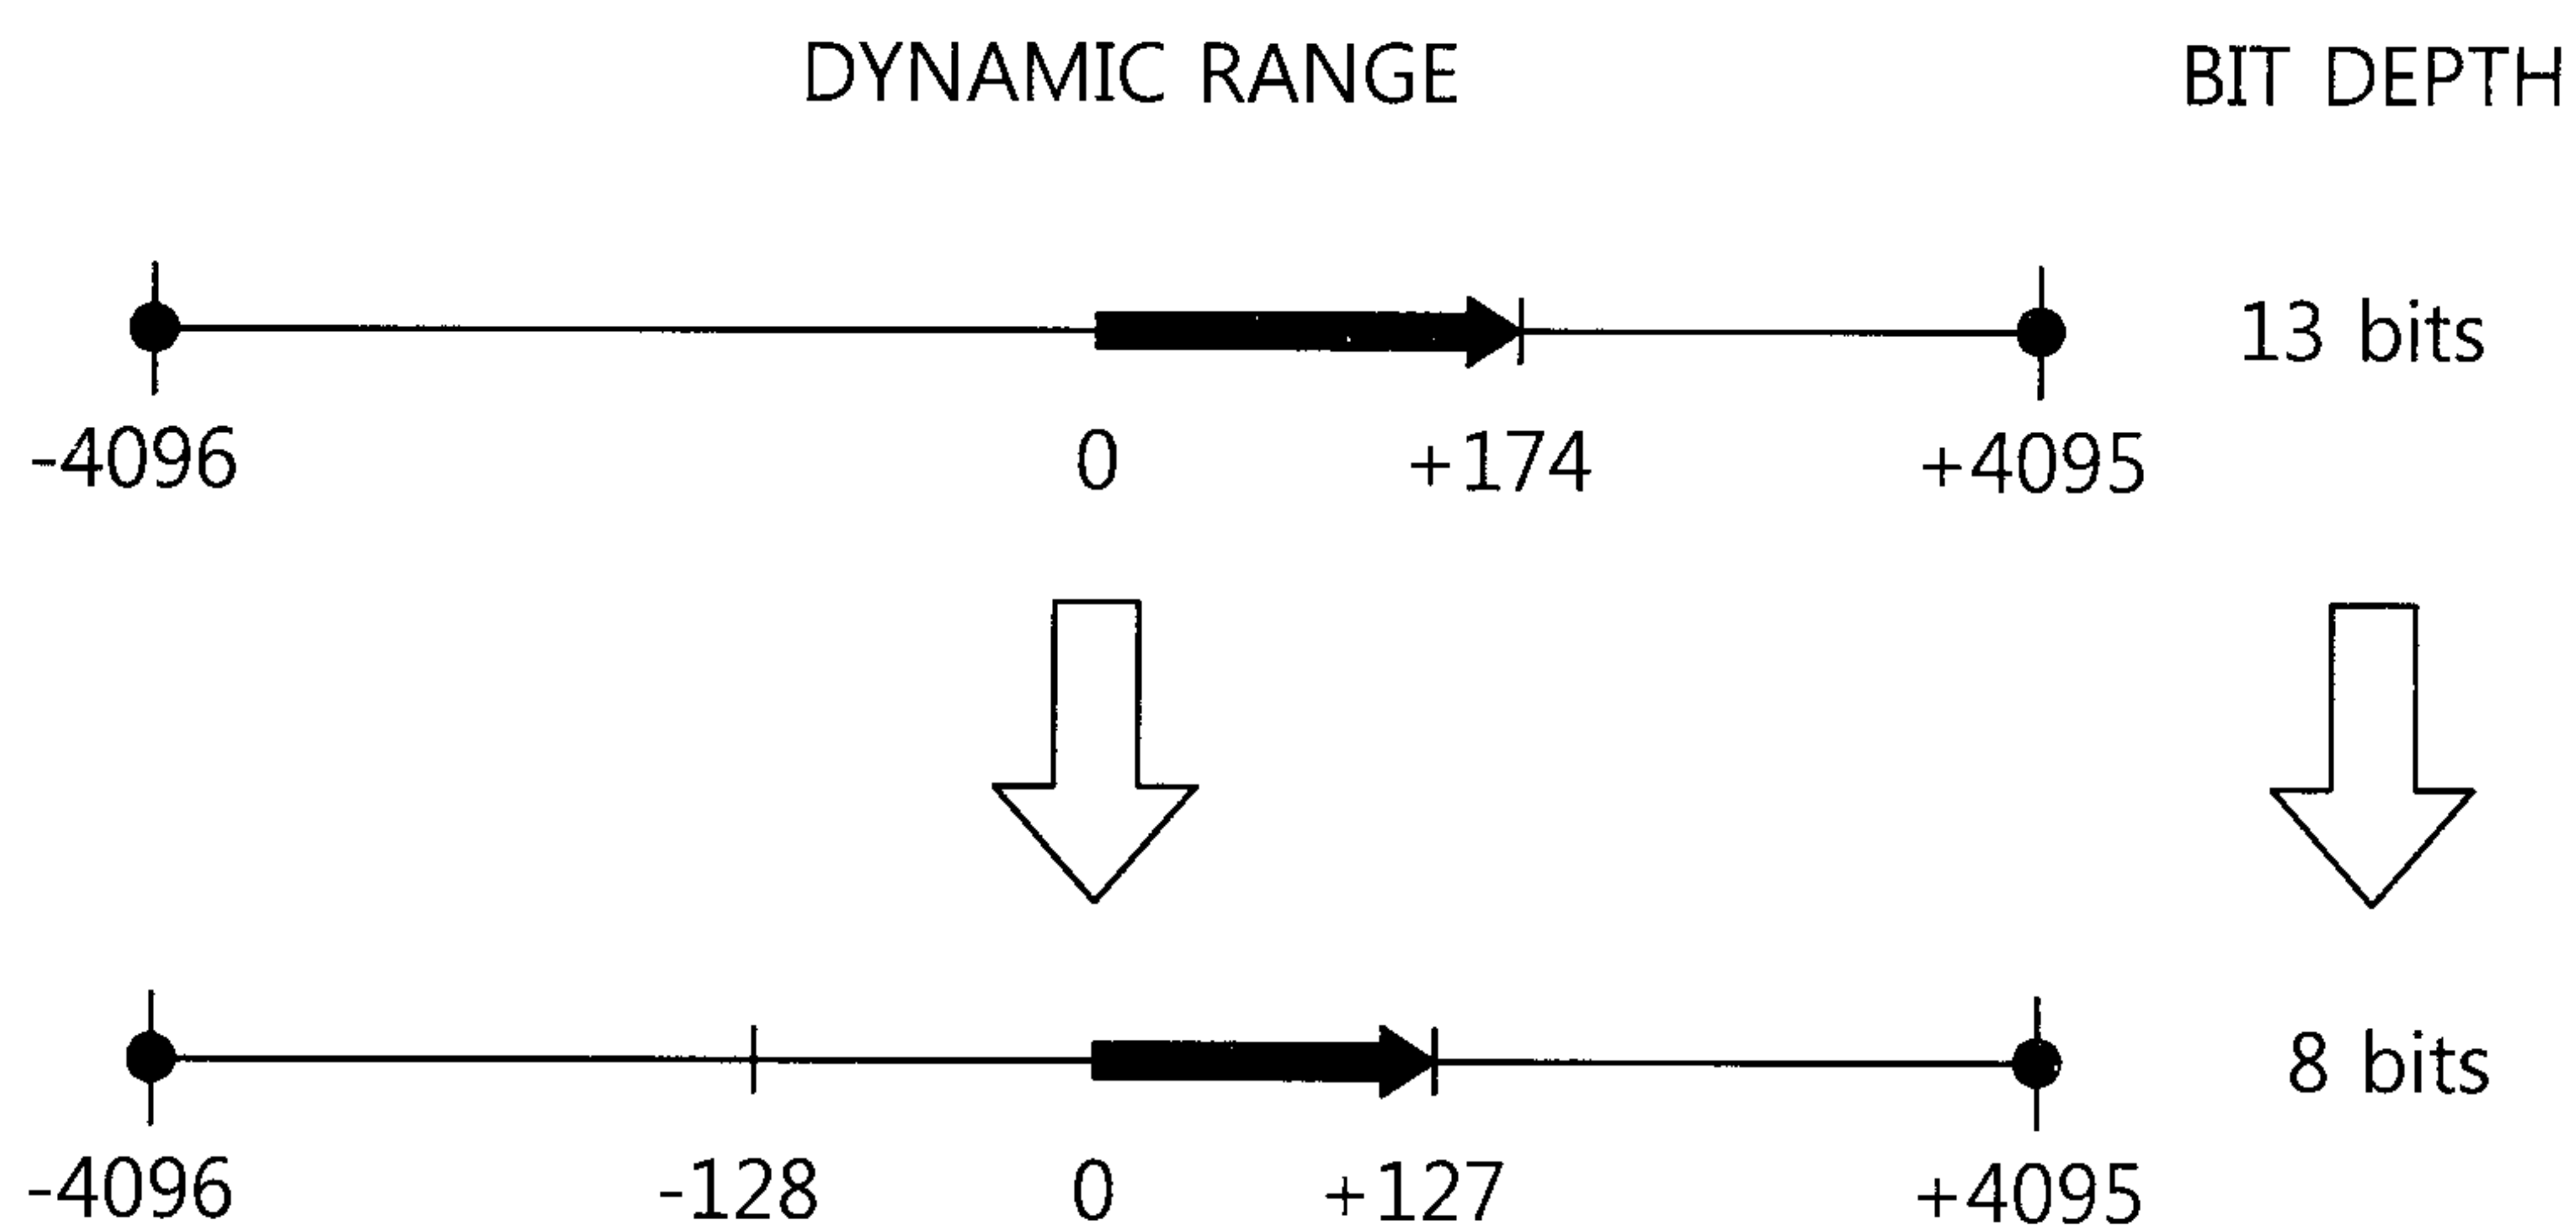


FIG. 5

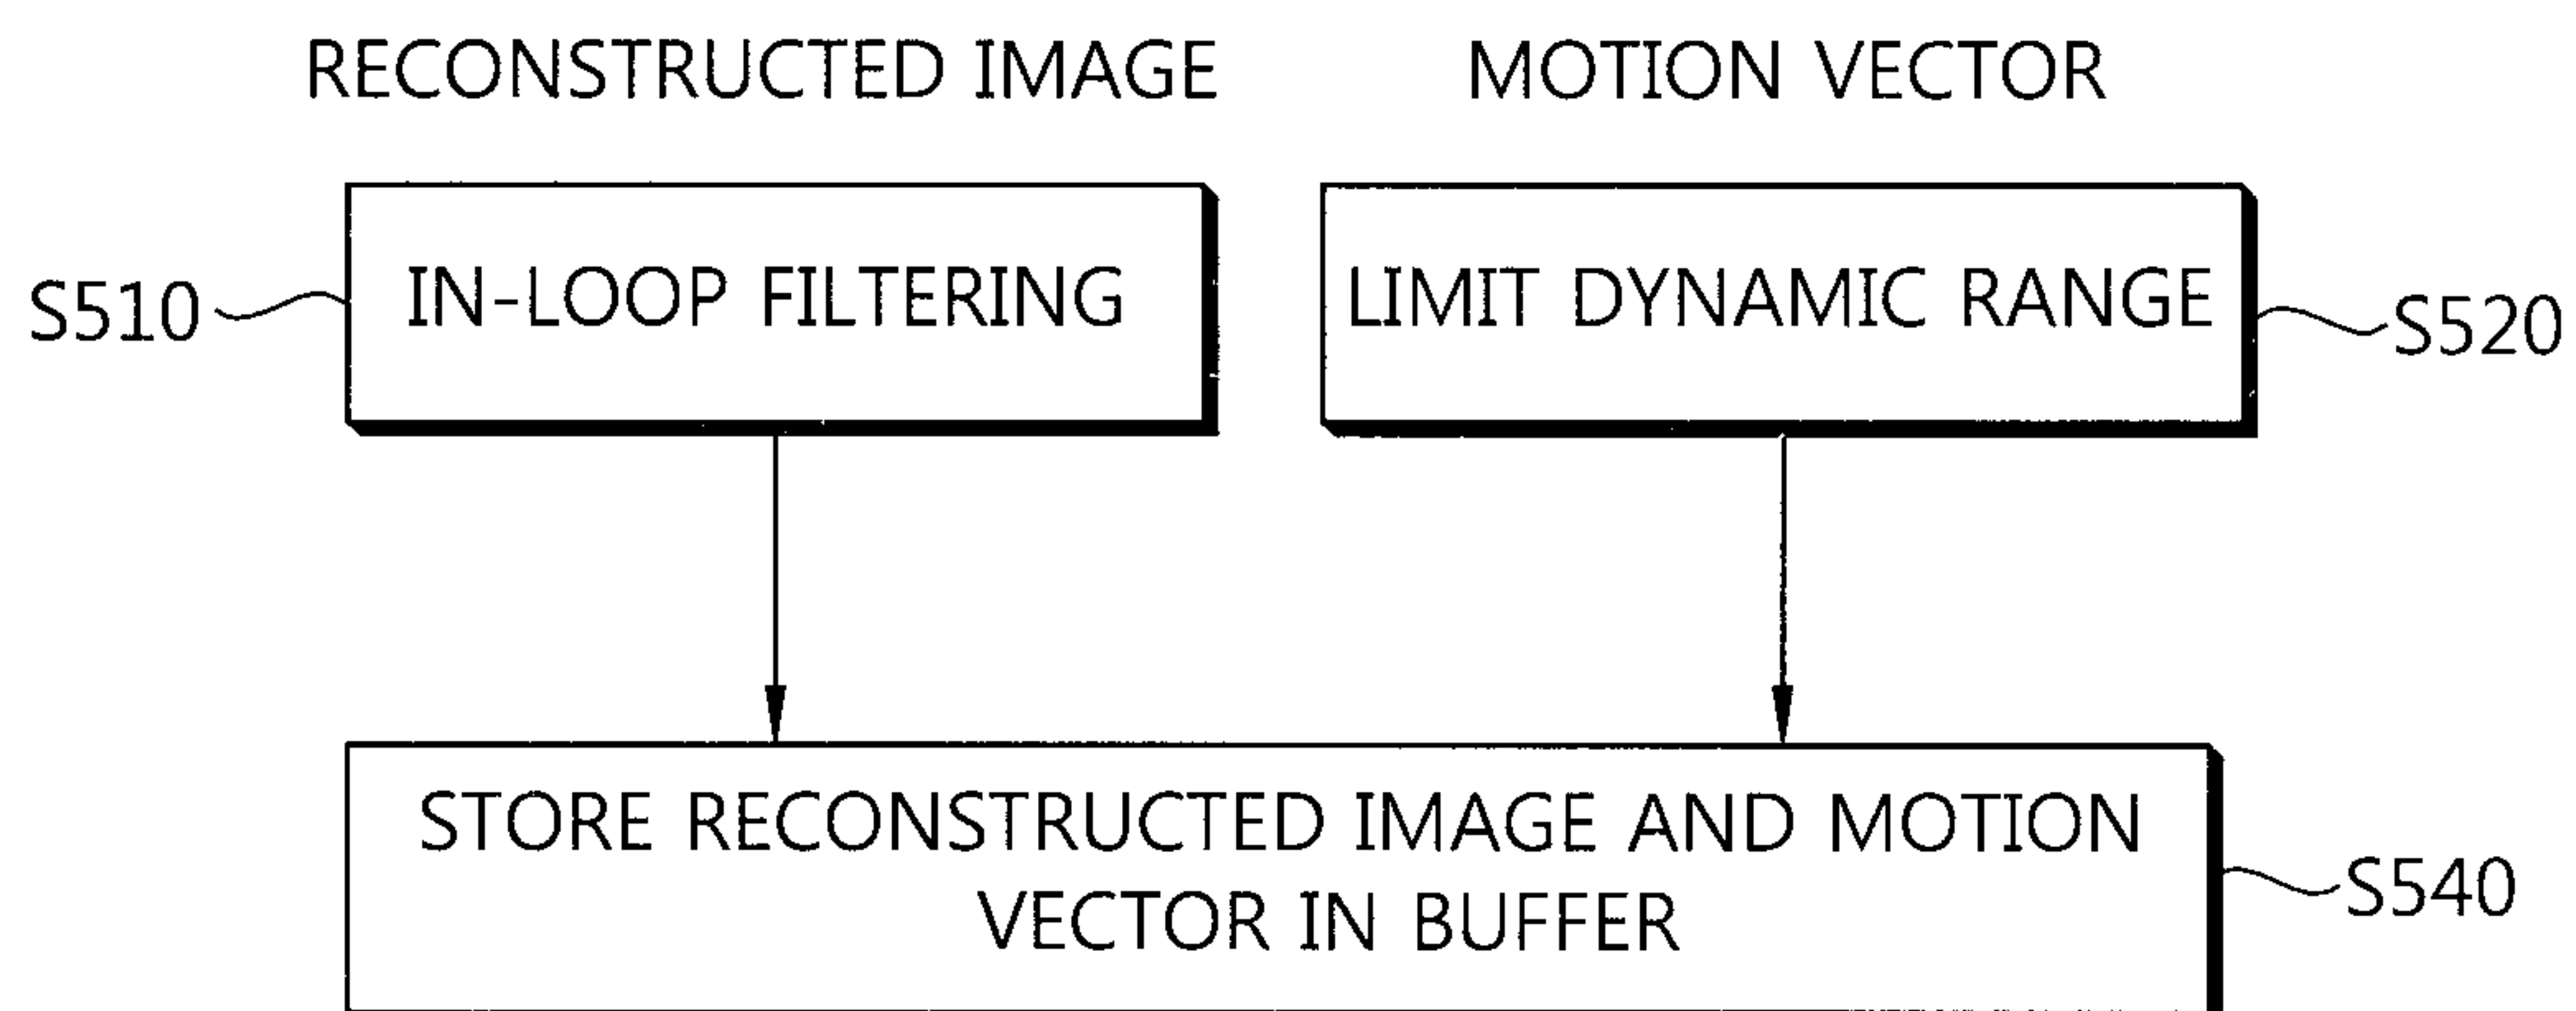


FIG. 6

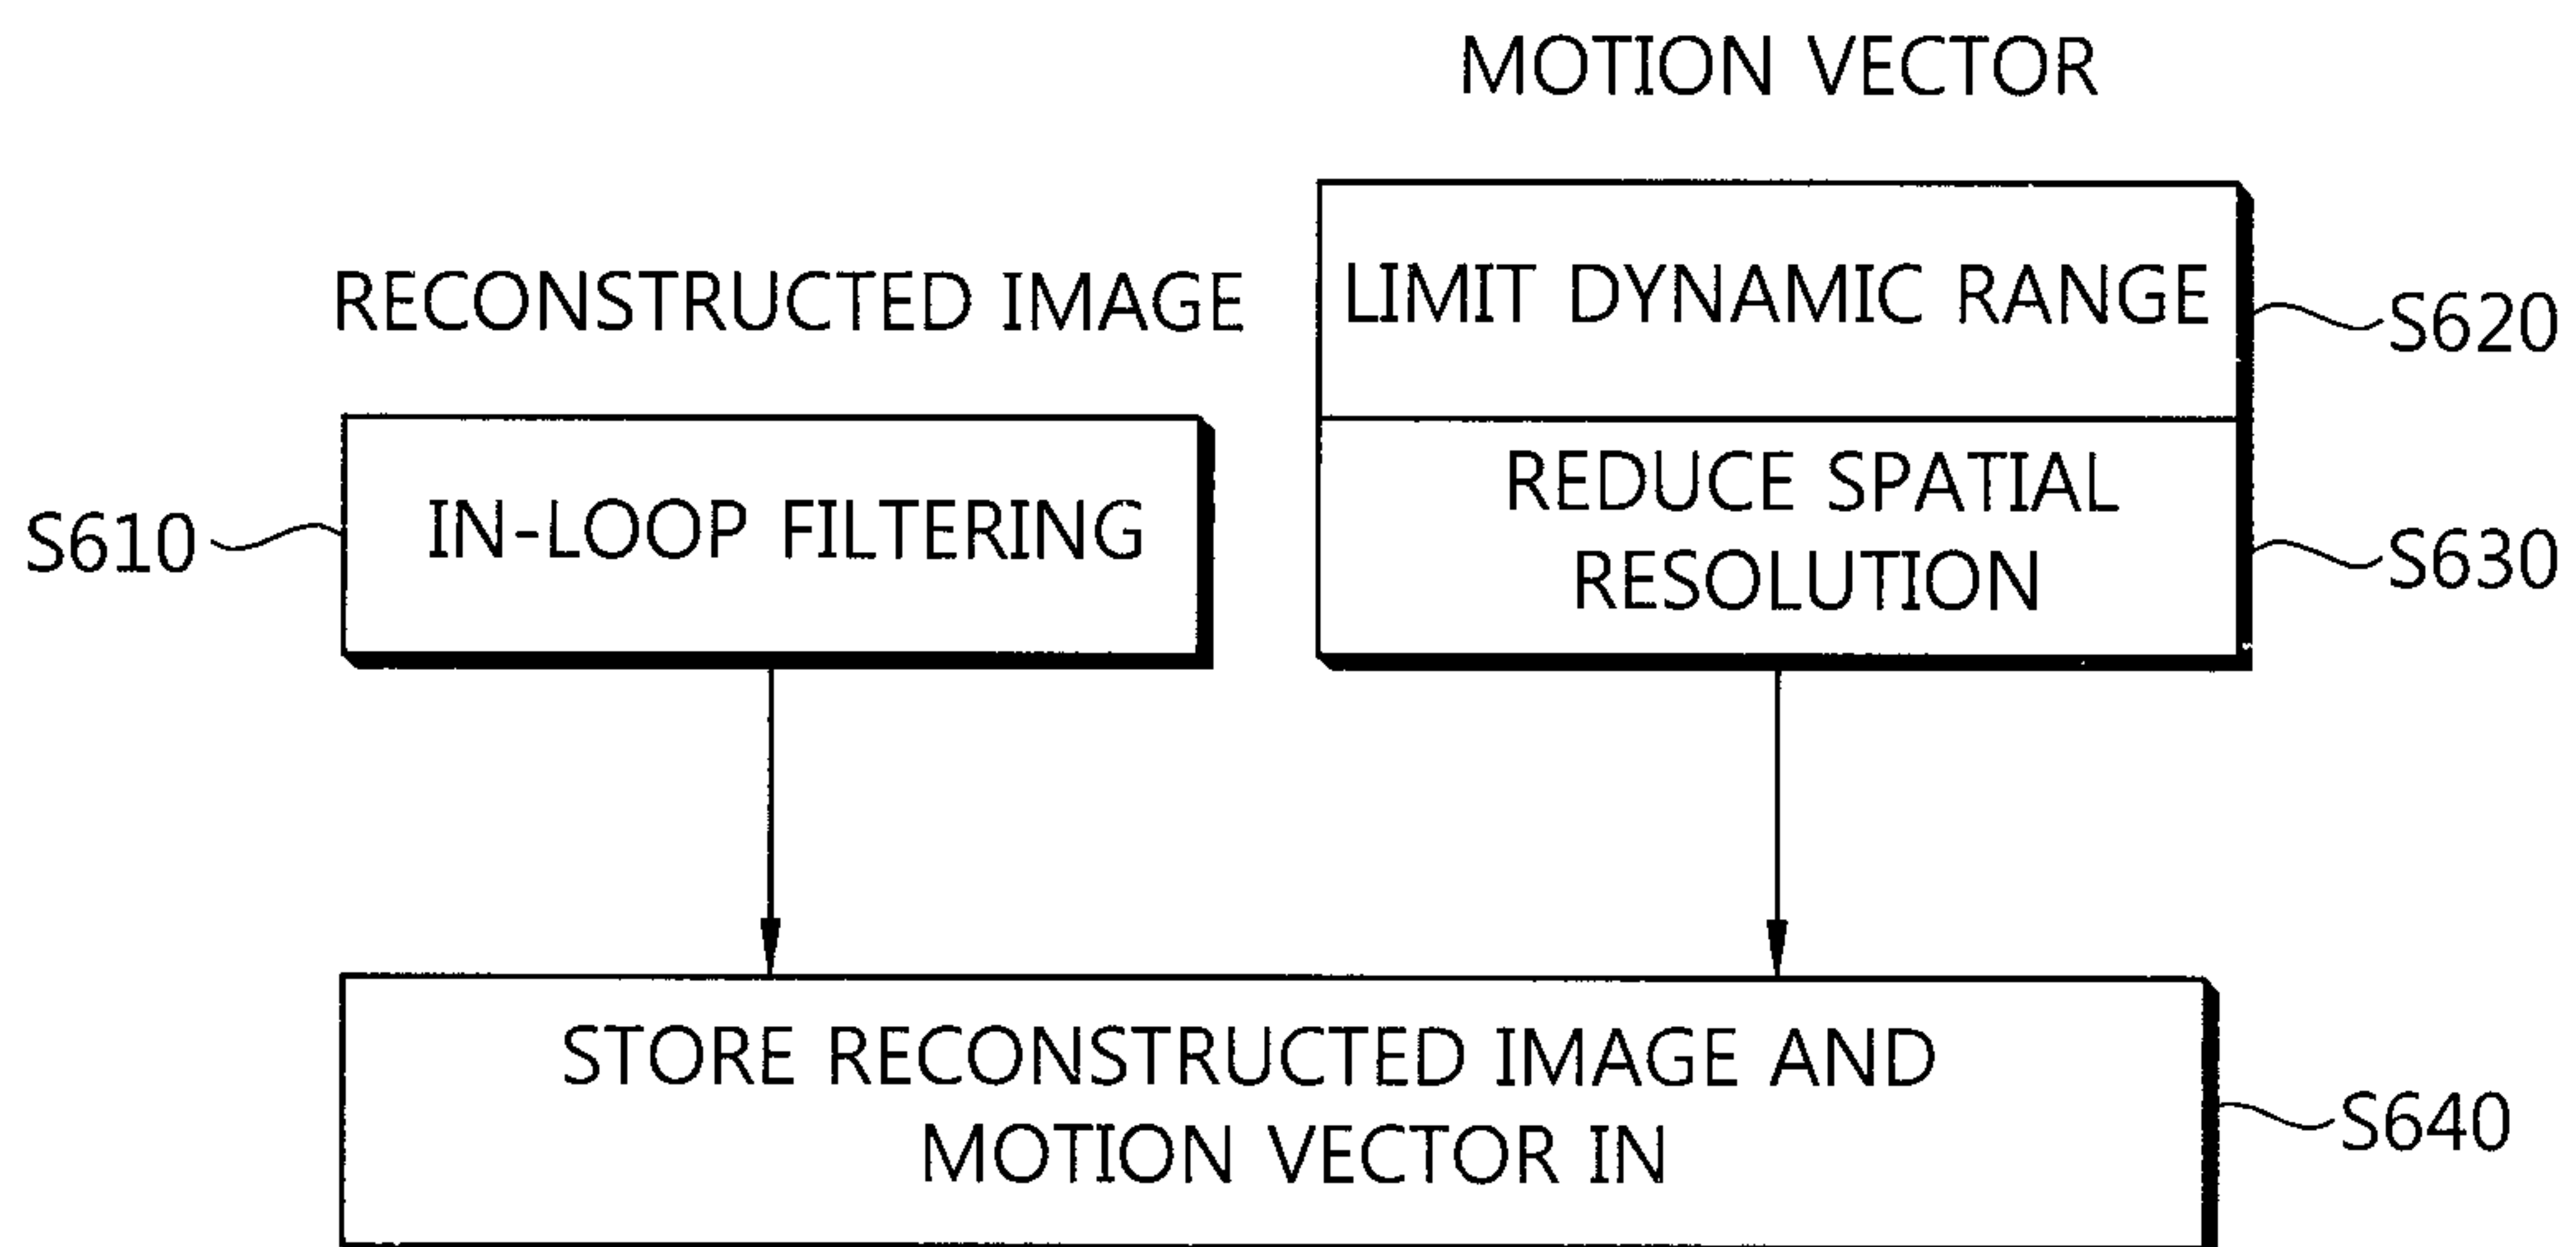


FIG. 7

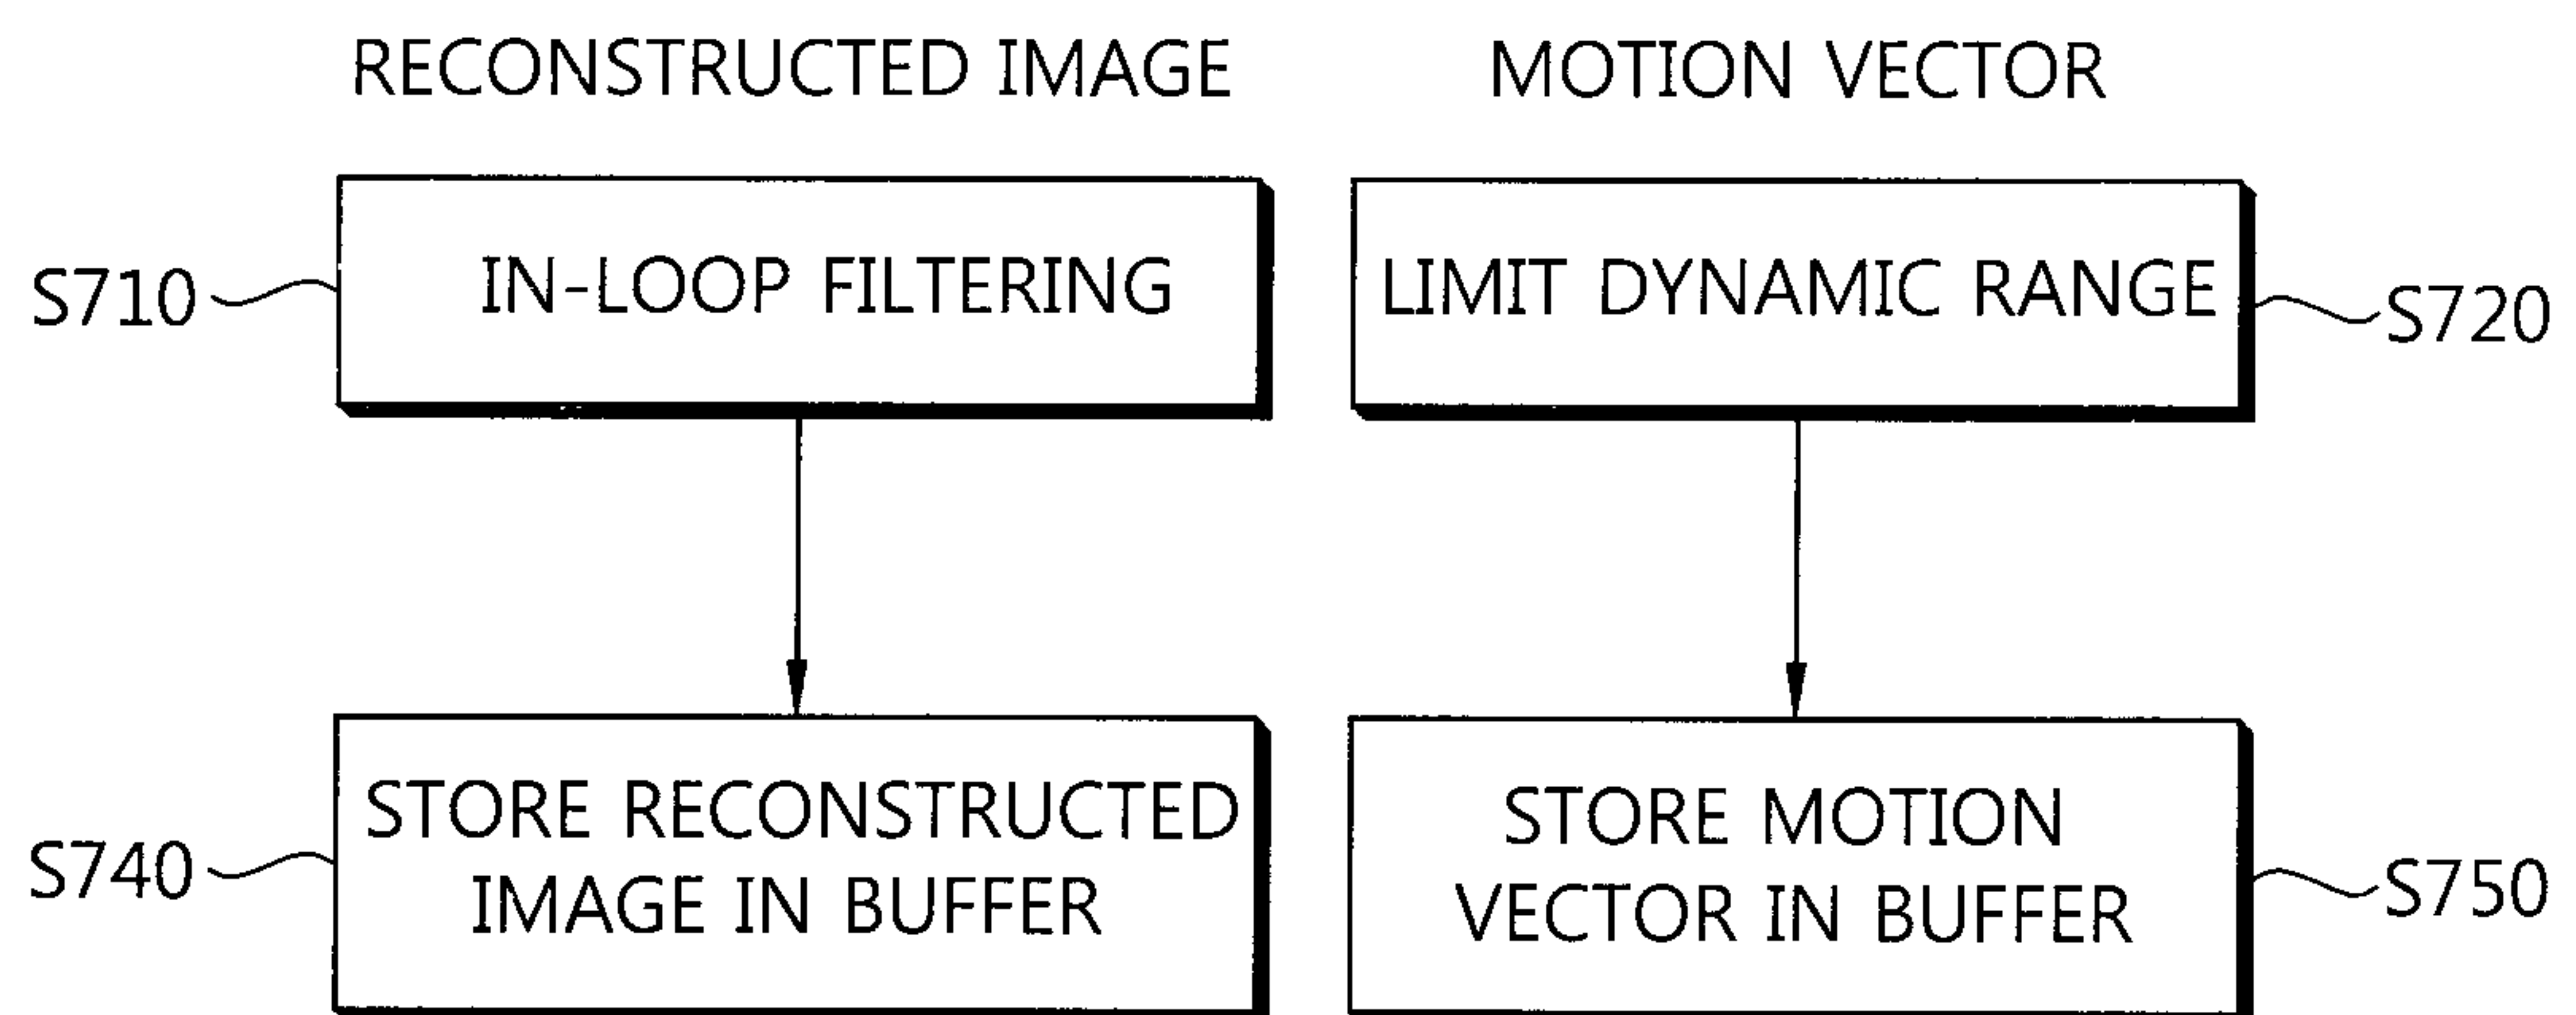


FIG. 8

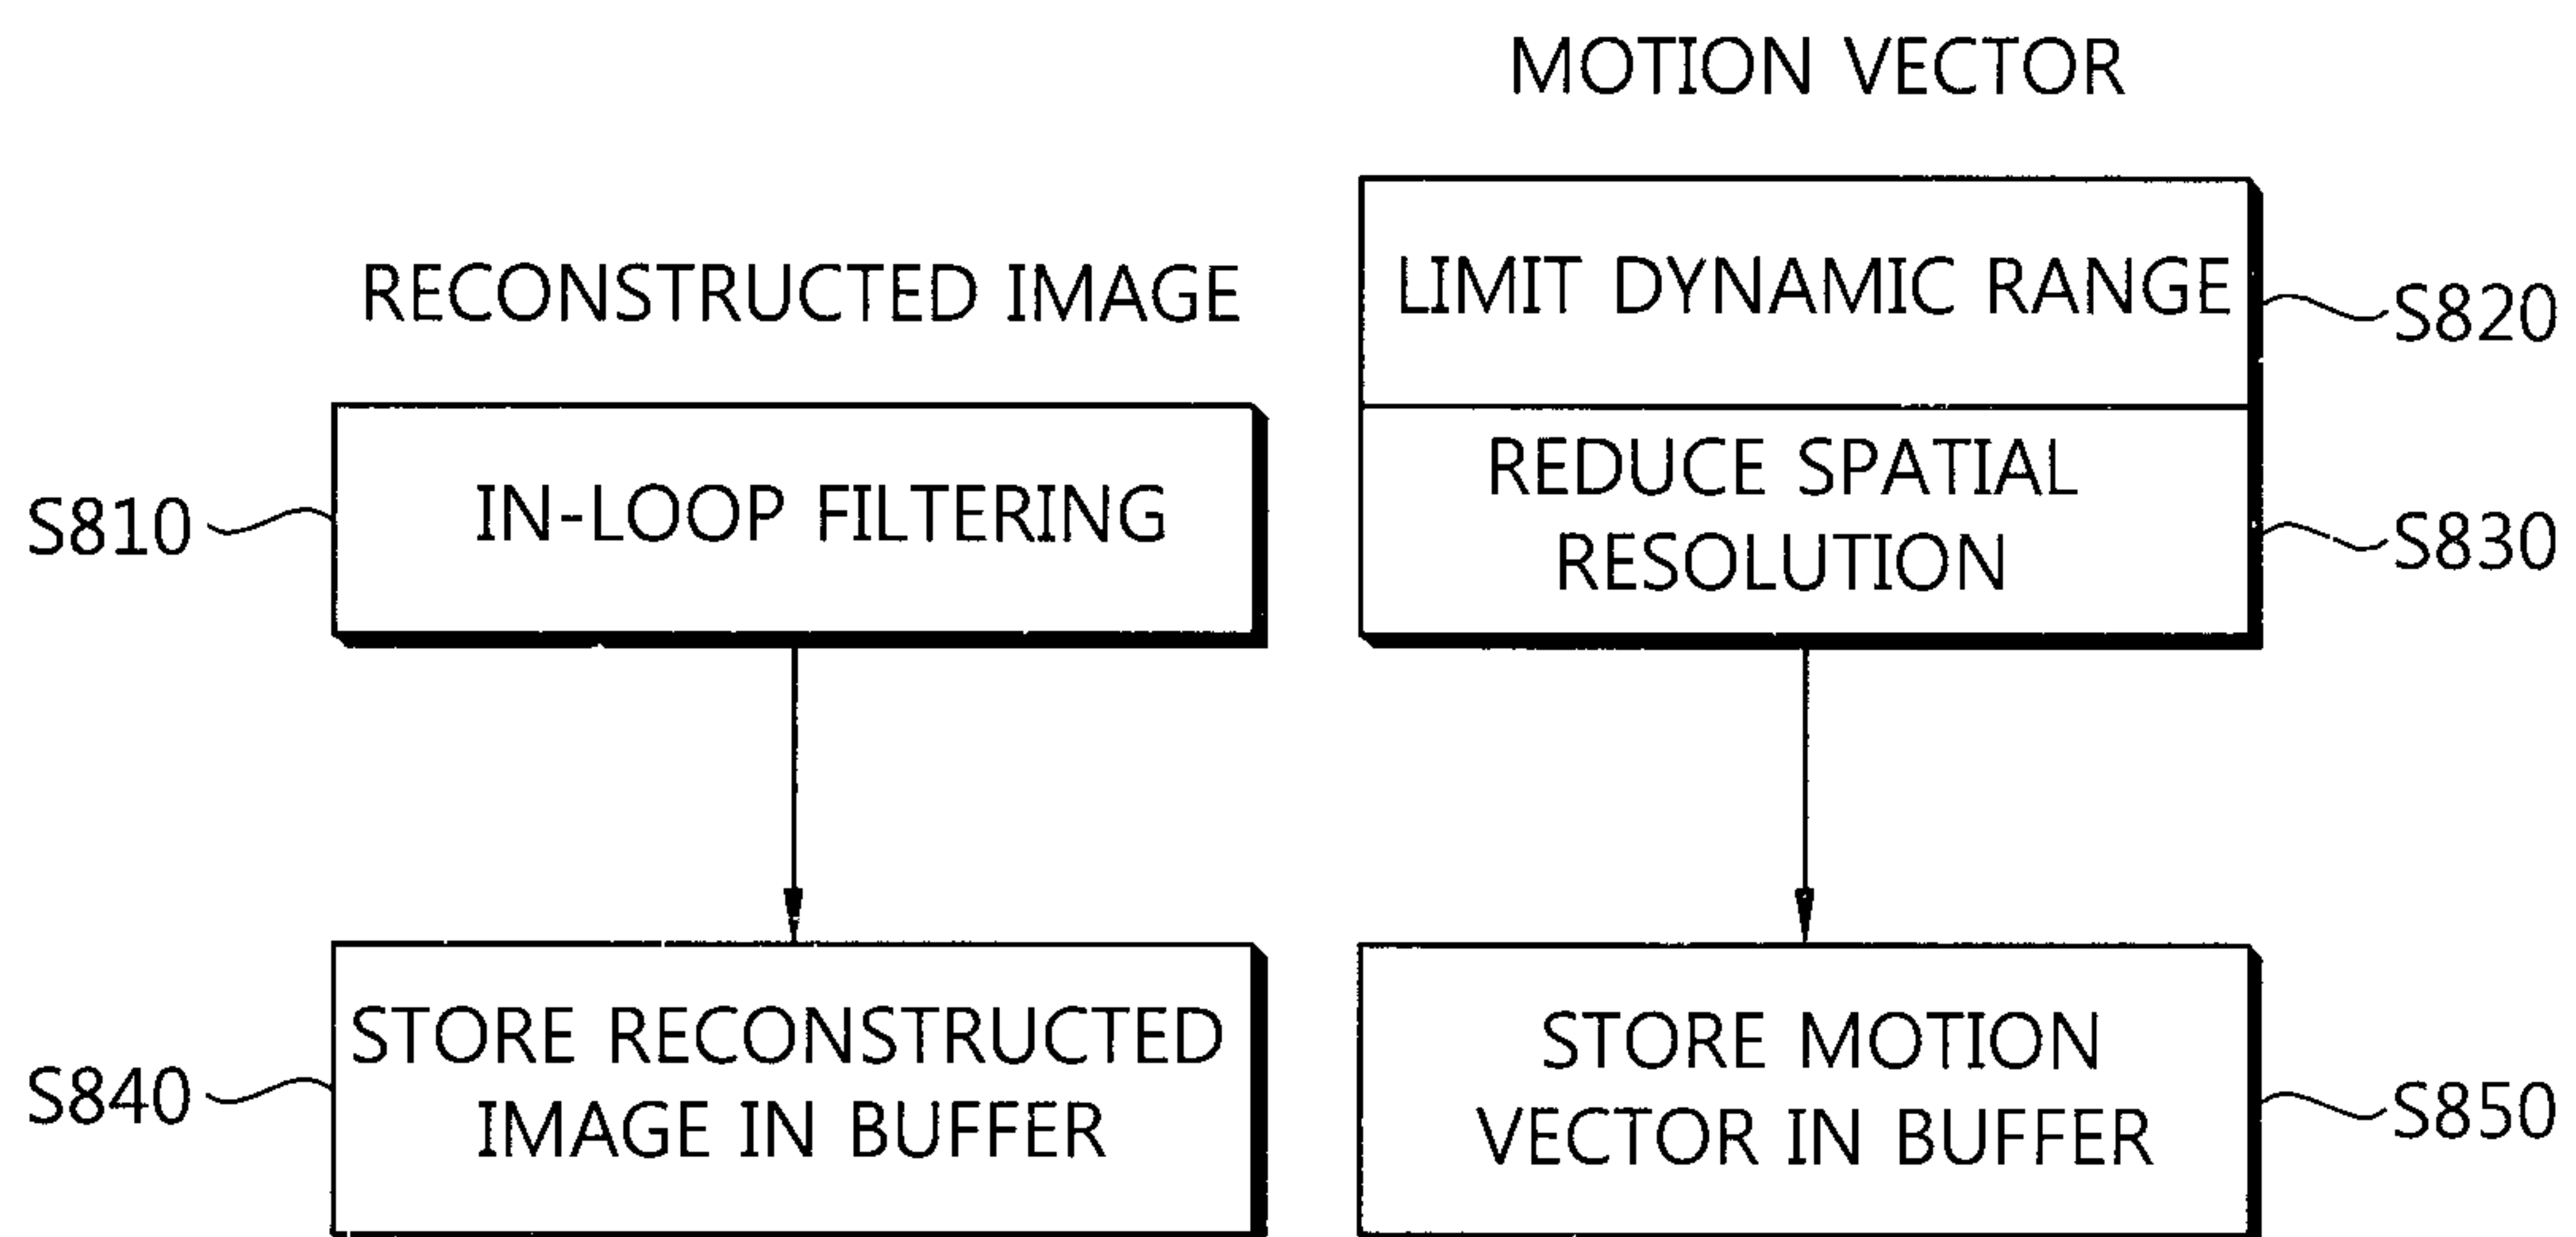


FIG. 9

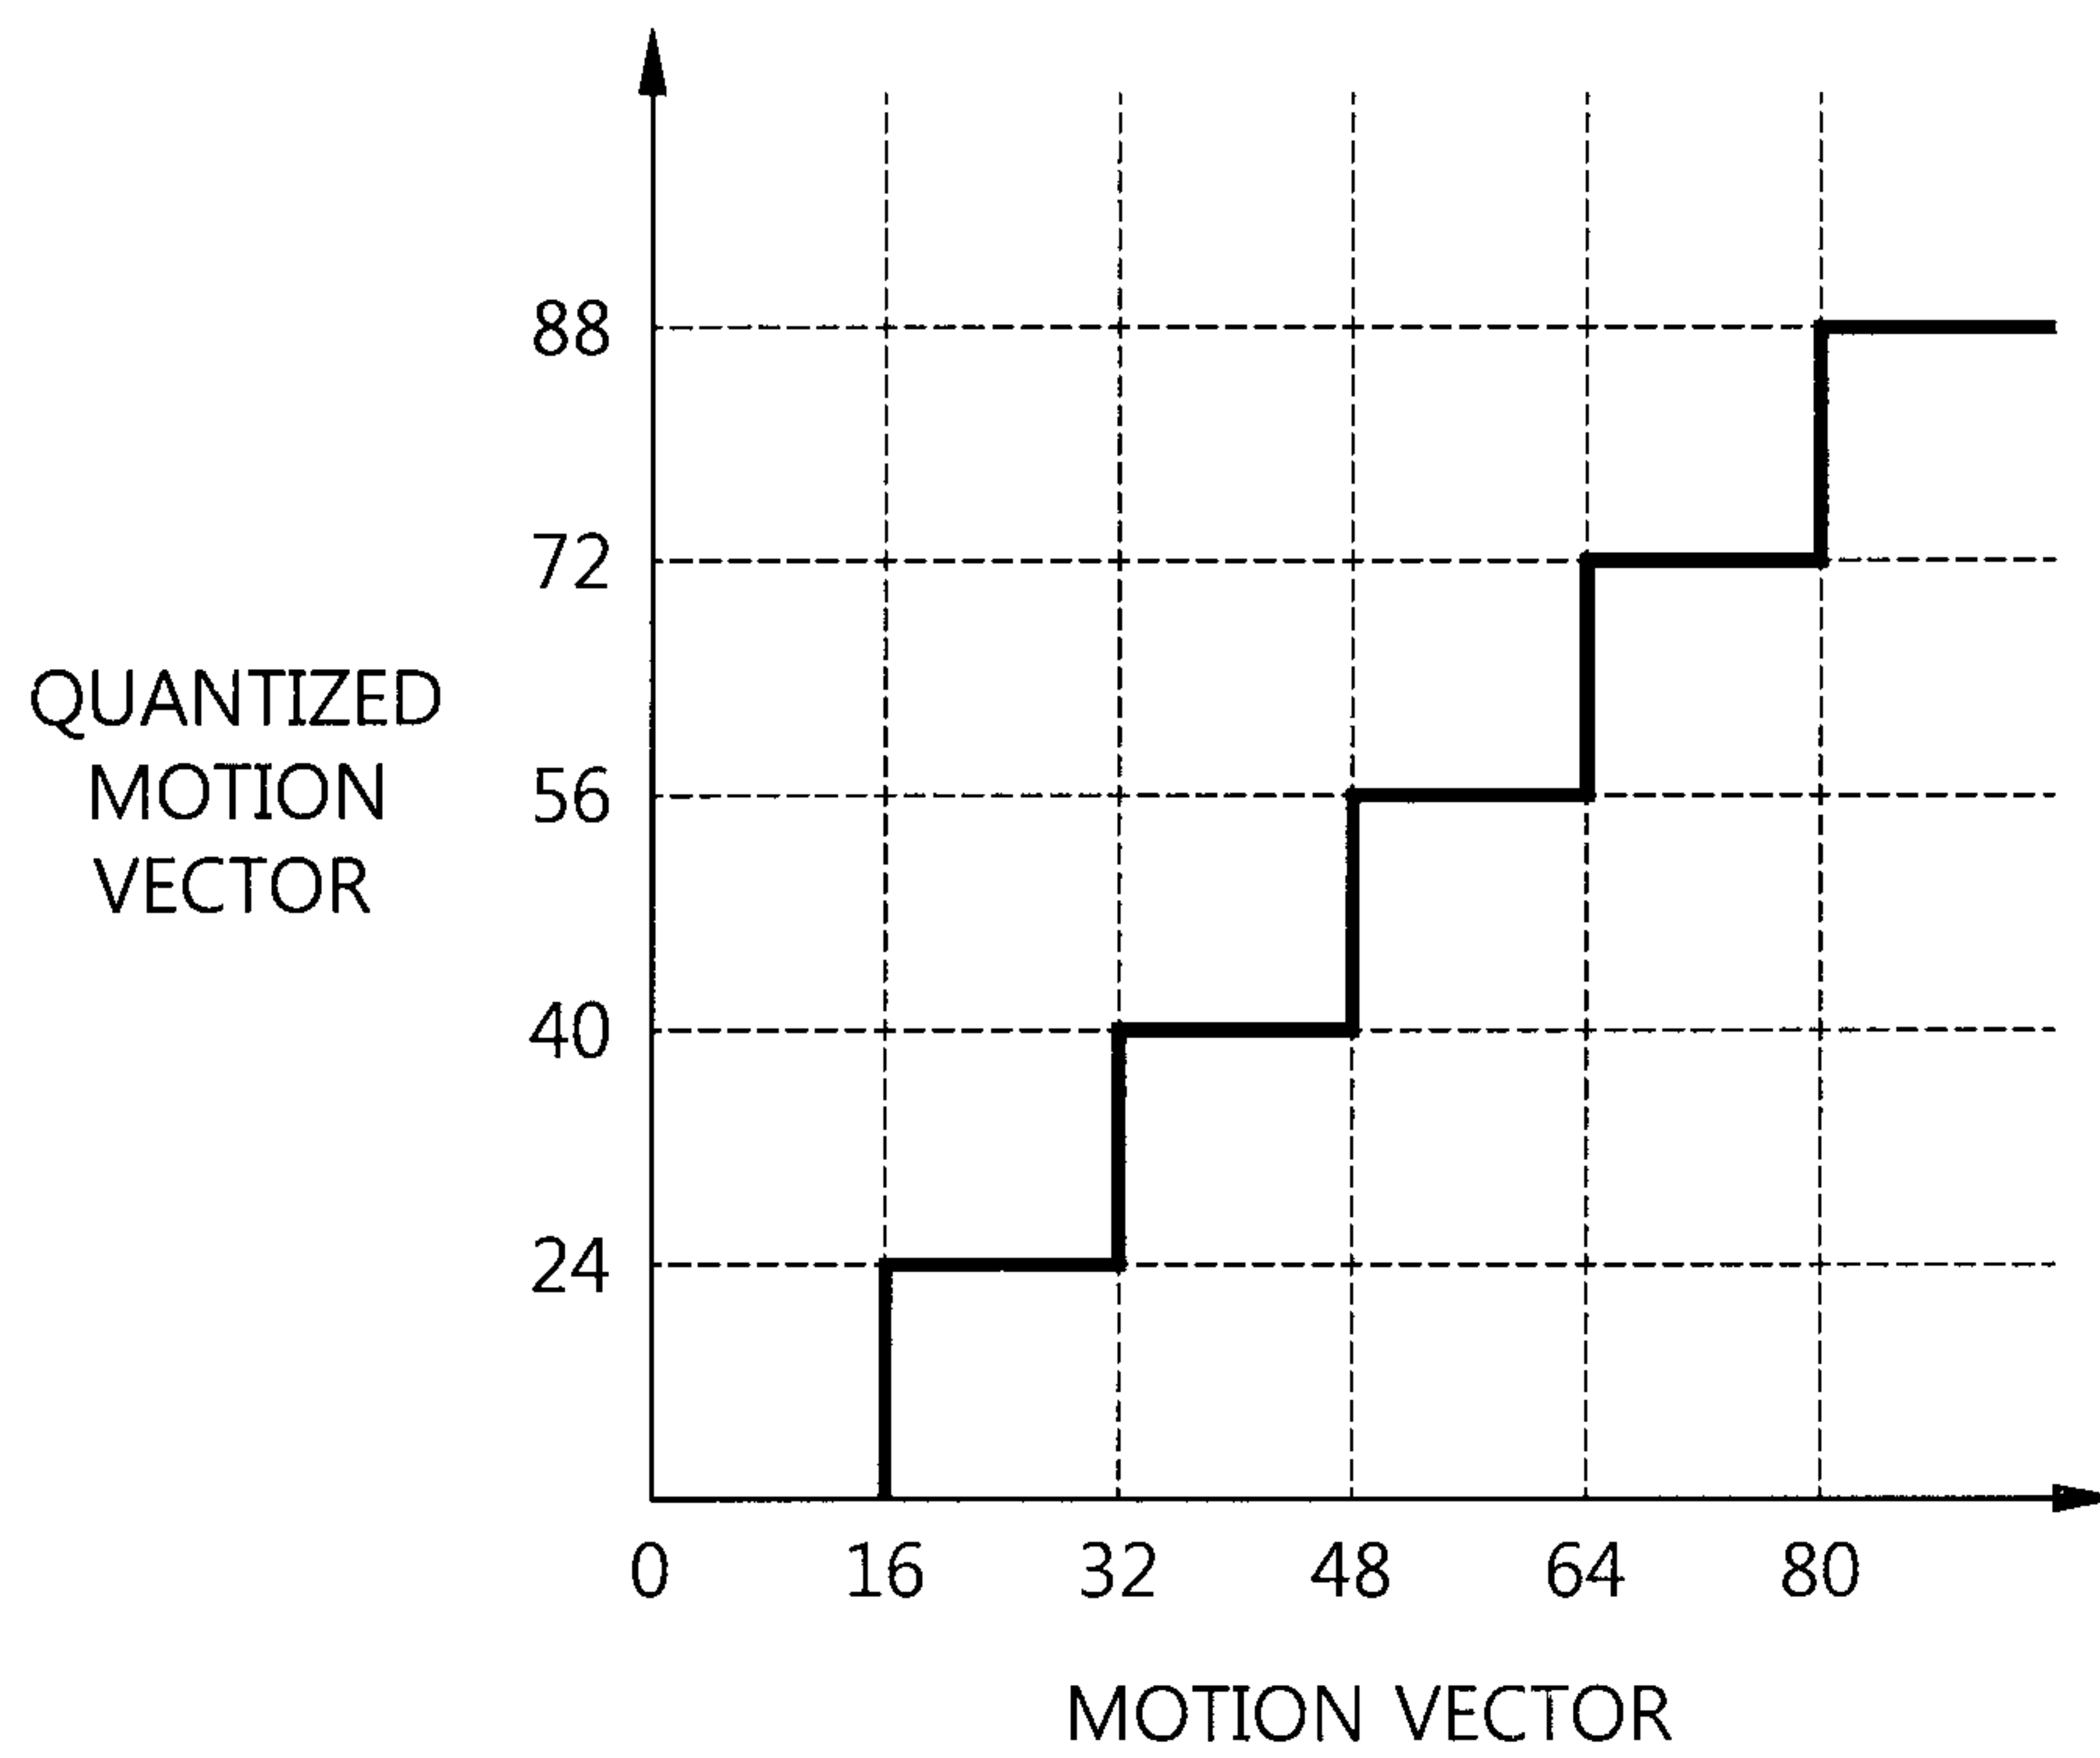


FIG. 10

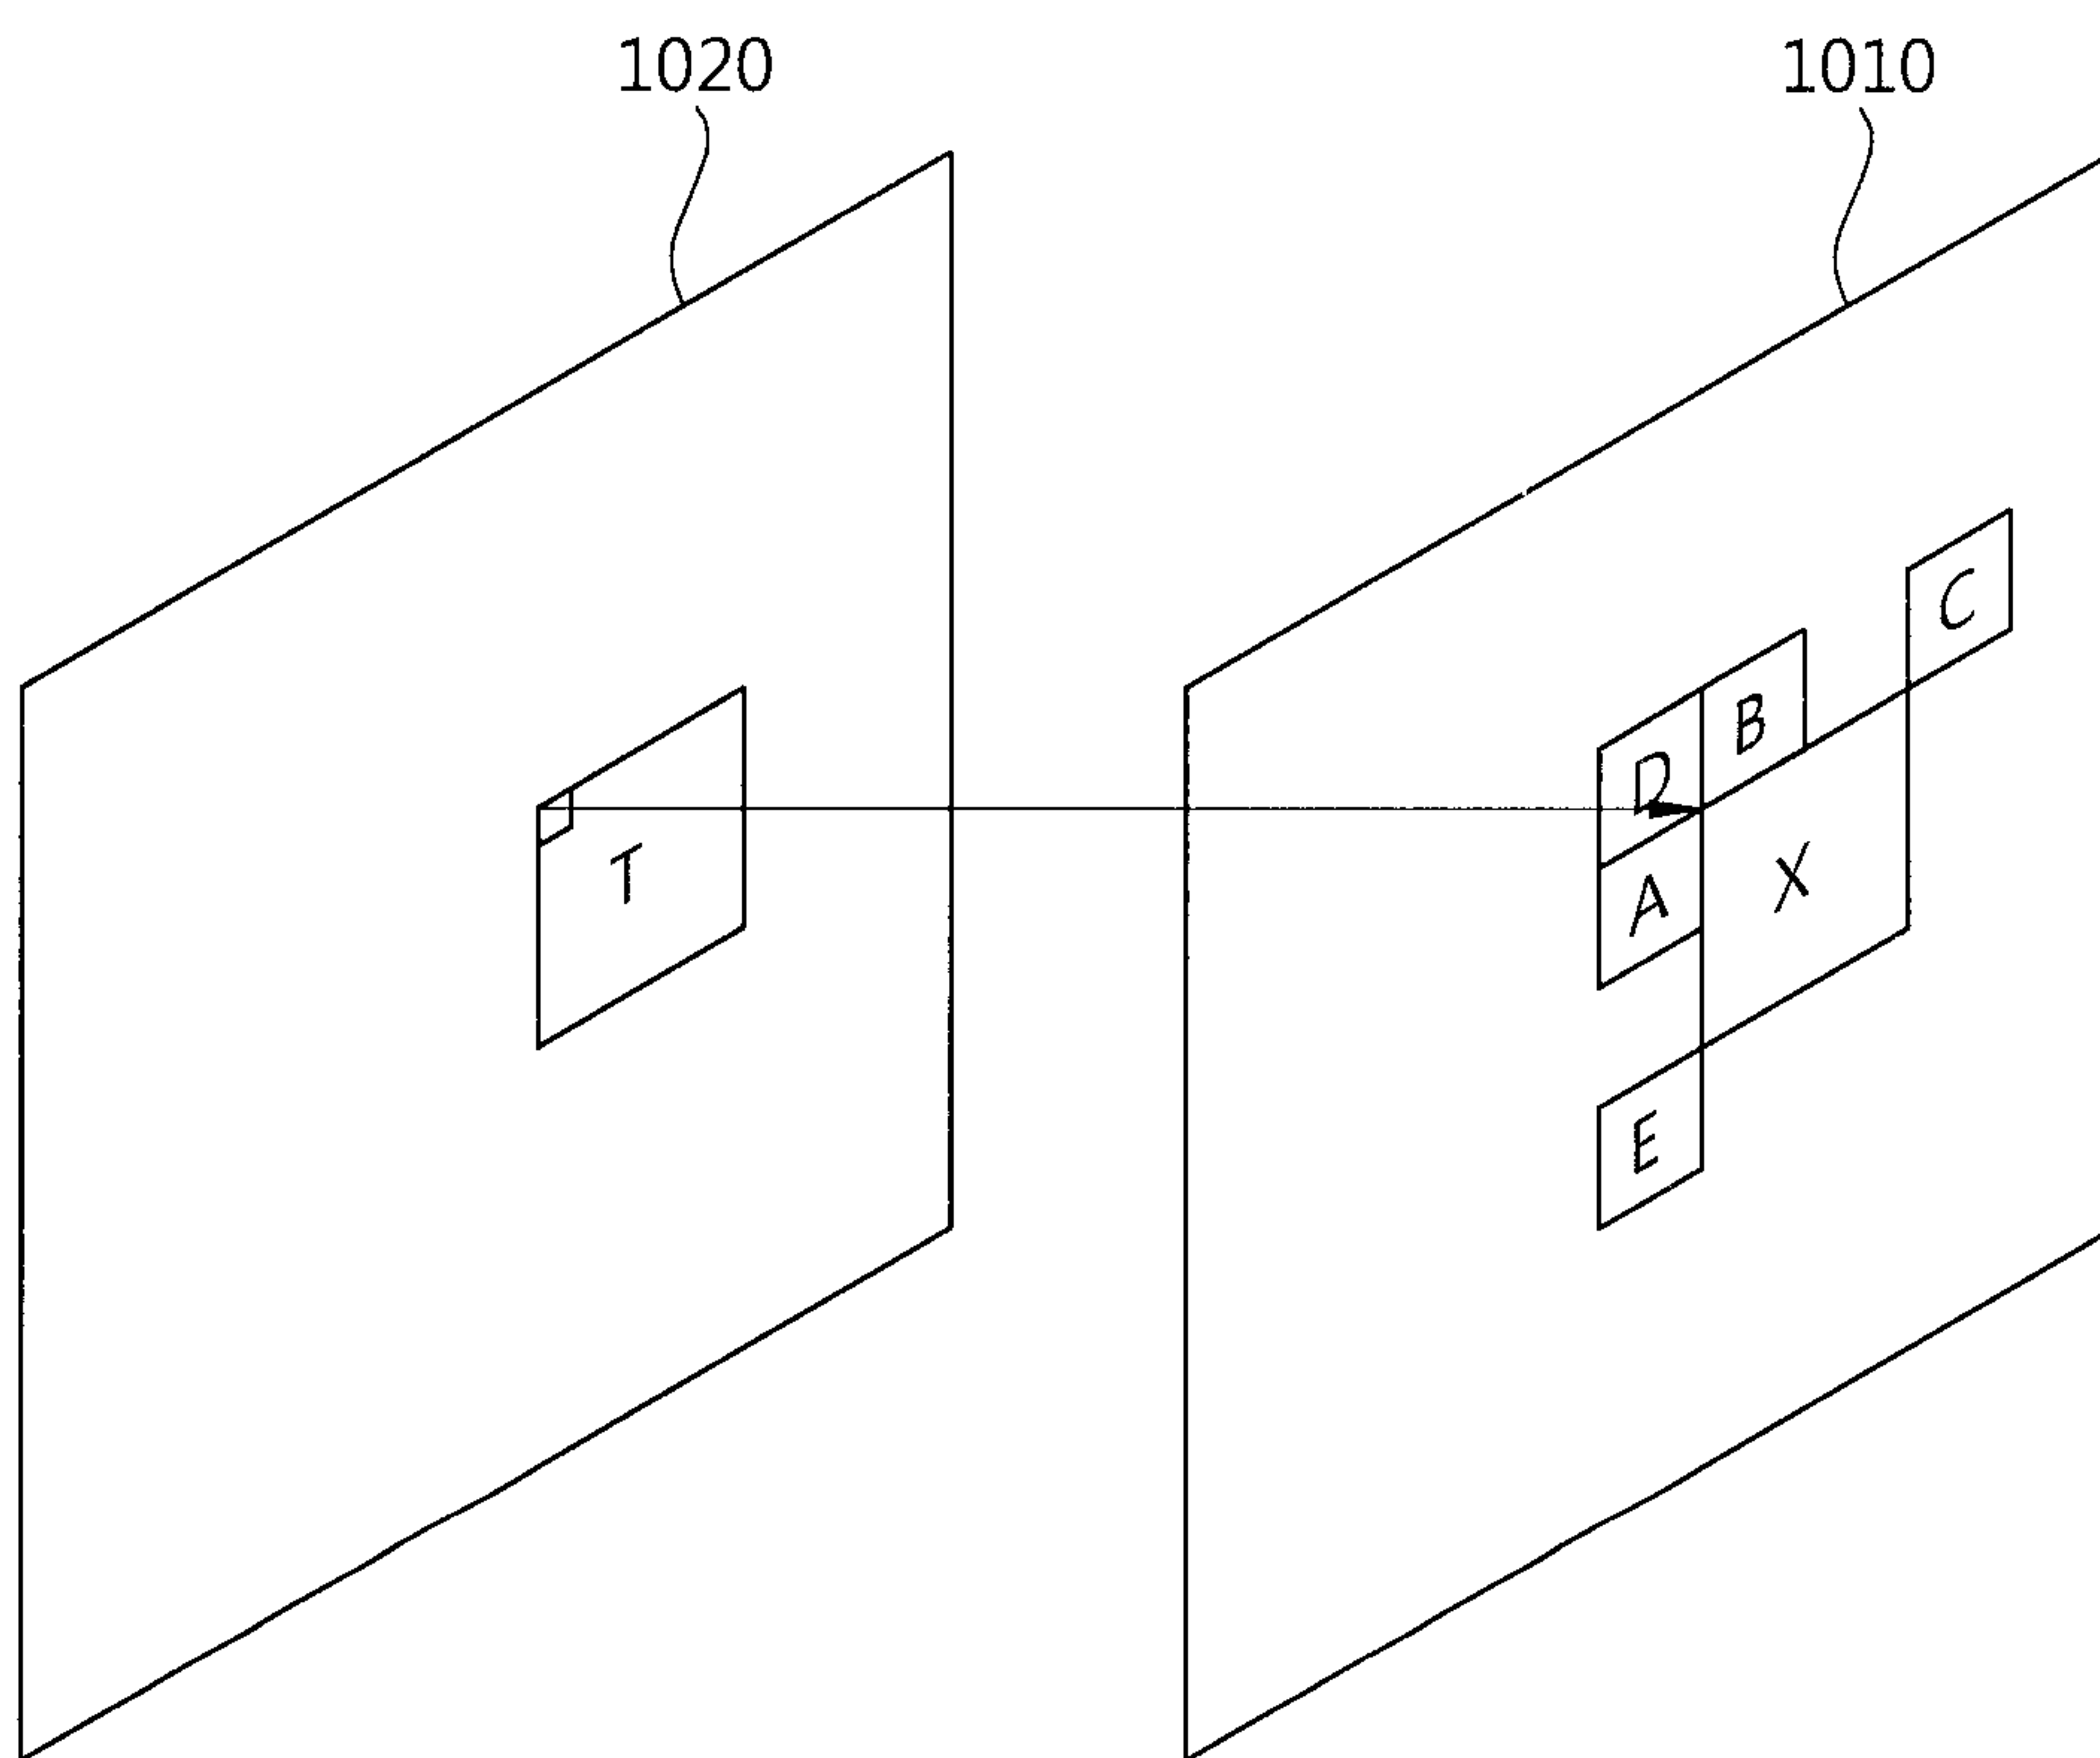


FIG. 11

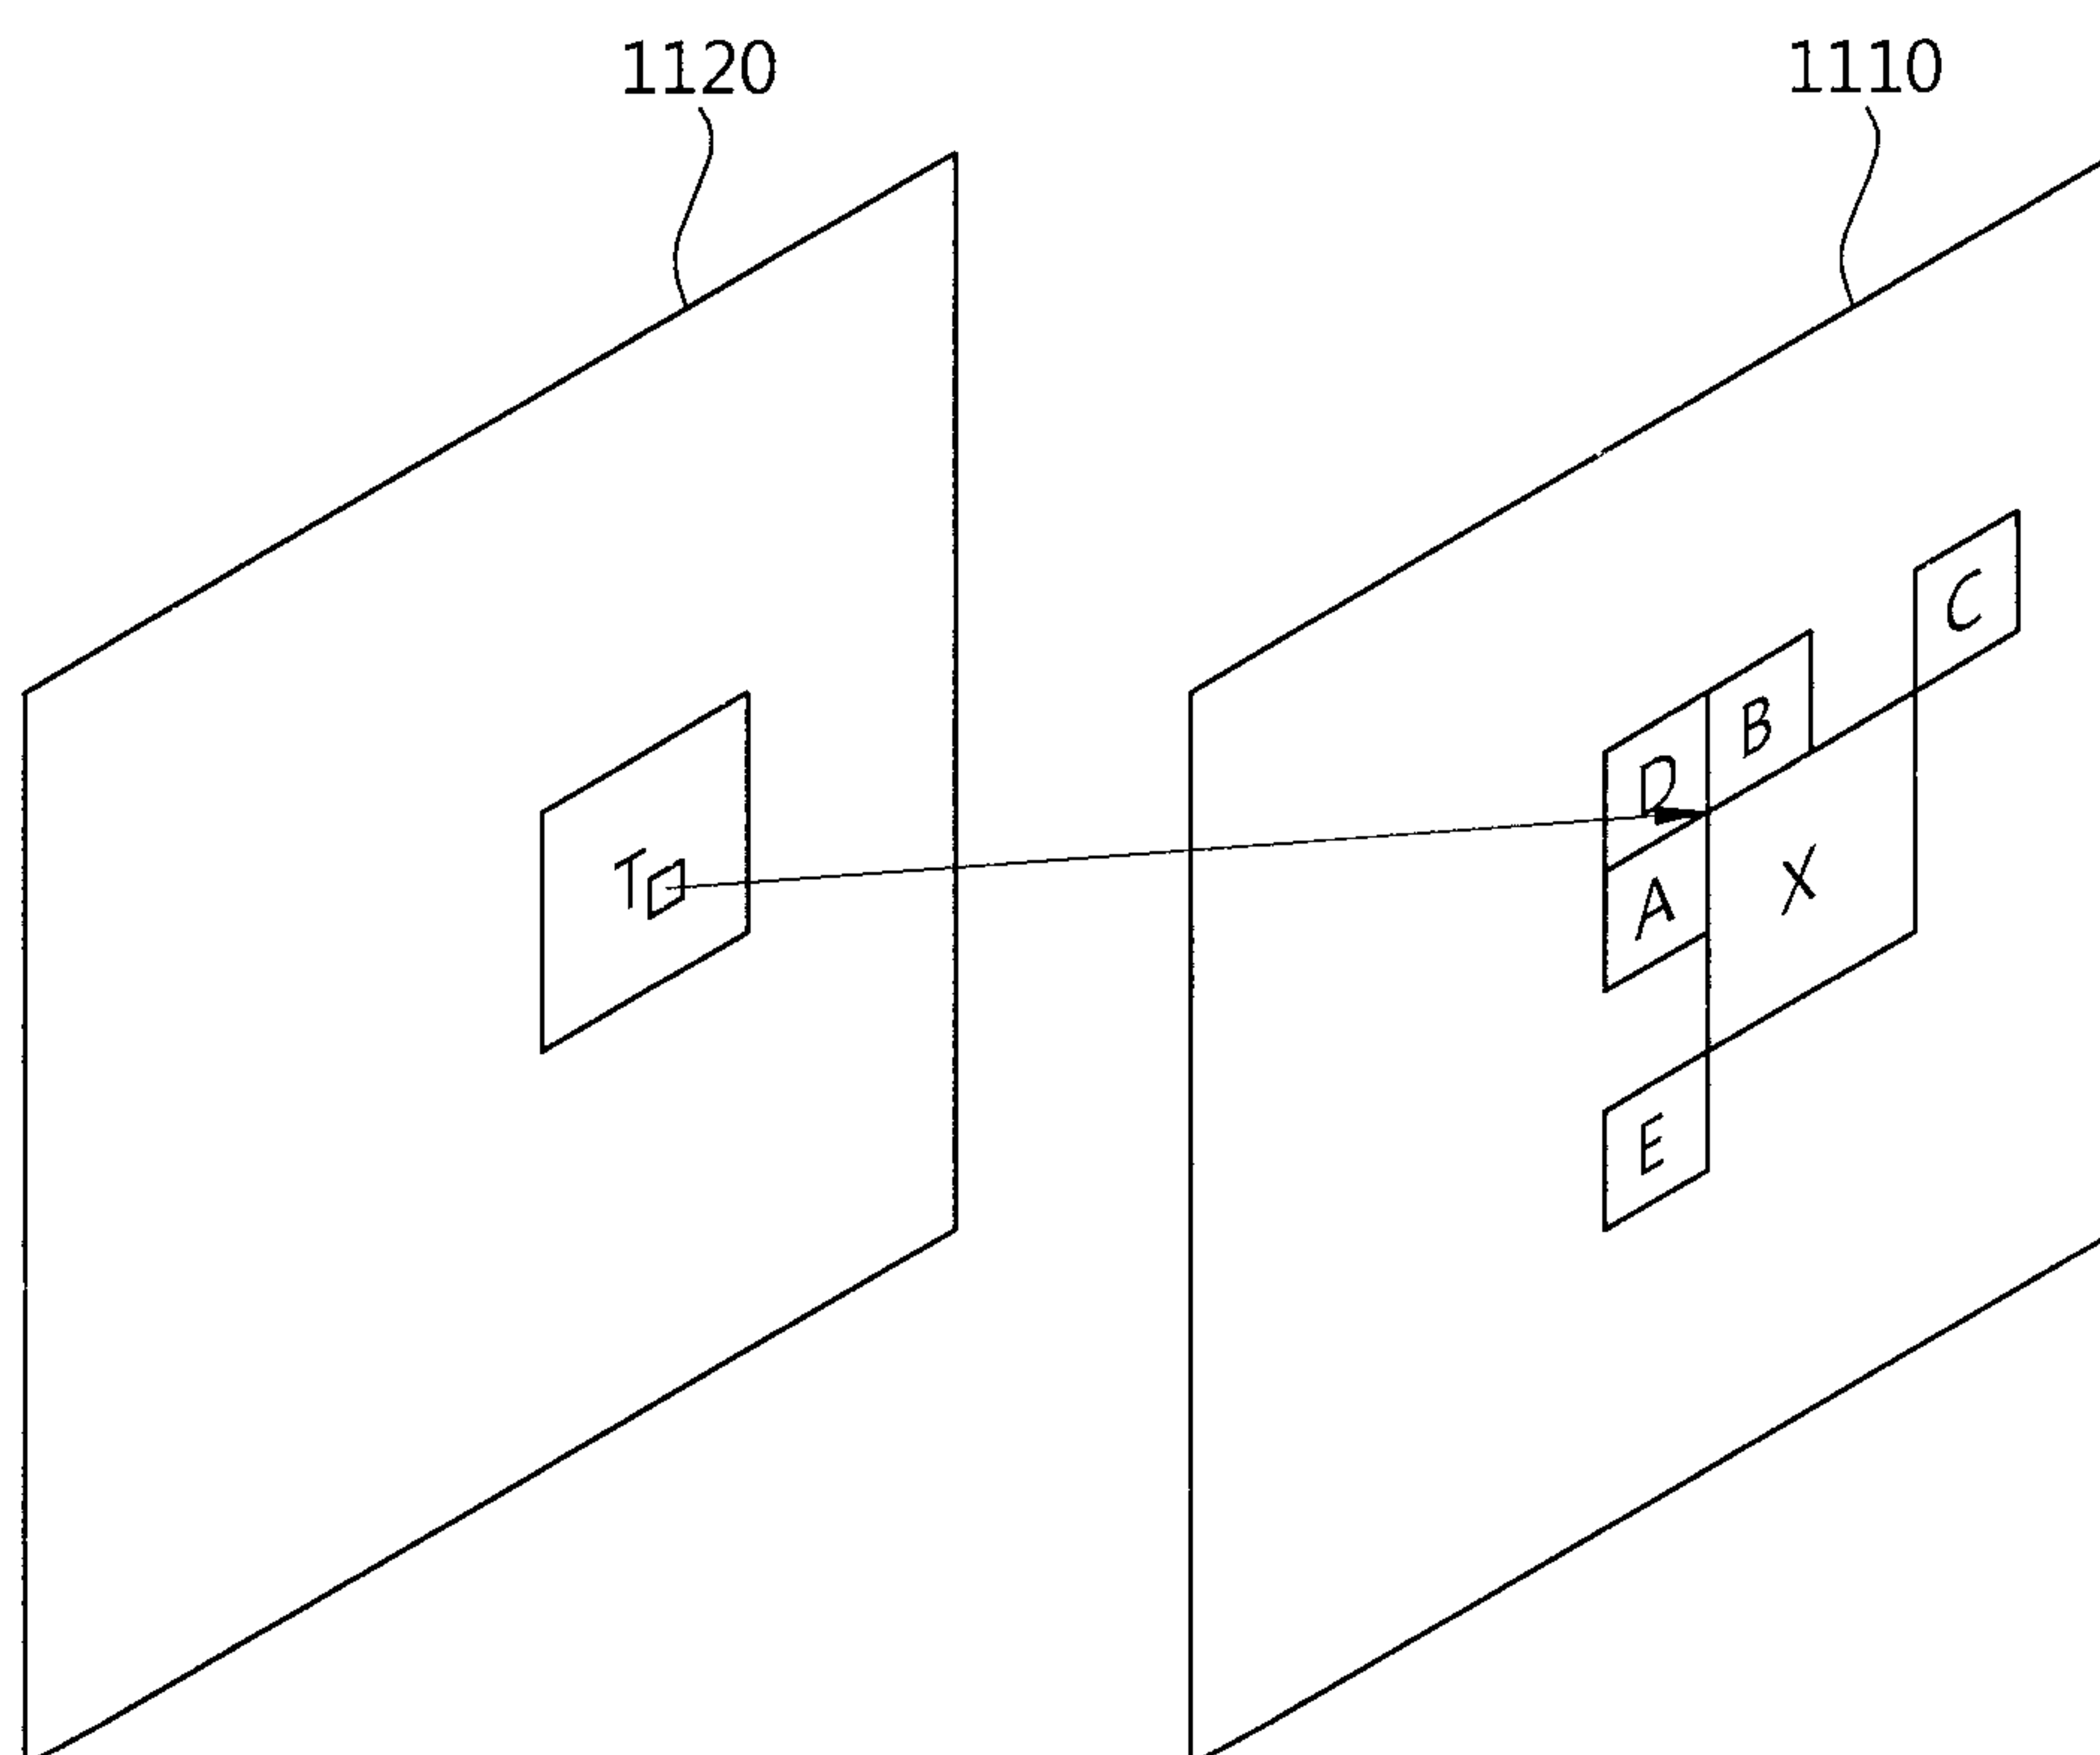


FIG. 12

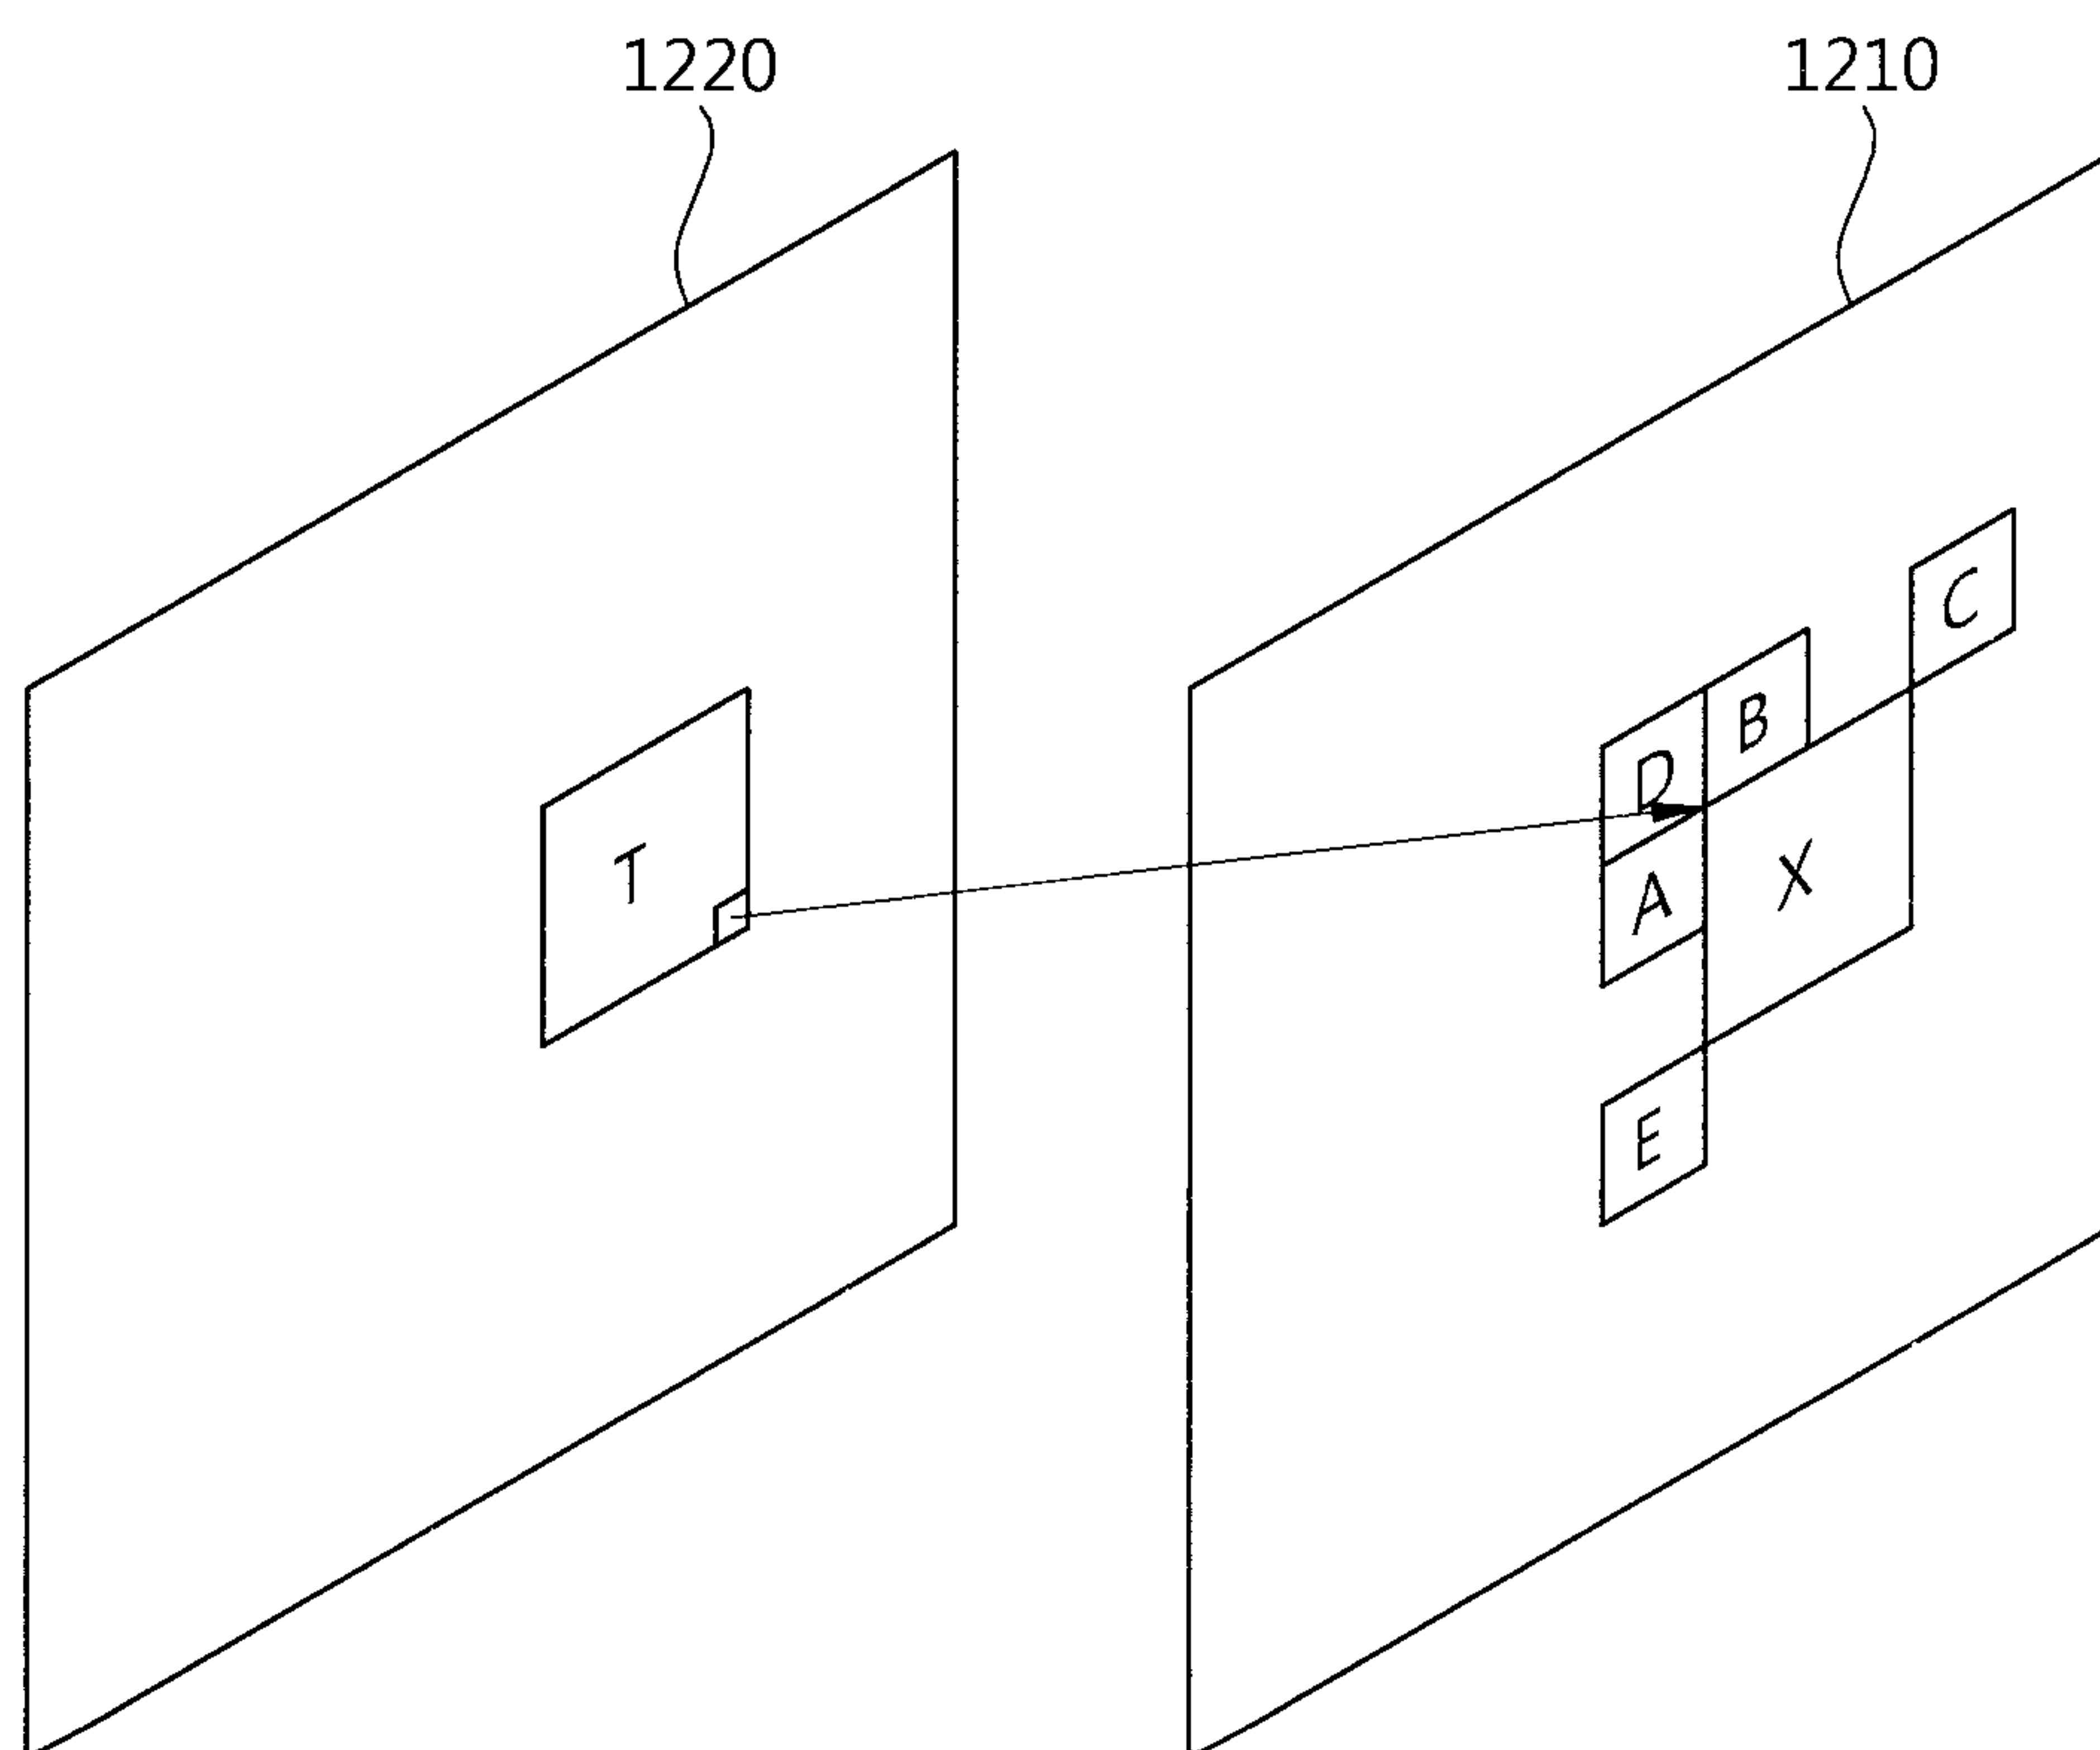


FIG. 13

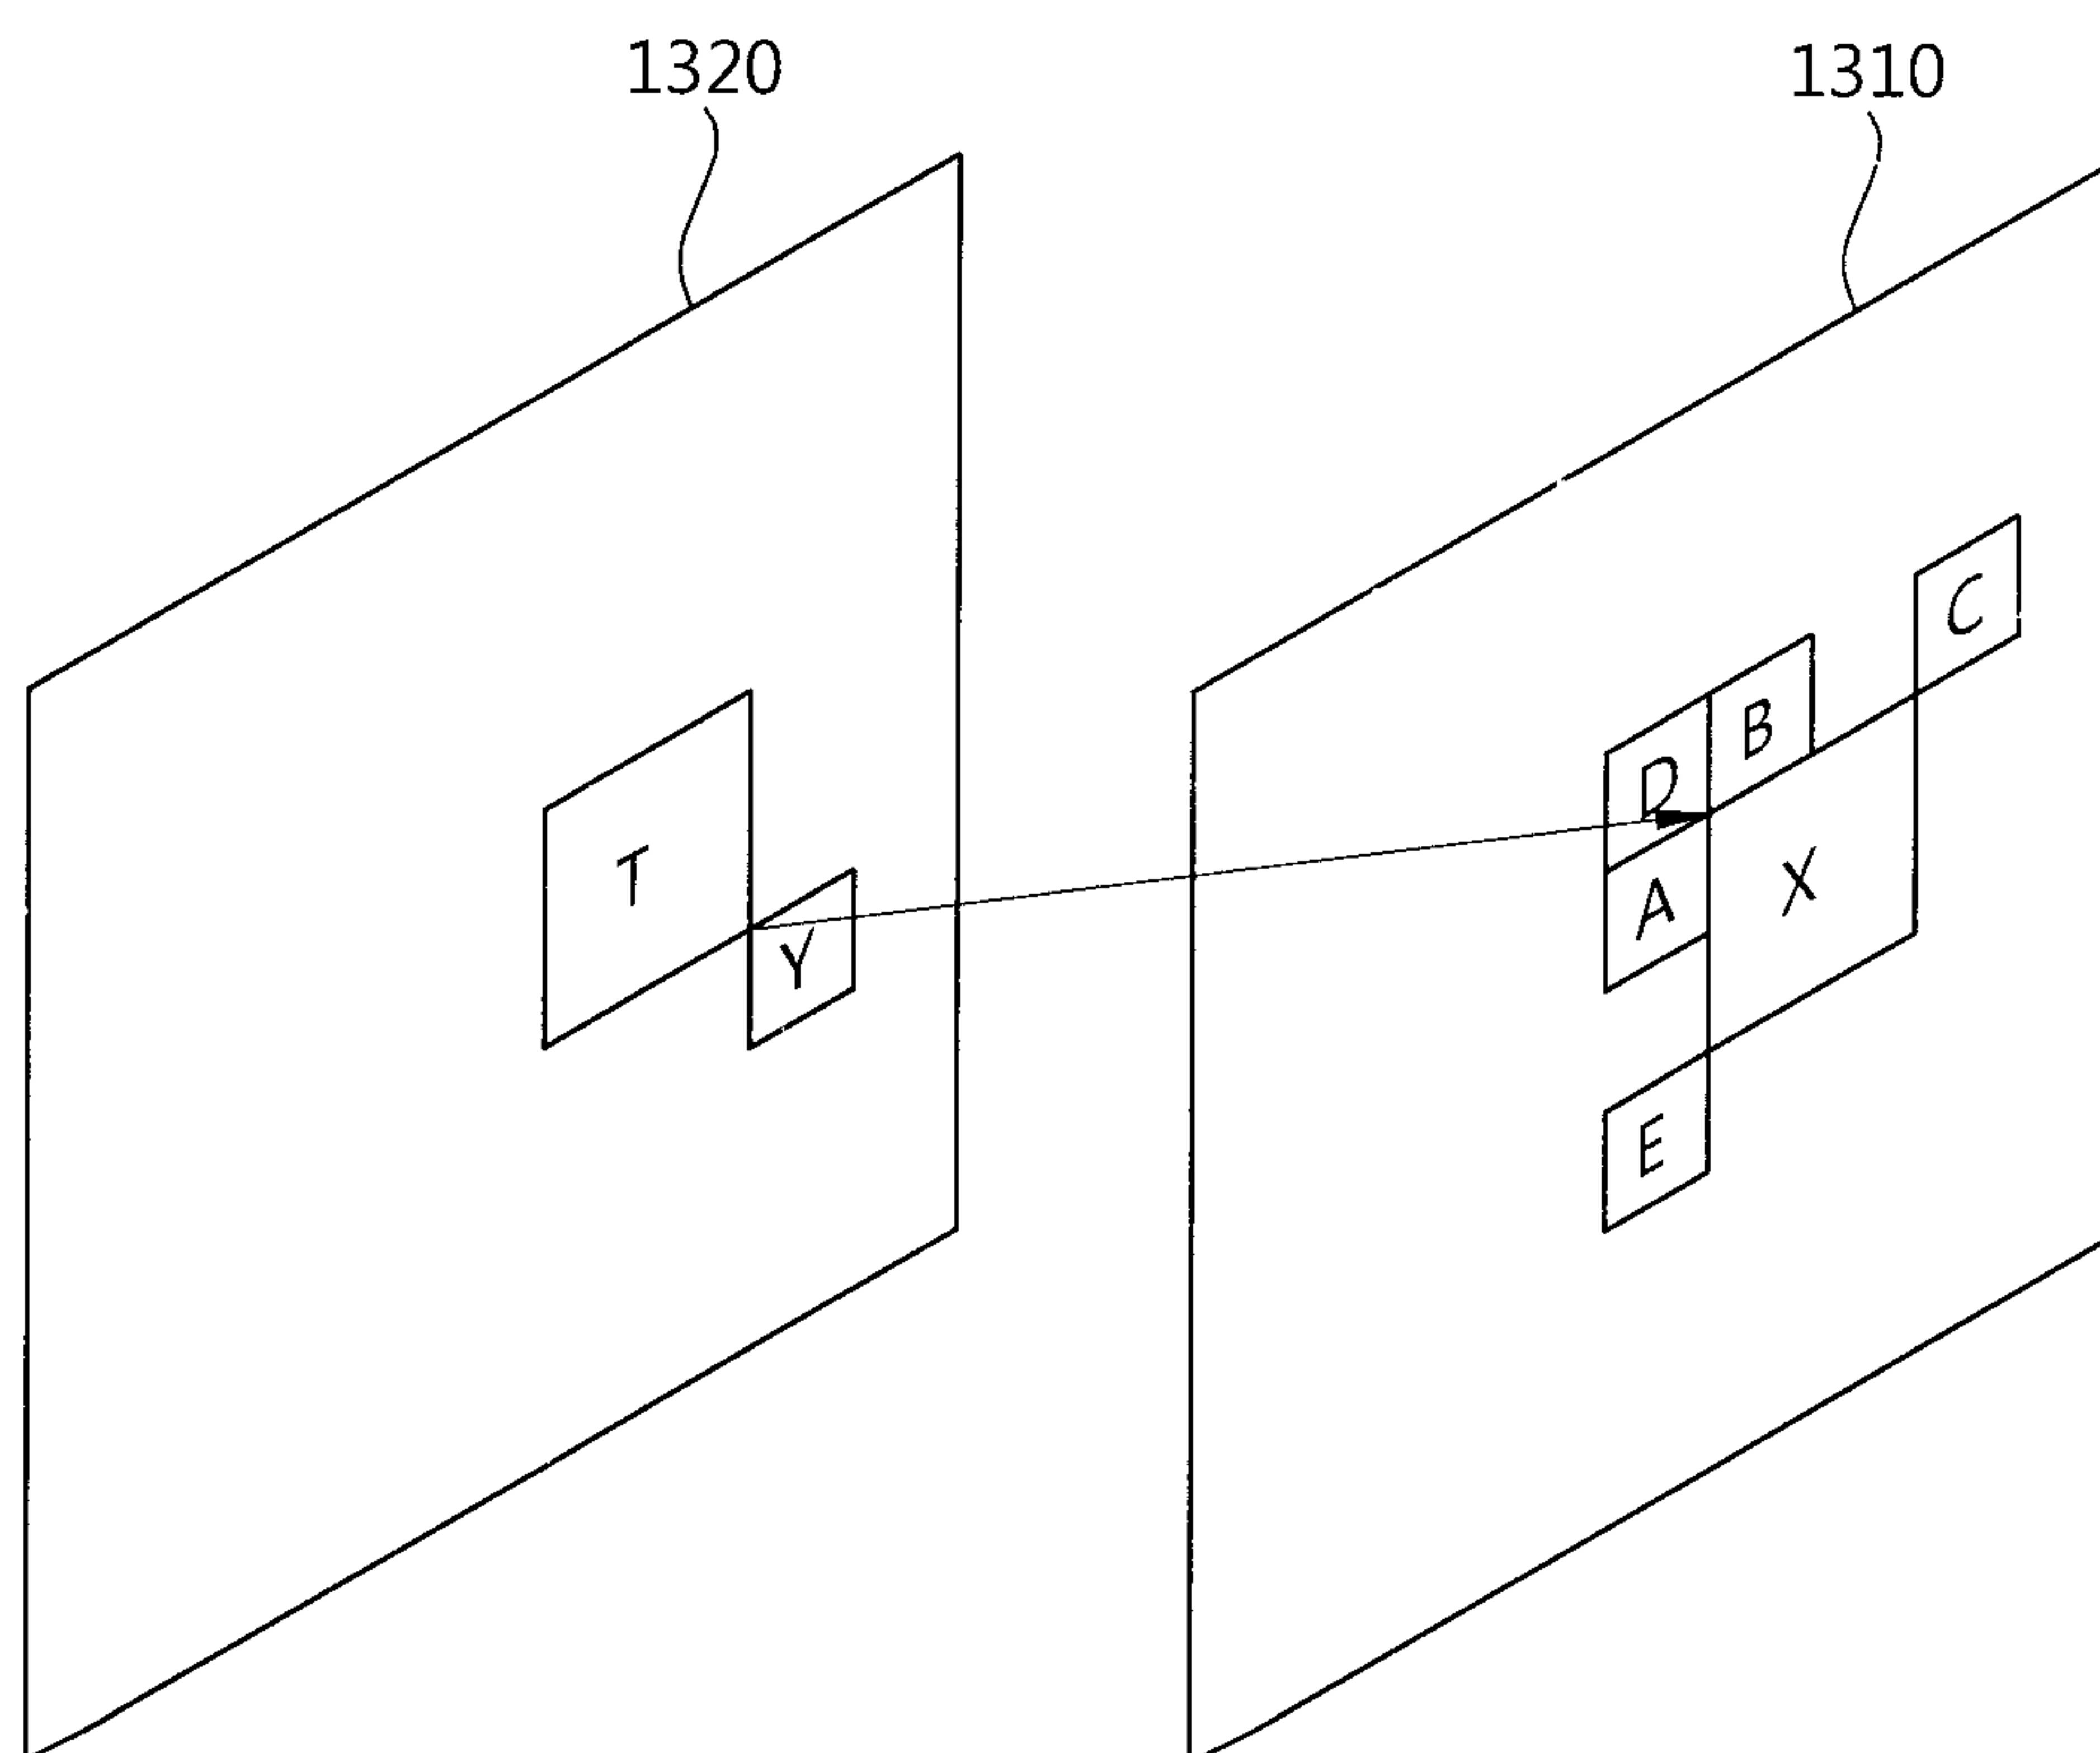


FIG. 14

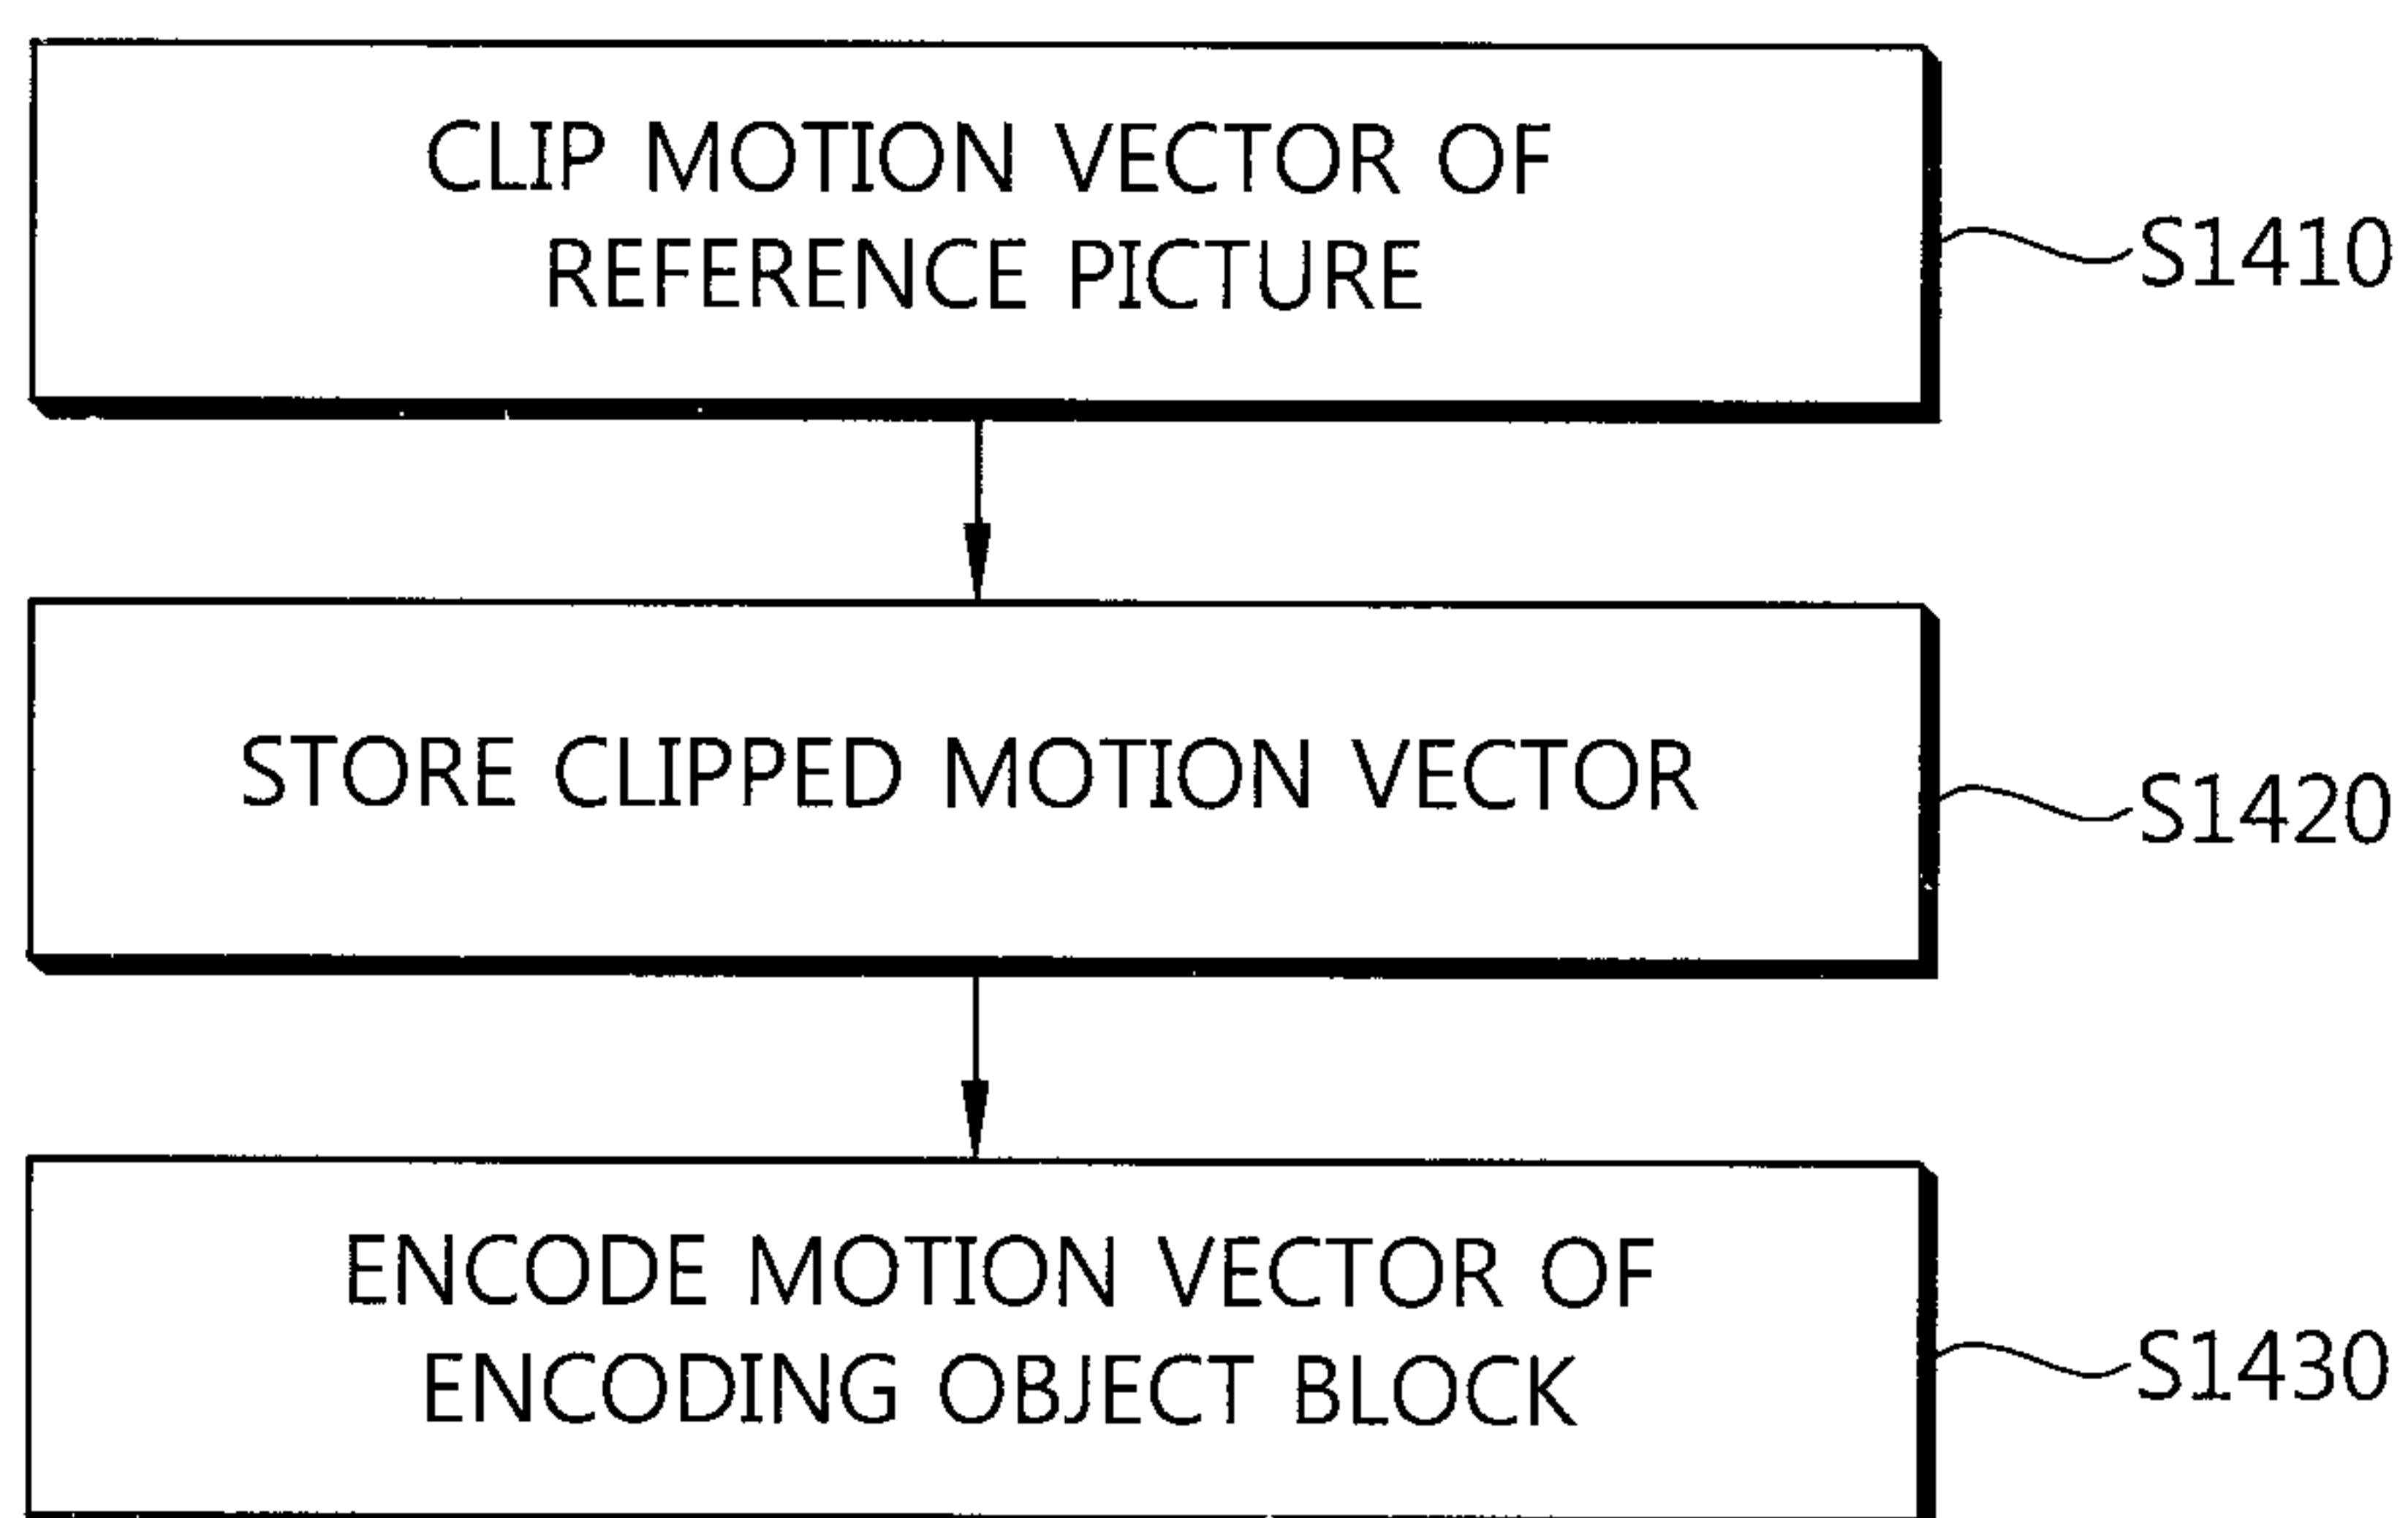


FIG. 15

