

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3433183 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **B 65 D 77/06 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2020-07-27**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2020-04-29**
- (86) Europæisk ansøgning nr.: **16770681.1**
- (86) Europæisk indleveringsdag: **2016-09-15**
- (87) Den europæiske ansøgnings publiceringsdag: **2019-01-30**
- (86) International ansøgning nr.: **EP2016001547**
- (87) Internationalt publikationsnr.: **WO2017162258**
- (30) Prioritet: **2016-03-24 DE 202016001876 U**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Mauser-Werke GmbH, Schildgesstrasse 71-163, 50321 Brühl, Tyskland**
- (72) Opfinder: **WEYRAUCH, Detlev, Im Oberen Tal 12, 52372 Kreuzau-Untermaubach, Tyskland**
- (74) Fuldmægtig i Danmark: **RWS Group, Europa House, Chiltern Park, Chiltern Hill, Chalfont St Peter, Bucks SL9
9FG, Storbritannien**
- (54) Benævnelse: **INDVENDIG BEKLÆDNING TIL PALLECONTAINER**
- (56) Fremdragne publikationer:
EP-A1- 0 415 719
EP-A1- 2 090 528
WO-A2-2011/002925
DE-U1-202014 007 695
JP-A- 2005 289 464

Description

The invention relates to a cuboid-shaped flexible inliner (hereunder alternatively also referred to as a "film bag"), having an upper filling connector and a lower retrieval connector, for a pallet container (hereunder referred to as "IBC" for short) for storing and for transporting liquid or free-flowing filling materials, having a thin-walled rigid internal container from a thermoplastic plastics material, having a tubular lattice frame, as a supporting jacket tightly enclosing the plastics-material internal container, from welded-together horizontal and vertical tubular bars, and having a rectangular base pallet on which the plastics-material internal container bears and to which the tubular lattice frame is fixedly connected, wherein the rectangular plastics-material container has two longer side walls, a shorter rear wall, a shorter front wall, an upper base having a closable filling connector and a container base, wherein on the base side, in the center of the front wall, a lower retrieval region having a protective-housing-shaped molding (hereunder synonymously also referred to as "retrieval fitting protective housing"), directed inward toward the inside of the plastics-material internal container, for disposing a closable retrieval fitting in a protected recessed manner is provided.

Set of problems:

Pallet containers, or IBCs, respectively, are extensively used in the chemical industry, mainly for transporting liquid chemicals. The majority of these chemical products is classified as hazardous liquid filling material because the former in a concentrated form are a risk to the health of humans and animals and to the environment. During storage and transportation in IBCs, the chemicals may stress, such as discolor, contaminate, or damage, the HDPE material of the plastics-material internal containers in such a manner that the used internal containers cannot be simply washed and reused. In the case of a usual multiple use of used IBCs, the only remaining option is the

replacement of the damaged plastics-material internal container with a new internal container. Considering that a plastics-material internal container, depending on the list of requirements, may weigh approx. 14 kg to 18 kg, this however
5 represents a costly solution involving a not insignificant waste of plastics material. A more cost-effective solution, for example, lies in protecting the plastics-material internal container by means of an inserted thin inliner, or film bag, respectively, against any contamination by the respective
10 filling material, and on account thereof enabling multiple reuse or repeated use, respectively, of the internal container. In this instance, only the contaminated inliner needs to be disposed of, said inliner for a 1000 liter IBC, depending on the film thickness, merely having a weight of approx. 0.7 to 1.3 kg
15 in terms of the plastics-material mass thereof, and a new inliner has to be inserted in order for the IBC to be reused.

Inserting thin-walled film bags, or inliners, respectively, into rigid box-shaped external containers, such as large rigid
20 cardboard boxes or cardboard sleeves (bag in box) is a measure that has been usual for years. However, only cylindrical, cuboid, or cushion-shaped inliners of simple construction have always been available for square-shaped or rectangular-shaped external containers. Said inliners may be used without problems
25 for containers that have an externally located retrieval system. Said simple inliners are likewise used for pallet containers, or IBCs, respectively, having blow-molded stiff or rigid plastics-material internal containers, respectively, having a protective housing that is molded inwardly into the internal
30 container for a recessed retrieval fitting that is protected from external influences, but said inliners are problematic in this instance, because they during handling in the case of installation, filling, retrieval, and removal from the rigid IBC internal container consistently lead to problems, there in
35 particular inevitably being a formation of creases in the region about the lower retrieval connector.

Prior art:

The use of a cuboid-shaped inliner from a thin plastics film in a rigid plastics-material internal container having a molded protective housing for the retrieval fitting of a usual pallet container is known from publication EP 2 090 528 A1. The focus herein is on securely fixing the thin-walled inliner retrieval connector in the rigid retrieval connector of the plastics-material internal container with the aid of the screwed-on retrieval fitting. To this end, the front periphery of the thin tubular film, using a sealing flange and a sealing lip, is jammed at the end side by an annular shoulder in the housing screw nut of the retrieval fitting on the threaded sleeve (having an external thread) that is welded to the bottle retrieval fitting. However, when the housing screw nut is placed ready for screwing, the periphery of the thin tubular film that is folded over can no longer be tightly held and no longer be seen; said folded-over periphery may easily slide out of place herein or even be imparted creases. Small pimples on the film periphery and respective depressions in the end wall of the threaded sleeve are intended to counteract this. In any case, fixing and securing the inliner retrieval connector against rotation is performed only by clamping, once the thread of the housing screw nut has been completely tightened. It has to be ensured at the same time that the opening lever of the retrieval fitting is exactly in the vertical position.

In the case of another large container that is known from US 6,55,657 B1, the undesirable formation of creases by the cuboid-shaped inliner in the region of the protective housing of the retrieval fitting within the plastics-material internal container has been identified as disadvantageous, and the thin-walled retrieval connector of the inliner as a supposedly suitable countermeasure has not been positioned in the base-side proximity of the inliner front wall but rather close to the front-side periphery of the lower base of the cuboid-shaped inliner. Upon insertion of the inliner into the rigid internal container of the IBC, the front-side periphery of the lower base is then folded up in a rectangular manner, and the thin-walled

retrieval connector of the inliner is guided through the rigid retrieval connector of the internal container and fixed. On account thereof however, the inliner cannot bear on the front wall of the internal container in a fully planar manner, and free spaces or cavities, respectively, remain below the inliner, laterally next to the protective housing of the internal container. As the filling of the IBC is increased, the cuboid-shaped inliner is of course pressed onto the protective housing and, laterally next thereto, onto the base of the rigid internal container. Herein, the inliner is here too inevitably withdrawn from the lateral corner regions of the rigid internal container, and the formation of creases by the thin-walled inliner arises here too, even if this arises rather toward either side and no longer directly in front of the outlet opening of the retrieval connector. The problem of the formation of creases is thus also not completely solved here either.

In the case of all known IBCs, the thin-walled inliners by way of the lower flexible retrieval connector thereof are fastened to the lower rigid retrieval connector and at the top by way of the flexible filling connector of the former to the upper rigid filling connector of the plastics-material internal container, otherwise being freely suspended from top to bottom. When filling the pallet container, irrespective of this being from the top or from below in the case of a so-called "base filling", the liquid filling material is most often filled into the inliner at even more increased process temperatures under pressure, or by way of a sharp jet. Intense fluttering of the film material often arises herein. The inliner base is withdrawn from the container corners, forming creases which later may block the base-side retrieval opening during a retrieval of filling material. Depending on the filling level, the inliner together with the liquid content thereof by virtue of the external transportation rocking motions acting thereon wobbles back and forth in the plastics-material internal container such that tensile stresses that are often variable act on the upper filling connector of the inliner, the film material potentially ripping. In order to obviate this phenomenon, expensive stress-resistant

film materials have to be used in the production of the inliner. Composite films having advanced barrier properties unfortunately have only a very poor resistance to stress, and may not be employed in many applications.

5

Object:

The present invention is based on the object of facilitating the use of inliners in pallet containers (IBCs), and in particular
10 of avoiding with high reliability a formation of creases by the inliner in the interior of the rigid internal container.

Achievement:

15 This object is achieved by the special features of Patent Claim 1. The features in the dependent claims describe further advantageous potential design embodiments of the inliner according to the invention. The proposed technical teaching opens up improved safety in the handling of IBCs that are
20 equipped with form-adapted inliners having a protective housing, inwardly molded in the internal container, for disposing the retrieval fitting in a protected recessed manner within the external lattice cage of the pallet container. It has been established that customers refuse the use of thin-walled
25 inliners in IBCs when leakages of the inliner and disruptions in the retrieval of filling material often arise. Such leakages and disruptions are often created by virtue of the formation of creases by the inliner that leads to clogging of the retrieval connector of the internal container.

30

An asset protection of high-value and multi-use-capable plastic-material internal containers is enabled by the constructive measures of the present invention by way of the disruption-free use of cost-effective inliners or film bags, respectively, such
35 that no more material is wasted in terms of valuable blow-molded plastics-material internal containers.

This is caused in an effective manner in that the cuboid-shaped

flexible inliner in the lower retrieval region has a wall recess, directed inward and adaptable to the protective-housing-shaped molding of the rigid plastics-material container, having two lateral wall parts, an upper wall part, and a rearward wall part having a flexible retrieval connector molded thereon, which make it possible to configure the adapted wall recess so as to bear in an exact fit on the internal surface of the molding of the retrieval fitting protective housing that protrudes into the interior of the rigid plastics-material container. On account thereof, there are no cavities below or laterally next to the still empty inliner base, that during continuous filling of known IBCs with liquid filling material are always filled, inevitably leading to distortions of the inliner and to the formation of creases by the latter.

In a constructive design embodiment of the invention it is expediently provided herein that the cuboid-shaped flexible inliner is welded together from three blank panels, and to this end comprises an upper horizontal lid part having a centric flexible filling connector, a lower horizontal base part having a clearance that corresponds with the base shape of the wall recess , and a vertically encircling side-wall blank panel having area portions for the two lateral wall parts, as well as the upper wall part, and the rearward wall part of the wall recess (34) of the inliner.

In a production-technology related design embodiment of the invention it is provided that the three blank panels in each case are welded together by way of a weld seam that horizontally encircles the external edge of the upper lid part and the external edge of the lower base part, and for closing the side-wall blank panel are welded together by way of a weld seam that runs vertically from top to bottom in the center of the front wall and through the center of the wall recess.

In another preferred production-technology related design embodiment of the invention it is provided that the three blank panels in each case are welded together by way of a weld seam

that horizontally encircles the external edge of the upper lid part and the external edge of the lower base part, and for closing the side-wall blank panel are welded together by way of a weld seam that runs vertically from top to bottom in the center of the rear wall, wherein a weld waste running vertically from top to bottom up to the wall recess, for removing excess film portion above the wall recess, is provided in the center of the front wall. In the production of inliners having a weld waste, the weld seam of the weld waste advantageously does not run through the upper and rearward wall part of the wall recess of the inliner. The position of the welded annular-disk-shaped flange periphery of the flexible inliner retrieval connector is then also free from a vertical weld seam running therethrough.

Surprisingly, in the inliner according to the invention, the length of the upper horizontal weld seam is configured so as to be shorter than the length of the lower horizontal weld seam, or the upper weld seam circumference of the upper lid part is configured so as to be shorter than the lower weld seam circumference of the lower base part, and the front-side vertical weld seam of the side-wall blank panel is configured so as to be longer than the height of the inliner cuboid. This is enabled by integrating the area portions for the two lateral wall parts and for the upper and the rearward wall part of the wall recess of the inliner into the vertically encircling side-wall blank panel. This indeed necessitates somewhat more cutting waste in terms of film material, and a curved weld seam in the upper and rearward wall part of the wall recess, but this does save complex welding of four individual small wall parts of the wall recess.

According to one particularly preferred process-technology related embodiment of the invention it is provided that the inliner after insertion and welding to the rigid filling connector and retrieval connector of the plastics-material internal container is inflated using compressed air, and excess air is removed without residue by vacuum pumps from the intermediate space between the external surface of the inliner

and the internal surface of the plastics-material internal container until no air and no intermediate space remains between the inliner and the plastics-material internal container such that a stable vacuum is set, said vacuum, upon gas-tight closure
5 of the container opening by way of which the excess air has been evacuated, being durably maintained during the entire intended use of the pallet container until the next replacement of the used inliner. This extraordinary handling friendliness of the pallet containers according to the invention is achieved in that
10 the flexible inliner by way of the upper filling connector thereof is welded in a materially integral manner to the upper filling connector of the rigid plastics-material internal container, and by way of the lower thin-walled retrieval connector thereof is welded in a materially integral manner to
15 the lower retrieval connector of the rigid plastics-material internal container, in each case in a gas-tight and liquid-tight manner, while the entire external surface of the inserted inliner is operatively connected to the entire internal surface of the plastics-material internal container and is connected to
20 the latter in a force-fitting manner. On account thereof it is precluded with utmost reliability that creases continue to be able to be formed in front of the lower retrieval connector in the inliner. The inliner sits like a second skin in the plastics-material internal container, so to speak. In order to enable
25 vacuum pumping, an additional container opening may be disposed at any suitable location in the upper base. The container opening is preferably embodied as a 2-inch spout opening, which is closable in a gas-tight and liquid-tight manner by way of a 2-inch spout plug, preferably having an inbuilt one-way valve. A
30 vacuum/compressed-air pump is connected to the container opening on demand.

The invention will be explained and described in more detail hereunder by means of an exemplary embodiment that is
35 schematically illustrated in the drawings.

In the drawings:

fig. 1 shows a front view of an IBC having an inserted inliner according to the invention;

5 fig. 2 shows a perspective view of the inserted inliner according to the invention;

fig. 3 shows a plan view of an upper-base blank panel of the inliner;

10 fig. 4 shows a plan view of a vertical wall blank panel of the inliner;

fig. 5 shows a plan view of a lower-base blank panel of the inliner; and

15

fig. 6 shows a perspective view of a partial section around the region of the upper filling opening of the plastics-material internal container; and

20 fig. 7 shows a perspective view of a partial section around the region of the lower retrieval opening of the plastics-material internal container.

A pallet container (= IBC) for storing and for transporting in particular hazardous liquid or free-flowing filling materials is identified by the reference sign 10 in fig. 1. For employment, or for use, respectively, in the context of hazardous filling materials, the pallet container 10 meets particular testing criteria, and is provided with a respective official
25 classification. In an embodiment for a filling material volume of approx. 1000 l, the pallet container 10 has standardized dimensions, having a length of approx. 1200 mm, a width of approx. 1000 mm, and a height of approx. 1151 mm. The salient elements of the pallet container 10 are composed of a thin-
30 walled rigid internal container 12 that is produced by the blow-molding method from a thermoplastic plastics material, of a tubular lattice frame 14 that as a supporting jacket tightly encloses the plastics-material internal container 12, and of a

base pallet 16 on which the plastics-material internal container 12 bears and to which the tubular lattice frame 14 is fixedly connected. The external tubular lattice frame 14 is composed of welded-together horizontal and vertical tubular bars 18, 20. In order for a closed lattice cage to be obtained as an external container, the horizontal tubular bars 18 that run in an annular encircling manner each are fixedly interconnected at a connection point. The base pallet 16 in the illustrated version is configured as a composite pallet having an upper steel-sheet support plate, having a tubular steel support frame disposed therebelow, and having plastics-material corner and central feet. A labeling plate 22 from thin steel sheet, for identification of the respective liquid filling material, is fixed on the front side of the tubular lattice frame 14. A retrieval fitting 24 for retrieving the liquid filling material is connected in the center of the base of the plastics-material internal container 12.

In a manner corresponding to the dimensions of the pallet container 10, the plastics-material internal container 12 has two longer side walls, a shorter rear wall, a shorter front wall, an upper base having a closable filling connector 30, and a container base, wherein on the base side in the center of the front wall a lower retrieval region having a protective-housing-shaped molding, directed inward toward the inside of the plastics-material internal container 12, for disposing the closable retrieval fitting 24 in a protected and recessed manner is provided. In order for the rigid plastics-material internal container 12 to be protected against contamination by the filled filling material, and in order for multiple reuse of the valuable internal container to be enabled, a thin-walled likewise cuboid-shaped flexible inliner 28, or a film bag, according to a previous designation, is inserted into the rigid plastics-material internal container 12 prior to each new filling of the pallet container 10, which inliner 28 is connected at the top to the filling connector 30 and at the bottom to the retrieval connector 32 of the rigid plastics-material internal container 12.

This cuboid-shaped flexible inliner 28 according to the present invention is schematically illustrated per se (without the enclosing plastics-material internal container 12) in fig. 2.

5 As opposed to the rigid plastics-material internal container 12 which during handling thereof in any case remains dimensionally stable, the inliner 28 by virtue of the thin-wall construction thereof, is not dimensionally stable per se, but is very flexible, resilient, and adaptable. The wall thickness of the

10 usually multi-layered inliner composite film is approx. 100 - 150 μm , having a mass-per-unit-area of approx. 100 - 150 g/m²; this results in a material weight of approx. 0.7 - 1.3 kg for a 1000 l inliner bag. The inliners employed are typically produced from a multi-layered plastics-material

15 composite film. Herein, the wafer-thin composite layers may be composed of various materials such as, for example, HDPE or LDPE/EVOH/PET/PA/bonding agents/SiO_x, and/or be provided with a glass-fiber or woven-fabric reinforcement. Depending on the type of application, the composite film is equipped with barrier

20 layers against the diffusion of hydrocarbons, oxygen, or water vapor, or with an aseptic antibacterial coating, or a vapor-deposited metal foil containing silver or aluminum.

According to the present invention, the cuboid-shaped flexible

25 inliner 28 is distinguished in that the latter in the forward lower retrieval region has a wall recess 24, directed inward and adaptable so as to correspond with the protective-housing-shaped molding 26 of the rigid plastics-material container 12, having two lateral wall parts 36, an upper wall part 38, and a

30 rearward wall part 40 having a flexible retrieval connector 42 molded thereon, which make it possible to configure the adapted wall recess so as to bear completely in an exact fit on the internal surface of the molding 26 that protrudes in a protective-housing manner into the interior of the rigid

35 plastics-material container 12. For the sake of improved clarity, this wall recess 34 of the inliner 28 herein is illustrated as being very box-shaped. Of course, the walls and wall transitions may also be configured so as to be heavily

rounded, flattened and/or mutually transitioning, but in any case so as to be adapted to the respective protective-housing-shaped molding 26 of the rigid plastics-material internal container 12.

5

The flexible inliner 28 for a usual 1000 l pallet container has a cuboid-shaped design, having a length LI of approx. 1150 - 1190 mm, a width BI of approx. 950 - 990 mm, and a height HI of approx. 950 - 1050 mm. The length measurements should be exactly adhered to within a positive/negative tolerance (+/-) of 2 mm. In terms of production technology, the cuboid-shaped flexible inliner 28 is welded together from three blank panels. These three blank panels are composed of an upper horizontal lid part 46, having the centric flexible filling connector 44 as can be seen in fig. 3, a lower horizontal base part 48, having a clearance 50 that corresponds to the base shape of the wall recess 34, as can be seen in fig. 5, and a vertically encircling side-wall blank panel 52, having area portions for the two lateral wall parts 36, and the upper wall part 38 and the rearward wall part 40 of the wall recess 34 of the inliner 28, as is illustrated in fig. 4. The three blank panels are welded together by way of two weld seams 54, 56 that horizontally encircle the external edge of the upper lid part 46 and the external edge of the lower base part 48, and for closing the side-wall blank panel 52 are welded together by way of a weld seam 58 that runs vertically from top to bottom in the center of the front wall and through the center of the wall recess 34.

After completion of the inliner 28 from the three blank panels, the length of the upper horizontal weld seam 54, that is to say the upper weld seam circumference SNUo is approx. 4100 - 4150 mm, the length of the lower horizontal weld seam 56, that is to say the lower weld seam circumference SNUu is approx. 4265 - 4310 mm, and the front-side vertical weld seam 58 is approx. 1050 - 1100 mm for an inliner for a filling material volume of approx. 1000 l.

The side-wall blank panel 52 illustrated in fig. 4 is laid up

in a doubled manner and at the bottom has two triangular wedges of $c = 320 \text{ mm} \times a = 70 \text{ mm}$; a double strip of $70 \times 875 \text{ mm}$ is "waste-welded" above the recess 34. The start of the weld waste is located at a height HAA of 125.5 mm from the lower weld seam.

5 The weld waste from there initially runs in an oblique manner, rising at an acute angle, until said weld waste reaches the full width of 70mm at a height HvBA of 250 mm from the lower weld seam. This weld waste 60 is removed and only represents cutting waste. However, this is necessary in order for the curved contour
10 of the molding 26 in the blow-molded plastics-material internal container 12 to be mimicked. However, a tubular film having a constant height of 1070 mm plus 2 x the weld-seam periphery may be used too. This would result in a simpler blank geometry, with approximately identical consumption of material due to weld
15 waste. Once the weld waste 60 has been performed in the vertical wall blank 52, or in the tubular film, respectively, while configuring the curved inliner wall recess 34, the flexible retrieval connector 42 by way of a smaller welded annular flange 66 is fixedly welded onto the rearward wall part 40, and a
20 corresponding passage opening is cut out. Likewise, the upper flexible filling connector 44 is by way of a welded annular flange 68 that is larger in terms of diameter is centrically and fixedly welded onto the upper horizontal lid part 46, and a corresponding larger passage opening is cut out. Thereafter, the
25 side-wall blank panel 54 including the flexible retrieval connector 42 by way of the upper weld seam 54 is then welded to the lid part 46 including the flexible filling connector 44, and the base part 48 by way of the lower weld seam 56 in a final operative step is welded to the finished inliner.

30

Prior to the inliner 28 being inserted into the rigid plastics-material internal container 12, the upper filling connector 44 of the flexible inliner should have a diameter of approx. 145 mm or 225 mm, and a length of approx. 300 mm, and the lower flexible
35 retrieval connector 44 should have a diameter of approx. 2", 3", or 145 mm, and a length of at least 100 mm. After insertion of the inliner 28 into the rigid plastics-material internal container 12, the filling connector (44) and the retrieval

connector (42) of the flexible inliner 28 each are folded over the filling connector (30) and the retrieval connector (32) of the rigid plastics-material internal container 12, push-fitted there over, welded thereto in a tensile-force-and tension-force-free manner, and then cut to the appropriate length.

The filling region of the plastics-material internal container 12 having the molded filling connector 30 and the filling connector 44, welded thereto, of the flexible inliner 28 can be seen in a fragmented illustration in fig. 6. The flexible filling connector 44 by way of a narrow flange periphery 68 is on the one hand pulled taut on the upper side of the inliner 28 and upwardly on the external side, aligned to the correct positioning according to a "circular" marking (not visible), then push-fitted over the rigid filling connector 30, and by way of a larger annular weld seam 72 welded in a rotationally secure and gas-tight and liquid-tight manner on the internal side just below the end side of the rigid filling connector 30, whereupon the excess tubular piece of the flexible inliner filling connector 44 is cut off so as to be flush. In order to allow excess air to escape from the intermediate space between the inliner 28 and the plastics-material internal container 12 during inflation of the inliner, and/or in order for vacuum pumping from this intermediate space to be enabled, an additional container opening 64 is disposed at any suitable location in the upper base. The container opening 64 is preferably embodied as a 2-inch spout opening which is closable in a gas-tight and liquid-tight manner by way of a 2-inch spout plug, preferably having an inbuilt one-way valve. A vacuum/compressed-air pump is connected to the container opening 64 on demand.

Finally, the retrieval region of the plastics-material internal container 12 having the molded rigid retrieval connector 32 and the retrieval connector 42, welded thereto on the end side, of the flexible inliner 28 can be seen in a fragmented illustration in fig. 7.

For improved understanding, a rectangle has been cut out of the wall of the rigid plastics-material internal container 12 herein, wherein the section line runs through the retrieval connector 32, through the molded protective housing 26, and
5 through a small piece of the front wall of the plastics-material internal container 12 such that the inliner 28 bearing thereon, having a curved wall recess 34, identified by a multiplicity of vertical lines, can be seen in the cut-out rectangle. The hidden left-hand rear part of the wall recess 34 is furthermore also
10 indicated by dashed lines.

It can be clearly seen in the rectangular cut-out that the flexible retrieval connector 42 on the inside or on the rear side, respectively, by way of a narrow welded annular flange 66
15 is welded onto the rearward wall part 40 of the wall recess 34 of the inliner 28, and on the external side by way of a smaller end weld seam 70 is welded onto the end face of the rigid retrieval connector 32, in each case in a gas-tight and liquid-tight manner. It is important herein that the inliner 28 by way
20 of the shape-adapted wall recess 34 thereof bears on the internal surface of the molding 26 of the rigid internal container 12 in a fully planar manner, like a second skin, as can be seen in fig. 7, such that no intermediate spaces or cavities, respectively, whatsoever may remain therebetween, as has been
25 the case to date with known IBCs having usual inliners.

A substantial advantage of the second-skin inliner lies in that the film bag does not require any high tensile strength in relation to fluttering during filling or to-and-fro swashing of
30 the liquid filling material during transportation movements, since no movement whatsoever of the inliner film material is performed herein, because the latter bears fixedly and durably on the internal side of the plastics-material internal container 12, as if adhesively bonded, so to speak. On account thereof,
35 rupture-sensitive film materials having advanced barrier properties may also be used now.

The upper flexible filling connector 44 and the lower flexible

retrieval connector 42 of the flexible inliner 28 are expediently produced from the same film material, having the same barrier properties, as the film material of the flexible inliner 28. Known inliners are often provided with filling connectors and retrieval connectors, having an integrally molded flange periphery for welding to the multi-layered composite film material of the inliner, that are prefabricated from thermoplastic plastics-material such as LDPE by the injection-molding method. These filling connectors and retrieval connectors are in most instances also configured so as to be somewhat thicker and more rigid. However, said connectors per se do not have any barrier properties. Inliners of this type, having filling connectors/retrieval connectors that are produced by the injection-molding method are not suitable for oxygen-sensitive liquids, such as fragrances for the production of perfume, for example, or additives for the production of foodstuffs. By contrast, in the case of the inliner 28 according to the invention, the filling connectors/retrieval connectors (42, 44) are equipped with the same barrier properties as the inliner 28 per se, and disadvantageous diffusion procedures that penetrate the plastics material are precluded.

Conclusion:

When an inliner according to the invention is used, only the contaminated inliner has to be disposed of after use in order for reconditioning to be achieved, said inliner, depending on the film thickness, for a 1000 liter IBC having a weight of only approx. 0.7 to 1.3 kg in terms of the plastics-material mass, excluding the filling-material contaminations, and a new inliner has to be inserted in order for the IBC to be reused. In the case of a replacement of the rigid internal container having a weight of approx. 14 kg, some EUR 35 in terms of production costs would have to be absorbed, while the replacement of an inliner accounts for costs of approx. EUR 15. The present invention thus offers a solution for the reuse of used IBCs that functions in flawless a manner, is cost-effective, and is material-preserving.

List of reference signs

	10	Pallet container
	12	Plastics-material internal container
5	14	Tubular lattice frame
	16	Base pallet
	18	Horizontal tubular bars (12)
	20	Vertical tubular bars (12)
	22	Labeling plate
10	24	Retrieval fitting
	26	Molding (12)
	28	Inliner (film bag)
	30	Filling connector (12) rigid
	32	Retrieval connector rigid (12)
15	34	Inliner recess (28)
	36	Lateral wall parts (34, 28)
	38	Upper wall part (34, 28)
	40	Rearward wall part (34, 28)
	42	Flexible retrieval connector (28)
20	44	Flexible filling connector (28)
	46	Upper horizontal lid part (28)
	48	Lower horizontal lid part (28)
	50	Clearance (28, 34)
	52	Side-wall blank panel (28)
25	54	Upper horizontal weld seam (46, 52)
	56	Lower horizontal weld seam (48, 52)
	58	Front vertical weld seam (52)
	60	Weld waste (52)
	62	free
30	64	Upper 2" container opening vacuum
	66	Welded annular flange (42, 40) small
	68	Welded annular flange (44, 28) large
	70	End-side weld seam (24, 42) small
	72	Annular weld seam (30, 44) large
35	LI	Length of inliner (28)
	BI	Width of inliner (28)
	SNUo	Weld seam circumference top
	SNUu	Weld seam circumference bottom

	c	Long side triangular wedge
	a	Short side triangular wedge
	BA	Width weld waste (60)
	HAA	Height of start of weld waste (60)
5	HvBA	Height of full width of weld waste (60)

Patentkrav

1. Kubusformet fleksibel indvendig beklædning (28) af kunststoffolie med øverste påfyldningsstuds (44) og nederste udtagningsstuds (42) til en pallecontainer (10) til lagring og transport af påfyldningsgods, der er flydende eller har flydeevne, med en tyndvægget stiv indvendig beholder (12) af termoplastisk kunststof, med en rørgitterramme (14), der som støttekappe tæt omslutter den indvendige kunststofbeholder (12), af med hinanden sammensvejsede horisontale og vertikale rørstave (18, 20), og med en rektangulær bundpalle (16), på hvilken den indvendige kunststofbeholder (12) hviler, og med hvilken rørgitterrammen (14) er fast forbundet, hvor den kubusformede indvendige kunststofbeholder (12) har to længere sidevægge, en kortere bagvæg, en kortere forvæg, et loft med lukbar påfyldningsstuds (30) og en beholderbund, hvor der på bundsiden i midten af forvæggen er indrettet et nederste udtagningsområde med en indadtil i den indvendige kunststofbeholder (12) rettet beskyttelseshusformet indformning (26) med henblik på den beskyttede tilbageskudte anbringelse af et lukbart udtagningsarmatur (24),
- kendetegnet ved, at
- den kubusformede fleksible indvendige beklædning (28) i det nederste udtagningsområde har en indadtil rettet vægindbugtning (34), der kan tilsvarende tilpasses til den beskyttelseshusformede indformning (26) i den stive indvendige kunststofbeholder (12), med to sideværts vægdele (36), en øverste vægdel (38) og en bagudvendt vægdel (40) med derpå tildannet fleksibel udtagningsstuds (42), hvilke vægdele gør det muligt at udforme den vægindbugtning (34), der er tilpasset til anlæg med fuldstændig pasning mod den indre overflade af den indformning (26), der rager beskyttelseshusformet ind i den stive indvendige kunststofbeholders (12) indre.
2. Indvendig beklædning ifølge krav 1,
- kendetegnet ved, at
- den kubusformede fleksible indvendige beklædning (28) er sammensvejset af tre tilskårne dele og omfatter en øverste

horisontal lågdels (46) med en fleksibel påfyldningsstud (44) centralt i midten, en nederste horisontal bunddel (48) med en udsparing (50), der svarer til vægindbugtningens (34) bundform, og en vertikalt omløbende tilskåret sidevægsdel (52) med
5 fladeandele til de to sideværts vægdele (36), den øverste (38) og den bagudvendte vægdels (40), af den indvendige beklædnings (28) vægindbugtning (34).

3. Indvendig beklædning ifølge krav 1 eller 2,
10 kendetegnet ved, at
de tre tilskårne dele med hver især en på den øverste lågdels (46) yderkant og på den nederste bunddels (48) yderkant horisontalt omløbende øverste og nederste svejssesøm (54, 56) og med henblik på lukning af den tilskårne sidevægsdel (52) er
15 sammensvejset med en i forvæggen midt og gennem vægindbugtningens (34) midte vertikalt ovenfra og nedad forløbende svejssesøm (58).

4. Indvendig beklædning ifølge krav 1 eller 2,
20 kendetegnet ved, at
de tre tilskårne dele med hver især en på den øverste lågdels (46) yderkant og på den nederste bunddels (48) yderkant horisontalt omløbende øverste og nederste svejssesøm (54, 56) og med henblik på lukning af den tilskårne sidevægsdel (52) er
25 sammensvejset med en i bagvæggen midt vertikalt ovenfra og nedad forløbende svejssesøm, hvor der i forvæggen midt er indrettet en afsvejsning (60), der forløber vertikalt ovenfra og nedad frem til vægindbugtningen (34).

30 5. Indvendig beklædning ifølge krav 1, 2, 3 eller 4, kendetegnet ved, at
den øverste horisontale svejssesøms (54) længde er kortere end den nederste horisontale svejssesøms (56) længde, henholdsvis den øverste lågdels (46) øverste svejssesøms omfang er kortere end den
35 nederste bunddels (48) nederste svejssesøms omfang, og den tilskårne sidevægsdels (52) vertikale svejssesøm (58) på forsiden er længere end højden af den indvendige beklædnings kubus.

6. Indvendig beklædning ifølge krav 1, 2, 3, 4 eller 5, kendetegnet ved, at

ved en indvendig beklædning (28) med 1000 l påfyldningsgodsvolumen er længden af den øverste horisontale svejsesøm (54), dvs. det øverste svejsesømsomfang (SNUo) 4100 - 4150 mm, længden af den nederste horisontale svejsesøm (56), dvs. det nederste svejsesømsomfang (SNUu) ca. 4265 - 4310 mm, og den vertikale svejsesøm på forsiden (58) er udformet ca. 800 - 1100 mm lang.

10

7. Indvendig beklædning ifølge et af de foregående krav 1 til 6,

kendetegnet ved, at

den fleksible indvendige beklædning (28) til et påfyldningsgodsvolumen på ca. 1000 l har en kubusformet form med en længde (LI) på 1150 - 1190 mm, en bredde (BI) på 950 - 1050 mm og en højde (HI) på 950 - 1050 mm, og dens væg er sammensvejset af tre tilskårne dele.

8. Indvendig beklædning ifølge et af de foregående krav 1 til 7,

kendetegnet ved, at

den fleksible indvendige beklædning (28) har en øverste påfyldningsstuds (44) med en diameter på ca. 145 mm eller 225 mm og en længde på 290 - 310 mm samt en nederste fleksibel udtagningsstuds (42) med en diameter på ca. 2" eller 3" eller 145 mm og en længde på i det mindste 100 mm.

9. Indvendig beklædning ifølge et af de foregående krav 1 til 10,

kendetegnet ved, at den fleksible indvendige beklædning (28) med sin øverste påfyldningsstuds (44) er påsvejset stofsluttende på den stive indvendige kunststofbeholders (12) øverste påfyldningsstuds (30) og med sin nederste fleksible udtagningsstuds (42) stofsluttende på den stive indvendige kunststofbeholders (12) nederste udtagningsstuds (32), hver gang gas- og væsketæt, mens hele den ydre overflade af den indsatte indvendige beklædning (28) står i virksom kontakt med hele den

35

indre overflade af den indvendige kunststofbeholder (12) og er kraftssluttende forbundet med denne overflade.

10. Indvendig beklædning ifølge et af de foregående krav 1 til 9,
kendetegnet ved, at
den fleksible indvendige beklædnings (28) øverste fleksible påfyldningsstuds (44) og nederste fleksible udtagningsstuds (42) er fremstillet som rørfolie af det samme flerlags komposit-foliemateriale med de samme barriereegenskaber som den fleksible indvendige beklædnings (28) flerlags komposit-foliemateriale.

11. Pallecontainer (10) til lagring og transport af påfyldningsgods, der er flydende eller har flydeevne, med en tyndvægget stiv indvendig beholder (12) af termoplastisk kunststof, med en rørgitterramme (14), der som støttekappe tæt omslutter den indvendige kunststofbeholder (12), af med hinanden sammensvejsede horisontale og vertikale rørstave (18, 20) og med en rektangulær bundpalle (16), på hvilken den indvendige kunststofbeholder (12) hviler, og med hvilken rørgitterramme (14) er fast forbundet, hvor den kubusformede indvendige kunststofbeholder (12) har to længere sidevægge, en kortere bagvæg, en kortere forvæg, et loft med lukbar påfyldningsstuds (30) og en beholderbund, hvor der på bundsiden i midten af forvæggen er indrettet et nederste udtagningsområde med en indadtil i den indvendige kunststofbeholder (12) rettet beskyttelseshusformet indformning (26) med henblik på den beskyttede tilbageskudte anbringelse af et lukbart udtagningsarmatur (24), og hvor en kubusformet fleksibel indvendig beklædning (28) af kunststoffolie med øverste påfyldningsstuds (44) og nederste udtagningsstuds (42) ifølge et af de foregående krav 1 til 12 er indsat i den stive indvendige beholder (12),
kendetegnet ved, at
den kubusformede fleksible indvendige beklædning (28) i det nederste udtagningsområde har en indadtil rettet vægindbugtning (34), der er tilsvarende tilpasset til den

- beskyttelseshusformede indformning (26) i den stive indvendige kunststofbeholder (12), med to sideværts vægdele (36), en øverste vægdel (38) og en bagudvendt vægdel (40) med derpå tildannet fleksibel udtagningsstuds (42), hvilken
- 5 vægindbugtning er udformet til anlæg med fuldstændig pasning på den indre overflade af den indformning (26), der rager beskyttelseshusformet ind i den stive indvendige kunststofbeholders (12) indre.
- 10 12. Fremgangsmåde til indsætning af en ny indvendig beklædning (28) ifølge et af de foregående krav 1 til 10 i en pallecontainer ifølge krav 11,
- kendetegnet ved, at den indvendige beklædning (28) efter indsætning og sammensvejsning på den indvendige
- 15 kunststofbeholders (12) stive påfyldnings- og udtagningsstuds (30, 32) opblæses med trykluft, og der ved hjælp af vakuumpumpning fuldstændigt fjernes overskydende luft fra mellemrummet mellem den indvendige beklædnings (28) ydre overflade og den indvendige kunststofbeholders (12) indre
- 20 overflade, indtil der ikke findes luft og intet mellemrum mere mellem den indvendige beklædning (28) og den indvendige kunststofbeholder (12), således at der er indstillet et stabilt vakuum, som efter gastæt lukning af den beholderåbning, gennem hvilken den overskydende luft er blevet bortpumpet, varigt
- 25 bevares under hele pallecontainerens (10) forskriftsmæssige brug frem til den næste udskiftning af den brugte indvendige beklædning (28).

Fig. 1

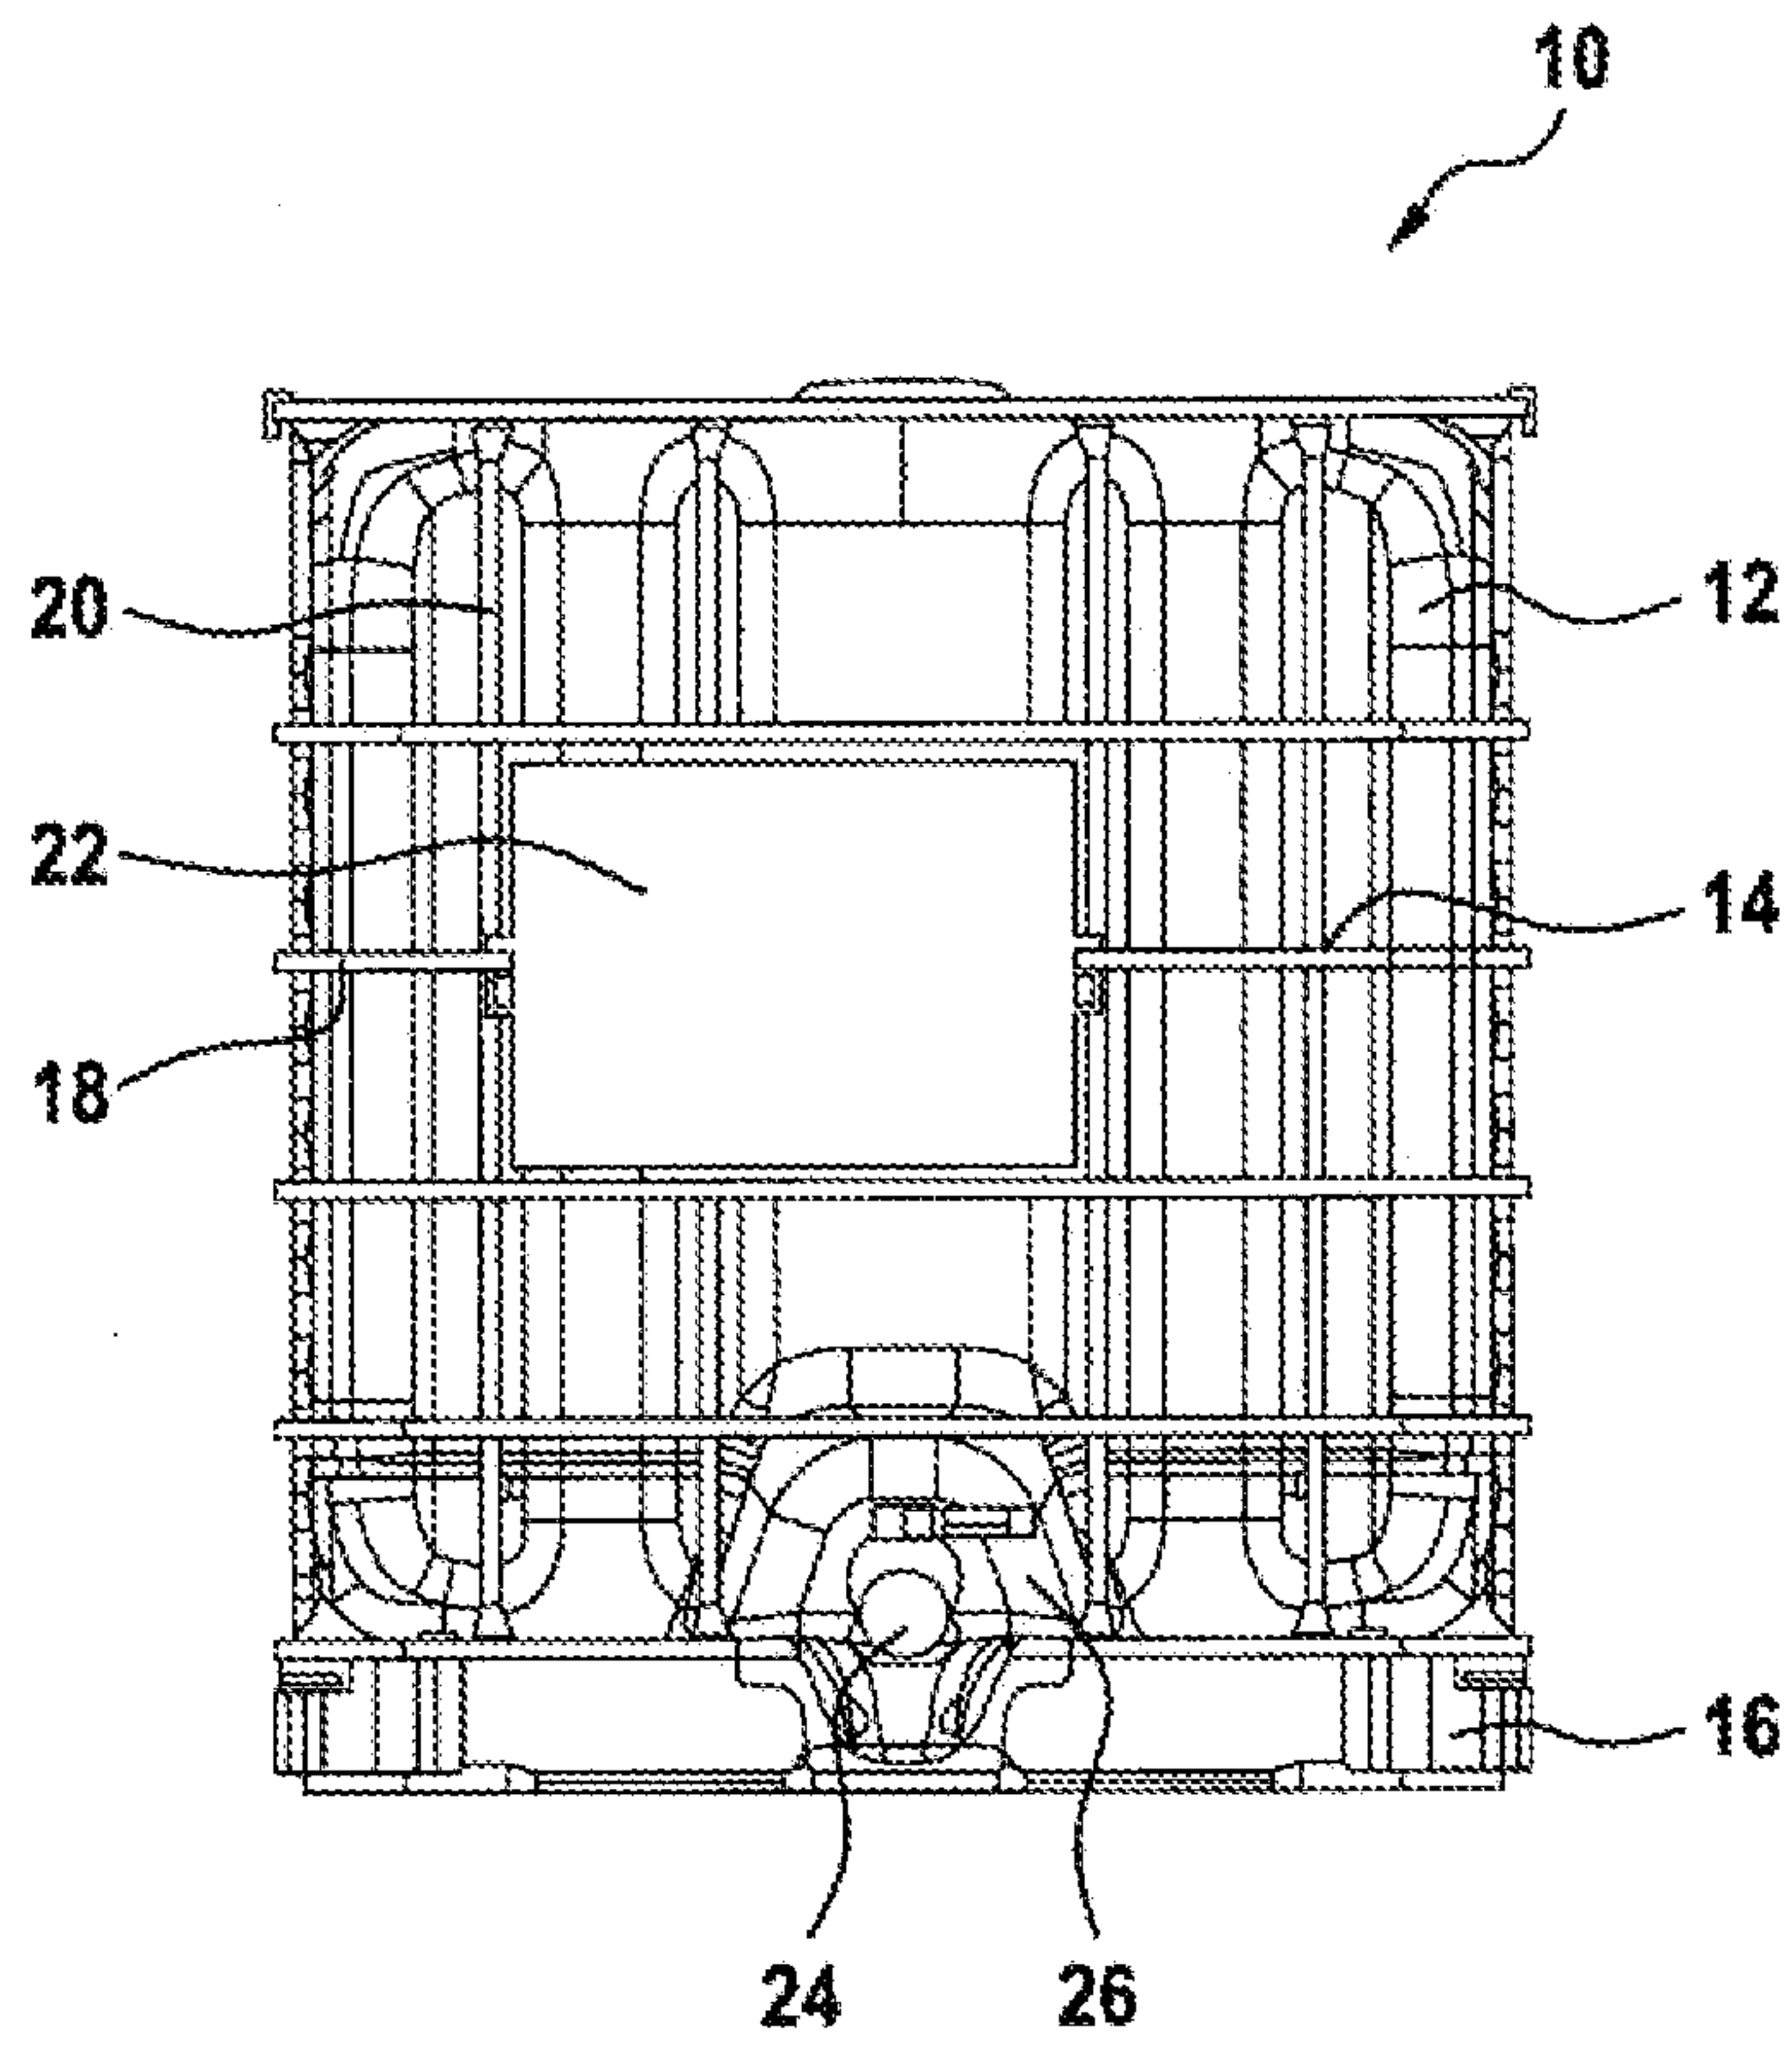


Fig. 2

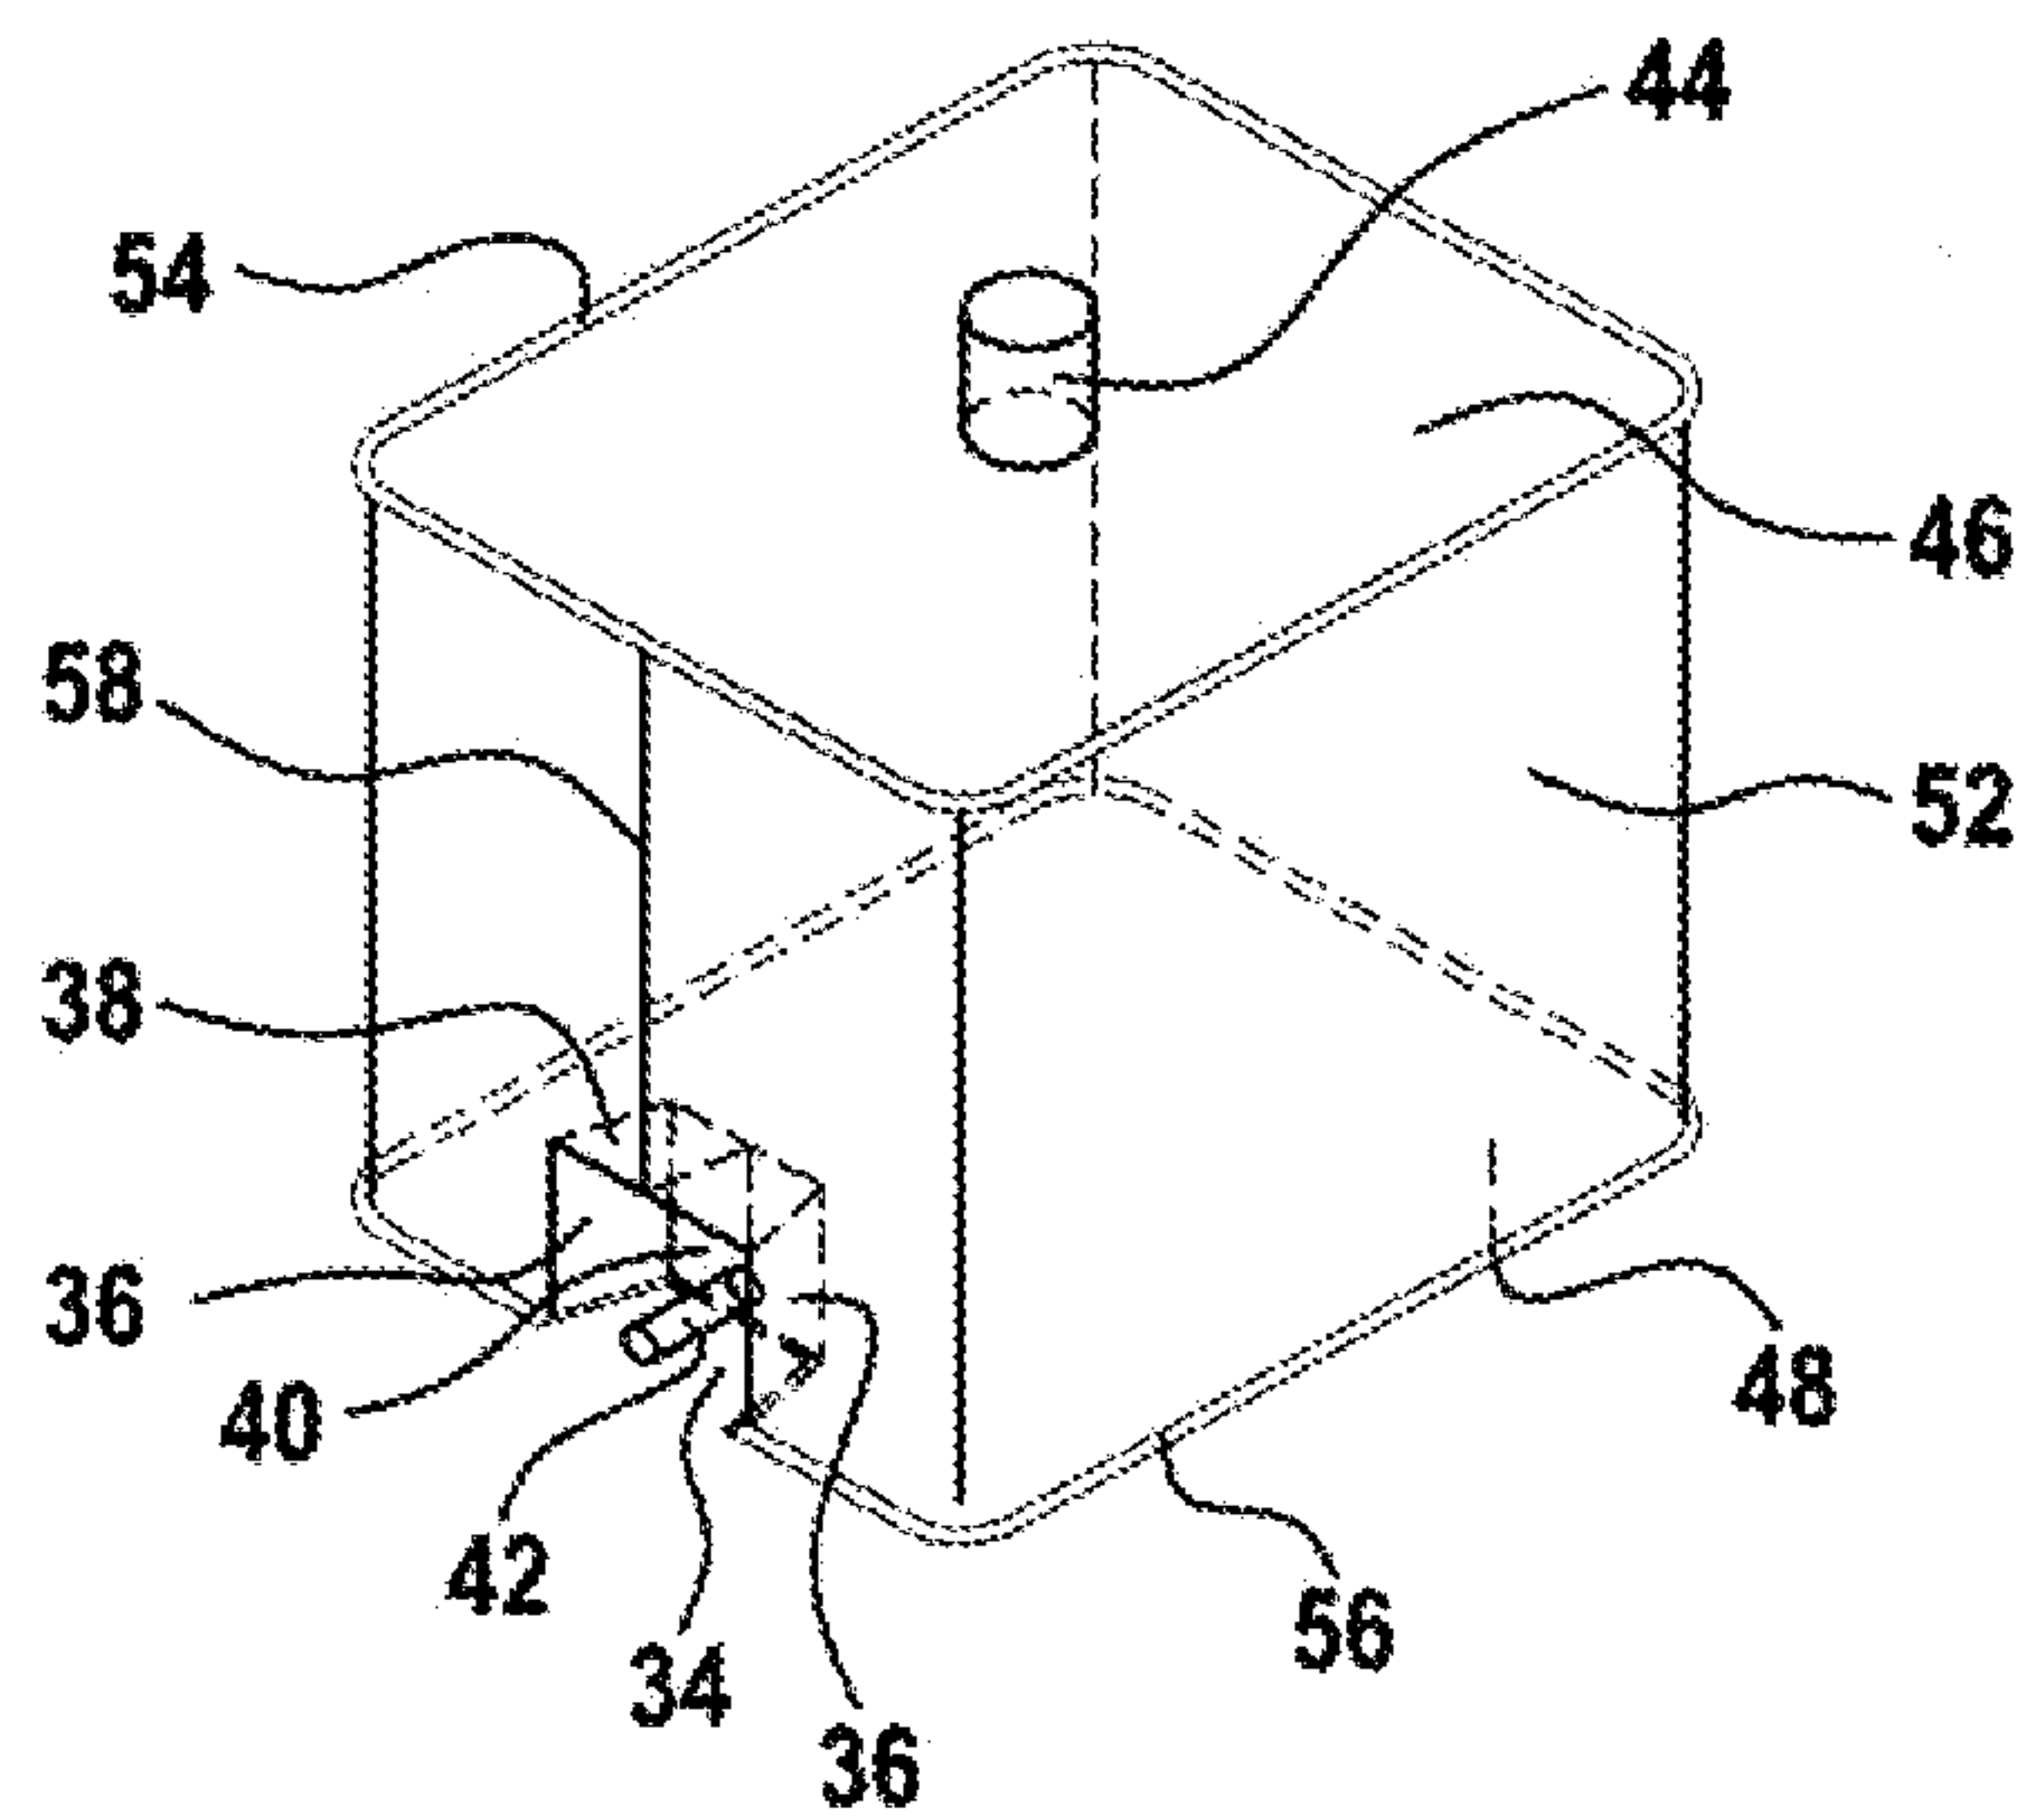


Fig. 3

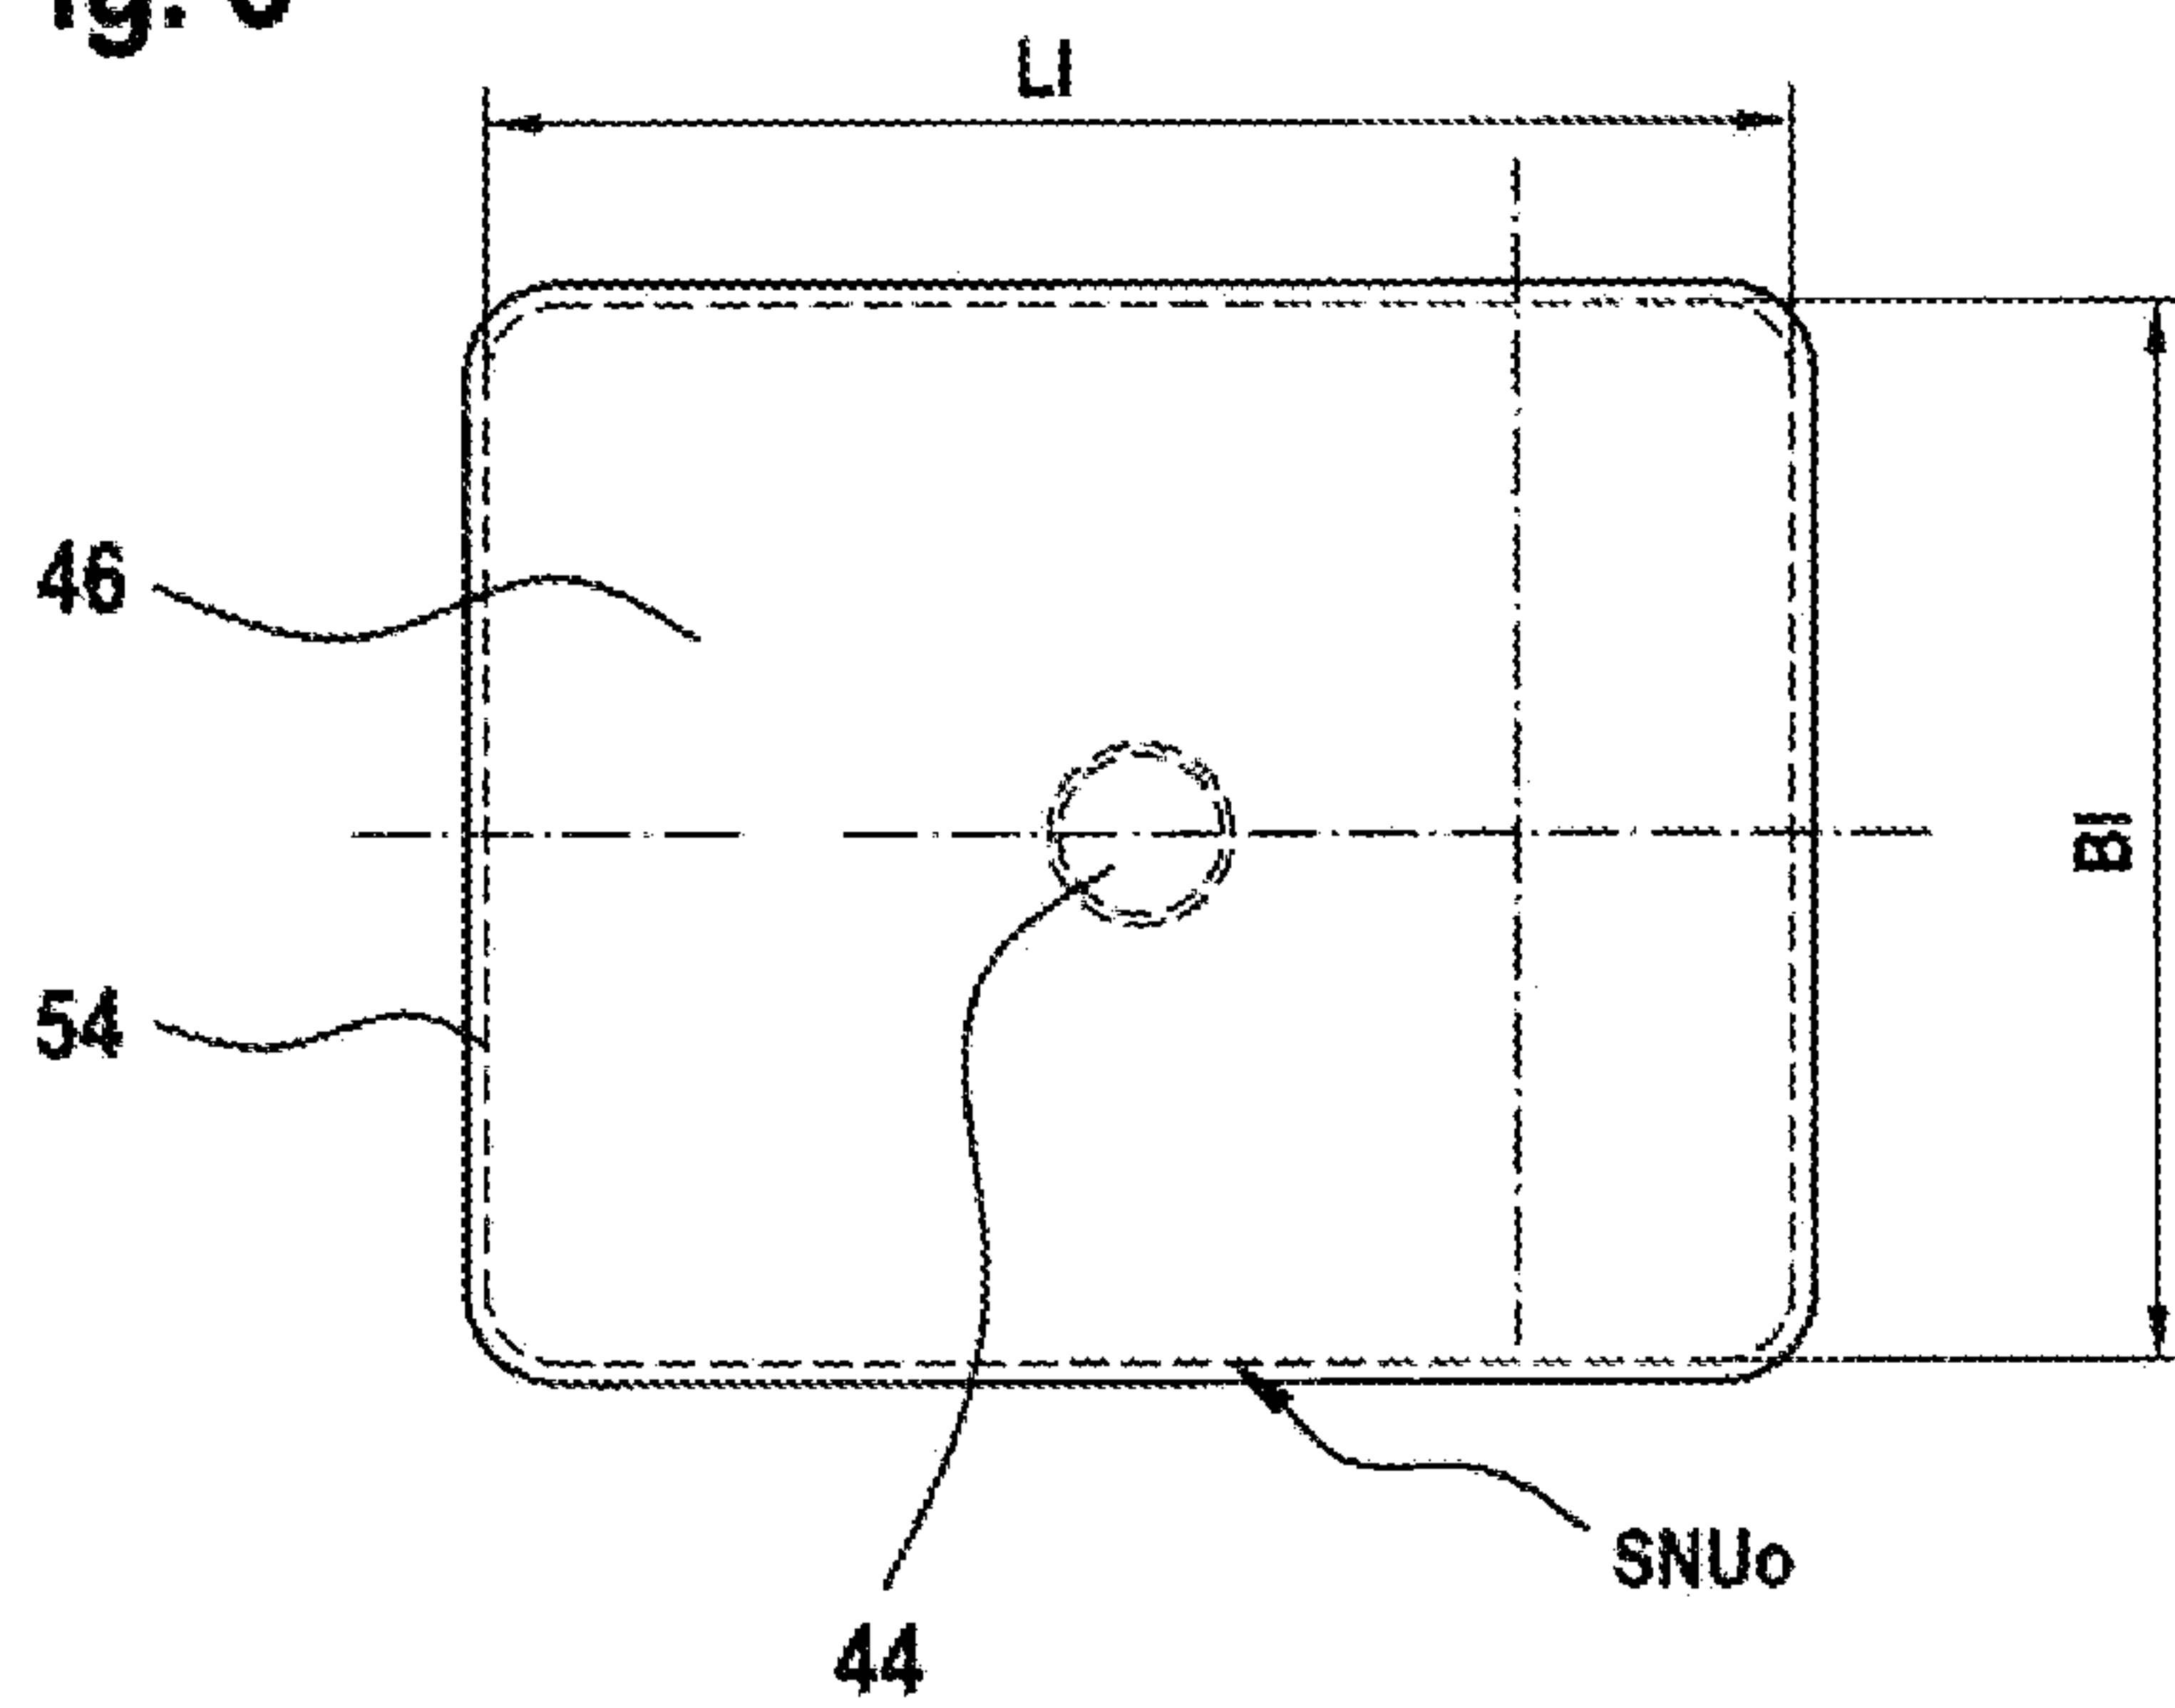


Fig. 4

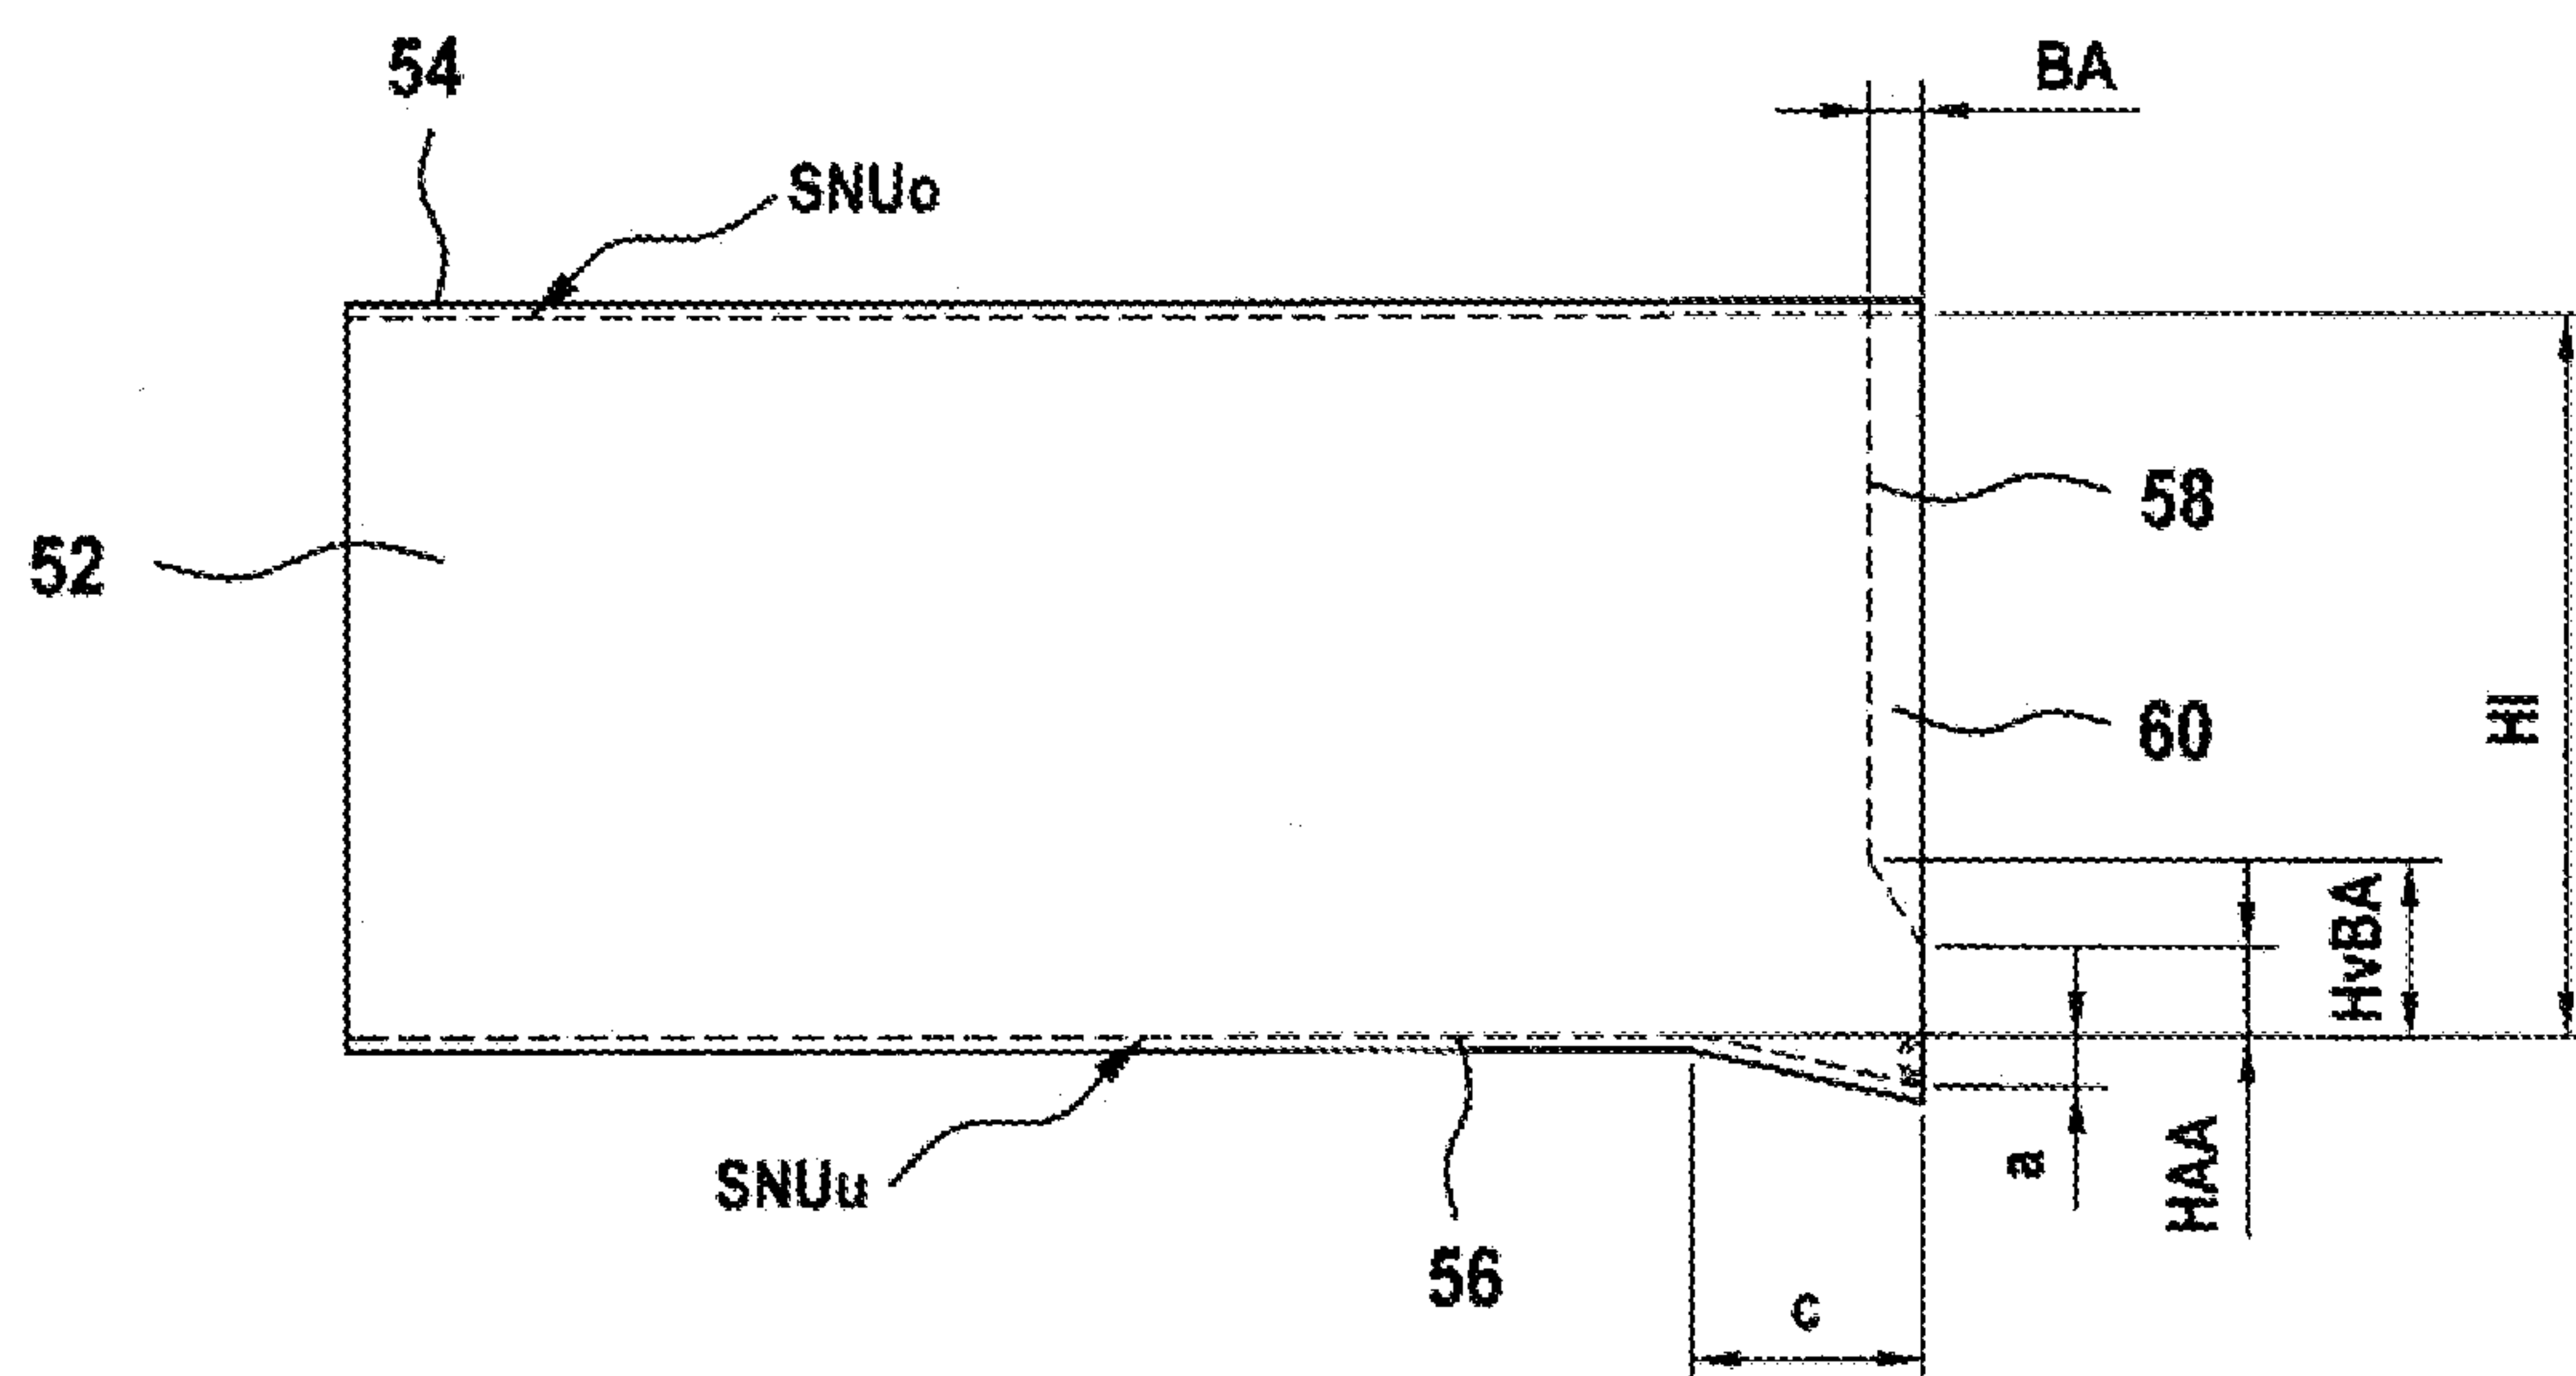


Fig. 5

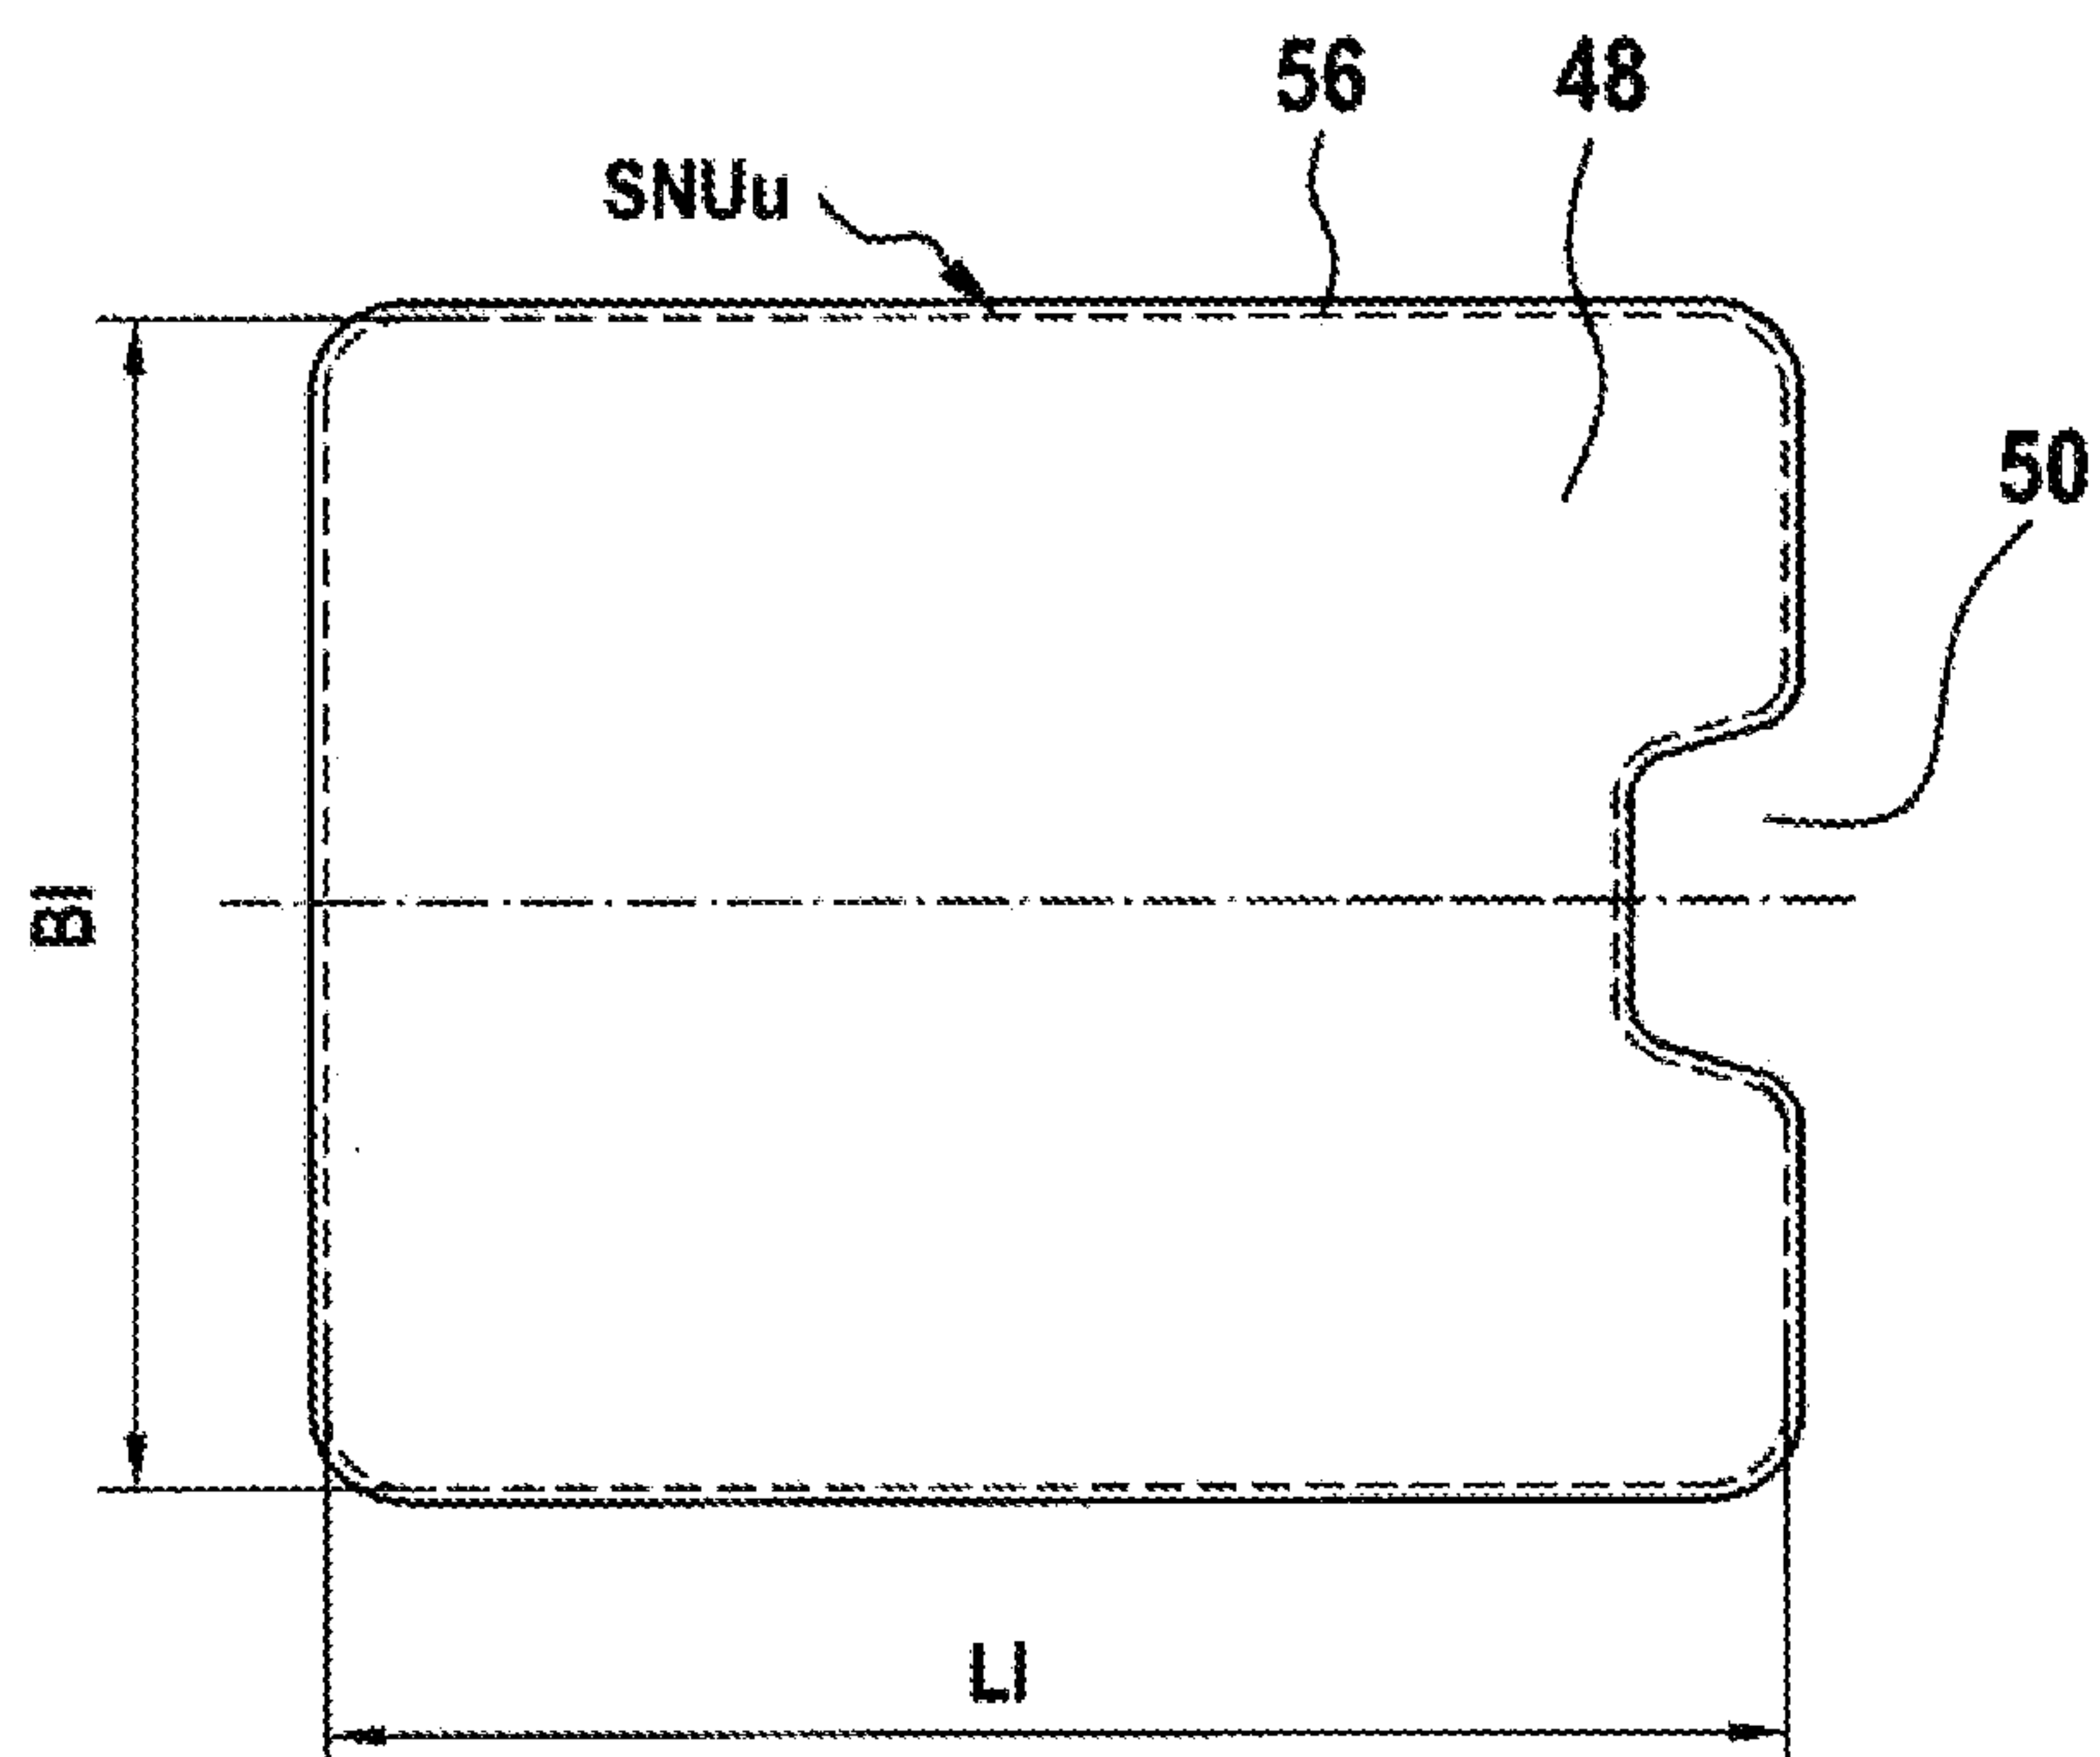


Fig. 6

