



- (51) **International Patent Classification:**
E04F 15/02 (2006.01)
- (21) **International Application Number:**
PCT/SE2013/051374
- (22) **International Filing Date:**
21 November 2013 (21.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1251322-2 22 November 2012 (22.11.2012) SE
- (71) **Applicant:** VÄLINGE FLOORING TECHNOLOGY AB [SE/SE]; Prastavagen 513, SE-263 65 Viken (SE).
- (72) **Inventor:** PERVAN, Darko; Bygatan 30, SE-263 61 Viken (SE).
- (74) **Agent:** ENGSTRAND, Ola; Valinge Innovation AB, Prastavagen 513, SE-263 65 Viken (SE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(H))

Published:

- with international search report (Art. 21(3))

(54) **Title:** MECHANICAL LOCKING SYSTEM FOR FLOOR PANELS

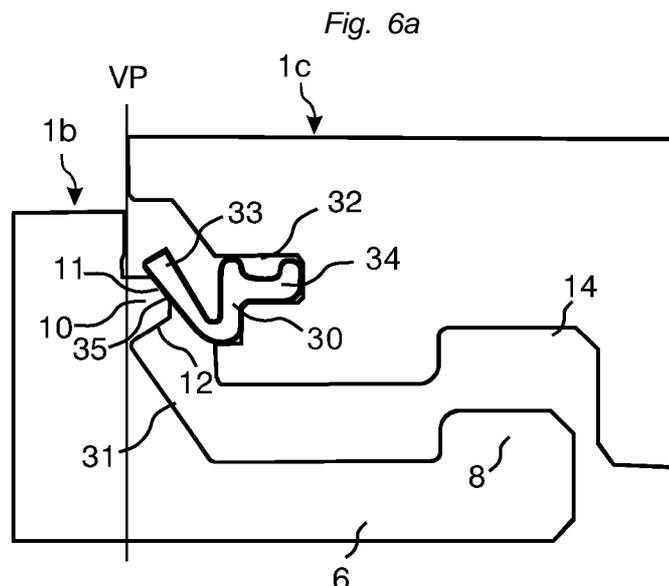

(57) **Abstract:** Floor panels (1b, 1c) provided with a mechanical locking system comprising a separate material in order to reduce snapping resistance during vertical displacement.

MECHANICAL LOCKING SYSTEM FOR FLOOR PANELS

Technical field

The invention generally relates to the field of mechanical locking systems for floor panels and building panels especially floor panels with mechanical locking systems, which may be locked by a vertical displacement.

Field of application of the invention

Embodiments of the present invention are particularly suitable for use in floating floors, which are formed of floor panels which are joined mechanically with a locking system integrated with the floor panel, i.e. mounted at the factory, that are made up of one or more upper layers of veneer, decorative laminate, powder based surfaces or decorative plastic material, an intermediate core of wood fibre based material or plastic material and preferably a lower balancing layer on the rear side of the core. The following description of known technique, problems of known systems and objects and features of the invention will therefore, as a non restrictive example, be aimed at this field of application and in particular at paper based or paper free laminate flooring formed as rectangular floor panels with long and short sides adapted to be mechanically joined on both long and short sides. The long and short sides are mainly used to simplify the description of the invention. The panels may be squared and may have more than four sides, which are not parallel or perpendicular to each other.

It should be emphasized that embodiments of the invention may be applied to any floor panel preferably at the short edges and it may be combined with all types of known locking system on the long edges, where the floor panels are adapted to be joined using a mechanical locking system connecting the long edges in a vertical and/or horizontal direction. Embodiments of the invention may also be used for joining building panels, which preferably comprise a board material, such as wall panels, ceilings, and furniture components and similar.

Background of the invention

Floating floor panels such as laminate floor panels are generally joined mechanically by means of so called mechanical locking systems. These systems comprise locking means, which lock the panels horizontally and
5 vertically on all edges.

The main advantages of floating floors with mechanical locking systems are that they are easy to install. Several versions of locking systems are use on the market and there is a continuous demand for improvements related to production costs and function.

10 Definition of some terms

In the following text, the visible surface of the installed floor panel is called "front side", while the opposite side of the floor panel, facing the sub floor, is called "rear side". The edge between the front and rear side is called "joint edge". By "horizontal plane (HP) or principal plane" is meant a plane, which
15 extends parallel to the outer part of the surface layer. Immediately juxtaposed upper parts of two adjacent joint edges of two joined floor panels together define a "vertical plane (VP)" perpendicular to the horizontal plane. By "horizontally" is meant parallel to the horizontal plane and by "vertically" parallel to the vertical plane. By "up or upwardly" is meant towards the front
20 side and by "down or downwardly" is meant towards the rear side. By "inwardly" is meant essentially horizontally towards the inner part of the panel and by "outwardly is meant essentially horizontally and away from the inner part of the panel. By "strip panel" is meant a panel comprising a strip and a locking element. By "fold panel" is meant a panel, with a locking groove
25 configured to cooperate with a locking element for horizontal locking that is adapted to be angled and displaced vertically during locking.

Known technique and problems thereof

The description of the known art below is in applicable parts also used in embodiments of the invention.

30 For mechanical joining of long sides as well as short sides in the vertical and horizontal direction several methods and locking systems may be used. One

of the most used methods is the angle-snap method and one of the most used locking systems is a system made in one piece with the core. The long sides are installed by angling. The panel is then displaced in locked position along the long side. The short sides are locked by horizontal snapping.

- 5 An alternative method is the so-called angling-angling method whereby long and short sides are locked with angling.

Recently a new and simpler method has been developed where all floor panels may be joined with just an angling of the long edges. This installation method generally referred to as "fold down" installation. An example of such a
10 known "fold down" installation method is shown in figure 18 and 19 of WO 03/016654. A problem with this method is that a flexible snap tab, arranged at an edge of a first panel, must be pressed inwardly by a sharp upper edge of an adjacent edge of a second panel. .

WO 2006/043893 (Valinge Innovation AB) figure 13d describes a fold down
15 locking system comprising a flexible tongue on the fold panel that locks against a rigid tongue formed in the edge of the adjacent strip panel. The flexible tongue has an inclined sliding surface at its outer and lower part that during folding slides against the rigid tongue and presses the flexible tongue inwardly into a sliding groove. The size of the sliding surface is limited by the
20 thickness of the flexible tongue. This thickness is not possible to increase since such an increased thickness will also increase the thickness of the displacement groove and this will have a negative impact of the strength of the locking system.

Summary of the invention

25 An objective of certain embodiments of the present invention is to provide an improved mechanical locking system, which may be locked by vertical folding, comprising a flexible tongue with an outer flexible snap tab connected to an edge of a fold panel

More specifically the object is to provide a vertical snap locking system, which
30 creates less snapping resistance during locking.

The above objects of certain embodiments of the invention are achieved wholly or partly by a mechanical locking systems and floor panels, as described herein. Further embodiments of the invention are evident from the claims, description and drawings.

- 5 A first aspect of the invention comprises a set of floor panels that are mechanically connectable to each other at a first and a second edge of a first and a second floor panel respectively, wherein upper edges of said first and second edge in a connected state define a vertical plane. The first edge is provided with a protruding tongue formed in one piece with the core of the
- 10 first floor panel. Said protruding tongue extends beyond the vertical plane. The second edge is provided with a separate flexible tongue comprising an inner part, which is connected to a holding groove at the second edge, and an outer flexible snap tab that extends upwardly and in the connected state into a cavity under the protruding tongue for locking the first and the second floor
- 15 panel to each other in a vertical direction. The first edge comprises a strip with a locking element. The second edge comprises a locking groove, which is open towards a rear side of the second floor panel that faces a subfloor. A locking surface of the locking element is configured to cooperate, in the connected state, with a locking surface of the locking groove for locking the
- 20 first and the second floor panel to each other in a horizontal direction, which is at right angles to the first and second edge. The first and the second floor panel are mechanically connectable by a vertical displacement towards each other, wherein the flexible snap tab and the protruding tongue are configured to cooperate during said displacement such that at least a part of the flexible
- 25 snap tab is, in a first stage, resiliently displaced, towards the second edge, by the protruding tongue, and that the flexible snap tab is, in a second stage, displaced towards the first edge to obtain the connected state.

The invention provides the advantages that the flexible snap tab may be displaced by an inclined guiding surface located on a rather soft tongue made

30 of the same material as the core and such displacement may be made without contact with the hard upper panel surface.

The protruding tongue is preferably arranged above the strip. The protruding tongue may be arranged at the vertical plane and extend from the vertical plane.

5 The separate flexible tongue with the snap tab requires a smaller holding groove as compared to the displacement groove shown in WO 2006/043893 (Valinge Innovation AB) figure 13d. The smaller holding groove makes the connection stronger since the distance between the holding groove and the locking groove may be increased.

10 The protruding tongue preferably comprises an inclined or rounded guiding surface at its upper and outer part.

The protruding tongue and the snap tab is preferably configured such that the initial contact, during said vertical displacement, between the protruding tongue and the snap tab is at an upper part of the snap tab. The initial contact at the upper part decreases the force needed for the displacement of the
15 snap tab, or a part of the snap tab. The decreased force makes it easier to connect the floor panels.

There may be a space between the upper parts of the protruding tongue and the second edge.

20 There may be is a space between the upper part of the strip and the second edge.

The protruding tongue preferably comprises a locking surface at its lower part that is inclined and in locked position in contact wit the flexible snap tab.

The locking surface of the protruding tongue is preferably arranged above the strip.

25 The flexible tongue may be glued into the holding groove.

The holding groove may comprise an upper wall and a lower wall and an inner wall extending between the upper and the lower wall. A glue is preferably provided at the upper, the lower and the inner wall. The flexible tongue may be glued to the upper, the lower and the inner wall.

The locking surface of the locking element and/or the locking surface of the locking groove preferably extend in an essentially vertical direction or at angle in a range of about 0 to about 45 degrees to the vertical plane.

Brief description of the drawings

5 The present invention will by way of example be described in more detail with reference to the appended schematic drawings, which shows embodiments of the present invention.

Figs 1-5 illustrate known systems.

Figs 6a-c illustrate a first embodiment of the invention.

10 Figs 7a-b illustrate a second embodiment of the invention.

Figs 8a-b illustrate a third embodiment of the invention.

Detailed description

To facilitate understanding, several locking systems in the figures are shown schematically. It should be emphasized that improved or different functions
15 may be achieved using combinations of the preferred embodiments.

A known "fold down" installation method is described in figures 1-4. Locking of short edges 1b, 1c takes place with a scissors like movement where a flexible tongue 30 is displaced inwardly gradually from one edge to the other edge when a long side of a panel 1c in one row is connected by angling to an
20 adjacent panel 1a in a previously installed row. A flexible snap tab 33, which in most cases is made of a plastic section, is during folding bended horizontally along the joint. A part of the snap tab is during folding pressed inwardly, as shown in figure 1, and other parts are in contact with the adjacent edge, figure 2, or in an completely unlocked position, as shown in figure 4.

25 The horizontal locking takes place when a locking element 8 located on a strip 6 on a first panel 1b, hereafter referred to as strip panel, cooperates with an adjacent second panel 1c, hereafter referred to as fold panel, such that the locking element 8 is inserted into a locking groove 14.

Figures 5a and 5b show that the flexible tongue 30 may be connected to an
30 edge of the fold panel 1c or the strip panel strip panel 1b.

From a production perspective it is an advantage if the flexible tongue 30 is connected to a fold panel 1c because it is easy to insert such a flexible tongue into a holding groove 32. There is no protruding strip 6 and the insertion of the flexible tongued may be made with an inserting equipment comprising rather simple guiding devices that guide the tongue into the holding groove 32. A problem with such a flexible tongue 30, as shown in figure 5a, is that the locking system is difficult to lock since the snap tab must be pressed inwardly by a sharp upper edge.

Figures 6a-6c show an embodiment of the invention. A strip panel 1b comprising a strip 6 and a locking element 8 which cooperates with a locking groove 14 in a fold panel 1c for horizontal locking of two adjacent edges of the fold panel 1c and the strip panel 1b is provided. The strip panel comprises a protruding tongue 10 with an upper inclined or rounded guiding surface 11 and a lower locking surface 12. The fold panel 1c comprises a flexible tongue 30 in a holding groove 32, which is open towards the vertical plane VP. The flexible tongue 30 has an inner part 34 connected into the holding groove 32 and a flexible snap tab 33 with a sliding surface 35 extending outwardly and upwardly. The sliding surface 35, that preferably is located at an upper part of the flexible snap tab, cooperates with the guiding surface 11 during a vertical displacement of the fold panel 6c and causes a pressure force that bends the flexible snap tab 33 inwardly towards the holding groove 32 as shown in figures 6a- 6b. The snap tab 33 snaps back toward its initial position and into the cavity 31 when the edges 1b, 1c are aligned horizontally and the lower locking surface 12 on the lower part of the protruding tongue 10 locks against the upper part of the snap tab 33 as shown in figure 6c. The flexible snap tab 33 and the protruding tongue 10 lock the edges vertically parallel to the vertical plane VP. The locking element 8 and the locking groove 14 lock the edges in a horizontal direction perpendicular to the vertical plane VP. The strip 6 and the protruding tongue 10 form a cavity 31 that in connected state accommodates an outer part of the flexible snap tab 33. The protruding tongue is preferably arranged above the strip, at the vertical plane and

extends from the vertical plane. The locking surface of the protruding tongue is preferably arranged above the strip.

The inclined guiding surface 11 facilitates an easy locking since the flexible snap may not be in contact during locking with the upper sharp edge of the panel surface. The guiding surface may be used to facilitate an easy locking even in the case that a contact may exist during folding between the upper edge and the flexible snap tab 11.

The lower locking surface 12 may be inclined and the locking may be made with a pre tension such that the snap tab 11 in locked position is pressed against a lower part of the protruding tongue 10.

Figure 7a shows that there may be a space S_1 between the upper part of the tongue 10 and the adjacent panel edge. The vertical locking is accomplished with an upper contact point A between the protruding tongue 10 and the flexible snap tab 33, and a lower contact point B between the strip 6 and a lower edge of the fold panel 1c. The snap tab may be flexible or rigid depending on the design and material composition. Polymer materials are preferred and the flexible tongue may comprise several different materials in for example the inner part or in the snap tab. The flexible tongue 30 may comprise a knee joint 36 with increased flexibility that facilitates bending and/or displacement of the snap tab. The locking groove 14 and the holding groove 32 are preferably horizontally displaced, in order to obtain a strong locking system, and preferably with a distance D_1 that is at least about 30% of the floor thickness T . The upper part of the locking groove 14 and the inner part of the holding groove 32 are preferably also displaced vertically with a distance D_2 .

Figure 7b shows that there may be a space S_2 between the upper part of the strip 6 and the lower edge of the adjacent fold panel 1c. The vertical locking is in this embodiment accomplished with a lower contact point B between the protruding tongue 10 and the flexible snap tab 33, and an upper contact point A between the protruding tongue 10 and an upper part of the fold panel 1c that overlaps the protruding tongue.

Figure 8a shows an embodiment where the upper edges of the panels are in contact with each other and the guiding surface 11 extends downwardly from the panel surface. The knee joint 36 comprises a flexible material 37 that is softer than the inner part 34 and the snap tab 33. The flexible tongue 30
5 comprises an inner part 34 that comprises a lower part 34a located under the flexible snap tab 33.

Figure 8b shows an embodiment where the holding groove 32 comprises glue 38 and the flexible tongue 30 is glued into the holding groove. This gives a stronger locking system and cracks C extending primarily between the
10 holding groove 32 and the locking groove 14 may be avoided. The lowest part of the flexible tongue 30 may be located essentially on the same horizontal plane as the lower and outer part 39 of the fold panel 1c. The holding groove may comprise an upper wall and a lower wall and an inner wall extending
15 between the upper and the lower wall. The glue is preferably provided at the upper, the lower and the inner wall. The flexible tongue is preferably glued to the upper, the lower and the inner wall.

CLAIMS

1. A set of floor panels which are mechanically connectable to each other at a first and a second edge of a first and a second floor panel (1b, 1c) respectively, wherein upper edges of said first and second edge in a
5 connected state define a vertical plane (VP), characterized in that

the first edge is provided with a protruding tongue (10) formed in one piece with the core of the first floor panel, said protruding tongue (10) extends beyond the vertical plane (VP),

the second edge is provided with a separate flexible tongue (30)

10 the flexible tongue comprises an inner part (34), which is connected to a holding groove (32) at the second edge, and an outer flexible snap tab (33) that extends upwardly and in the connected state into a cavity (31) under the protruding tongue for locking the first and the second floor panel to each other in a vertical direction,

15 the first edge comprises a strip (6) with a locking element (8),

the second edge comprises a locking groove (14), which is open towards a rear side of the second floor panel that faces a subfloor,

a locking surface of the locking element is configured to cooperate, in the connected state, with a locking surface of the locking groove for locking
20 the first and the second floor panel to each other in a horizontal direction, which is at right angles to the first and second edge,

wherein the first and the second floor panel are mechanically connectable by a vertical displacement towards each other, wherein the flexible snap tab (33) and the protruding tongue (10) are configured to
25 cooperate during said displacement such that at least a part of the flexible snap tab (33) is, in a first stage, resiliently displaced towards the second edge, by the protruding tongue (10), and that the flexible snap tab (33) is, in a second stage, displaced towards the first edge, to obtain the connected state.

2. The set of floor panels as claimed in claim 1, wherein an outer part of the protruding tongue (10) comprises an inclined or rounded guiding surface (11) at its upper and outer part.
3. The set of floor panels as claimed in claim 1 or 2, wherein the protruding
5 tongue (10) is arranged above the strip (6).
4. The set of floor panels as claimed in any one of the preceding claims, wherein the protruding tongue (10) is arranged at the vertical plane and extends from the vertical plane.
5. The set of floor panels as claimed in any one of the preceding claims,
10 wherein a space (S1) is provided between the upper parts of the protruding tongue (10) and the second edge.
6. The set of floor panels as claimed in any one of the preceding claims, wherein a space (S2) is provided between the upper part of the strip (6) and the second edge
- 15 7. The set of floor panels as claimed in any one of the preceding claims, wherein the protruding tongue (10) comprises at its lower part a locking surface (12) which in the connected state is configured to cooperate with the flexible snap tab (33).
8. The set of floor panels as claimed in claim 7, wherein the locking surface
20 (12) of the lower part of the protruding tongue is inclined.
9. The set of floor panels as claimed in claim 7 or 8, wherein the locking surface (12) of the lower part of the protruding tongue (10) is arranged above the strip (6).
10. The set of floor panels as claimed in any one of the preceding claims,
25 wherein the protruding tongue (10) and the snap tab (33) is configured such that the initial contact, during said vertical displacement, between the protruding tongue and the snap tab is at an upper part of the snap tab.
11. The set of floor panels as claimed in any one of the claims, wherein the flexible tongue (30) is glued into the holding groove (32).

12. The set of floor panels as claimed in any one of the preceding claims, wherein the holding groove (32) comprise an upper wall and a lower wall and an inner wall extending between the upper and the lower wall.

13. The set of floor panels as claimed in claim 12, wherein a glue is provided
5 at the upper, the lower and the inner wall.

14. The set of floor panels as claimed in claim 12 or 13, wherein the flexible tongue is glued to the upper, the lower and the inner wall.

Fig. 1

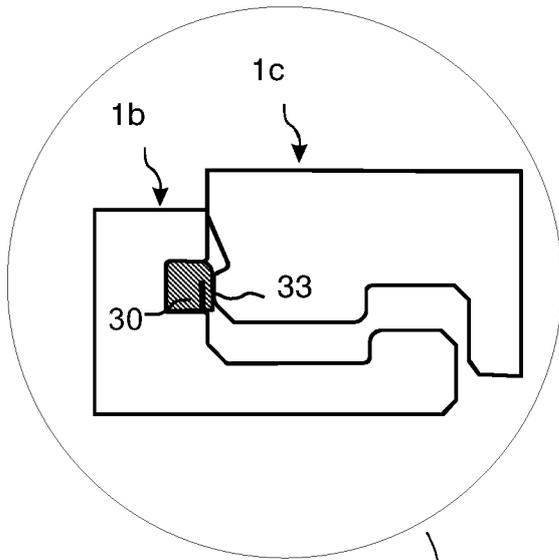


Fig. 2

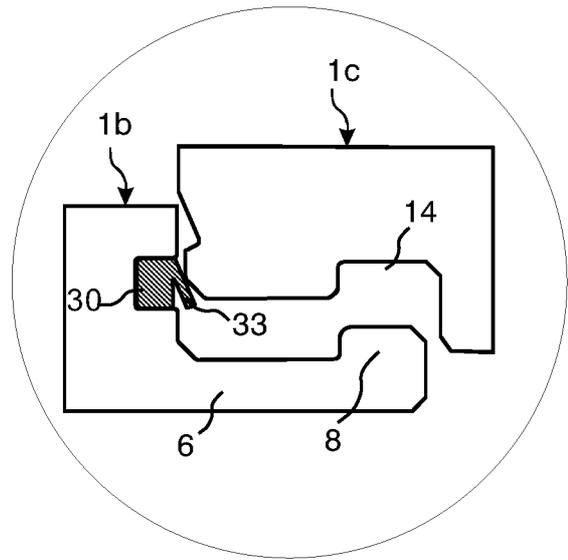


Fig. 3


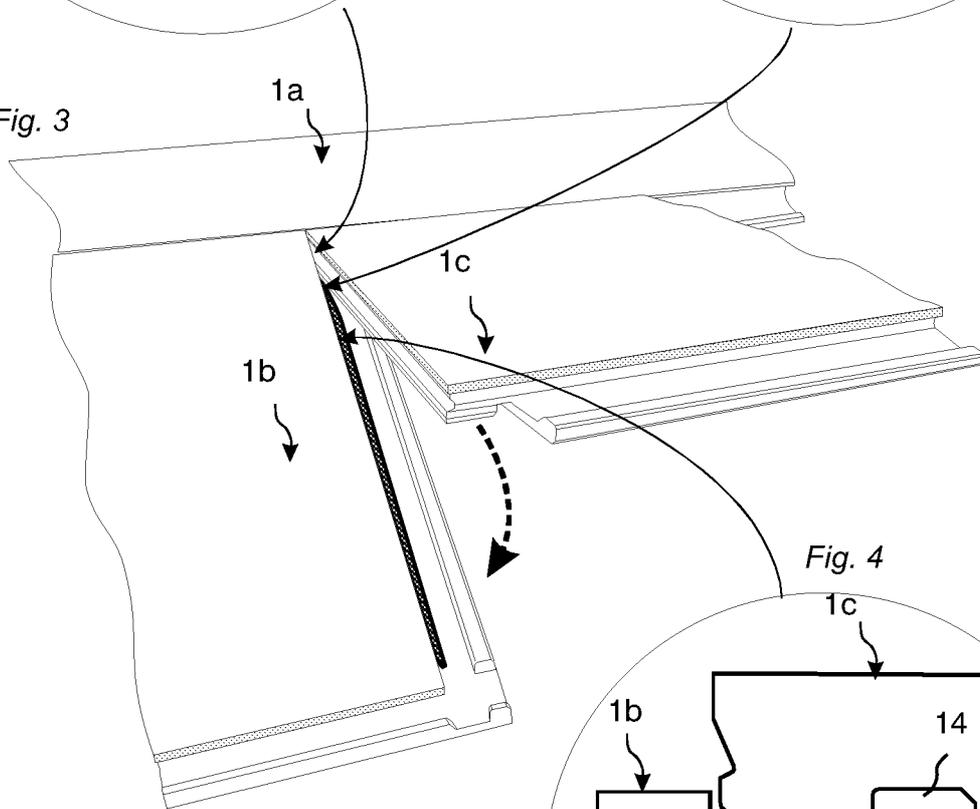


Fig. 4

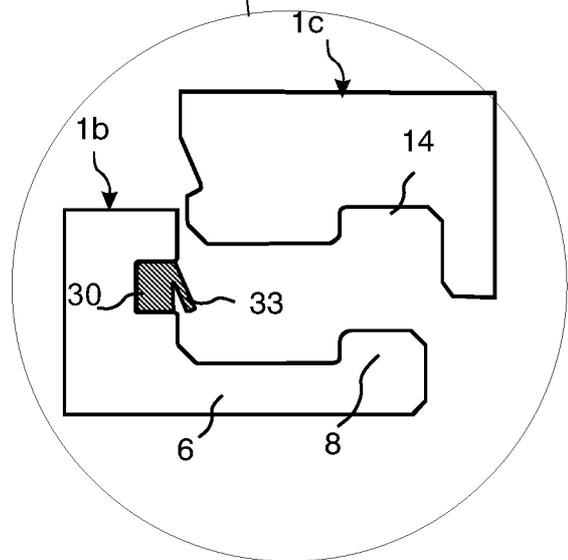

KNOWN TECHNOLOGY

Fig. 5a

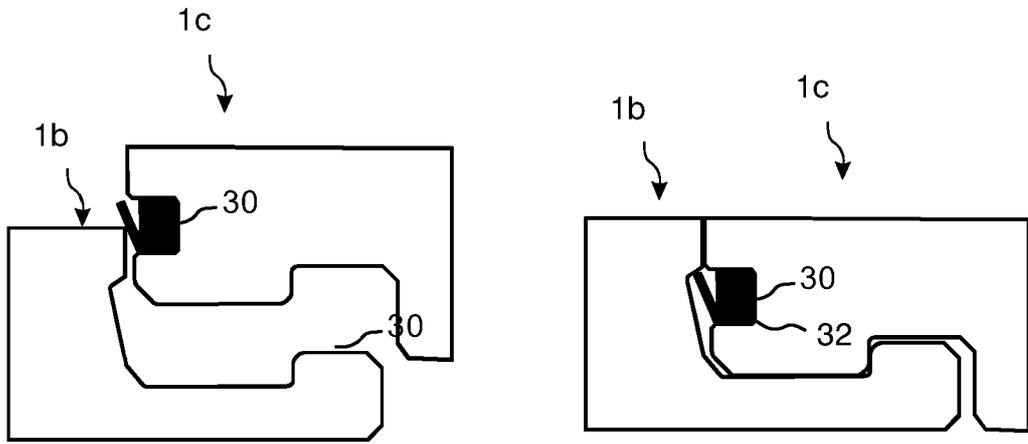


Fig. 5b

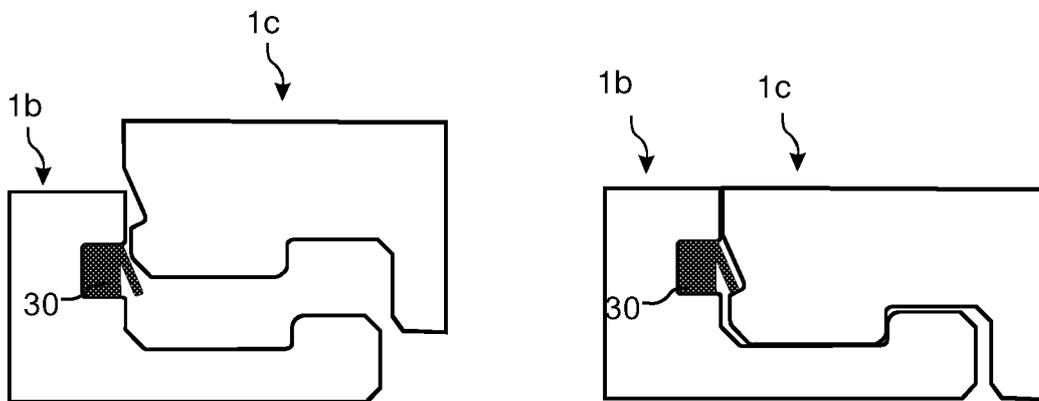


Fig. 6a

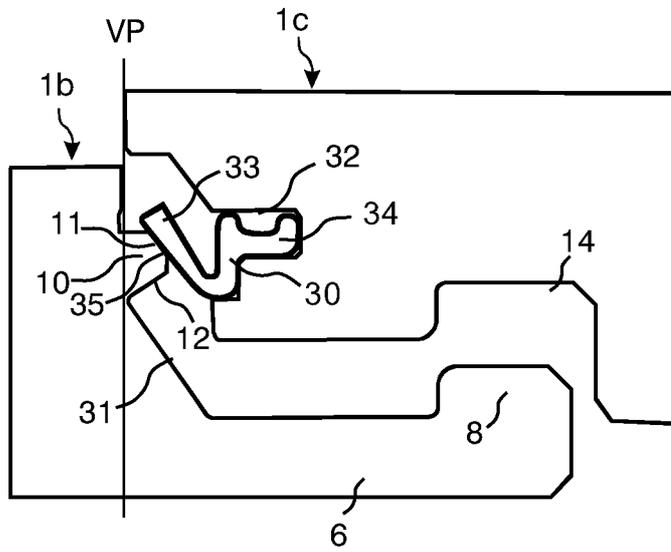


Fig. 6b

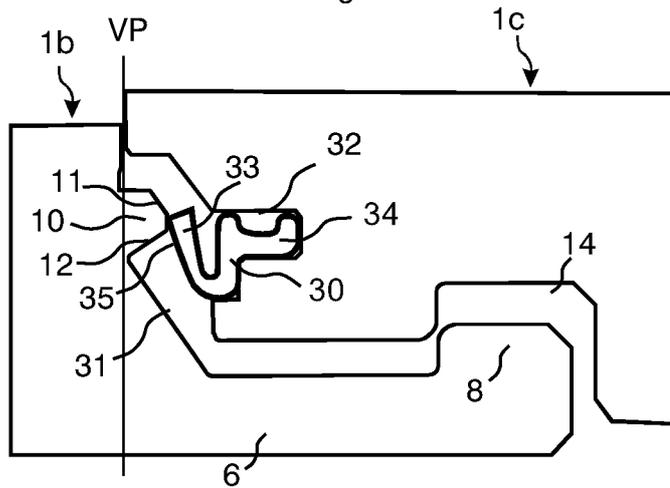


Fig. 6c

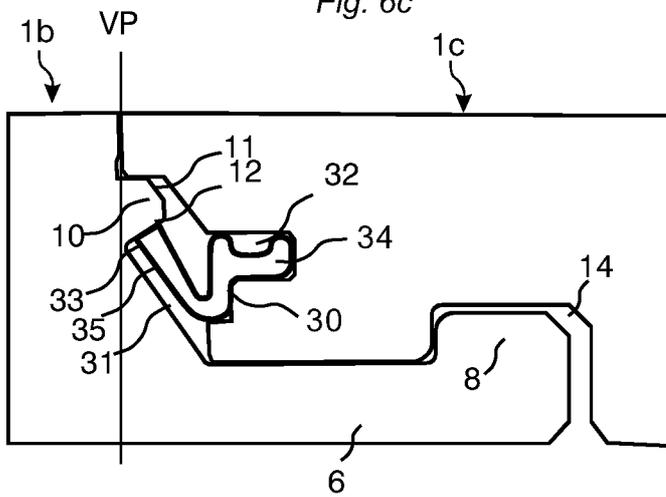


Fig. 7a

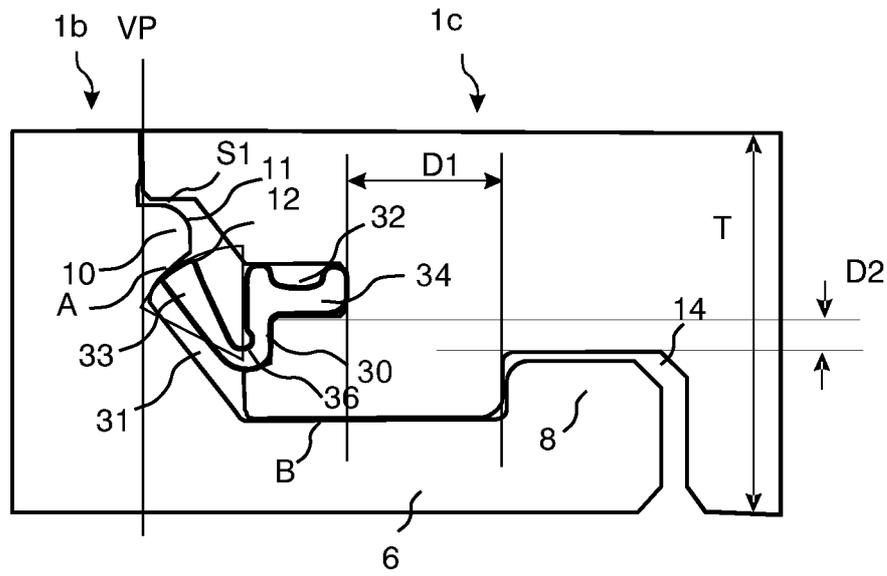


Fig. 7b

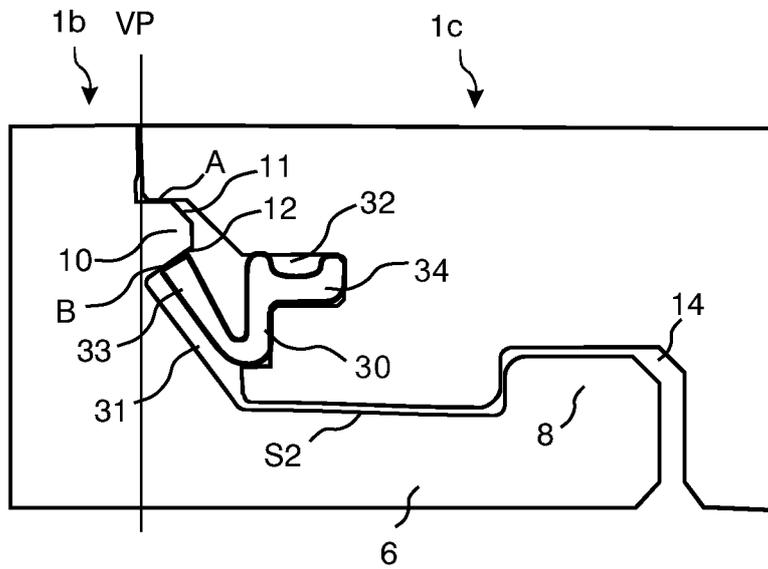


Fig. 8a


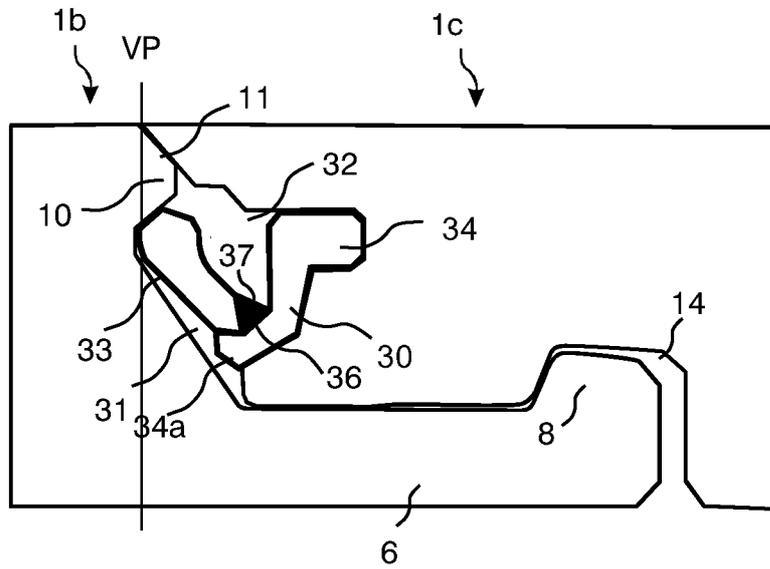


Fig. 8b

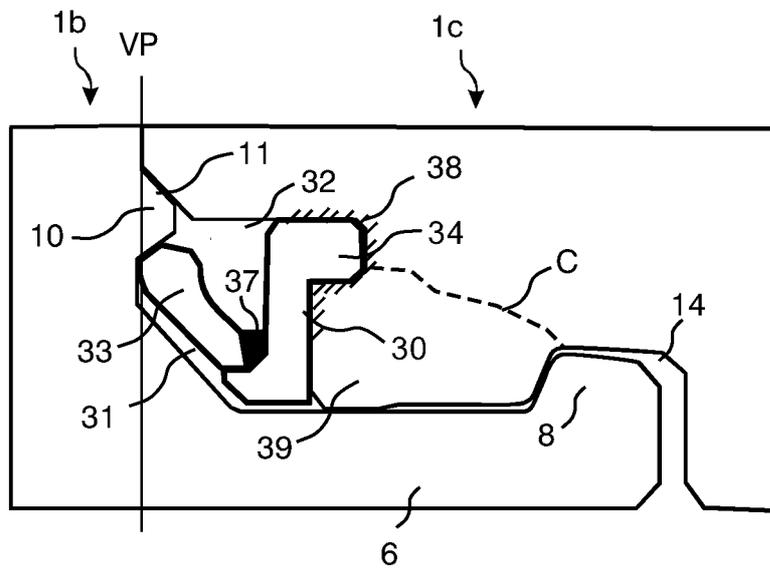

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE201 3/051 374

A. CLASSIFICATION OF SUBJECT MATTER		
IPC: see extra sheet		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: E04F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE, DK, FI, NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO-Internal, PAJ, WPI data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 201 00043333 A 1 (HANNIG HANS-JUERGEN), 25 February 201 0 (201 0-02-25); paragraph [0087]; figures 7a,7b; Details 6f, 8a	1-14
Y	--	3-4, 9
A	WO 2006043893 A 1 (VAELINGE INNOVATION AB ET AL), 27 April 2006 (2006-04-27); page 21, line 22 - line 32; page 33, line 11 - line 17; figures 6a-c; claim 1	1-14
	--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
25-02-201 4		25-02-201 4
Name and mailing address of the ISA/SE Patent- och registreringsverket Box 5055 S-1 02 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Örjan Nylund Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/SE201 3/051 374

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 20080236088 A 1 (HANNIG HANS-JUERGEN), 2 October 2008 (2008-1 0-02); paragraph [01 7 1]; figures 12-1 5; Details 3 1c,33	3-4, 9
A	--	1-2, 5-8, 10-1 4
Y	DE 102007035648 A 1 (AGEPAN TARKETT LAMINATEPARK EI), 29 January 2009 (2009-01 -29); abstract; figures 2-3; Details 24,26	3-4, 9
A	--	1-2, 5-8, 10-1 4
A	US 201 201 74521 A 1 (SCHULTE GUIDO), 12 July 201 2 (201 2-07-1 2); abstract; figures 2,4,5; Details 1 1a,1 7.21	1-14
A	--	
A	US 201 10088346 A 1 (HANNIG HANS-JUERGEN), 2 1 April 201 1 (201 1-04-21); abstract; figures 18,1 9	1-14
A	--	
A	US 201 00281 803 A 1 (CAPPELLE MARK), 11 November 201 0 (201 0-1 1-1 1); abstract; figures 4,5,1 4,1 5; Details 12,1 9	1-14
	-- -----	

Continuation of: second sheet

International Patent Classification (IPC)

E04F 75/02 (2006.01)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE201 3/051 374

US	201 00043333	A 1	25/02/2010	CA	2672877	A 1	12/06/2008
				CN	10 16 17092	A	30/1 2/2009
				DE	102006057491	A 1	12/06/2008
				EP	2089596	A 1	19/08/2009
				RU	20091 25569	A	20/01/201 1
				RU	24681 66	C2	27/1 1/201 2
				US	8381 476	B2	26/02/201 3
				WO	2008068245	A 1	12/06/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE201 3/051 374

WO	2006043893	A 1	27/04/2006	AT	3821 13	T	15/01/2008
				AT	542967	T	15/02/201 2
				AT	535660	T	15/1 2/201 1
				AU	2005296349	B2	03/03/201 1
				BR	PI051 6331	A	02/09/2008
				CA	2581 678	A 1	27/04/2006
				CN	10 1684685	B	18/07/201 2
				CN	10 1044289	A	26/09/2007
				CN	100547206	C	07/1 0/2009
				CY	1 107360	T 1	19/1 2/201 2
				DE	202005022097	U 1	16/07/201 3
				DE	202005022095	U 1	11/07/201 3
				DE	202005022094	U 1	11/07/201 3
				DE	202005021 702	U 1	16/07/2009
				DE	202005021 865	U 1	30/09/201 0
				DE	202005021 864	U 1	23/09/201 0
				DE	60200401 091 4	T3	07/07/201 1
				DE	202005021 889	U 1	05/01/201 1
				DK	1936068	T3	19/03/201 2
				DK	1802827	T3	14/05/201 2
				DK	1650375	T4	28/02/201 1
				EP	2378026	A2	19/1 0/201 1
				EP	2281 972	A2	09/02/201 1
				EP	2278091	A2	26/01/201 1
				EP	239051 2	A2	30/1 1/201 1
				EP	2388409	A2	23/1 1/201 1
				EP	2388405	A2	23/1 1/201 1
				EP	2388404	A2	23/1 1/201 1
				EP	2388403	A2	23/1 1/201 1
				EP	2388402	A2	23/1 1/201 1
				EP	2388401	A2	23/1 1/201 1
				EP	2388400	A2	23/1 1/201 1
				EP	2388399	A2	23/1 1/201 1
				EP	2388398	A2	23/1 1/201 1
				EP	2388397	A2	23/1 1/201 1
				EP	2388396	A2	23/1 1/201 1
				EP	2388395	A2	23/1 1/201 1
				EP	2388394	A2	23/1 1/201 1
				EP	2388393	A2	23/1 1/201 1
				EP	2388392	A2	23/1 1/201 1
				EP	2388391	A2	23/1 1/201 1
				EP	23881 16	A2	23/1 1/201 1
				EP	23851 87	A2	09/1 1/201 1
				EP	23851 86	A2	09/1 1/201 1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE201 3/051 374

US	20080236088	A 1	02/1 0/2008	AT	525540	T	15/1 0/201 1
				CA	26241 77	C	12/02/201 3
				DE	10200601 1887	A 1	19/07/2007
				EP	1984586	A 1	29/1 0/2008
				EP	251 1443	A2	17/1 0/201 2
				ES	23741 04	T3	13/02/201 2
				MX	2008004539	A	04/09/2008
				US	8091 238	B2	10/01/201 2
				US	201 20073235	A 1	29/03/201 2
				WO	2007079845	A8	10/04/2008
DE	102007035648	A 1	29/01/2009	NONE			
US	201 201 74521	A 1	12/07/201 2	CN	102498251	A	13/06/201 2
				DE	102009041 297	A 1	24/03/201 1
				EP	24781 68	B 1	01/01/201 4
				US	8635829	B2	28/01/201 4
				WO	201 1032540	A2	24/03/201 1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE201 3/051 374

US	201 10088346 A 1	21/04/2011	AT	506507 T	15/05/201 1
			AT	3 15698 T	15/02/2006
			CA	245651 3 C	23/09/2008
			DE	10 138285 A 1	06/03/2003
			DE	5021 5024 D 1	01/06/201 1
			DE	50205596 D 1	06/04/2006
			DE	20222006 U 1	29/07/201 0
			DE	20222005 U 1	19/08/201 0
			DE	201 22778 U 1	25/1 0/2007
			DE	201 22553 U 1	23/03/2006
			DK	14 15056 T3	29/05/2006
			DK	2 196596 T3	10/06/201 3
			EP	2345775 A 1	20/07/201 1
			EP	2 19421 0 A 1	09/06/201 0
			EP	1953309 A 1	06/08/2008
			EP	166951 2 B9	04/01/201 2
			ES	225471 3 T3	16/06/2006
			ES	2364848 T9	17/04/201 2
			ES	241 3581 T3	17/07/201 3
			PL	367767 A 1	07/03/2005
			PL	201 803 B 1	29/05/2009
			RU	20041 071 24 A	10/09/2005
			RU	2265703 C 1	10/1 2/2005
			US	8024904 B2	27/09/201 1
			US	7451 578 B2	18/1 1/2008
			US	2008001 0938 A 1	17/01/2008
			US	2004021 1143 A 1	28/1 0/2004
			US	8 132384 B2	13/03/201 2
			US	8631 621 B2	21/01/201 4
			US	201 2001 1796 A 1	19/01/201 2
			WO	0301 6654 A 1	27/02/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE201 3/051 374

US	201 00281 803 A 1	11/1 1/201 0	AU	200832761 6 A 1	28/05/2009
			BE	10 18600 A5	05/04/201 1
			CA	2702876 A 1	28/05/2009
			CN	103452275 A	18/1 2/201 3
			CN	10 1868583 A	20/1 0/201 0
			CN	103437528 A	11/1 2/201 3
			EA	201 201 568 A 1	30/04/201 3
			EA	201 000853 A 1	29/1 0/201 0
			EP	221 7775 A2	18/08/201 0
			JP	538591 1 B2	08/01/201 4
			JP	201 1504556 A	10/02/201 1
			KR	201 001 06393 A	01/1 0/201 0
			MX	201 0004973 A	07/06/201 0
			US	8621 8 14 B2	07/01/201 4
			WO	20090661 53 A3	26/1 1/2009
