



- | | |
|---|--|
| <p>(51) International Patent Classification:
 G07C 9/00 (2006.01) H04B 5/00 (2006.01)
 A61B 5/00 (2006.01) H04B 13/00 (2006.01)
 B60R 25/20 (2013.01)</p> | <p>(81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.</p> |
| <p>(21) International Application Number:
 PCT/EP2013/076385</p> | |
| <p>(22) International Filing Date:
 12 December 2013 (12.12.2013)</p> | |
| <p>(25) Filing Language:
 English</p> | |
| <p>(26) Publication Language:
 English</p> | |
| <p>(30) Priority Data:
 12306660.7 21 December 2012 (21.12.2012) EP</p> | <p>(84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).</p> |
| <p>(71) Applicant: GEMALTO SA [FR/FR]; Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).</p> | <p>Published:
 — with international search report (Art. 21(3))</p> |
| <p>(72) Inventors: PEILLON, Sylvain; C/O Gemalto S.A., Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR). RIOU, Mickaël; C/O Gemalto S.A., Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).</p> | |
| <p>(74) Agent: COUR, Pierre; C/O Gemalto S.A., Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).</p> | |

(54) Title: CONVERTING COMMUNICATION DEVICE

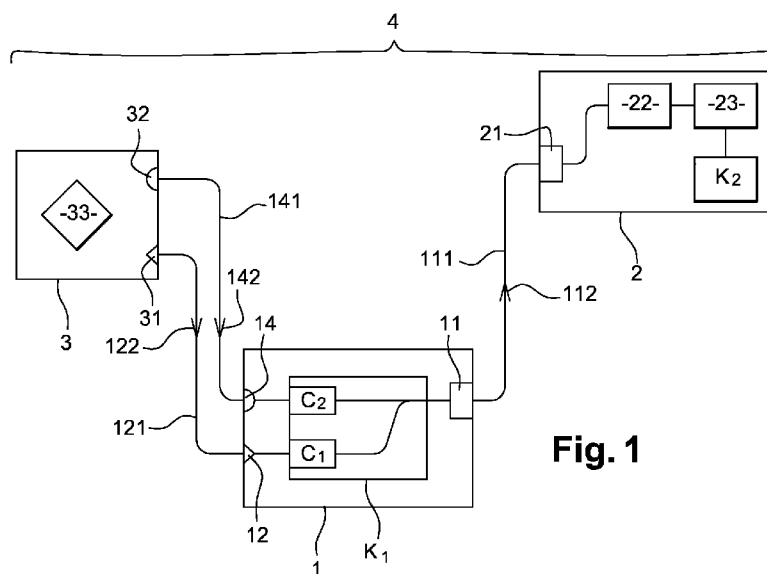


Fig. 1

(57) Abstract: The invention relates to a converting communication device comprising a first interface for establishing an audio communication path of a first data flow with a first device, a second interface for establishing a body-coupled communication path with a second device, and a first calculator for sending the first data flow to the first device after the body-coupled communication path has been established.

CONVERTING COMMUNICATION DEVICE

[0001] The invention relates to a converting communication device, acting as a proxy between two other devices such as an authentication device and a device
5 needing authentication information, for example for the authentication and identification of individuals in an electronic transaction.

[0002] Contactless devices are widely used for authentication, especially in the field of electronic transactions. With the boom of the use of mobile devices for executing secure electronic transactions, individuals have a need for a unique
10 contactless device comprising as much authentication information as possible. People also need to have a user-friendly device for which they do not have to remember quantity of password. Such authentication device can be for example described in the patent EP 1 695 296.

[0003] The applicant has thus developed contactless device connected to such
15 authentication devices through a converting communication device, also named proxy and application have been filed under the filing number PCT/EP2012/070339. The converting communication device allows connecting contactless device with authentication devices. In addition, those authentication devices are not necessarily compliant with the common mobile devices, without modifying the structure of these
20 mobile devices. However, the converting communication device has to be able to communicate with said authentication devices.

[0004] This converting communication device is especially directed to the growing market of mobile devices. One issue of this market is the lack of convergence between constructors regarding one standard and interoperable connector, the connector
25 allowing data transmission whatever the mobile device used is. Unfortunately, many mobile devices, as iPhone, Android based phones, Blackberry, have evolved without much convergence. Unlike computer that has industry-standardized USB connection, until today there is no universal connector that can connect to a wide array of these devices with a peripheral, for instance a smart card reader. Even when this solution
30 exists, it only has limited the interoperability of data transfers between different

models of different mobile devices. One alternative is to use contactless communication instead of hardwired connector. One such possibility is using the Bluetooth technology which is present on every tablet and smartphone. However, one drawback of this solution is that all devices don't support the same range of profile.

5 For instance, Android platform supports Bluetooth Serial Port Profile, but iPhone does not.

[0005] It is an object of the invention to provide a converting communication device compatible with as many mobile devices as possible in order to pair said mobile devices with contactless devices, especially used for authentication. The meaning of
10 mobile device is to be understood as any device allowing people to access data and information from wherever they are. These terms include mobile phones and portable devices, such as handset, tablets, PDAs, laptop computers, mobile computers, mobile phone etc...

[0006] To this end, the invention provides a converting communication device
15 comprising a first interface for establishing an audio communication path of a first data flow with a first device, a second interface for establishing a body-coupled communication path with a second device, and a first calculator for sending the first data flow to the first device after the body-coupled communication path has been established.

20 [0007] The establishment of the body-coupled communication (BCC) is the starting point for sending the first data flow to the first device through the audio communication path. An audio communication path is easy to establish with any kind of device, especially with any kind of mobile device. Moreover, notwithstanding the fact that it allows to connect two devices: one able to communicate through BCC and
25 one through audio communication; one advantage of this converting communication device is that the calculator sends the second data flow only once the BCC has been established, meaning once the converting communication device and the first device has been paired: this allows saving energy and securing the communication between the first and the second device. The BCC is based on the principle that modulated
30 electric field may carry a signal on a user body according to a capacitive coupling

mode, thus the human body is used as a wire between the first device and the converting communication device. The terms intrabody communication (IBC) can also be used when referring to a body-coupled communication. A BCC presents the advantages of low energy consumption and of a mandatory connection between the user wearing the second device and the second device, thus providing a supplementary step of security.

[0008] According to not limited embodiments, the device can comprise one or more of the following additional characteristics:

- the first interface comprises a first audio connector. A majority of mobile devices has an audio connector. Indeed an audio connector is widely available since it is used for phone call, music, audio, memo taking etc. The converting communication device of the invention can thus advantageously be easily connected to any kind of audio connector such as jack audio, mini jack, jack video, microphone jack etc.;
- the body-coupled communication path allows the communication of a second data flow and the first calculator comprises a first converter for converting said second data flow into the first data flow, said first data flow being an audio signal. The first converter could be an analog/digital converter that allows converting a digital data flow into an analog signal and vice versa ;
- the converting communication device comprises a third interface for establishing a wireless communication of a third data flow with the second device after the body-coupled communication path has been established. Thus, the converting communication device and the first device can exchange information and data through a wireless communication, which presents the following advantages over a body-coupled communication: higher data rate, higher communication range, higher speed and it is already deployed. The wireless communication can be Wi-Fi, Bluetooth, RF, ZigBee protocols etc... ; and

- the first calculator comprises a second converter for converting said third data flow into the first data flow, said first data flow being an audio signal. The second converter could be an analog/digital converter that allows converting a digital data flow into an analog signal and vice versa. The first converter and the second converter may be the same converter.

[0009] The invention also provides a communication system comprising the converting communication device as previously defined, a first device comprising a second audio connector, and a second device comprising a body-coupled communication interface, said communication system being configured so that said second device is located, in use, in an area sufficiently close to a human body so that the human body is used as a conductor for the body coupled communication path.

[0010] This area is defined according to the type of antenna used in the body-coupled communication interface. Thus, the second device could be on a bracelet, a belt, an ankle, a garment, in a pocket etc... The converting communication device can be plugged through its first interface to the first device's audio connector.

[0011] According to not limited embodiments, the communication system can comprise one or more of the following additional characteristics:

- the second device comprises a wireless communication interface;
- the second device comprises an interface adapted for biometric authentication. The fourth interface is a biometric sensor such as, for example, a fingerprint sensor, a voiceprint sensor, etc... Thus, a user (human body) can use the second device only if he authenticates himself on the second device. An additional step of security is thus added to the communication system. Indeed, if the second device comprises all the authentication information for many electronic transactions of one user, it would put in jeopardy said one user if a second user could access to it without an authentication ; and

- the first device comprises a driver for storing the first data flow in a memory and a second calculator for comparing the first data flow stored in the memory with a set of predefined authentication data. The set of predefined authentication data may consist of, for example, access codes to an application for electronic payment, and the first data flow may be the authentication information sent by the converting communication device. In order to authenticate a user, the comparison between those two set of data is done.

10 **[0012]** The invention also provides an authentication method between a first device and a second device, wherein it comprises the steps of:

- establishing a body-coupled communication path, between the second device and a converting communication device, to exchange a secret information between said second device and said converting communication device ;
- establishing a secure communication session, using said secret information, between the second device and the converting communication device ;
- sending, through said secure communication session, an authentication information from the second device to the converting communication device ;
- sending, through an audio communication path, an information corresponding to said authentication information, from the converting communication device to the first device.

25 **[0013]** According to not limited embodiments, the method can comprise one or more of the following additional characteristics:

- the secure communication session is a wireless communication ; and
- the authentication method comprises a step of identifying a user by its biometric by the second device.

30 **[0014]** The invention also provides headphones comprising a converting communication device according to any one of the previous embodiments.

[0015] Some embodiments of apparatus and methods in accordance with embodiments of the present invention are now described, by way of example only, and with reference to the accompanying drawings, in which:

- 5 - figure 1 schematically illustrates one embodiment of a communication system of the invention, said communication system comprising a converting communication device, a first device and a second device ; and
- figure 2 schematically illustrates one embodiment of a communication method of the invention.

10 [0016] Referring now to the drawings, Figure 1 shows the basic parts of a communication system comprising a converting communication device 1, a first device 2 and a second device 3. The converting communication device 1 comprises a first interface 11 for establishing an audio communication path 111 with the first device 2. The first interface 11 can be a first audio connector such as a jack connector: mini jack;
15 audio jack; video jack. The kind of first audio connector chosen depends on the type of the second audio connector 21 of the first device 2 to which the first interface 11 is to be connected. Through this audio communication path 111, a first data flow can be transmitted between the first device 2 and the converting communication device 1, the audio communication path is bi-directional. The first device 2 is a device with audio
20 capabilities such as a smartphone or a tablet.

 [0017] The converting communication device 1 also comprises a second interface 12 for establishing a body-coupled communication (BCC) path 121 with a second device 3. A body-coupled communication is based on the principle that a modulation of electric field can carry a signal on human skin using a technique called capacitive
25 coupling, the human body behaving as a capacitor. Thus, in use, the second device 3 is to be in an area sufficiently close to a human body, so that the human body can be used as a conductor for the BCC. The signal to be carried on said human skin is the signal to be transmitted between the converting communication device 1 and the second device 3. Thus, by touching the converting communication device 1, a user
30 allows the creation of a body-coupled communication path 121 between the

converting communication device 1 and a second device 3, in the area close to the user's human body. The second device can be, for example, integrated into an anklet, a bracelet, a necklace, a garment, a belt etc...

[0018] The converting communication device 1 also comprises a first calculator K1 for sending a first data flow 112 through the audio communication path 111 from the converting communication device 1 to the first device 2 after the BCC path 121 has been established. The first calculator K1 waits for the BCC path 121 to be established to send the first data flow 112 to the first device 2. As explained above, a BCC path is established with the help of a human body acting as a conductor. Thus, the first calculator K1 waits for a user, bearing a second device 3, touching the second interface 12 of the converting communication device 1 to authorize the transmission of a first data flow 112 to the first device 2.

[0019] The first device 2 is, for example, a device for controlling the identity of an individual before performing an electronic transaction, for example a smartphone before purchasing something on the internet. The converting communication device 1 is connected to the smartphone through their audio connector. Said individual, bearing the second device 3, has to identify himself on a website. The second device 3 contains authentication data of said individual, for example her bankcard number for performing purchases on internet. By touching the converting communication device 1, a BCC communication path is established between the second device 3 and the converting communication device 1. A positive action of an individual initiates the communication. Authentication data of the second device 3 can either be:

- sent over the BCC communication path 121 from the second device 3 to the converting communication device 1; or
- sent over a wireless communication path 141 established between a third interface 14 of the converting communication device 1 and a wireless communication interface 32 of the second device 3.

[0020] In the first case, when authentication data is sent over the BCC communication path 121, authentication data are sent as a second data flow 122. This second data flow 122 has to be converted into the first data flow, as an audio signal, in

order to be transmitted to the first device 2 through the audio communication path 111. To this end, the first calculator K1 comprises a first converter C1 for converting the second data flow 122 into the first data flow 112, to allow the transmission of the authentication data, over the audio communication path 111.

5 **[0021]** In the second case, when authentication data is sent over a wireless communication path 141 as a third data flow 142, it has to be converted in order to be transmitted to the first device 2 over the audio communication path. To this end, the first calculator K1 comprises a second converter C2 for converting this third data flow 142 into the first data flow 112 to allow the transmission of the authentication data
10 over the audio communication path 111.

[0022] When the second device 3 sends a data flow (second data flow or third data flow) to the converting communication device, this data flow can be stocked in a memory (before or after its conversion) before being sent to the first device 2, as the first data flow 112.

15 **[0023]** The second device 3 could comprise an interface 33 adapted for biometric authentication. This interface includes a specific sensor such as a fingerprint sensor, a voiceprint sensor etc... Biometric authentication allows ascertaining that the individual bearing the second device 3 is an authorized user. Indeed, as the second device is intended for containing sensitive authentication information of an individual such as
20 id-numbers (social security number), bank card number etc..., the biometric authentication disables an individual who had stolen the second device 3 of a user to use it.

[0024] The first device 2 is intended to check if the authentication data sent through the audio communication path 111 correspond to expected authentication
25 data to access a secure e-payment application for example. To this end, the first device 2 comprises a driver 22 for managing the first data flow 112 and a memory 23 where the managed first data flow is stored once it has been received by the first device 2 and a second calculator K2 for comparing the first data flow 112 stored in the memory 23 with a set of predefined authentication data. The set of predefined authentication
30 data could be, for example, stored in the memory 23.

[0025] The converting communication device may be included into headphones. Thus, an individual could easily plug its headphones into a first device (tablet, smartphone etc...) and access the authentication capabilities of the second device associated to the converting communication device.

5 [0026] Figure 2 illustrates the main steps of an authentication method between a first device and a second device. The second device is borne by an individual and contains authentication information of said individual for secure e-payment for example. The first device is a device intended to perform the e-payment, for example a smartphone or tablet.

10 [0027] The authentication method comprises a step of establishing 101 a body-coupled communication between the second device and a converting communication device. The establishment of the body-coupled communication can be realized by an action of touching the converting communication device, this action establishing a BCC path between the second device and the converting communication device, the
15 human body acting as a conductor. The second device might be always awake, waiting for its bearer to touch a BCC compliant converting communication device, or the second device may comprise an ON/OFF button so that the bearer would awake its second device only when necessary. The step of establishing 101 a BCC between the second device and the converting communication device is to exchange secret
20 information between those two devices. The second device, borne by an individual, when the BCC is established, sends the secret information to the converting communication device. The exchange of the secret information allows the opening of a secure channel for a step of establishing a secure communication session 102 between those two devices.

25 [0028] Once the secure communication session is established between the converting communication device and the second device, the method comprises a step of sending 103, through said secure communication session, authentication information from the second device to the converting communication device. The authentication information corresponds to the realization of the e-payment on the
30 first device. The secure communication session could use the body-coupled

communication path established before between the second device and the converting communication device or a wireless communication between those two devices.

[0029] Once the converting communication device has received said authentication information, it realizes a step of sending 104, through an audio communication path, information corresponding to this authentication information to the first device. The information corresponding to this authentication information could be:

- the authentication information converted into an audio communication path compliant data flow; or
- an information corresponding to said authentication information in a database.

[0030] The second device uses this information corresponding to the authentication information to verify the identity of the individual bearing the second device and its authorization to access to the e-payment application (in our example). The second device could use the bi-directional audio communication path 111 to send a set of information from the first device 2 to the converting communication device 1, for example for notifying the authorization once the first device authorize the second device, through the converting communication device, to access to the e-payment application.

[0031] The authentication method may comprise an optional step of identifying a user by its biometric by the second device. This step should be realized before the establishment of a body-coupled communication between the second device and the converting communication device.

[0032] The authentication method has been described, as an example, with reference to the accomplishment of an e-payment on a smartphone or a tablet, but this example is not restrictive. The authentication method applies to any type of service access.

CLAIMS

1. A converting communication device (1) comprising :

- a first interface (11) for establishing an audio communication path (111) of
5 a first data flow (112) with a first device (2) ;
- a second interface (12) for establishing a body-coupled communication
path (121) with a second device ; and
- a first calculator (K1) for sending the first data flow (112) to the first device
10 (2) after the body-coupled communication path (121) has been
established.

2. The converting communication device (1) according to claim 1, wherein the first
interface (11) comprises a first audio connector.

15 3. The converting communication device (1) according to claim 1, wherein the
body-coupled communication path (121) allows the communication of a second data
flow (122) and the first calculator (K1) comprises a first converter (C1) for converting
said second data flow (122) into the first data flow (112), said first data flow (112)
being an audio signal.

20 4. The converting communication device (1) according to claim 1, wherein it
comprises a third interface (14) for establishing a wireless communication (141) of a
third data flow (142) with the second device (3) after the body-coupled
communication path (121) has been established.

25 5. The converting communication device (1) according to claim 4 wherein the first
calculator (K1) comprises a second converter (C2) for converting said third data flow
(142) into the first data flow (112), said first data (112) flow being an audio signal.

6. A communication system (4) comprising:

- the converting communication device (1) according to claim 1 ;
- a first device (2) comprising a second audio connector (21) ; and
- a second device (3) comprising a body-coupled communication interface (31) ;

5 said communication system (4) being configured so that said second device (3) is located, in use, in an area sufficiently close to a human body so that the human body is used as a conductor for the body-coupled communication path (121).

7. The communication system (4) according to claim 6 wherein the second device
10 (3) comprises a wireless communication interface (32).

8. The communication system (4) according to claim 6 wherein the second device (3) comprises an interface (33) adapted for biometric authentication.

15 9. The communication system (4) according to claim 6 wherein the first device (2) comprises:

- a driver (22) for managing the first data flow (112),
- a memory (23) for storing the managed first data flow (112), and
- a second calculator (K2) for comparing the first data flow (112) stored in
20 the memory (23) with a set of predefined authentication data.



10. An authentication method between a first device (2) and a second device (3), wherein it comprises the steps of:

- establishing (101) a body-coupled communication path (121), between the
25 second device (3) and a converting communication device (1), to exchange a secret information between said second device (3) and said converting communication device (1) ;
- establishing (102) a secure communication session, using said secret information, between the second device and the converting
30 communication device (1) ;

- sending (103), through said secure communication session, an authentication information from the second device to the converting communication device (1) ;
- sending (104), through an audio communication path (111), an information corresponding to said authentication information, from the converting communication device (1) to the first device (2).

11. The authentication method according to claim 10 wherein the secure communication session is a wireless communication.

12. The authentication method of claim 10 wherein it comprises a step of identifying (105) a user by its biometric by the second device.

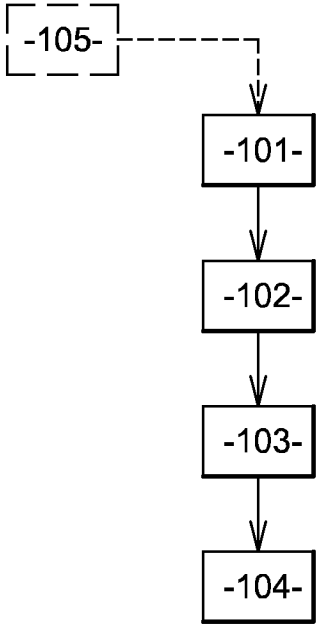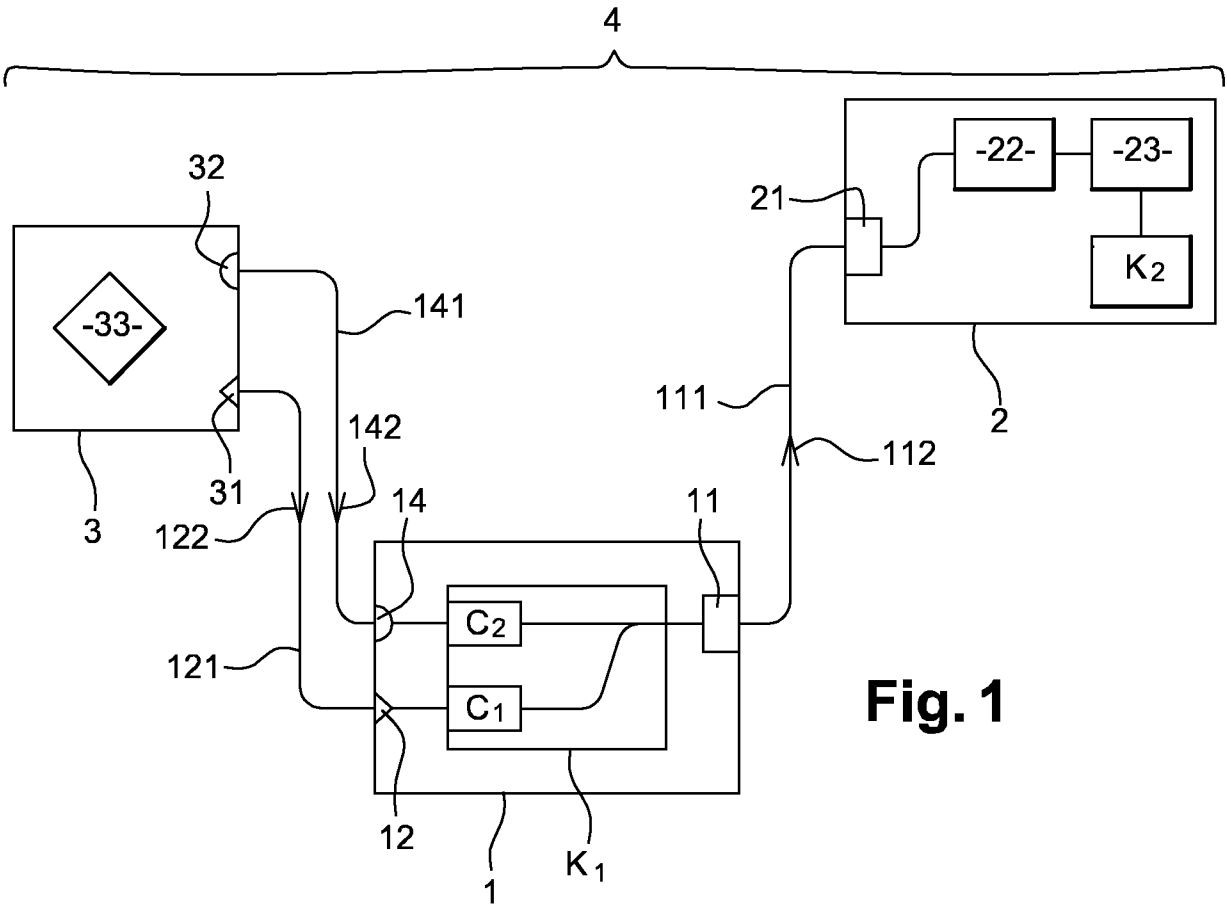

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/076385

A. CLASSIFICATION OF SUBJECT MATTER

INV. G07C9/00 A61B5/00 B60R25/20 H04B5/00 H04B13/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G07C B60R H04B A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 100 218 A2 (SONY CORP [JP]) 16 May 2001 (2001-05-16)	1-3,6-9, 12
Y	abstract paragraph [0005] - paragraph [0007] paragraph [0024] - paragraph [0035] paragraph [0041] - paragraph [0048] figures 1-4,7-9	10,11
Y	----- EP 1 024 626 A1 (IBM [US]) 2 August 2000 (2000-08-02) abstract paragraph [0005] paragraph [0019] - paragraph [0024] paragraph [0031] paragraph [0044] - paragraph [0049] ----- -/-	10,11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 April 2014

Date of mailing of the international search report

10/04/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Van der Haegen, D

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/076385

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2005/062236 A2 (AXALTO SA [FR]; RHELIMI ALAIN [FR]) 7 July 2005 (2005-07-07) page 2, line 8 - page 3, line 25 page 4, line 12 - page 6, line 18 page 7, line 10 - line 19 -----	1-10
A	WO 2006/064397 A2 (KONINKL PHILIPS ELECTRONICS NV [NL]; PHILIPS CORP [US]; BALDUS HERIBER) 22 June 2006 (2006-06-22) page 2, line 13 - page 3, line 16 page 4, line 26 - page 8, line 3 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/076385

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1100218	A2	16-05-2001	CN 1303187 A 11-07-2001
			EP 1100218 A2 16-05-2001
			JP 2001144662 A 25-05-2001
			US 7181024 B1 20-02-2007
EP 1024626	A1	02-08-2000	CA 2296223 A1 27-07-2000
			CN 1262563 A 09-08-2000
			EP 1024626 A1 02-08-2000
			JP 2000224156 A 11-08-2000
			KR 200000057751 A 25-09-2000
WO 2005062236	A2	07-07-2005	AT 423364 T 15-03-2009
			EP 1695296 A2 30-08-2006
			JP 5112700 B2 09-01-2013
			JP 2007528054 A 04-10-2007
			KR 20060120207 A 24-11-2006
			US 2007145119 A1 28-06-2007
			WO 2005062236 A2 07-07-2005
WO 2006064397	A2	22-06-2006	AT 545361 T 15-03-2012
			EP 1827214 A2 05-09-2007
			JP 5317476 B2 16-10-2013
			JP 2008522703 A 03-07-2008
			US 2009231125 A1 17-09-2009
			WO 2006064397 A2 22-06-2006