





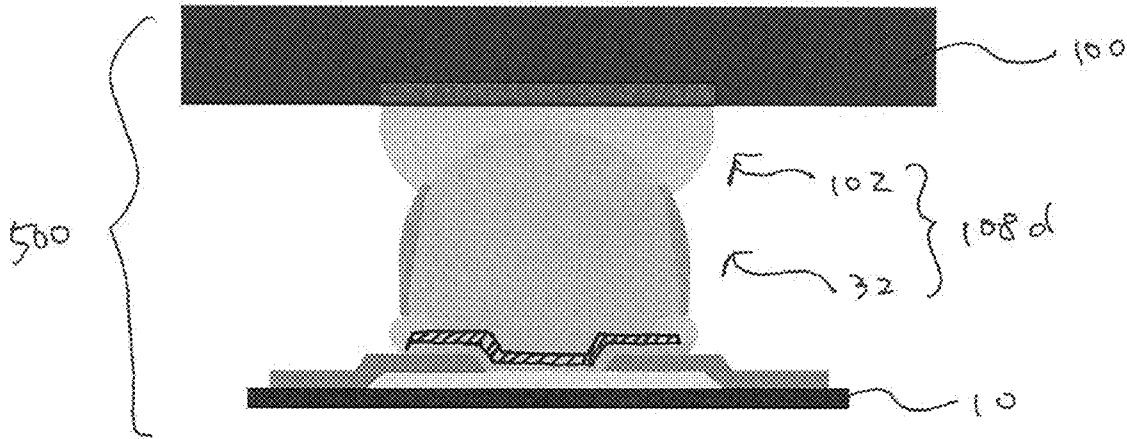





US 20110186989A1

(19) **United States**(12) **Patent Application Publication**  
**Hsiao et al.**(10) **Pub. No.: US 2011/0186989 A1**(43) **Pub. Date: Aug. 4, 2011**(54) **SEMICONDUCTOR DEVICE AND BUMP  
FORMATION PROCESS****Related U.S. Application Data**(60) Provisional application No. 61/301,456, filed on Feb.  
4, 2010.**Publication Classification**(51) **Int. Cl.**  
**H01L 23/52** (2006.01)  
**H01L 21/44** (2006.01)  
(52) **U.S. Cl.** ..... **257/737**; 438/614; 257/E23.141;  
257/E21.476(73) Assignee: **Taiwan Semiconductor  
Manufacturing Company, Ltd.,**  
Hsin-Chu (TW)(21) Appl. No.: **12/883,950**(22) Filed: **Sep. 16, 2010**(57) **ABSTRACT**

A semiconductor device includes a solder bump overlying and electrically connected to a pad region, and a metal cap layer formed on at least a portion of the solder bump. The metal cap layer has a melting temperature greater than the melting temperature of the solder bump.



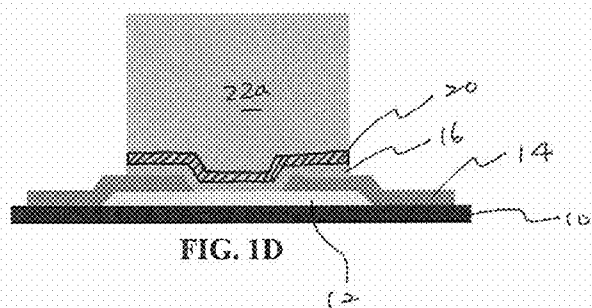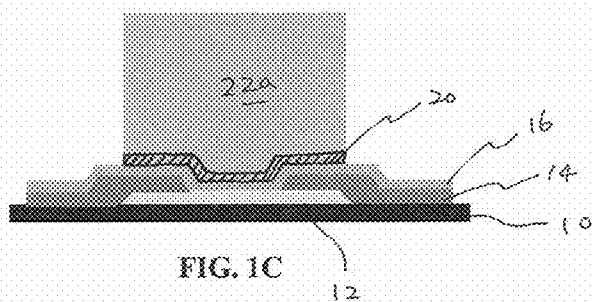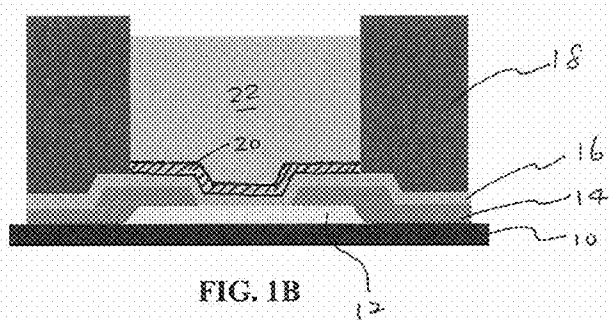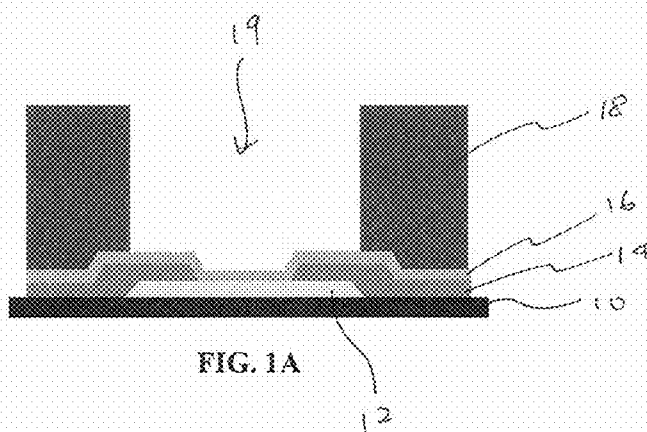

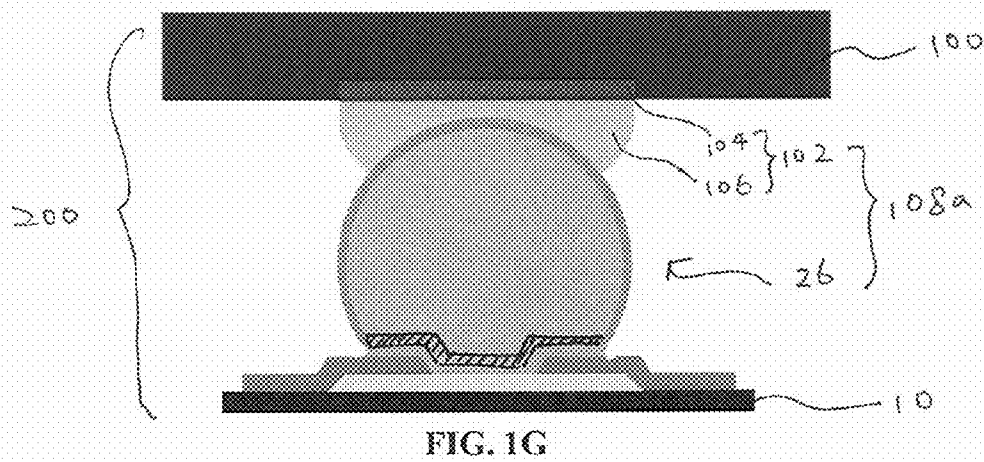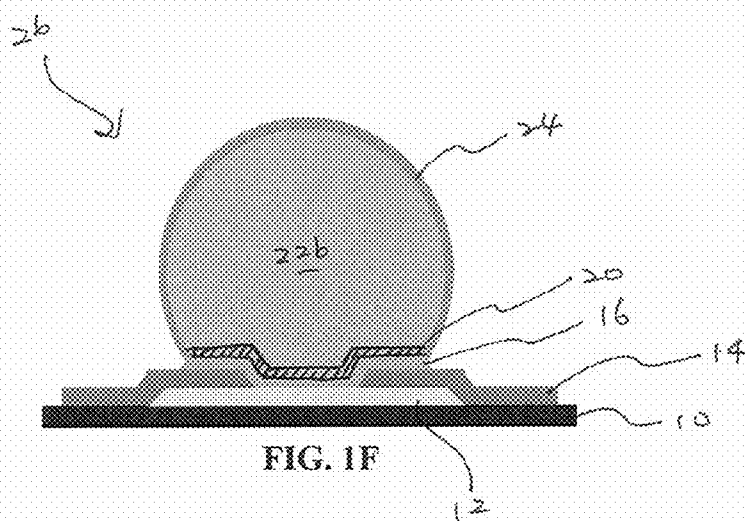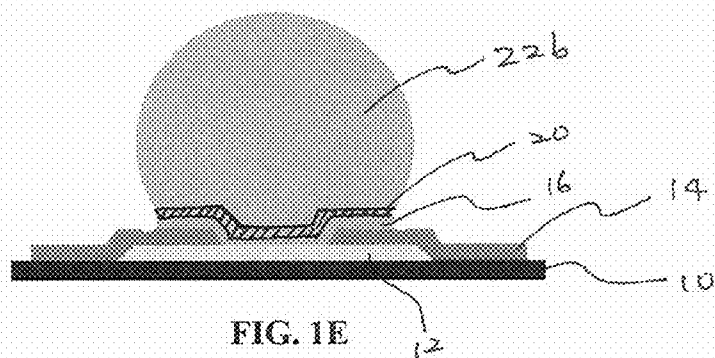




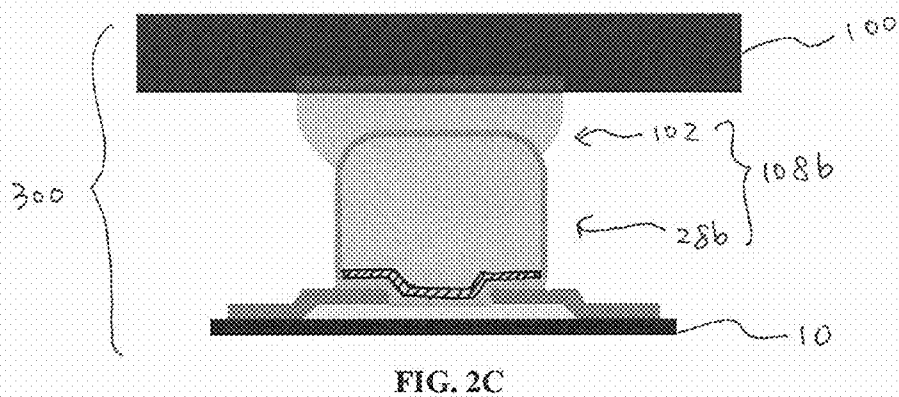


FIG. 3D

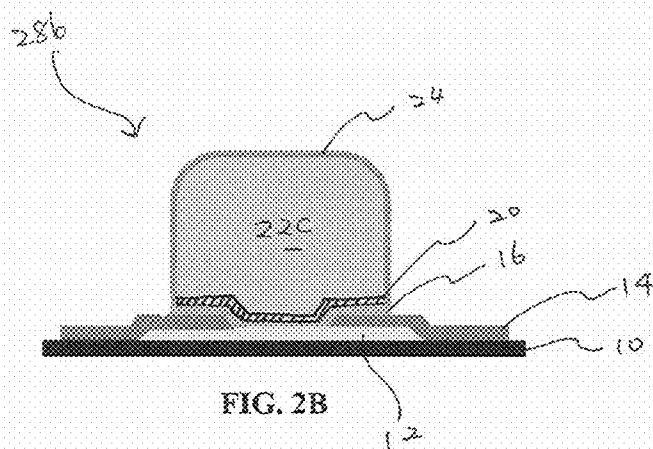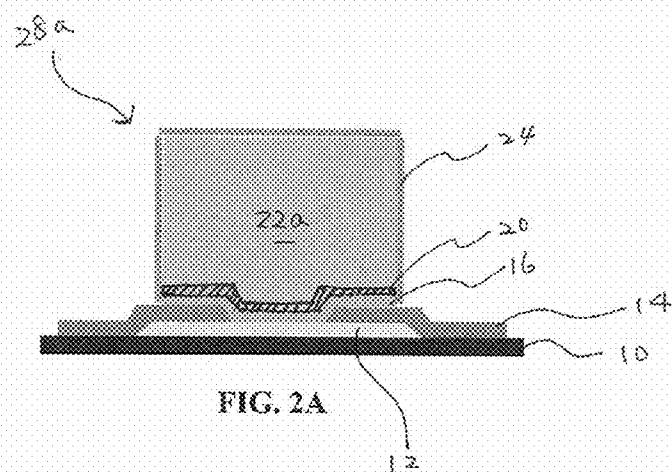

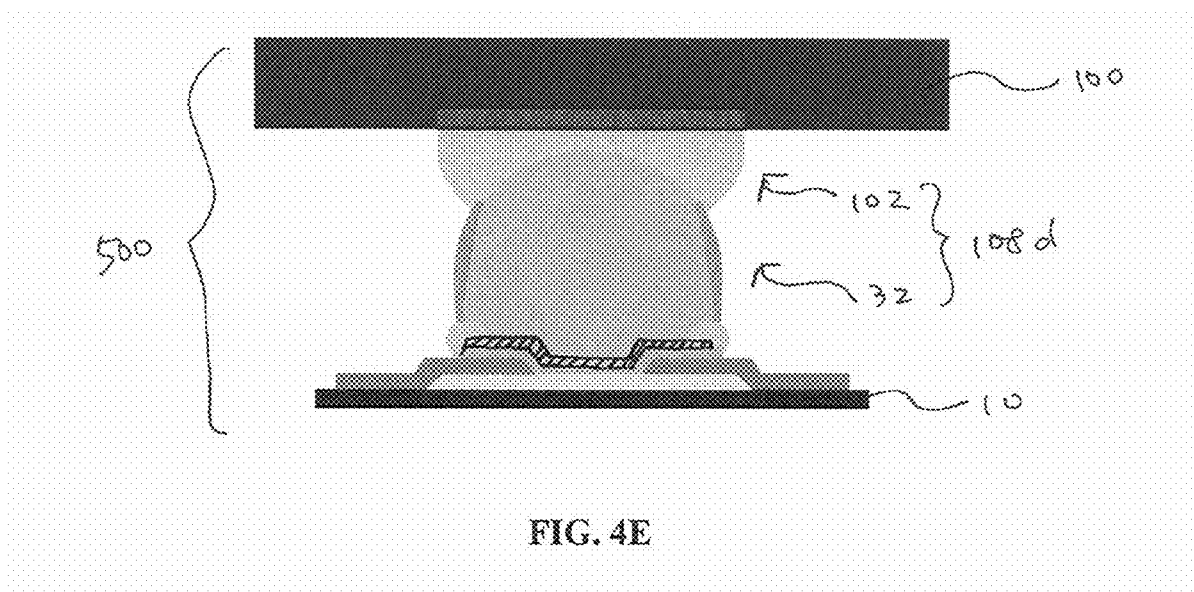

## SEMICONDUCTOR DEVICE AND BUMP FORMATION PROCESS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/301,456, filed Feb. 4, 2010, and entitled “Fine Pitch Solder Bumps and Process for Making Same”, which is hereby incorporated in its entirety herein.

### TECHNICAL FIELD

[0002] This disclosure relates to semiconductor devices, and more particularly, to the fabrication of bump structures in semiconductor devices.

### BACKGROUND

[0003] Modern integrated circuits are made up of literally millions of active and/or passive devices such as transistors and capacitors. These devices are initially isolated from each other, but are later interconnected together to form functional circuits. Typical interconnect structures include lateral interconnections, such as metal lines (wirings), and vertical interconnections, such as vias and contacts. Interconnections are increasingly determining the limits of performance and the density of modern integrated circuits. On top of the interconnect structures, bond pads are formed and exposed on the surface of the respective chip. Electrical connections are made through bond pads to connect the chip to a package substrate or another die. Bond pads can be used for wire bonding or flip-chip bonding. In a typical bumping process, interconnect structures are formed on metallization layers, followed by the formation of under-bump metallurgy (UBM) and solder balls. Flip-chip packaging utilizes bumps to establish electrical contact between a chip's I/O pads and the substrate or lead frame of the package. Structurally, a bump actually contains the bump itself and a so-called under bump metallurgy (UBM) located between the bump and an I/O pad. An UBM generally contains an adhesion layer, a barrier layer and a wetting layer, arranged in that order, on the I/O pad. The bumps themselves, based on the material used, are classified as solder bumps, gold bumps, copper pillar bumps and bumps with mixed metals.

[0004] Usually, a material used for the solder alloy is so-called Sn—Pb eutectic solder of Sn-38 mass % Pb. Recently the semiconductor industry has been moving to “lead (Pb) free” packaging and lead-free device connector technology. This trend increasingly results in the use of lead free solder bumps and lead free solder balls to form connections with integrated circuits and packages. The use of lead free solder is safer for the environment, safer for workers in the industry and safer for consumers than lead based solder bumps or solder balls. However, the quality and reliability of the solder bumps has not always been as great as desired. For finer pitches and larger interconnect densities, the risk of shorts occurring between solder bumps during fabrication and flip-chip assembly is high.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIGS. 1A~1G are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment;

[0006] FIGS. 2A~2C are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment;

[0007] FIGS. 3A~3D are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment; and

[0008] FIGS. 4A~4E are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment.

### DETAILED DESCRIPTION

[0009] This disclosure provides bump formation processes used in semiconductor devices applied to flip-chip assembly, wafer-level chip scale package (WLCSPP), three-dimensional integrated circuit (3D-IC) stack, and/or any advanced package technology fields. Embodiments described herein relate to methods of forming solder bumps for use with semiconductor devices. In the following description, numerous specific details are set forth to provide a thorough understanding of the disclosure. However, one having an ordinary skill in the art will recognize that the disclosure can be practiced without these specific details. In some instances, well-known structures and processes have not been described in detail to avoid unnecessarily obscuring the disclosure. Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment. Thus, the appearances of the phrases “in one embodiment” or “in an embodiment” in various places throughout this specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more embodiments. It should be appreciated that the following figures are not drawn to scale; rather, these figures are merely intended for illustration.

[0010] FIGS. 1A~1G are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an exemplary embodiment.

[0011] With reference to FIG. 1A, an exemplary semiconductor substrate 10 used for bump fabrication is employed in a semiconductor device fabrication, and integrated circuits may be formed therein and/or thereupon. The semiconductor substrate 10 is defined to mean any construction comprising semiconductor materials, including, but is not limited to, bulk silicon, a semiconductor wafer, a silicon-on-insulator (SOI) substrate, or a silicon germanium substrate. Other semiconductor materials including group III, group IV, and group V elements may also be used. The substrate 10 may further comprise a plurality of isolation features (not shown), such as shallow trench isolation (STI) features or local oxidation of silicon (LOCOS) features. The isolation features may define and isolate the various microelectronic elements (not shown). Examples of the various microelectronic elements that may be formed in the substrate 10 include transistors (e.g., metal oxide semiconductor field effect transistors (MOSFET), complementary metal oxide semiconductor (CMOS) transistors, bipolar junction transistors (BJT), high voltage transistors, high frequency transistors, p-channel and/or n-channel field effect transistors (PFETs/NFETs), etc.), resistors, diodes, capacitors, inductors, fuses, or other suitable elements. Various processes are performed to form the various microelectronic elements including deposition, etching, implantation, photolithography, annealing, or other suitable processes. The microelectronic elements are interconnected to form the integrated circuit device, such as a logic device, memory device (e.g., static random access memory or SRAM), radio frequency (RF) device, input/output (I/O)

device, system-on-chip (SoC) device, combinations thereof, or other suitable types of devices.

**[0012]** The substrate **10** further includes inter-layer dielectric layers and a metallization structure overlying the integrated circuits. The inter-layer dielectric layers in the metallization structure include low-k dielectric materials, un-doped silicate glass (USG), silicon nitride, silicon oxynitride, or other commonly used materials. The dielectric constants (k value) of the low-k dielectric materials may be less than about 3.9, or less than about 2.8. Metal lines in the metallization structure may be formed of copper or copper alloys. One skilled in the art will realize the formation details of the metallization layers.

**[0013]** FIG. 1A depicts a conductive region **12** and a passivation layer **14** formed on the substrate **10**. The conductive region **12** is a metallization layer formed over the inter-layer dielectric layers. The conductive region **12** is a portion of conductive routes and has an exposed surface treated by a planarization process, such as chemical mechanical polishing (CMP), if necessary. Suitable materials for the conductive region **12** may include, but are not limited to, for example copper, aluminum, copper alloy, or other mobile conductive materials, although it may also be formed of, or include, other materials such as copper, silver, gold, nickel, tungsten, alloys thereof, and/or multi-layers thereof. In one embodiment, the conductive region **12** is a pad region **12**, which may be used in the bonding process to connect the integrated circuits in the respective chip to external features. The passivation layer **14** is formed on the substrate **10**, overlying the pad region **12**. Using photolithography and etching processes, the passivation layer **14** is patterned to form an opening exposing a portion of the conductive region **12**. In one embodiment, the passivation layer **14** is formed of a non-organic material selected from un-doped silicate glass (USG), silicon nitride, silicon oxynitride, silicon oxide, and combinations thereof. In another embodiment, the passivation layer **14** is formed of a polymer layer, such as an epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), and the like, although other relatively soft, often organic, dielectric materials can also be used.

**[0014]** FIG. 1A also depicts the formation of an under-bump-metallurgy (UBM) layer **16** on the passivation layer **14**, electrically connected to the pad region **12**. The UBM layer **16** is formed on the passivation layer **14** and the exposed portion of the conductive region **12**. In an embodiment, the UBM layer **16** includes a diffusion barrier layer and/or a seed layer. The diffusion barrier layer, also referred to as a glue layer, is formed to cover the sidewalls and the bottom of the opening of the passivation layer **14**. The diffusion barrier layer may be formed of titanium, although it may also be formed of other materials such as titanium nitride, tantalum, tantalum nitride, or the like. The formation methods include physical vapor deposition (PVD) or sputtering. The seed layer may be a copper seed layer formed on the diffusion barrier layer using PVD or sputtering. The seed layer may be formed of copper alloys that include silver, chromium, nickel, tin, gold, or combinations thereof. In one embodiment, the UBM layer **16** is a Cu/Ti layer. The diffusion barrier layer may have a thickness about 1000–2000 Angstroms, and the seed layer may have a thickness equal to about 3000–7000 Angstroms, although their thicknesses may also be greater or smaller. The dimensions recited throughout the description are merely examples, and will be scaled with the downscaling of integrated circuits.

**[0015]** FIG. 1A further depicts the formation a mask layer **18** provided on the UBM layer **16** and patterned with an opening **19** for example, by exposure, development or etching, so that a portion of the UBM layer **16** is exposed for bump formation. The mask layer **18** may be a dry film or a photoresist film. In an embodiment, the mask layer **18** is a dry film, and may be formed of an organic material such as Ajinomoto buildup film (ABF). In alternative embodiments, the mask layer **18** is formed of a photo resist. The thickness of the mask layer **18** may be greater than about 5  $\mu\text{m}$ , or even between about 10  $\mu\text{m}$  and about 120  $\mu\text{m}$ .

**[0016]** Referring to FIG. 1B, a solder material layer **22** is formed over the UBM layer **16** within the opening **19** of the mask layer **18**. The solder material layer **22** is made of Sn, SnAg, Sn—Pb, SnAgCu (with Cu weight percentage less than 0.3%), SnAgZn, SnZn, SnBi—In, Sn—In, Sn—Au, SnPb, SnCu, SnZnIn, or SnAgSb, etc. In one embodiment, the solder material layer **22** is a lead-free solder material layer. In some embodiments, an optional metallization layer **20** is deposited in the opening **19** before the formation of the solder material layer **22**. The optional metallization layer **20** has a thickness less than 10  $\mu\text{m}$ . In some embodiments, the optional metallization layer **20** has a thickness about 1–10  $\mu\text{m}$ , for example about 4–8  $\mu\text{m}$ , although the thickness may be greater or smaller. The formation method of the metallization layer **20** may include electro plating methods. In one embodiment, the optional metallization layer **20** includes a copper layer, a copper alloy layer, a nickel layer, a nickel alloy layer, or combinations thereof. In some embodiments, the optional metallization layer **20** includes gold (Au), silver, palladium (Pd), indium (In), nickel-palladium-gold (NiPdAu), nickel-gold (NiAu) or other similar materials or alloy.

**[0017]** Next, the mask layer **18** is removed as shown in FIG. 1C. In the case the mask layer **18** is a dry film, it may be removed using an alkaline solution. If the mask layer **18** is formed of photoresist, it may be removed by a wet stripping process using acetone, n-methyl pyrrolidone (NMP), dimethyl sulfoxide (DMSO), aminoethoxy ethanol, and the like. Thus the uncovered portions of the UBM layer **16** are exposed, and the solder material layer **22** becomes a solder pillar **22a**. In an embodiment, the thickness of the solder pillar **22a** is greater than 40  $\mu\text{m}$ . In other embodiments, the thickness of the solder pillar **22a** is about 40–70  $\mu\text{m}$ , although the thickness may be greater or smaller. Next, as shown in FIG. 1D, uncovered portions of the UBM layer **16** are removed to expose the underlying passivation layer **14** by etching methods, such as wet etching, dry etching or the like.

**[0018]** FIG. 1E depicts a thermally reflow process performed on the solder pillar **22a**, forming a ball-shaped solder bump **22b**. During thermal cycling, an intermetallic compound (IMC) layer may be formed between the solder bump **22b** and the optional metallization layer **20**. The optional metallization layer **20** may be consumed during the IMC formation.

**[0019]** With reference to FIG. 1F, a metal cap layer **24** is formed on at least an exposed portion of the solder bump **22b**. In one embodiment, the metal cap layer **24** is formed on the entire surface of the solder bump **22b**. In other embodiments, the metal cap layer **24** extends to cover the surface of the optional metallization layer **20** and the UBM layer **16**. The metal cap layer **24** is a metal material layer with a melting temperature greater than the melting temperature of the solder material layer **22**. In some embodiments, the metal cap layer **24** is formed of copper, nickel (Ni), gold (Au), silver

(Ag), palladium (Pd), indium (In), nickel-palladium-gold (NiPdAu), nickel-gold (NiAu), other similar materials, or alloy. In some embodiments, the metal cap layer **24** may further include many other conductive materials used in semiconductor packaging such as indium (In), platinum (Pt), cobalt (Co), vanadium (V), and their alloys. In one embodiment, the metal cap layer **24** has a thickness about  $0.02\text{ }\mu\text{m}$ – $5\text{ }\mu\text{m}$ , although the thickness may be greater or smaller. The metal cap layer **24** may be a single-layered structure or a multi-layered structure. In an embodiment, the metal cap layer **24** is deposited by electroless or immersion metal deposition process, for example an ENEPIG structure (a stack of an electroless nickel (Ni)/electroless palladium (Pd)/immersion gold (Au) layers), an ENEP structure (a stack of an electroless nickel (Ni)/electroless palladium (Pd) layers), and EN layer (an electroless nickel (Ni) layer), an ENIG structure (a stack of an electroless nickel (Ni)/immersion gold (Au) layers), or combinations thereof.

**[0020]** This completes a bump structure **26** including the UBM layer **16**, the optional metallization layer **20**, the solder bump **22b** and the metal cap layer **24**. The bump structure **26** of the embodiments may be various sizes in diameter and may include so-called “micro-bumps”. For example, the bump structure may be 65–80 microns in diameter. The pitch between bump structures may be less than 150 microns, such as 130–140 microns, and may in the future get even smaller. For micro-bump applications, the pitch may be 20–50 microns, and the diameter may be between 10–25 microns as well. The resulting bump structure **26** has a portion that is covered with the metal cap layer **24** that is harder, and has a higher melting point, than the solder bump **22b**. The metal cap layer **24** causes the solder bump **22b** to act as a spring or act like an air filled balloon when subsequently pushed against a substrate, that is, the bump structure **26** can resist deformation. In some ways, the metal cap layer **24** acts as a hard stop. The bump structure **26** can maintain a more uniform stand off height in completed packages, and the shorting and bridging problems are reduced or eliminated.

**[0021]** FIG. 1G is a cross-sectional diagram depicting an embodiment of a package assembly with the bump structure **26**. After the formation of the bump structure **26**, the substrate **10** may then be sawed and packaged onto a package substrate, or another die, with solder balls or Cu posts mounted on a pad on the package substrate or the other die. The structure shown in FIG. 1F is attached to another substrate **100**. The substrate **100** may be a package substrate, board (e.g., a print circuit board (PCB)), or other suitable substrate. The connection structure **102** contacts the substrate **100** at various conductive attachment points, for example, a solder layer **106** on contact pads **104** and/or conductive traces. The solder layer **106** may be a eutectic solder material including alloys of tin, lead, silver, copper, nickel, bismuth, or combinations thereof. Using an exemplary coupling process including a flux application, chip placement, thermally reflowing of melting solder joints, and cleaning of flux residue, a joint-solder structure **108** is formed between the substrates **10** and **100**. The substrate **10**, the joint-solder layer **108a**, and the other substrate **100** is referred to as a packaging assembly **200**, or in the present embodiment, a flip-chip assembly. In some embodiments, after thermal cycles during package assembly process, the metal cap layer **24** may react with the solder bump **22b** and/or the solder layer **106**, resulting in an intermetallic compound (IMC) within the joint-solder structure **108a**. Also, the metal elements in the metal cap layer **24** may diffuse into the

solder bump **22b** and/or the solder layer **106** after thermal cycles. The metal cap layer **24** may be partially consumed during the IMC formation. It is discovered that the use of the metal cap layer **24** on the solder bump **22b** maintains a more uniform stand off height in completed packages, and improved reliability of the semiconductor device.

**[0022]** FIGS. 2A–2C are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with embodiments. The explanation of the same or similar portions to the description in FIG. 1A to FIG. 1G will be omitted.

**[0023]** With reference to FIG. 2A, after the UBM etching process, the resulting structure as shown in FIG. 1D proceeds to the formation of the metal cap layer **24**. That is, the metal cap layer **24** is formed on the solder pillar **22a** before performing a solder thermally reflow process. In one embodiment, the metal cap layer **24** is formed on the entire surface of the solder pillar **22a** by electroless or immersion metal deposition process. In some embodiments, the metal cap layer **24** extends to cover a portion of the optional metallization layer **20** and the UBM layer **16**. This completes a bump structure **28a** including the UBM layer **16**, the optional metallization layer **20**, the solder pillar **22a** and the metal cap layer **24**. The metal cap layer **24** causes the solder pillar **22a** to act as a spring or act like an air filled balloon when subsequently pushed against a substrate. The metal cap layer **24** acts as a hard stop to make the bump structure **28a** maintain a more uniform stand off height in completed packages. The shorting and bridging problems are therefore reduced or eliminated.

**[0024]** In an alternative embodiment, the bump structure **28a** proceeds to a solder thermally reflow process. With reference to FIG. 2B, the solder pillar **22a** is thermally reflowed to shape the pillar into a rounded solder bump **22c**. In one embodiment, the solder bump **22c** includes a rounded corner in a cross-sectional view. Also, the metal elements in the metal cap layer **24** may diffuse into the solder bump **22c** after thermal cycles. This completes another bump structure **28b** including the UBM layer **16**, the optional metallization layer **20**, the rounded solder bump **22c** and the metal cap layer **24**. The metal cap layer **24** causes the solder bump **22c** to act as a spring or act like an air filled balloon when subsequently pushed against a substrate. The metal cap layer **24** acts as a hard stop to make the bump structure **28b** maintain a more uniform stand off height in completed packages. The shorting and bridging problems are therefore reduced or eliminated.

**[0025]** FIG. 2C is a cross-sectional diagram depicting an embodiment of a package assembly with the bump structure **28b**. After the formation of the bump structure **28a** or **28b**, the substrate **10** may then be sawed and packaged to another substrate **100** through the connection structure **102** including a solder layer **106** on contact pads **104** and/or conductive traces. Using an exemplary coupling process, a joint-solder structure **108b** is formed between the substrates **10** and **100**. The substrate **10**, the joint-solder layer **108b**, and the other substrate **100** is referred to as a packaging assembly **300**. In the case of forming the bump structure **28a** on the substrate **10**, the solder pillar **22a** is thermally reflowed to shape the pillar into a rounded solder bump **22c** during the coupling process, and thereby the bump structure **28b** becomes the bump structure **28b** in the packaging assembly **300**. Also, the metal elements in the metal cap layer **24** may diffuse into the solder bump **22c** and/or the solder layer **106** after thermal cycles. It is discovered that the use of the metal cap layer **24** of the bump

structure **28a** or **28b** maintains a more uniform stand off height in completed packages, and improved reliability of the semiconductor device.

[0026] FIGS. 3A~3D are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment. The explanation of the same or similar portions to the description in FIG. 1A to FIG. 1G will be omitted.

[0027] With reference to FIG. 3A, after removing the mask layer, the resulting structure as shown in FIG. 1C proceeds to the formation of the metal cap layer **24**. That is, the metal cap layer **24** is formed on the solder pillar **22a** and the uncovered portions of the UBM layer **16** before performing an UBM etching process. In one embodiment, the metal cap layer **24** is formed on the entire surface of the solder pillar **22a** by electro plating, electroless plating, or chemical vapor deposition (CVD) methods.

[0028] Next, as shown in FIG. 3B, an etching process, such as wet etching, dry etching or the like, is performed in order to remove the UBM layer **16** outside the solder pillar **22a** till the passivation layer **14** is exposed. The metal cap layer **24** and the UBM layer **16** outside the solder pillar **22a** are removed in the etching process, and a portion of the metal cap layer **24** on the surface of the solder pillar **22a** is also removed. In one embodiment, a portion of the metal cap layer **24** on the top of the solder pillar **22a** is removed to expose the top surface **22t** of the solder pillar **22a**. In some embodiments, a portion of the metal cap layer **24** adjacent to the upper sidewall of the solder pillar **22a** is removed to expose the upper sidewall surface **22su** of the solder pillar **22a**. The metal cap layer **24** remains on the lower sidewall surface **22sl** of the solder pillar **22a**.

[0029] FIG. 3C depicts a thermally reflow process performed on the solder pillar **22a**, forming a surface-rounded solder bump **22d**. During thermal cycling, the metal elements of the metal cap layer **24** may diffuse into the solder bump **22d**, and an intermetallic compound (IMC) layer may be formed between the solder bump **22d** and the metal cap layer **24**. This completes a bump structure **30** including the UBM layer **16**, the optional metallization layer **20**, the solder bump **22d** and the metal cap layer **24**. The metal cap layer **24** remains on the lower sidewall surface **22sl** of the solder bump **22d**. The metal cap layer **24** causes the solder bump **22d** to act as a spring or act like an air filled balloon when subsequently pushed against a substrate. The metal cap layer **24** acts as a hard stop to make the bump structure **28a** maintain a more uniform stand off height in completed packages. The shorting and bridging problems are therefore reduced or eliminated.

[0030] FIG. 3D is a cross-sectional diagram depicting an embodiment of a package assembly with the bump structure **30**. After the formation of the bump structure **30**, the substrate **10** may then be sawed and packaged to another substrate **100** through the connection structure **102** including a solder layer **106** on contact pads **104** and/or conductive traces. Using an exemplary coupling process, a joint-solder structure **108c** is formed between the substrates **10** and **100**. The substrate **10**, the joint-solder layer **108c**, and the other substrate **100** is referred to as a packaging assembly **400**. It is discovered that the use of the metal cap layer **24** of the bump structure **30** maintains a more uniform stand off height in completed packages, and improved reliability of the semiconductor device.

[0031] FIGS. 4A~4E are cross-sectional views of a portion of a semiconductor device at various stages in a bump formation process in accordance with an embodiment. The explanation of the same or similar portions to the description in

FIG. 1A to FIG. 1G will be omitted.

[0032] With reference to FIG. 4A, after the formation of the solder material layer **22** in the opening **18** of the mask layer **18**, the mask layer **18** is partially removed to expose a portion of the solder pillar **22a**, and a portion of the mask layer **18** remains at the lower portions of the solder pillar **22a**. In one embodiment, the top surface **22t** is exposed, and an upper portion of the sidewall surface **22s<sub>1</sub>** is exposed. For example, more than 50% (e.g., about 70%~80%) of the sidewall surface is exposed at this step.

[0033] Next, as shown in FIG. 4B, a metal cap layer **24** is formed on the exposed surface of the solder pillar **22a** by electro plating or electroless plating methods, followed by removing the remaining portion of the mask layer **18**. That is, the metal cap layer **24** is formed on the uncovered surface of the solder pillar **22a**, including the top surface **22t** and the upper portion of the sidewall surface **22s<sub>1</sub>**. After completely removing the mask layer **18**, the lower portion of the sidewall surface **22s<sub>2</sub>** and the UBM layer **16** are exposed.

[0034] Next, as shown in FIG. 4C, an etching process, such as wet etching, dry etching or the like, is performed in order to remove the UBM layer **16** outside the solder pillar **22a** till the passivation layer **14** is exposed. A portion of the metal cap layer **24** on the surface of the solder pillar **22a** is also removed during the UBM etching step. In one embodiment, a portion of the metal cap layer **24** on the top of the solder pillar **22a** is removed to expose the top surface **22t**. In some embodiments, a portion of the metal cap layer **24** on to the top of the upper portion sidewall of the solder pillar **22a** is removed to expose the top sidewall surface **22s<sub>ir</sub>**. The metal cap layer **24** remains on the middle sidewall surface **22sm** of the solder pillar **22a**.

[0035] FIG. 4D depicts a thermally reflow process performed on the solder pillar **22a**, forming an ovoid-shaped solder bump **22e**. Because the metal cap layer **24** has a higher melting point than the solder material, the bump shape is laterally spread at the bottom portion **22e<sub>1</sub>** that is outside the metal cap layer **24**. The bottom portion **22e<sub>1</sub>** provides several advantages, e.g., providing an additional stress relief feature, further promoting adhesion of the solder bump with the underlying materials, as well as providing a mechanical stress relief. During thermal cycling, the metal elements of the metal cap layer **24** may diffuse into the solder bump **22e**, and an intermetallic compound (IMC) layer may be formed between the solder bump **22e** and the metal cap layer **24**.

[0036] This completes a bump structure **32** including the UBM layer **16**, the optional metallization layer **20**, the solder bump **22e** and the metal cap layer **24**. The metal cap layer **24** causes the solder bump **22e** to act as a spring or act like an air filled balloon when subsequently pushed against a substrate. The metal cap layer **24** acts as a hard stop to make the bump structure **28a** maintain a more uniform stand off height in completed packages. The shorting and bridging problems are therefore reduced or eliminated.

[0037] FIG. 4E is a cross-sectional diagram depicting an embodiment of a package assembly with the bump structure **32**. After the formation of the bump structure **32**, the substrate **10** may then be sawed and packaged to another substrate **100** through the connection structure **102** including a solder layer **106** on contact pads **104** and/or conductive traces. Using an exemplary coupling process, a joint-solder structure **108d** is formed between the substrates **10** and **100**. The substrate **10**, the joint-solder layer **108d**, and the other substrate **100** is referred to as a packaging assembly **500**. It is discovered that

the use of the metal cap layer **24** of the bump structure **32** maintains a more uniform stand off height in completed packages, and improved reliability of the semiconductor device. **[0038]** In the preceding detailed description, the disclosure is described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications, structures, processes, and changes may be made thereto without departing from the broader spirit and scope of the disclosure. The specification and drawings are, accordingly, to be regarded as illustrative and not restrictive. It is understood that the disclosure is capable of using various other combinations and environments and is capable of changes or modifications within the scope of inventive concepts as expressed herein.

What is claimed is:

1. A semiconductor device, comprising:  
a semiconductor substrate;  
a pad region on the semiconductor substrate;  
a solder bump overlying and electrically connected to the pad region; and  
a metal cap layer formed on at least a portion of the solder bump;  
wherein the metal cap layer has a melting temperature greater than a melting temperature of the solder bump.
2. The semiconductor device of claim 1, wherein the metal cap layer comprises nickel.
3. The semiconductor device of claim 1, wherein the metal cap layer comprises palladium.
4. The semiconductor device of claim 1, wherein the metal cap layer comprises gold.
5. The semiconductor device of claim 1, wherein the metal cap layer comprises copper.
6. The semiconductor device of claim 1, wherein the solder bump comprises a lead-free solder material.
7. The semiconductor device of claim 1, wherein the metal cap layer is formed on the entire surface of the solder bump.
8. The semiconductor device of claim 1, wherein the metal cap layer is formed on the lower sidewall surface of the solder bump.
9. The semiconductor device of claim 1, wherein the metal cap layer is formed on the middle sidewall surface of the solder bump.

10. The semiconductor device of claim 9, wherein the solder bump comprises a bottom portion laterally spreading outside the metal cap layer.

11. A packaging assembly, comprising:

- a semiconductor substrate;
  - a package substrate; and
  - a bump structure disposed between and electrically connecting the semiconductor substrate and the package substrate;
- wherein the bump structure comprises a solder bump and a metal cap layer covering at least a portion of the solder bump, and the metal cap layer has a melting temperature greater than a melting temperature of the solder bump.

12. The packaging assembly of claim 11, wherein the metal cap layer comprises at least one of nickel, palladium and gold.

13. The packaging assembly of claim 11, wherein the metal cap layer comprises copper.

14. The packaging assembly of claim 11, wherein the solder bump comprises a lead-free solder material.

15. The packaging assembly of claim 11, wherein the solder bump comprises a portion laterally spreading outside the metal cap layer.

16. A method of forming a semiconductor device, comprising:

- forming a solder material layer on a semiconductor substrate;
  - performing a thermally reflow process on the solder material layer; and
  - forming a metal cap layer on at least a portion of the solder material layer;
- wherein the metal cap layer a melting temperature greater than a melting temperature of the solder material layer.

17. The method of claim 16, wherein the metal cap layer comprises at least one of nickel, palladium and gold.

18. The method of claim 16, wherein the metal cap layer is formed after the thermally reflow process.

19. The method of claim 16, wherein the metal cap layer is formed before the thermally reflow process.

20. The method of claim 16, wherein the solder material layer is a solder pillar, and the metal cap layer is formed to cover at least a portion of the sidewall surface of the solder pillar.

\* \* \* \* \*