

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3294206 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **A 01 K 45/00 (2006.01)** **A 61 D 1/02 (2006.01)** **B 05 B 1/28 (2006.01)**
B 05 B 3/10 (2006.01) **B 05 B 9/08 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2021-04-19**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2021-01-13**
- (86) Europæisk ansøgning nr.: **16726455.5**
- (86) Europæisk indleveringsdag: **2016-05-13**
- (87) Den europæiske ansøgnings publiceringsdag: **2018-03-21**
- (86) International ansøgning nr.: **US2016032337**
- (87) Internationalt publikationsnr.: **WO2016183430**
- (30) Prioritet: **2015-05-14 US 201562161440 P**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Boehringer Ingelheim Animal Health USA Inc., 3239 Satellite Boulevard, Bldg. 500, Duluth, GA
30096, USA**
- (72) Opfinder: **LESLIE, Christopher, Davis, 59 Leslie Lane, Cleveland, GA 30528, USA**
PORCHER, Ludovic, 20 La Renais, 44750 Quilly, Frankrig
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **SPRØJTEAPPLIKATOR MED FORBEDRET RÆKKEVIDDE**
- (56) Fremdragne publikationer:
CA-A1- 2 416 726
GB-A- 1 515 511
US-A1- 2006 086 821
US-A1- 2011 036 926

DESCRIPTION

CROSS-REFERENCE TO OTHER APPLICATIONS

[0001] This application claims priority to US provisional patent application serial No. USSN 62/161,440, filed on 14 May 2015.

FIELD OF THE INVENTION

[0002] The disclosure generally relates to spray applicators for dosing vaccines or probiotics to avian animals at a distance. In particular, the disclosure relates to spray applicators for vaccines (i.e. "sprayers") or probiotics, having increased dosing ranges, relative to prior spray applicators. The disclosed improved spray applicator delivers effective and uniform amounts of liquid vaccine or probiotic formulations, having uniformly distributed droplet sizes, to avian animals from at least about 5 to at least about 10 meters away from the spray applicator.

BACKGROUND OF THE INVENTION

[0003] Spray vaccination can be defined as the method for administration of the live vaccines dissolved in water, in the form of droplets, through the air to the birds' target cells. It is considered to be one of the most efficient routes for massive vaccination against Newcastle disease ND and infectious bronchitis IB as it triggers local immunity in the respiratory tract. Moreover, as the respiratory tract is the main site of entry of NDV and IBV, local immediate immune mechanisms therefore form a first line of defense against these infections. Besides that, spray vaccination also induces humoral immune response.

[0004] Similarly, spray administration of probiotics can be defined as the method for administration of the probiotics (dissolved in water or another suitable solvent), in the form of droplets, for inhalation or ingestion by the bird so as to modulate the bird's intestinal microbiota and confer a beneficial effect on the health or well-being of the bird. Known probiotic spray applicators, include LEE, Eng-Hong, PCT Publication number WO 2012/016328.

[0005] This method of vaccination can be done either in the hatchery with cabinet sprayers or at the farms with different kinds of equipment and it allows the vaccination of a large number of birds in a short period of time with low cost. Nevertheless, it is not always synonymous of efficacy as it can lead to vaccination failures uneven uptake and/or development of post - vaccination reactions PVR if it is not properly managed.

[0006] In order to reach the desirable results with the spray process, it is important to consider some key points as the formation of the droplets and the target to be reached respiratory or

digestive tract. The spraying process consists of forcing a vaccine solution through hydraulic nozzles using determined pressure, which provides the energy that breaks a stream of water into droplets. More recently, sprayers equipped with spinning disc atomizers have been developed. In any case, the size of the droplets is influenced by pressure, type of nozzle and environment conditions. These droplets can be classified, according to their size at the point of production as atomization or aerosol <50 µm, fine spray 50 - 100 µm or coarse spray 100 - 150 µm.

[0007] Rotary or disc atomizers generate conical sheets by imparting a tangential velocity component to the flow as it issues from a discharge orifice. The mechanisms of sheet integration are broadly the same as those responsible for jet breakup i.e. in the case of a pressure-sprayer. If the liquid sheet is flowing at high velocity, the turbulence forces generated within the liquid may be strong enough to cause the sheet to disintegrate into groups without any aid or intervention from the surrounding air. However, the principal cause of sheet breakup stems from interaction of the sheet with the surrounding air, whereby rapidly growing waves are superimposed on the sheet. Disintegration occurs when the wave amplitude reaches a critical value and fragments of sheet are torn off. Surface tension forces cause these fragments to contract into irregular ligaments which then collapse into droplets according to the Rayleigh mechanism. Rotary atomizers utilize centrifugal energy to achieve the high relative velocity between air and liquid that is needed for good atomization. A rotating surface is employed which may take the form of a flat disc, vaned disc, cup, bell, or slotted wheel. A simple form of rotary atomizer, comprising a spinning disc with means for introducing liquid at its center. The liquid flows radially outward across the disc and is discharged at high velocity from its periphery. Several mechanisms of atomization are observed with a rotating flat disc, depending on the liquid flow rate and the rotational speed of the disc. At low flow rates the liquid is discharged from the edge of the disc in the form of droplets of fairly uniform size.

[0008] The UlvaVac™ is a professional spray applicator for poultry vaccination FIG. 1A/1B, and the UlvaVac™ Instruction Manual 9010, rev 2. The spray applicator incorporates a spinning disc atomiser see above discussion to control accurately spray droplet size, a process referred to as Controlled Droplet Application CDA which is essential for the efficient delivery of spray vaccine. Rotary / spinning disc atomisers are disclosed in a variety of documents, particularly in US5557848 A to Micron Sprayers Limited. Spray droplets are dispersed in a turbulent airstream to ensure even distribution to all birds.

[0009] The spray applicator consists of a one litre spray reservoir, colour coded liquid feed nozzles to control flow rate, atomiser spray head with spinning disc, electrically operated fan to disperse spray and a 12 V battery for power with recharging unit. The UlvaVac can be used for vaccination of broilers, layers and turkeys and is recommended for vaccination against respiratory diseases such as Infectious Bronchitis, Turkey Rhinotracheitis and Newcastle Disease.

[0010] Low spray volumes of 1-2 litres per house are normally applied allowing operators to treat up to 30,000 broilers, for example, in less than 20 minutes. The method of atomisation

used by the UlvaVac gives precise control over droplet size, ensuring accurate delivery of vaccine to the eye and upper respiratory tract. Post-vaccinal reaction caused by the production of very small droplets is minimised. The precise control over droplet size also allows the use of low spray volumes which significantly reduces the time spent for both vaccine preparation and application, ensuring minimal disturbance to birds.

[0011] The spray droplet sizes produced by the UlvaVac have been accurately measured. The spray applicator is capable of producing a very uniform size range of droplets suitable for the delivery of respirable spray vaccines. Spraying should be carried out on a time and volume basis rather than solely a volume per thousand birds. The more time spent spraying the birds the better the vaccine coverage. However, the time allowed for spraying is determined by the length of time during which the shed/house ventilation can be inoperative. Nozzles may be selected to accommodate different applications.

Table 1. Different rotating disc nozzles provide different flow rates

Nozzle	Flow Rate	Spray volume ml applied in		
		10 min	15 min	20 min
Yellow	45 ml/min in	450	675	900
Orange	60 ml/min in	600	900	1200
Red	90 ml/min in	900	1350	1800
Black	150 ml/min in	1500	2250	3000

[0012] To spray a house containing 30,000 ten day old broilers, depending on ambient temperature, the ventilation can be shut down for approximately 20 minutes without stressing the birds. In 20 minutes the yellow nozzle will spray approximately 900 ml. 30,000 doses should be mixed in 900 ml of fresh distilled water and the vaccine sprayed on the birds for 20 minutes.

[0013] To spray a house containing 8,000 twelve week old broiler breeders, depending on ambient temperature, the ventilation can be shut down for approximately 20 minutes without stressing the birds. In 20 minutes the yellow nozzle will spray approximately 900 ml. 8,000 doses of vaccine should be mixed in 900 ml of fresh distilled water and the vaccine sprayed on the birds for 20 minutes.

[0014] The UlvaVac provides the uniform droplet size required for vaccinating avian animals including chickens, including broilers, but its range is limited i.e. the user must be relatively close to the birds. Before the instant disclosure, it was not known whether the dosing range could be extended by increasing the speed of the air flow. For example, if increasing the speed of the air flow caused the vaccine droplet size to become too small, the vaccine would end up in the lungs of the birds, which is not desirable. Furthermore, if higher speed caused the vaccine to be sprayed non-uniformly, some of the birds would be under-protected, while others would be overdosed, and suffer from side effects. Finally, higher air speeds could also comprise the immunogenicity and/or efficacy of the vaccine or probiotic formulation itself.

[0015] Therefore, to achieve the desired range increase for spray applicators, it would be necessary to increase the speed of airflow, while taking into account and optimizing at least four variables: 1 air flow geometry; 2 uniformity of droplet size; 3 uniformity of vaccine dose delivered to each bird; and 4 preservation of the immunogenicity of a vaccine that subjected to high air flow conditions. Development of tests to measure each of these variables is also required for the development of an improved dosing range spray applicator.

ADVANTAGES

[0016] Like the UlvaVac, the disclosed extended-range spray applicator is battery powered. As well as spinning the disc atomizer that produces the uniform droplets, the battery also powers an air supply means, which may be a blower motor. The combined action of the air supply means and the rotating disc atomizer distributes the vaccine over an area of up to about 5 to about 10 meters long and 2 meters wide. The about 5 to about 10 L of liquid that is contained in the machine's reservoir should last about 10 to about 30 minutes when a yellow nozzle is used.

[0017] For broilers, protection from good spray vaccination reduces the possibility of economic losses caused by diseases that enter via the respiratory tract and can cause weight loss and general poor performance of the flock. For layers and breeders, as well as respiratory disease, Infectious Bronchitis viruses can damage the kidneys and oviduct with infections resulting in false layers, drops in production and poor quality eggs.

[0018] By using the instantly disclosed extended-range spray applicator, specifically for use in poultry, vaccines and probiotics are delivered directly to the upper respiratory system - including the eye, nasal cavities and trachea. The device yields a uniform droplet size, is not too heavy to use and is battery powered so it is not too noisy for the birds. Similarly, using the instantly disclosed extended-range spray applicator for administering probiotics enables a predetermined dose of liquid probiotic to be sprayed directly on the birds. It is expected that as the birds preen they will ingest the probiotics from their feathers.

[0019] If a vaccine is sprayed at "chicken-height," not only will pullets and broilers inhale the vaccine or probiotic, it will also go into the Harderian gland in the eye, thereby stimulating the birds' immune systems. Similarly, if the probiotic is sprayed at "chicken-height," it enables the efficient delivery of the probiotic to the bird so that they can ingest the probiotics from their feathers when they preen.

[0020] When one applies vaccines or probiotics with the disclosed improved spray applicator, the band of spray is about 1 to about 2 meters wide and goes about five (5) to about ten (10) meters out, so it can cover a large number of birds. It is possible to vaccinate and/or administer probiotics to 100,000 birds in just 20 minutes.

[0021] The ventilation should be turned off prior to vaccinating the birds using the disclosed improved spray applicator. If there is a lot of air movement, the vaccine can get blown away by the ventilation system.

[0022] IB vaccines and probiotics are quite fragile, so when poultry producers reconstitute the vaccine or probiotic, they must vaccinate and/or administer the probiotic to the birds as quickly and effectively as possible. If an IB vaccine is put through drinker lines, it can take the birds more than two hours to drink it all so a lot of the vaccine virus will have died before it has been consumed by the birds. Similarly, administration of probiotics through drinker lines is known to be problematic as the liquid may be spilled by the birds or the probiotic settles in the lines and does not result in even distribution to the flock.

SUMMARY OF THE INVENTION

[0023] An object of the present disclosure is to provide an extended-range spray applicator and methods of making and use thereof. The extended-range spray applicator is particularly well-suited to delivering liquid medicament, including vaccines and/or probiotics, via an array of droplets having an average droplet size of from about 50 μM to about 200 μM in diameter. These droplets sizes are particularly useful for vaccinating avian animals, including chickens, against a variety of respiratory pathogens or administering probiotics to birds. The spray applicator is capable of vaccinating or administering probiotics to avians at a distance of at least about 5 to about 10 meters.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] A full and enabling disclosure of the present invention, including the best mode thereof, to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, wherein:

FIG. 1 shows an extended-range spray applicator **1** according to the invention;

FIG. 2A shows a more compact embodiment **1A** of the extended-range spray applicator;

FIG. 2B shows an enlarged view of the head assembly **20** configured to attach to the spray applicator depicted in FIG. 2A. This head assembly **20** comprises "Shroud Version 7," which is comprised of a primary shroud **22** and a secondary shroud **62**. In a particular embodiment, the secondary shroud **62** is in approximately in the shape of a section of a 30° cone;

FIG. 2C shows multiple representative secondary shrouds/cones **62**, each having different shapes, angles and diameters. The primary shroud **22** and secondary shroud **62** each comprise a slot **69**, through with the atomizer extenders **66** may pass;

FIG. 2D shows an air supply means **90** with the head assembly **20** removed;

FIG. 3A shows the prior art UlvaVac™ sprayer made by Micron Sprayers for Merial;

FIG. 3B shows an enlarged view of the exploded disc atomizer **23a** operably connected to a disc motor **24** and disc motor housing **25**. Shown are springs **26**; o-rings **27, 28**; a motor front plate **29**; and motor front plate screws **30**, for attaching the motor front plate to the motor housing **25**;

FIG. 4A shows a side view of the head assembly **20**, having the shroud air guide **22**, the nozzle **32** the rotating disc atomizer **23a**, the disc atomizer motor housing **25**, the quick connect hose adapter **34**, and the air supply means adapter **21**;

FIG. 4B shows a three-quarter front view of the head assembly **20**, having the shroud air guide **22**, the nozzle **32** the rotating disc atomizer **23a**, the disc atomizer motor housing **25**, the quick connect hose adapter **34**, the air supply means adapter **21**, and an air supply adapter attachment means **35**, configured to allow for reversible and sealable attachment between the air supply means **10** and the air supply adapter means **21**;

FIG. 4C shows a front view of the head assembly **20**, having the shroud air guide **22**, the nozzle **32** and the rotating disc atomizer **23a**;

FIG. 4D shows a top view of the head assembly **20**, showing the shroud air guide **22**, the rotating disc atomizer **23a**, the quick connect hose adapter **34**, the air supply means adapter **21**, and an air supply adapter attachment means **35** for reversibility attachably and sealably connecting the air supply means **10** to the air supply adapter means **21**. Shown also is a first diameter **D1**, which is about equal in dimension to the diameter of the air supply conduit **11**; a second diameter **D2**, which in this embodiment is the widest part of the shroud air guide **22**. **A1** defines an angle between a rear portion and a front portion of the shroud air guide **22**; and **A2** defines an angle between the rear portion of the shroud air guide **22** and a front portion of the air supply means adapter **21**. The shroud also contains a cut-out **37** to accommodate a power supply wire/cable **38**;

FIG. 4E shows a top view of the head assembly **20**, showing the shroud air guide **22**, the rotating disc atomizer **23a**, the quick connect hose adapter **34**, the air supply means adapter **21**, and an air supply adapter attachment means **35** for reversibility attachably and sealably connecting the air supply means **10** to the air supply adapter means **21**. Shown also is a first diameter **D1**, which is about equal in dimension to the diameter of the air supply conduit **11**; a second diameter **D2**, which in this embodiment is the widest part of the shroud air guide **22**; a third diameter **D3**, which is the diameter of the shroud air guide **22** at the end farthest away from the air supply adapter **21**. **A1** defines an angle between a rear portion and a front portion of the shroud air guide **22**; and **A2** defines an angle between the rear portion of the shroud air guide **22** and a front portion of the air supply means adapter **21**. The shroud also contains a cut-out **37** to accommodate a power supply wire/cable **38**;

FIG. 5A shows a first version of an extended-range spray applicator having a first embodiment of a head assembly **20** operably connectable to a reservoir **40** and an air supply means **10**;

FIG. 5B shows a close-up of the head assembly **20** shown in FIG. 5A;

FIG. 5C shows a left cross-section view of the head assembly **20** shown in FIG. 5A;

FIG. 5D shows bottom view of the head assembly **20** shown in FIG. 5A;

FIG. 6A shows a three-quarter side view of another head assembly **20**;

FIG. 6B shows a side cross-section of the head assembly **20** of FIG. 6A;

FIG. 6C shows a bottom cross-section of the head assembly **20** of FIG. 6A;

FIG. 7A shows a three-quarter side view of another head assembly **20**;

FIG. 7B shows a side cross-section of the head assembly **20** of FIG. 7A;

FIG. 7C shows a bottom cross-section of the head assembly **20** of FIG. 7A;

FIG. 8A shows a three-quarter side view of another head assembly **20**;

FIG. 8B shows a side cross-section of the head assembly **20** of FIG. 8A;

FIG. 8C shows a bottom cross-section of the head assembly **20** of FIG. 8A;

FIG. 9A shows a three-quarter side view of another head assembly **20**;

FIG. 9B shows a bottom view of the head assembly **20** of FIG. 9A;

FIG. 9C shows a top view of the head assembly **20** of FIG. 9A, with a cross-section line drawn from air supply adapter to the far end of the shroud air guide;

FIG. 9D shows a left cross-section view of the head assembly **20** of FIG. 9A, from the perspective of the cross-section line of FIG. 9C;

FIG. 9E shows a side view of the head assembly **20** of FIG. 9A;

FIG. 9F shows a bottom view of the head assembly **2** of FIG. 9A;

FIG. 10A shows a three-quarter side view of another head assembly **20**. In this embodiment, the shroud air guide **22** and the air supply means adapter **21** are two separate pieces, which are configured to be reversibly connected to one another;

FIG. 10B shows a side view of the head assembly **20** of FIG. 10A;

FIG. 10C shows a bottom view of the head assembly **20** of FIG. 10A;

FIG. 10D shows the separated shroud air guide **22** and air supply means adapter **21** of the head assembly **20** of FIG. 10A. Shown are a separate shroud air guide **22** and air supply means adapter **21**, which are configured to be reversibly attached to one another via any suitable attachment means, including via three holes **45a** in the shroud air guide **22**, which alignably correspond to three holes **45b** in the air supply means adapter **21**, such that a

suitable attachment means e.g. a nut/bolt combination may be passed through the corresponding holes to fasten the shroud air guide **22** to the air supply means adapter **21**;

FIG. 10E shows a side/front view of the head assembly **20** of FIG. 10A;

FIG. 10G shows a rear view of the head assembly **20** of FIG. 10A;

FIG. 11 shows how either a longer spray applicator **1** or a more-compact spray applicator **1A** may be fluidly connected to a reservoir **40**, which is configured to be secured and held by a wearable, backpack-style reservoir holding assembly **50**;

FIG. 12 is a graph showing cumulative volume % v. droplet size. The lines show the prior art UlvaFan at 60.96 and 152.4 cm (2 and 5 feet) and the "Hybrid" extended-range spray applicator of the instant disclosure. Surprisingly, ideal droplet size is maintained even at 609.6 cm (20 feet);

FIG. 13 shows the ULVAFAN/ULVAPAK-MK2 with Olympus i-SPEED TR High Speed Video Camera;

FIG. 14 shows an extended-range spray applicator with Olympus i-SPEED TR High Speed Video Camera;

FIG. 15 shows an ULVAFAN/ULVAPAK-MK2 with Sympatec Laser Diffraction Particle Analyzer;

FIG. 16 shows an extended-range spray applicator with Sympatec Laser Diffraction Particle Analyzer;

FIG. 17 shows an ULVAFAN/ULVAPAK-MK2 High Speed Image;

FIG. 18 shows an extended-range spray applicator High Speed Image;

FIG. 19 is a graph showing MVD of atomizers over various distances in X direction.

DETAILED DESCRIPTION OF THE INVENTION

[0025] The present invention relates to extended-range spray applicator and methods of making and use thereof. The extended-range spray applicator is particularly well-suited to delivering liquid medicament, including vaccines and/or probiotics, via an array of droplets having an average droplet size of from about 50 μM to about 200 μM in diameter. These droplets sizes are particularly useful for vaccinating avian animals, including chickens, against a variety of respiratory pathogens or administering probiotics to birds.

[0026] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in

commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and this disclosure. To the extent the definitions of terms in the publications, patents, and patent applications incorporated herein by reference are not the same as the definitions set forth in this specification, the definitions in this specification control for the entire specification, including the claims. Any other definitions in the publications, patents, and patent applications incorporated herein by reference that are not explicitly provided in this specification apply only to the embodiments discussed in the publications, patents, and patent applications incorporated herein by reference.

[0027] As used above, and throughout the description of the invention, the following terms, unless otherwise indicated, shall be understood to have the following meanings:

As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0028] The term "and/or" as used herein includes any and all combinations of one or more of the associated listed items.

[0029] The term "about," as used herein, means approximately, in the region of, roughly, or around. When the term "about" is used in conjunction with a numerical range, it modifies that range by extending the boundaries above and below the numerical values set forth. In general, the term "about" is used herein to modify a numerical value above and below the stated value by a variance of 10%. In one aspect, the term "about" means plus or minus 20% of the numerical value of the number with which it is being used. Therefore, about 50% means in the range of 45%-55%. Numerical ranges recited herein by endpoints include all numbers and fractions subsumed within that range (e.g. 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.90, 4, and 5). It is also to be understood that all numbers and fractions thereof are presumed to be modified by the term "about."

[0030] The term "effective amount" as used herein means an amount of a composition according to the present invention effective in producing the desired veterinary effect.

[0031] In an aspect, the disclosure provides an extended-range spray applicator substantially as depicted in FIG. 1 or FIGs. 2A-2D.

[0032] In some embodiments, the extended-range spray applicator comprises:

1. (a) an air supply means, for providing a flow of air through the spray applicator; wherein the air supply means is configured to connect to
2. (b) a head assembly, configured to attach to the air supply means; wherein the assembly comprises:
 1. (i) an air supply means adaptor, for connecting the head assembly to the air supply means;
 2. (ii) a primary air guide shroud, to guide the flow of air coming from the air supply means;

3. (iii) a liquid atomizer means, for transforming liquid into sub-millimeter-sized droplets; wherein the atomizer is situated centrally within the shroud;
4. (iv) a mounting means, for attaching the atomizer to the head assembly;
5. (v) a motor, mechanically connected to the atomizer; and optionally
6. (vi) a battery receptacle, for holding a battery, which is electrically connected to the motor, wherein the head assembly, already equipped with the primary air guide shroud, is configured to reversibly attach to a secondary shroud.

[0033] In some embodiments, the mounting means are extenders, and both shrouds comprise slots through which the extenders pass.

[0034] In some embodiments, the atomizer is fixedly connected to the extenders.

[0035] In other embodiments, the atomizer is adjustably connected to the extenders, such that a user may direct the atomizer upward or downward, with respect to the direction of air flow.

[0036] In some embodiments, the adjustable connection also allows the user to position the atomizer laterally, such that it is either nearer to, or farther from, the air supply means.

[0037] In some embodiments, both the primary and secondary shrouds comprise a plurality of spacers, which are configured to allow the shrouds to be reversibly connected to one another. For example, each shroud may comprise 4 spacers.

[0038] In some embodiments, the air supply means adapter is cylindrical and comprises a means for lockably attaching the head assembly to the air supply portion of the spray applicator.

[0039] In some embodiments, the spray applicator comprises a battery housing, situated atop the head assembly, and configured to receive and house a rechargeable battery, which supplies electricity to the atomizer motor.

[0040] In some embodiments, the atomizing means is a rotary disc atomizer, which is mechanically connected to a disc atomizer motor, which is housed within a motor housing, which is fixedly connected to a disc atomizer assembly frame.

[0041] In another aspect, the disclosure provides a head assembly, for use with the disclosed spray applicator, comprising:

1. (a) an air supply means adaptor, for connecting the head assembly to the air supply means;
2. (b) a primary air guide shroud, to guide the flow of air coming from the air supply means;
3. (c) a rotary disc atomizer, for transforming liquid into sub-millimeter-sized droplets; wherein the atomizer is situated centrally within the shrouds;

4. (d) at least two extenders, for attaching the atomizer to the head assembly;
5. (e) a motor, mechanically connected to the atomizer; and
6. (f) a battery receptacle, for holding a battery, which is electrically connected to the motor, wherein the head assembly, already equipped with the primary air guide shroud, is configured to reversibly attach to a secondary shroud.

[0042] In an embodiment, the head assembly may comprise a primary and secondary shroud, each comprising a slot through which the extenders pass. In an advantageous embodiment, the secondary shroud has a conical angle of about 30°.

[0043] In some embodiments of the head assembly, at least one shroud is characterized by having at least three diameters, D1, D2 and D3, and at least two angles, A1 and A2.

[0044] In some embodiments, D1 is at least about 30% to about 50% smaller than D2, and D2 is about equal to or is about 10% smaller than D3.

[0045] In some embodiments, A1 is between about 90° and about 145°, and A2 is between about 130° and 160°.

[0046] In some embodiments, the spray applicator is capable of delivering to an avian animal in need thereof a safe and effective amount of a liquid medicament selected from an immunological formulation, a vaccine or probiotic formulation, an antibiotic formulation, an antifungal formulation, an anticoccidial formulation, a feed additive formulation and combinations thereof.

[0047] In some embodiments, the spray applicator is configured to transform the liquid medicament into substantially uniformly sized droplets, with 90 % of the droplets having a diameter between about 25 µm and about 200 µm.

[0048] In other embodiments, the spray applicator is capable of propelling fluid/vaccine or probiotic droplets at least about 5 or about 10 meters through the air, to deliver safe and effective amounts of the droplets to the avian animals.

[0049] In some embodiments, the spray applicator comprises:

1. (a) an air supply means, which is operably connected to
2. (b) a head assembly, which comprises an air supply means adapter, configured to sealably connect the head assembly to the air supply means; comprising:
 1. (i) at least one air shroud guide, for guiding the array of droplets to the avian animals; and
 2. (ii) a liquid medicament atomizing means, for transforming the liquid medicament into a uniform distribution of droplets.

[0050] In some embodiments, the air shroud guide and the air supply means adapter are either a unitary piece or are at least two separate pieces, to accommodate connection of the head assembly to many different types of air supply means.

[0051] In some embodiments, the air supply means is a commercially-available blower, including a leaf blower.

[0052] In some embodiments, the atomizing means is a rotary disc atomiser, which is operably connected to an electric motor. In an alternate embodiment, the rotary disc atomizer is operably connected to an impeller, which is driven by the air flowing from the air supply means, and which turns the rotary disc atomizer in place of an electric motor.

[0053] In some embodiments, the disc assembly comprises a disc atomizer, a washer and a disc fixing screw. The disc atomizer comprises grooves, wherein the spinning of the atomizer by the motor causes liquid to be drawn into and through the grooves, and wherein the force of the spinning causes the liquid to exit the atomizer as an array of droplets dispersed throughout a substantially columnar or conical flow of air.

[0054] In some embodiments, the head assembly shroud is characterized by having at least three diameters, D1, D2 and D3, and at least two angles, A1 and A2.

[0055] In some embodiments, D1 is at least about 30% to about 50% smaller than D2 and D2 is about equal to or is about 10% smaller than D3.

[0056] In some embodiments, A1 is between about 90° and about 145° and A2 is between about 130° and 160°.

[0057] In another aspect, the disclosure provide a method of vaccinating avian animals against respiratory pathogens, from a distance of at least about 5 or about 10 meters away, comprising the step of using the disclosed extended-range spray applicator to administer to said avian animals an effective amount of at least one respiratory antigen, carried in the form of uniformly-sized droplets, having diameters of from about 50 µm to about 200 µm, thereby vaccinating said avian animal.

[0058] In some embodiments, 10,000 avian animals are vaccinated and/or administered probiotics in less than about 20 minutes; and/or about 5 L to about 10 L of vaccine is delivered within about 20 minutes.

[0059] In some embodiments, the disclosure provides a method of treating birds with a probiotic formulation therapeutic agent by dispersing the probiotic formulation in the form of uniformly-sized droplets, having diameters of from about 50 µm to about 200 µm, from a spray applicator of claim 1 or 2, wherein the birds being treated are at least about 5 to at least about

10 meters away from the spray applicator; and allowing the birds to consume the droplets.

[0060] In some embodiments, the probiotic formulation is a liquid or liquid-like gel.

[0061] In other embodiments, 10,000 birds are treated in less than about 20 minutes, and/or about 5 L to about 10 L of probiotic formulation is delivered within about 20 minutes.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0062] Referring now in more detail to the drawings, in which like numerals indicate like parts throughout the several views, **FIG. 1** illustrates a front perspective view of an extended-range spray applicator **1**. The extended-range spray applicator **1** comprises the following components: an air supply means **10**, which is operably connected to an air supply conduit **11**, and a handle/gripping means **12**, a rechargeable battery retaining means **13** an air supply blower motor housing **14**, and a blower motor **15**, which is encased inside the blower motor housing **14**; and, an extended-range sprayer head assembly **20**. The head assembly **20** comprises an air supply means adapter **21**; configured to connect the air supply conduit **11** to a shroud air guide **22**; an atomizer means **23**, shown here as a rotating disc atomizer **23a**; a means for rotating the atomizer **24**, where mechanical atomizers are employed; a housing **25** for encasing said atomizer rotating means; a fluid supply conduit **33** for delivering fluid to the atomizer **23**. The fluid supply conduit may have a quick-connect adapter **34**, for connecting to a second fluid supply conduit **39**, which is in fluid communication with a reservoir **40** containing a liquid formulation, including a vaccine or probiotic formulation.

[0063] **FIG. 2A** presents a significantly more compact embodiment of an extended-range vaccine spray applicator **100**. In this embodiment, the vaccine spray applicator **100** comprises a compact air supply means **10**, which comprises an air-moving means, which may take the form of a plurality of turbine- or fan-style blades **16**, operably connected to an air supply motor **15** contained within a housing **14**. A handle **12** may be attached in any suitable location on the spray applicator **100**, and particularly, mounted atop the motor housing **14**, in order to provide, advantageously, excellent user ergonomics. The air supply means **10** is configured to receive a battery retaining means **13**, which is electrically connected to the motor **15**, which actuates the air moving means **16** to move air through the spray applicator **100** to ultimately propel liquid droplets through the air. A blower on/off switch may be positioned anywhere on the spray applicator, including on the handle **12**. Further, the spray applicator **100** may be configured to allow for on-device blower motor battery recharging, or, the battery may be charged using a remote docking station. Various configurations are possible now that the instant disclosure has been made.

[0064] As further shown in **FIG. 2B**, the spray applicator **100** comprises a head assembly **20**, configured to reversibly and sealably engage with the portion of the spray applicator **100** that supplies the air. **FIG. 2C** presents the head assembly **20** separated from the air supply portion **90**, and **FIG. 2D** shows various possible secondary shrouds **62**. Shrouds may be alternately

referred to as "cones" or "air guide cones" or "air guide shrouds." In each case, the function of these shrouds **62** is to guide the flow of air to propel atomized liquid droplets that emanate from the atomizer means **23**, **23a**. **FIG 2D** shows the air supply portion **90** of the spray applicator **100** without a head assembly **20** attached thereto. Air supply conduit **11** (which corresponds to the air supply conduit **11** depicted in **FIG. 1**) is configured to reversibly engage with and/or connect to the air supply portion **90** of the various possible head assemblies **20**. Likewise, the head assembly **20** of **FIG. 2B** is configured to attach to air supply conduit **11** via the air supply means adapter **21**. As shown, the air supply means adapter **21** may be cylindrical and may further comprise various means for lockably attaching to the air supply portion **90**, such that the force of the moving air will not dislodge the head assembly **20**.

[0065] Adjacent to the adapter **21**, and situated atop the head assembly **20**, is a battery housing **45**. The battery housing **45** is configured to receive and house a rechargeable battery, which supplies electricity to an atomizer motor, which is electrically connected to the battery, and which is contained within a housing **25**. The motor is operably connected to a disc atomizer **23a**, and may be activated by turning on a power switch housed in power switch receptacle **46**. The disc atomizer **23a** and disc atomizer motor **24** are fixedly connected to a disc atomizer assembly frame **19**, which itself is fixedly connected to a disc atomizer fluid supply assembly **36**. An external fluid supply may be attached and thereby fluidly connected to the supply assembly **36** via quick-connect **34**. Any suitable conduit **39** may be connected to quick-connect **34**, and the fluid supply may be under pressure using gravity (i.e. by maintaining a fluid reservoir **40** at a suitable height above the sprayer's point of use) or, by using a suitable pumping means, including a pulsatile pump or other fluid pump.

[0066] The disc atomizer assembly frame **19** is configured to be fixedly or adjustably mounted to the head assembly **20** via disc atomizer assembly extenders **66**, which are configured to allow reversible attachment of multiple different primary **22** and secondary **62** shrouds. When the disc atomizer assembly frame **19** is adjustably connected to the extenders **66**, the atomizer assembly may be adjusted up or down, to allow the fluid/vaccine to be delivered at either a higher or lower angle, with respect to the stream of air emanating from the air supply means. The frame may also be adjusted to be either nearer to, or farther away from, the air supply portion **90**. This adjustability feature allows the user to select multiple different secondary cones **62**, each cone providing a different pattern of fluid/vaccine droplet delivery. Furthermore, this adjustability allows a user to fine-tune and/or customize the spray applicator to suit a variety of different field vaccination conditions. For example, the atomizer **23a** may be adjusted to point up to direct the vaccine or probiotic droplets to travel higher and farther. Many different combinations and permutations are possible, now that the disclosure has been made.

[0067] Moreover, as shown in **FIGs. 2B/2C**, the primary shroud/cone **22** and secondary shroud/cone **62** comprise slots **69**, which provide space for the disc atomizer assembly extenders **66**. The secondary shroud **62** may be placed nearer to, or farther from, the air supply portion **90**, depending upon the length of the spacers **63**. The longer the spacers **63**, the greater the distance between the air supply **90** and the secondary cone **62**. And hence, the greater the distance away from the air supply must the disc atomizer frame **19** must be

adjusted on the extenders **66**. The primary shroud **22** comprises its own spacers **66**, which are adapted to receive and connect to the spacers **63** present on the secondary shrouds **62**. Configured in this way, the head assembly **20** is adapted to receive a wide variety of different secondary shrouds **62**, which provide the user with a significant degree of flexibility in directing the flow of vaccine or probiotic droplets.

[0068] Accordingly, the spray applicators **1, 100** offer a dramatic improvement in the field of spray vaccination, significantly increasing each of the following delivery parameters: effective range, speed, accuracy and precision.

[0069] As shown in **FIG. 11**, the extended-range spray applicator **1, 100** may also be equipped with the sprayer head assembly **20** depicted in **FIGs. 10A-10D**. Further, the spray applicator **1, 100** is configured to be equipped with a second fluid supply conduit **39**, which is configured to be in conditional fluid communication with a fluid reservoir **40**. In other words, the fluid supply may be reversibly interrupted by the user of the spray applicator. The fluid may also be pushed through the conduit to the sprayer by action of gravity or a pumping means. In an embodiment, the reservoir **40** is configured to be reversibly attachable to a backpack-style harness assembly **50**, which may be worn by a user to facilitate use of the extended-range spray applicator **1, 100**. The rechargeable battery means may provide power to both the air supply means and the atomizer means. In one example, an Allied Electronics NTE1936 integrated circuit positive voltage regulator and a 100 microfarad in-line capacitor may be employed to step-down a 40 volt battery to provide 12 volts to the electric motor that is operably connected to the rotating disc atomizer. In an advantageous embodiment, the atomizer motor **15** is electrically connected to, and powered by, a rechargeable battery housed in receptacle **45**.

[0070] In one embodiment, the probiotic formulation may be in the form of a liquid-like gel. A "liquid-like gel" as used herein is a gel that is easily disrupted or thinned, and that liquefies or becomes less gel-like and more liquid-like under stress, such as caused by the gel being drawn into, through and out of the spinning atomizer, but which quickly returns to a gel when the movement or other stress is alleviated or removed, such as when movement of the fluid exiting the spinning atomizer is stopped, as for example when the exiting fluid lands on the targeted bird. The skilled person knows how to make a formulation more the gel-like or liquid-like by adjusting the amount of gelling agent used in the formulation. One type of liquid-like gel suitable for use in delivering probiotics to birds is disclosed in Wright et al, PCT patent publication number WO2001095891. Other suitable liquid-like gels for use to deliver probiotics to birds include GroGel™ by MS BioScience of Madison, Wis, and gel-Pac™ Animal Science Products, Inc. PO Drawer 631408 Nacogdoches, TX.

[0071] In another embodiment, the liquid-like gel pass through the atomizer disc of the spray applicator and thereby dispersed from the spray applicator in the form of small gel beadlets. The term "beadlet" as used herein refers to small discrete particles, which have a mean particle size from about 50 μM to about 200 μM in diameter and are usually nearly spherical. Beadlets contain one or more probiotics in an encapsulated form.

[0072] While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modifications and this application is intended to cover any variations, uses, or adaptations of the invention following, in general, the principles of the invention and including such departures from the present disclosure as come within known or customary practice within the art to which the invention pertains and as may be applied to the essential features hereinbefore set forth and as follows in the scope of the appended claims. This invention includes all modifications and equivalents of the subject matter recited in the aspects or claims presented herein to the maximum extent permitted by applicable law.

[0073] It is further noted that it is an object of the invention to not encompass within the invention any previously known product, process of making the product, or method of using the product such that Applicants reserve the right and hereby disclose a disclaimer of any previously known product, process, or method. It is further noted that the invention does not intend to encompass within the scope of the invention any product, process, or making of the product or method of using the product, which does not meet the written description and enablement requirements of the USPTO ((35 U.S.C.)112, first paragraph) or the EPO (Article 83 of the EPC), such that Applicants reserve the right and hereby disclose a disclaimer terms such as "consisting essentially of" and "consists essentially of" have the meaning ascribed to them in U.S. Patent law, e.g., they allow for elements not explicitly recited, but exclude elements that are found in the prior art or that affect a basic or novel characteristic of the invention.

[0074] The invention will now be further described by way of the following non-limiting examples.

Examples

[0075] Below disclose the development of the extended-range spray applicator, up to and including the present preferred embodiment, which is detailed above.

Example 1 - Shroud Version 1

[0076] During development of the first shroud version, the goal was to define an optimum angle for the spinning disk atomizer **23a** relative to the air supply / blower tube **11**, to provide optimal operation of the spinning disk atomizer **23a**. Testing demonstrated that the angle between the tip of the spinning disc and the tube needed to be about 240° to allow the fluid to be siphoned out correctly and to prevent leakage during normal operation. During testing of this first shroud version **FIG. 5**, it became apparent that some droplets were being carried downstream by the airflow. However, a large percentage of the droplets created by the atomizer disc were being propelled i.e. via centripetal acceleration outside the effective range

of the air being pushed by the air supply means i.e. the cylinder of air being pushed through air supply conduit **11**. As such, many droplets were landing only a few feet from the device approx. 91.44 to 152.4 cm (3 to 5 feet), which would cause a significant amount of vaccine and/or probiotic to be wasted. It was further observed that the reservoir/bottle made the device very "end-heavy" when full of water or similar solvent. This weight forced the device to have a natural downward aim when held at arm's length. This was observed to be a negative attribute as this would be uncomfortable for the operator to keep the device level for optimum spray coverage. Even were the reservoir to be relocated instead of being mounted directly onto the head assembly **20**, the shroud air guide **22** had too small a diameter **D3** to capture a sufficient percentage of the spray droplets generated by the disc atomizer **23a**.

Example 2 - Shroud Version 2

[0077] In Version 2 (**FIGs. 6A-6C**), the onboard vaccine bottle was replaced by a backpack style tank **FIG. 11**, reservoir **40** to improve the weight and overall ergonomics of the spray applicator. An adapter was designed to adapt the atomizer to a quick connect fitting **34** and silicone supply line **39** from a backpack **50** holding a tank with a capacity of, for example, 5 or 10 liters. The shroud air guide **22** to tube **11** angle was increased to **150°**, which resulted in a larger 12.192 cm (4.8 inch) third shroud diameter **D3**. This increase in **D3** diameter only slightly increased the percentage of droplets captured by the air flow, necessitating further increases to obtain the required vaccine and/or probiotic delivery.

Example 3 - Shroud Version 3

[0078] In Version 3 (**FIGs. 7A-7B**), angle **A2** was increased to 140°, and the shroud was lengthened to about 6.604 cm (2.6 "), which resulted in a much larger about 19.304 cm (7.6") diameter shroud air guide **22**. This **D3** diameter increase resulted in substantially more droplets being carried downstream by the airflow. However, the array of droplets created by the atomizer disc now contacted the shroud at the bottom edge of the shroud **22** resulting in droplet build up on the shroud as well as less coverage on the floor directly in front 60.96 to 91.44 cm (2 to 3 feet) of the extended-range spray applicator.

Moving the atomizer assembly forward, with respect to the shroud air guide **22** resulted in fewer droplets being carried down range, while moving the atomizer assembly rearward resulted in more droplet build up on the lower half of the shroud and less coverage directly in front of the spray applicator. Accordingly, this version did not meet all acceptability criteria.

Example 4 - Shroud Version 4

[0079] In Version 4 (**FIGs. 8A-8C**), the bottom of the shroud was modified to prevent droplet build up and provide better coverage directly in front of the device. These modifications also

allowed the device to be placed on a flat surface when not in use and retain its upright position. A shroud extension ring **22a** was added to capture a greater number of droplets with the airflow directed more substantially in the downstream direction. The shroud extension ring **22a** defined a new diameter, **D2** and an new angle, **A1**. While these modifications yielded better coverage of the vaccine or probiotic droplets directly in front of the spray applicator, droplets were unacceptably building up on the lower edges of the extension ring **22a**. An access opening **37** was also added to allow easier access to the mounting hardware when removing the atomizer assembly for cleaning, repair etc. The adapter **21** was also decreased in length to about 7.112 cm (2.8") to further improve the balance and ultimately the ergonomics of the spray applicator.

Example 5 - Shroud Version 5

[0080] In Version 5 (**FIGs. 9A-9F**), the extension ring **22a** and the diameter **D3** were modified to prevent droplet build up. Component thickness was also increased to about 0.508 cm (0.20") to improve durability.

Example 6 - Shroud Versions 6 and 7

[0081] In Version 6, an advantageous single-shroud embodiment (**FIGs. 10A-10D**), the air supply means adapter **21** and shroud air guide **22** are separate pieces that may be attached to one another. Separation of the adapter and shroud provide additional manufacturing options, more versatility, and allows the shroud to be adapted to any air supply means. That said, the shroud air guide **22** could have a much larger diameter, including greater than 182.88 cm (6 feet), which would allow the spray applicator to capture all the vaccine or probiotic droplets. However, such a device would not be very friendly to operate or produce. As such, a reasonable diameter was selected for the currently preferred head assembly **20**.

[0082] In Version 7, Applicants have taken all the effective functional elements (e.g. two-piece design, shape, diameters, angles, etc.) of the Version 7 assembly **20**, and adapted it to provide for the addition of secondary shrouds **62** having different geometries (as discussed above). The primary shroud **22** now comprises a slot **69** through which can pass the atomizers extenders **66**. Without the extenders **66**, or a suitable functional replacement therefor, it would not have been mechanically practical to add an additional shroud. Once the secondary shroud **62** was added to the spray applicator **100**, Applicants found surprisingly that an even greater percentage of vaccine or probiotic droplets were being effectively delivered to the birds. This finding could not have been predicted in advance of the present disclosure, and was only made possible by the non-routine experimentation disclosed herein.

Example 7 - High Speed Video and Drop Size Characterization Confirms Uniform and Acceptable Droplet Size is Maintained up to at Least 609.6 cm (20 feet).

[0083] High-speed video and drop size characterization of two droplet dispersion devices used in a vaccine delivery application was conducted. The two rotary atomizers evaluate are: 1 Micron ULVAFAN / ULVAPAK-MK2 FIG. 3A ultra-low volume rotary atomizer with battery operation and an 2 ULVAPAK / Hybrid leaf blower assembly i.e. an extended-range spray applicator according to the disclosure and as depicted in FIG. 1 outfitted with a battery powered leaf-blower air supply means unit to deliver spray droplets at a significant distance, including at least about 5 or about 10 meters, away from the operator. A comprehensive evaluation was carried out to investigate the spray characteristics at various distances with an objective to understand the old and new design performance.

[0084] *Test Setup.* An Olympus i-SPEED TR high-speed video camera was used for capturing video during this test. This camera is designed for research and development usage where the objective is to capture high quality video images for subsequent review and analysis. With an acquisition rate of up to 2,000 frames per second at a full resolution of 1280 x 1024, and a top speed of 10,000 fps, the camera is suitable for the vast majority of spray analysis and research testing. The test setup consisted of fabricating a holding bracket for the ULVAFAN / ULVAPAK-MK2 for high-speed videography. The extended-range spray applicator was held in place with a 10.16 cm (four-inch) pipe clamp on a three-axis traverse. Three-axis traverse allowed final adjustments to achieve clean field of view for high-speed videography FIG. 13 and FIG. 14. All testing was conducted using water at ambient lab conditions i.e. approximately 20° C.

[0085] *Drop Size Measurement.* The Sympatec HELOS Particle Analyzer was used to acquire drop size measurements for this test FIG. 15 and FIG. 16. The Sympatec unit is a laser diffraction instrument that measures drop size based on the diffraction pattern of the laser light encountering droplets passing through the analyzer's sampling area a wide laser beam. The scattered light intensity distribution was measured using a multi-element semicircular photodetector housed in the receiver unit left side in FIGs. 15 and 16. Testing was performed using an R6 lens setup. This lens configuration allowed a measurement range of 0.5-9 μm to 1750 μm . All droplets were given a size within a bin---range, the smallest bin of which covers the 0.5-9 μm range, and the largest of which can detect droplets up to 1750 μm . The collected drop size distributions were then used to generate drop size statistics, such as the Median Volume Diameter Dv0.5 or MVD. To characterize the spray performance consistently a typical spray scanning technique was implemented by attaching the atomizer assemblies to an electric cart. The atomizers were traversed vertically in +/-Z directions spraying perpendicular through the measurement area. For characterization at various distances in the +X direction a measuring tape was used as a marker where the zero of the tape was at the center of the measurement area bottom of FIGs. 15 and 16.

[0086] The reservoir level was filled to full at the beginning of each test to reduce the pressure-head changes introduced by water displaced during testing. The battery was charged to full status indicated as solid green on the extended-range spray applicator charger.

[0087] For drop size characterization of ULVPAK / Hybrid Assembly extended-range spray applicator, the grey shroud was used. The tank level was filled to full before each test to reduce the gravity pressure---head changes by water displaced during testing. An external 12V DC power source with an on/off toggle switch fabricated by Spraying Systems Co® and used to power the spinning disc atomizer. The $D_{V0.1}$, $D_{V0.5}$, and $D_{V0.9}$ diameters as defined below were used to evaluate the drop size data in microns μm . The drop size terminology is defined below, and more information can be found in Understanding Drop Size, Bulletin 459c, available at the following link: www.spray.com/literature_pdfs/B459C_Understanding_Drop_Size.pdf.

$D_{V0.1}$: A value where 10% of the total volume or mass of liquid sprayed is made up of drops with diameters smaller or equal to this value.

$D_{V0.5}$: Volume Median Diameter also known as VMD. A means of expressing drop size in terms of the volume of liquid sprayed. The VMD is a value where 50% of the total volume or mass of liquid sprayed is made up of drops with diameters larger than the median value and 50% smaller than the median value. This diameter is used to compare the change in drop size on average between test conditions.

D_{32} : Sauter Mean Diameter also known as SMD is a means of expressing the fineness of a spray in terms of the surface area produced by the spray. The Sauter Mean Diameter is the diameter of a drop having the same volume to surface area ratio as the total volume of all the drops to the total surface area of all the drops.

$D_{V0.9}$: A value where 90% of the total volume or mass of liquid sprayed is made up of drops with diameters smaller or equal to this value.

$D_{V0.99}$: A value where 99% of the total volume or mass of liquid sprayed is made up of drops with diameters smaller or equal to this value.

[0088] *Test Results & Analysis.* High-speed video was acquired near the exit of the spinning disk atomizer to visualize the formation of droplets and the interaction of the droplets with the airstream. Sympatec drop size testing was conducted at multiple downstream distances to assess the drop size characteristics as well as the relative density of the spray cloud. All testing data was collected at one speed for ULVAFAN / ULVPAK MK2 atomizer with the onboard on/off switch. For the extended-range spray applicator Hybrid Assembly, data was collected with the blower fan triggered to max with the atomizer powered by an external 12V DC power with 200 milliamps. Representative screen shots of the high-speed video recording of ULVAFAN / ULVPAK MK2 FIG. 17 and Hybrid Assembly FIG. 18, highlight the atomization process of droplets at the exit of spinning disk geometry. Videos have been produced and may be submitted as electronic amendments to this application.

[0089] The second phase of the tests was to characterize the ULVAFAN / ULVPAK MK2 and the ULVPAK / Hybrid Assembly for drop size using the Sympatec laser diffraction instrument

at many downstream distances from the atomizers. The maximum distance of data collection depended on each blower fan's ability to push a sufficient quantity of droplets downstream. The spray plume was scanned a minimum of two times for data collected at each distance. A straight average method was used to obtain the final results, which are provided in Table 2.

[0090] All drop size measurements acquired for the ULVAFAN / ULVAPAK MK2 atomizer were at constant speed, a step of a 15.24 cm (half-foot) over a maximum distance of 152.4 cm (five feet) was collected Table 2. The MVD data recorded under 100 μm for ULVAFAN / ULVAPAK MK2 is consistent over several distances, a low concentration of droplets at further distances provided a maximum measurement distance of 152.4 cm (5 feet) FIG. 19.

[0091] For drop size collection of ULVAPAK / Hybrid Assembly, the blower fan trigger was pressed at maximum speed, with power supplied directly to the atomizer. The system was allowed to stabilize for few seconds prior each scan for drop size data collection.

Table 2. High Speed Videography Data

Nozzle Name	Gravity Feed Water Supply Height in	Spray Distance ft	D _{v0.1}	D ₃₂	D _{v0.5}	D _{v0.99}
Micron UlvaFan/UlvaPak-MK2	Onboard Tank Attached	0.5	52	81	90	142
		1	50	78	84	141
		1.5	48	73	78	128
		2	47	71	76	125
		2.5	46	71	77	127
		3	46	71	77	131
		3.5	47	72	79	130
		4	46	71	78	127
		4.5	46	72	78	129
		5	47	74	81	135
Extended-range spray applicator hybrid blower tilted up 18°	6" from nozzle inlet	1	86	124	135	197
		2	80	115	125	184
		3	77	115	128	187
		4	73	110	124	181
		5	69	107	121	177
Extended-range spray applicator hybrid blower tilted up 18°	6" from nozzle inlet	1	95	133	141	201
		2	90	128	135	201
		3	83	119	127	191
		4	80	115	123	188
		5	78	113	121	187
		6	75	109	119	186

Nozzle Name	Gravity Feed Water Supply Height in	Spray Distance ft	D _{v0.1}	D ₃₂	D _{v0.5}	D _{v0.99}
		7	69	108	123	184
		8	73	110	121	191
		9	70	106	115	184
		10	76	113	124	195

[0092] During data collection, it was observed that the angled nozzle on the shroud assembly was generating an obstruction at the blower exit. The majority of the forced air was directed so that it was concentrated over the lower-half portion of the spray plume. The top half portion of the spray was unaffected by the forced air which allowed some particles to follow their natural path to ground.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [JP62161440A](#) [0001]
- [WO2012016328PCT](#) [0004]
- [US5557848A](#) [0008]
- [WO2001095891PCT](#) [0070]

Non-patent literature cited in the description

- Understanding Drop Size, Bulletin 459c, [\[0087\]](#)

Patentkrav**1.** Sprøjteapplikator med forbedret rækkevidde (1) omfattende:

- 5 (a) et lufttilførselsorgan (10) til at tilvejebringe en luftstrøm gennem sprøjteapplikatoren (1); hvor lufttilførselsorganet (10) er konfigureret til at forbindes til
- (b) en hovedanordning (20) konfigureret til at fastgøres til lufttilførselsorganet (10); hvor anordningen (20) omfatter:
- 10 (i) en lufttilførselsadaptor (21) til at forbinde hovedanordningen (20) til lufttilførselsorganet (10);
- (ii) en primær luftguidekasse (22) til at guide luftstrømmen, som kommer fra lufttilførselsorganet (10);
- (iii) et væskeforstøverorgan (23) til at omdanne væske til små dråber med sub-millimeterstørrelse; hvor forstøveren (23) er placeret midt inde i kappen (22);
- 15 (iv) et monteringsorgan til at fastgøre forstøveren (23) til hovedanordningen (20);
- (v) en motor (15) mekanisk forbundet med forstøveren (23); og eventuelt
- (vi) en batteribeholder (45) til at holde et batteri, som er elektrisk forbundet med motoren (15);
- 20 hvor hovedanordningen (20), som allerede er udstyret med den primære luftguidekasse (22), er konfigureret til reversibelt at fastgøres til en sekundær kasse (62).

- 25 **2.** Sprøjteapplikatoren ifølge krav 1, hvor monteringsorganerne er forlængere, og hvor begge kasser omfatter slidser, gennem hvilke forlængerne passerer.

3. Sprøjteapplikatoren ifølge krav 2, hvor forstøveren er fast forbundet med forlængerne.

- 30 **4.** Sprøjteapplikatoren ifølge krav 2, hvor forstøveren er justerbart forbundet med forlængerne, således at en bruger kan rette forstøveren opad eller nedad i forhold til retningen af luftstrømmen.

- 5.** Sprøjteapplikatoren ifølge krav 4, hvor den justerbare forbindelse også gør det muligt for brugeren at positionere forstøveren lateralt, således at den er enten tættere på, eller længere fra, lufttilførselsorganet.
- 5 **6.** Sprøjteapplikatoren ifølge et hvilket som helst af kravene 1-5, hvor både den primære og den sekundære kappe omfatter en flerhed af afstandsstykker, som er konfigureret til at gøre det muligt at forbinde kapperne reversibelt med hinanden, eventuelt hvor hver kappe omfatter 4 afstandsstykker.
- 10 **7.** Sprøjteapplikatoren ifølge et hvilket som helst af kravene 1-6, hvor lufttilførselsorganadapteren er cylinderformet og omfatter et organ til aflåseligt at fastgøre hovedanordningen til lufttilførselsafsnittet af sprøjteapplikatoren.
- 8.** Sprøjteapplikatoren ifølge et hvilket som helst af kravene 1-7, omfattende et
15 batterihus, placeret oven på hovedanordningen, og konfigureret til at modtage og rumme et genopladeligt batteri, som leverer elektricitet til forstøvermotoren.
- 9.** Sprøjteapplikatoren ifølge et hvilket som helst af kravene 1-8, hvor
forstøverorganet er en drejeskiveforstøver, som er mekanisk forbundet med en
20 skiveforstøvermotor, som er placeret inde i et motorhus, som er fast forbundet med en skiveforstøveranordningsramme.
- 10.** Hovedanordning (20) til anvendelse med sprøjteapplikatoren (1) ifølge et hvilket som helst af kravene 1-9, omfattende:
- 25 (a) en lufttilførselsorganadaptor (21) til at forbinde hovedanordningen (20) med lufttilførselsorganet (10);
(b) en primær luftguideappe (22) til at guide luftstrømmen, som kommer fra lufttilførselsorganet (10);
(c) en drejeskiveforstøver (23a) til at omdanne væske til små dråber med
30 sub-millimeterstørrelse; hvor forstøveren (23) er placeret midt inden i kapperne (22);
(d) mindst to forlængere (66) til at fastgøre forstøveren (23) til hovedanordningen (20);
(e) en motor (15) mekanisk forbundet med forstøveren (23); og

(f) en batteribeholder (45) til at holde et batteri, som er elektrisk forbundet med motoren (15), hvor hovedanordningen (20), som allerede er udstyret med den primære luftguide (22), er konfigureret til at fastgøres reversibelt til en sekundær kappe (62).

5

11. Hovedanordningen ifølge krav 10, omfattende den primære luftguide (22) og den sekundære kappe (62), som hver omfatter en slids (69), gennem hvilken forlængerne passerer, og hvor den sekundære kappe har en konisk vinkel på ca. 30°.

10

12. Hovedanordningen ifølge krav 10, hvor mindst en kappe er **kendetegnet ved, at** have mindst tre diametre, D1, D2 og D3, og mindst to vinkler, A1 og A2, eventuelt hvor D1 er mindst ca. 30% til ca. 50% mindre end D2; og hvor D2 svarer omtrent til eller er ca. 10% mindre end D3, yderligere eventuelt hvor A1 er mellem ca. 90° og ca. 145°; og hvor A2 er mellem ca. 130° og 160°.

15

13. Sprøjteapplikatoren med forlænget rækkevidde ifølge et hvilket som helst af kravene 1-9 til anvendelse i en fremgangsmåde til at vaccinere fjerkræ mod respiratoriske patogener, fra en afstand på mindst ca. 5 eller mindst ca. 10 meter, omfattende trinnet at indgive til nævnte fjerkræ en effektiv mængde af mindst et respiratorisk antigen, båret i form af små dråber med samme størrelse, med diametre på fra ca. 50 µm til ca. 200 µm, under anvendelse af sprøjteapplikatoren med forlænget rækkevidde, for derved at vaccinere nævnte fjerkræ.

20

14. Sprøjteapplikatoren med forlænget rækkevidde til anvendelse ifølge krav 13, hvor 10.000 fjerkræ vaccineres og/eller der indgives probiotika på mindre end ca. 20 minutter, og/eller hvor der leveres ca. 5 L til ca. 10 L vaccine inden for ca. 20 minutter.

25

15. Sprøjteapplikatoren med forlænget rækkevidde ifølge et hvilket som helst af kravene 1-9 til anvendelse i en fremgangsmåde til behandling af fugle med en probiotisk formulering ved at sprede den probiotiske formulering i form af små dråber med samme størrelse, som har diametre på fra ca. 50 µm til ca. 200 µm, fra sprøjteapplikatoren med forlænget rækkevidde, hvor fuglene, som behandles,

30

er mindst ca. 5 til mindst ca. 10 meter væk fra sprøjteapplikatoren; og ved at lade fuglene konsumere de små dråber, eventuelt hvor:

- a) den probiotiske formulering er en væske eller væskelignende gel; og/eller
- 5 b) 10.000 fugle behandles på mindre end ca. 20 minutter; og/eller
- c) der leveres ca. 5 L til ca. 10 L probiotisk formulering inden for ca. 20 minutter.

DRAWINGS

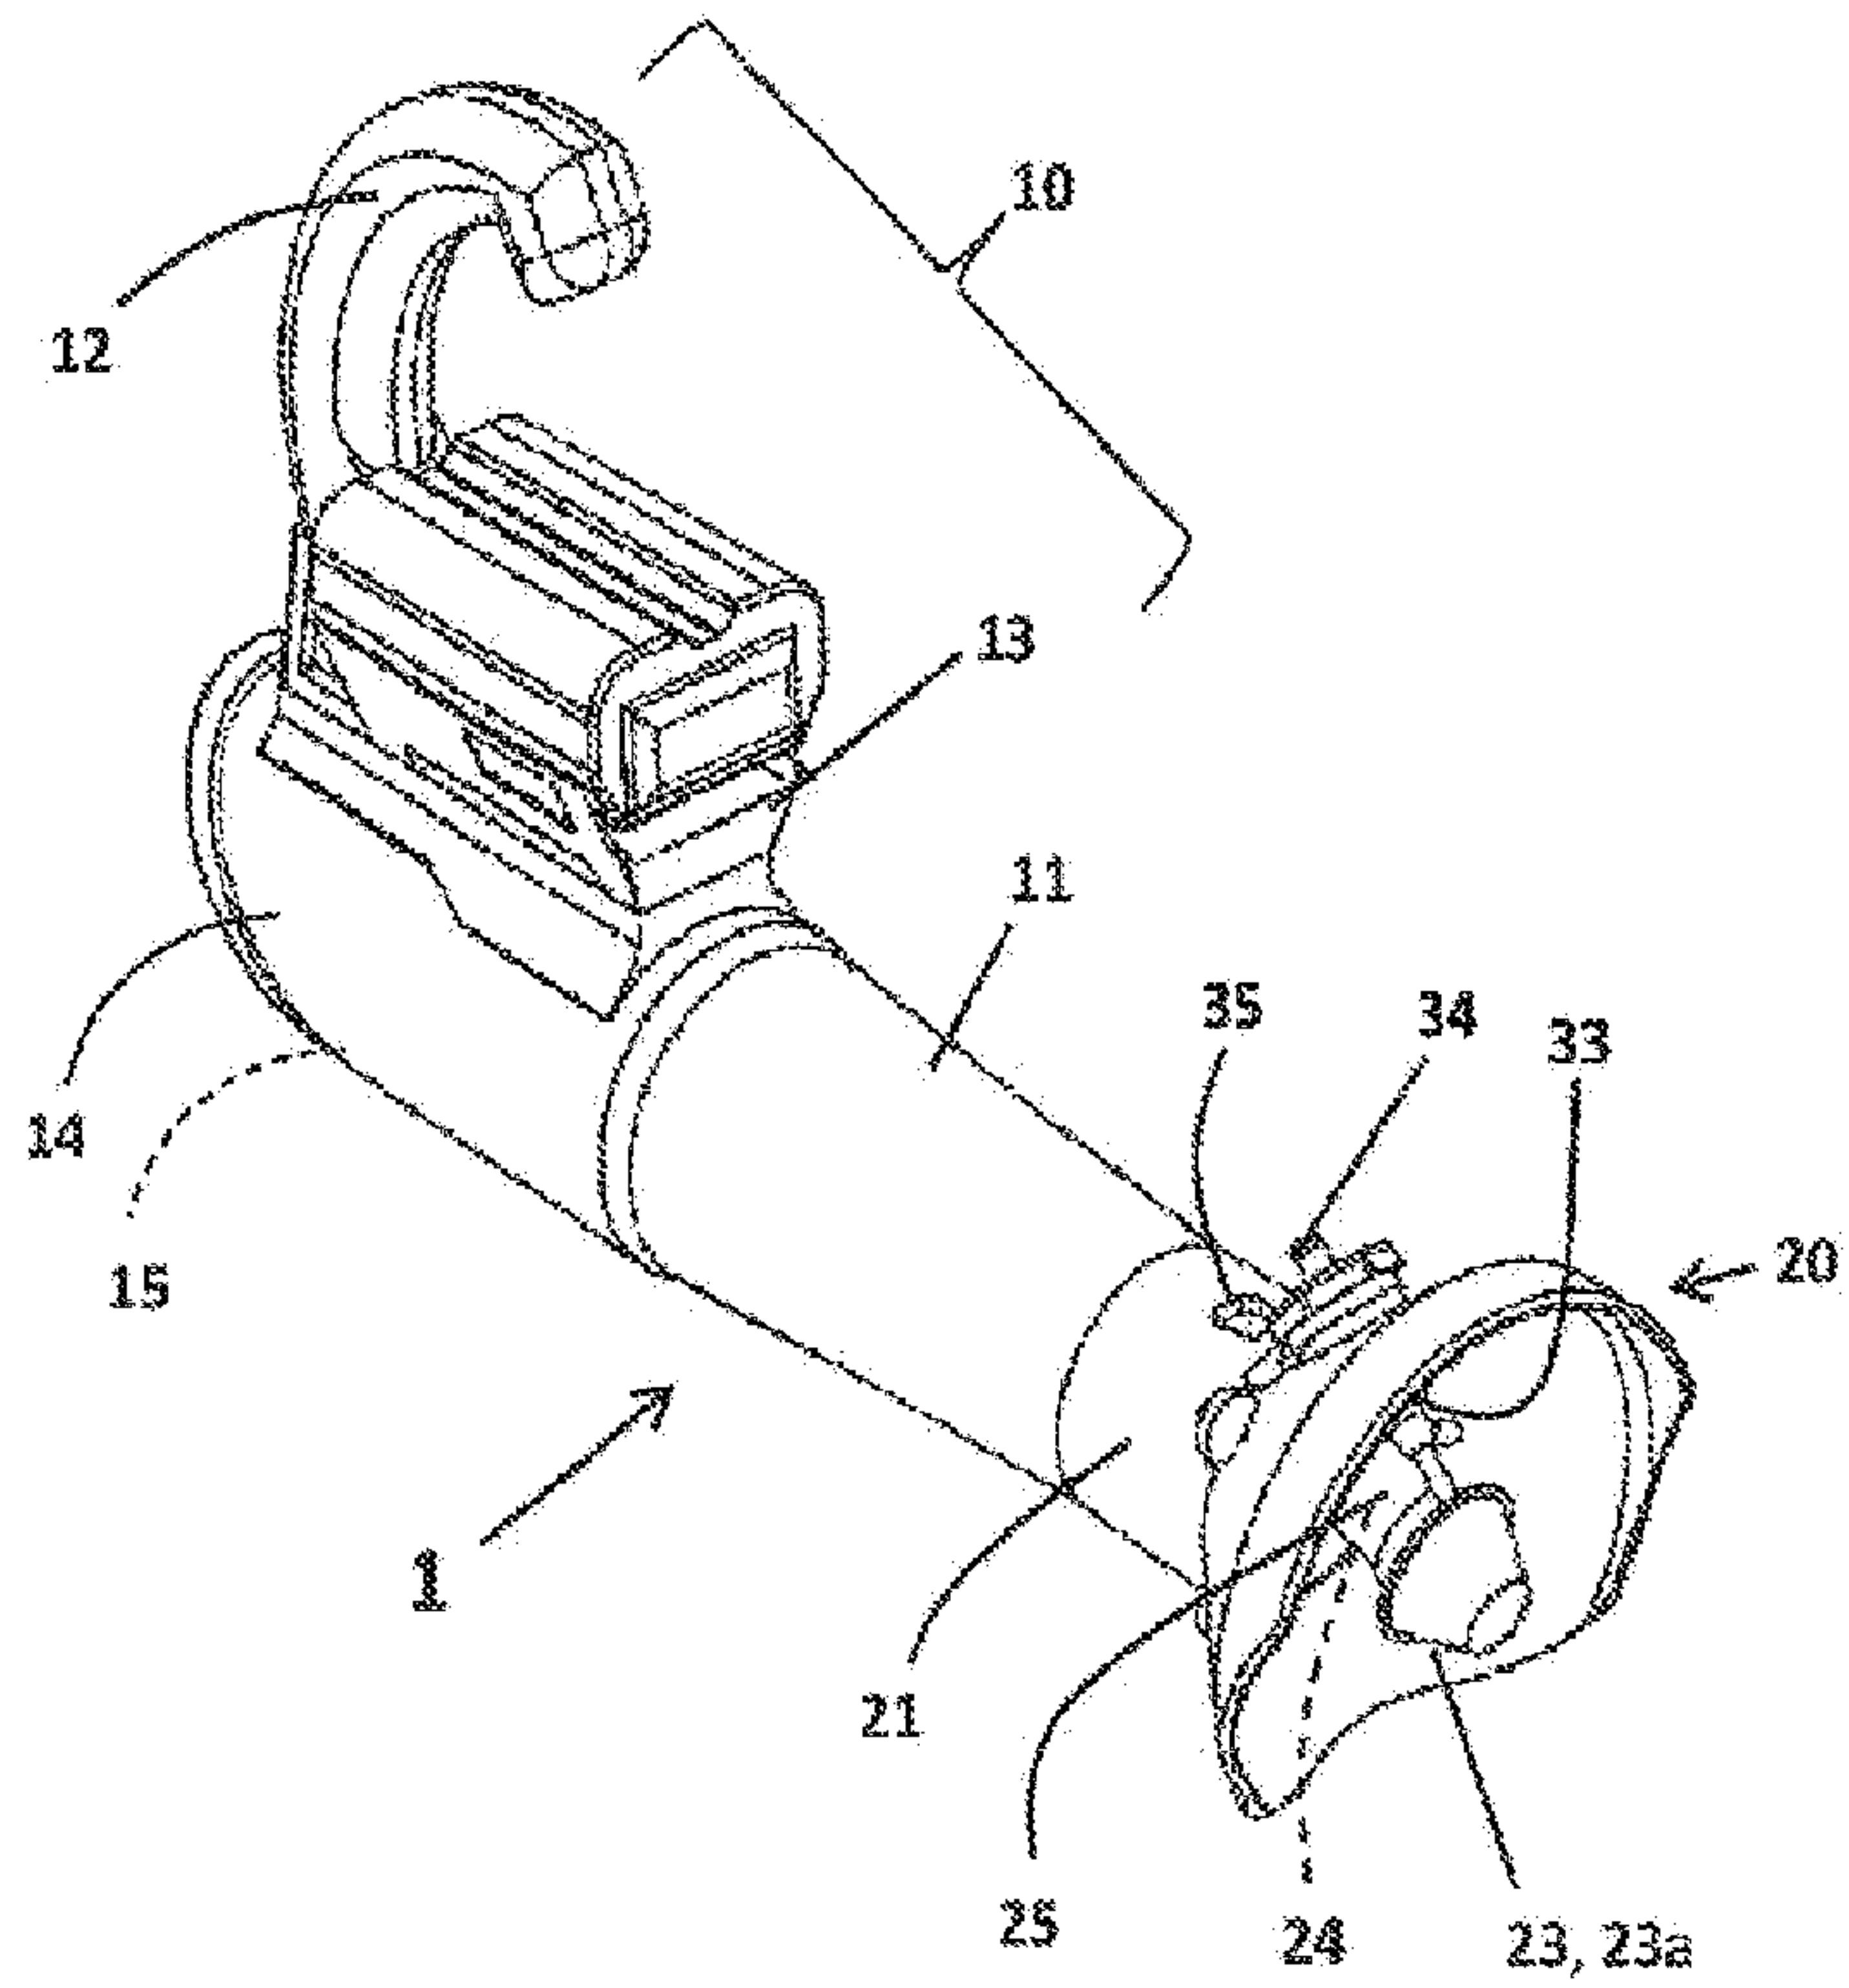


FIG. 1

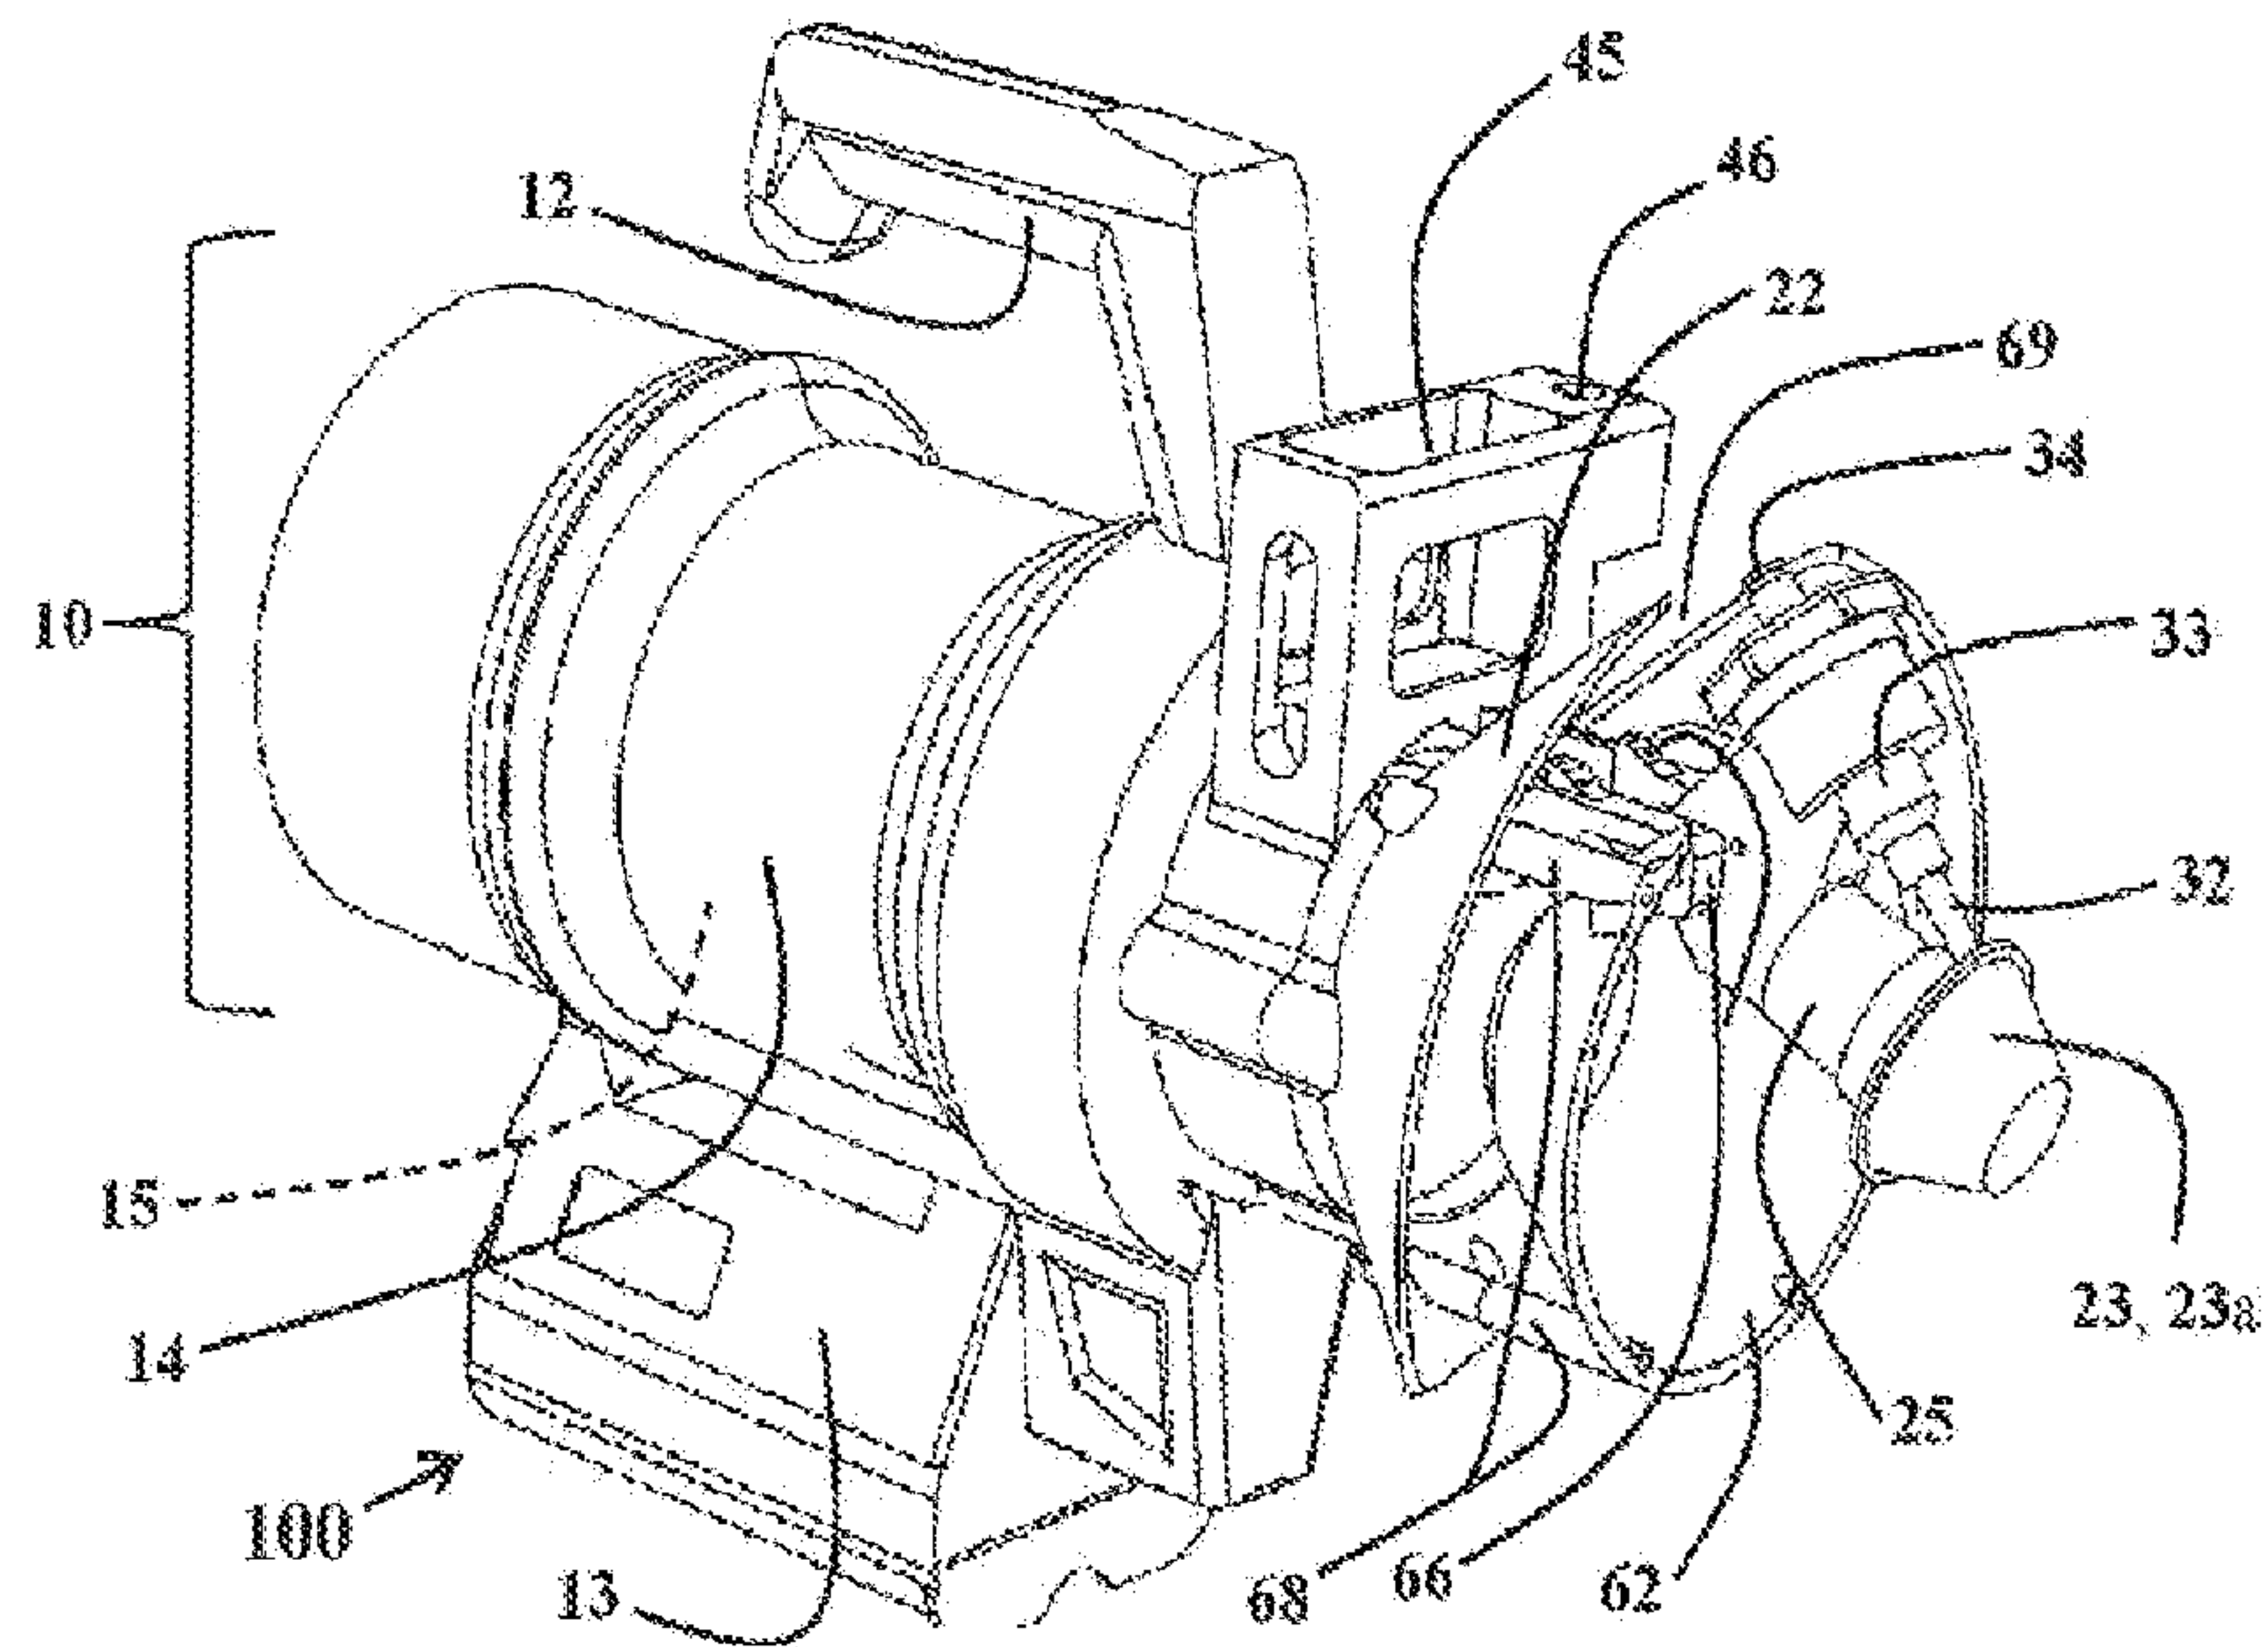


FIG. 2A

Shroud Version 7

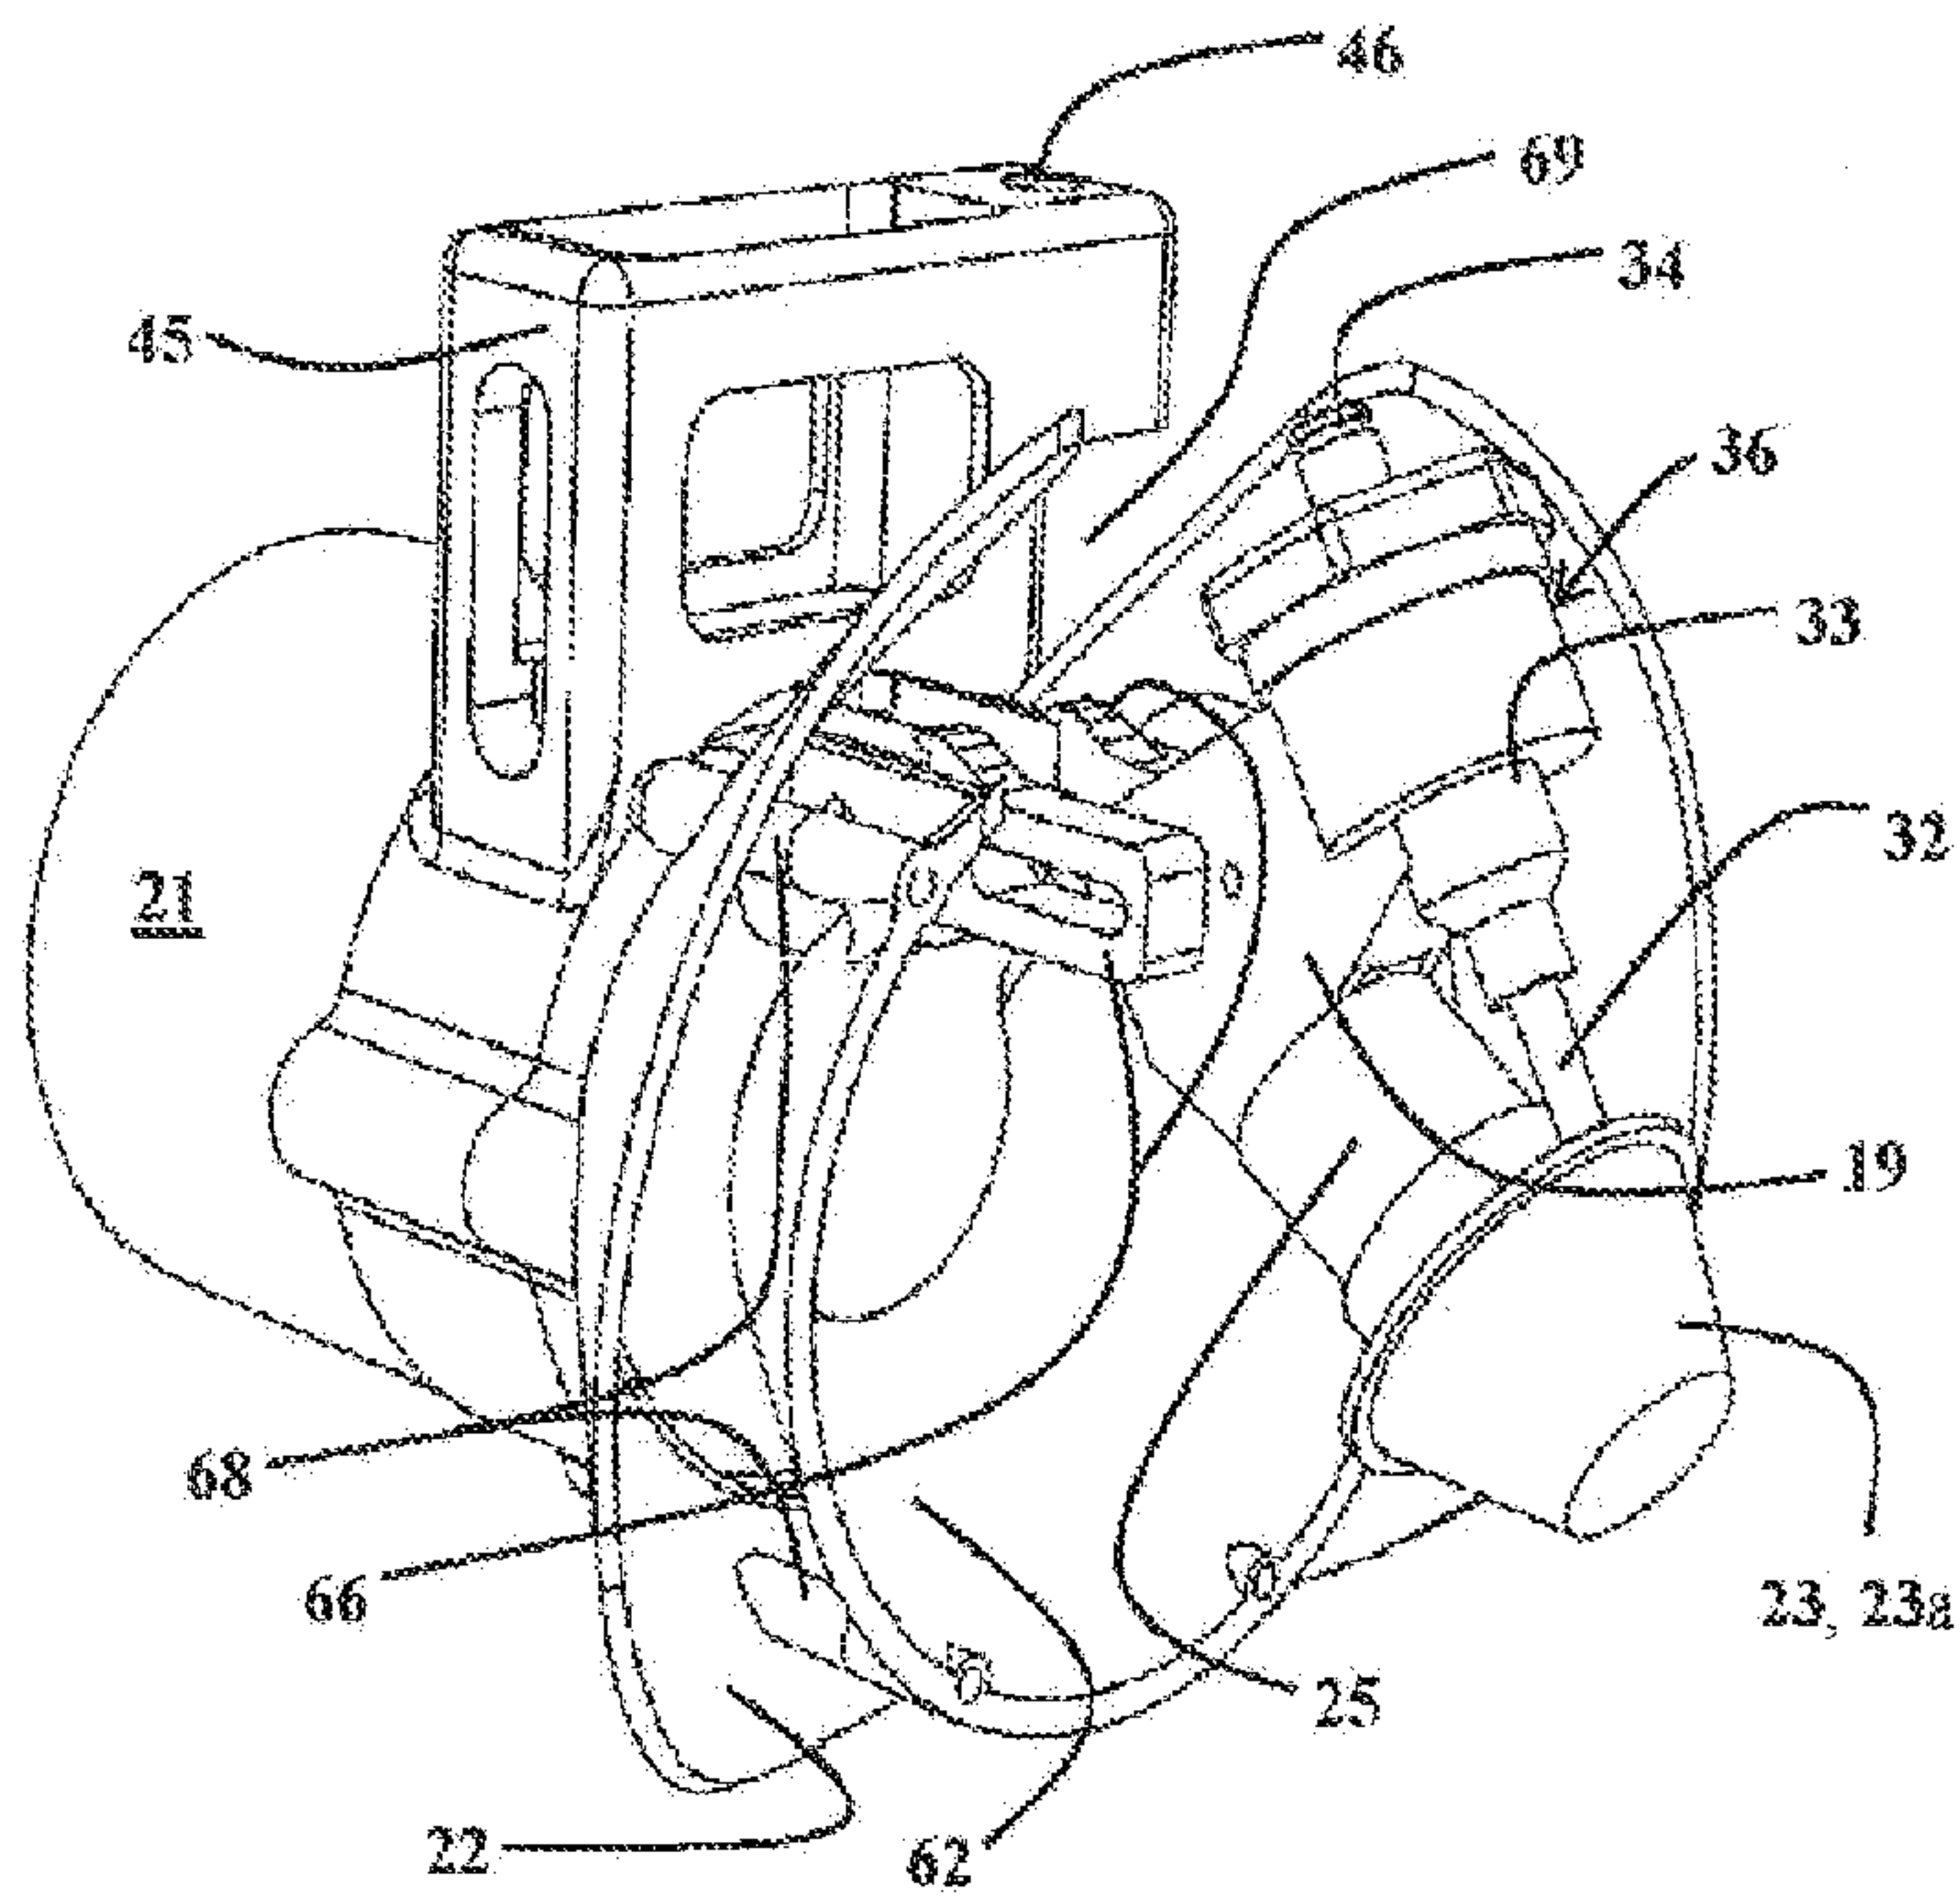


FIG. 2B

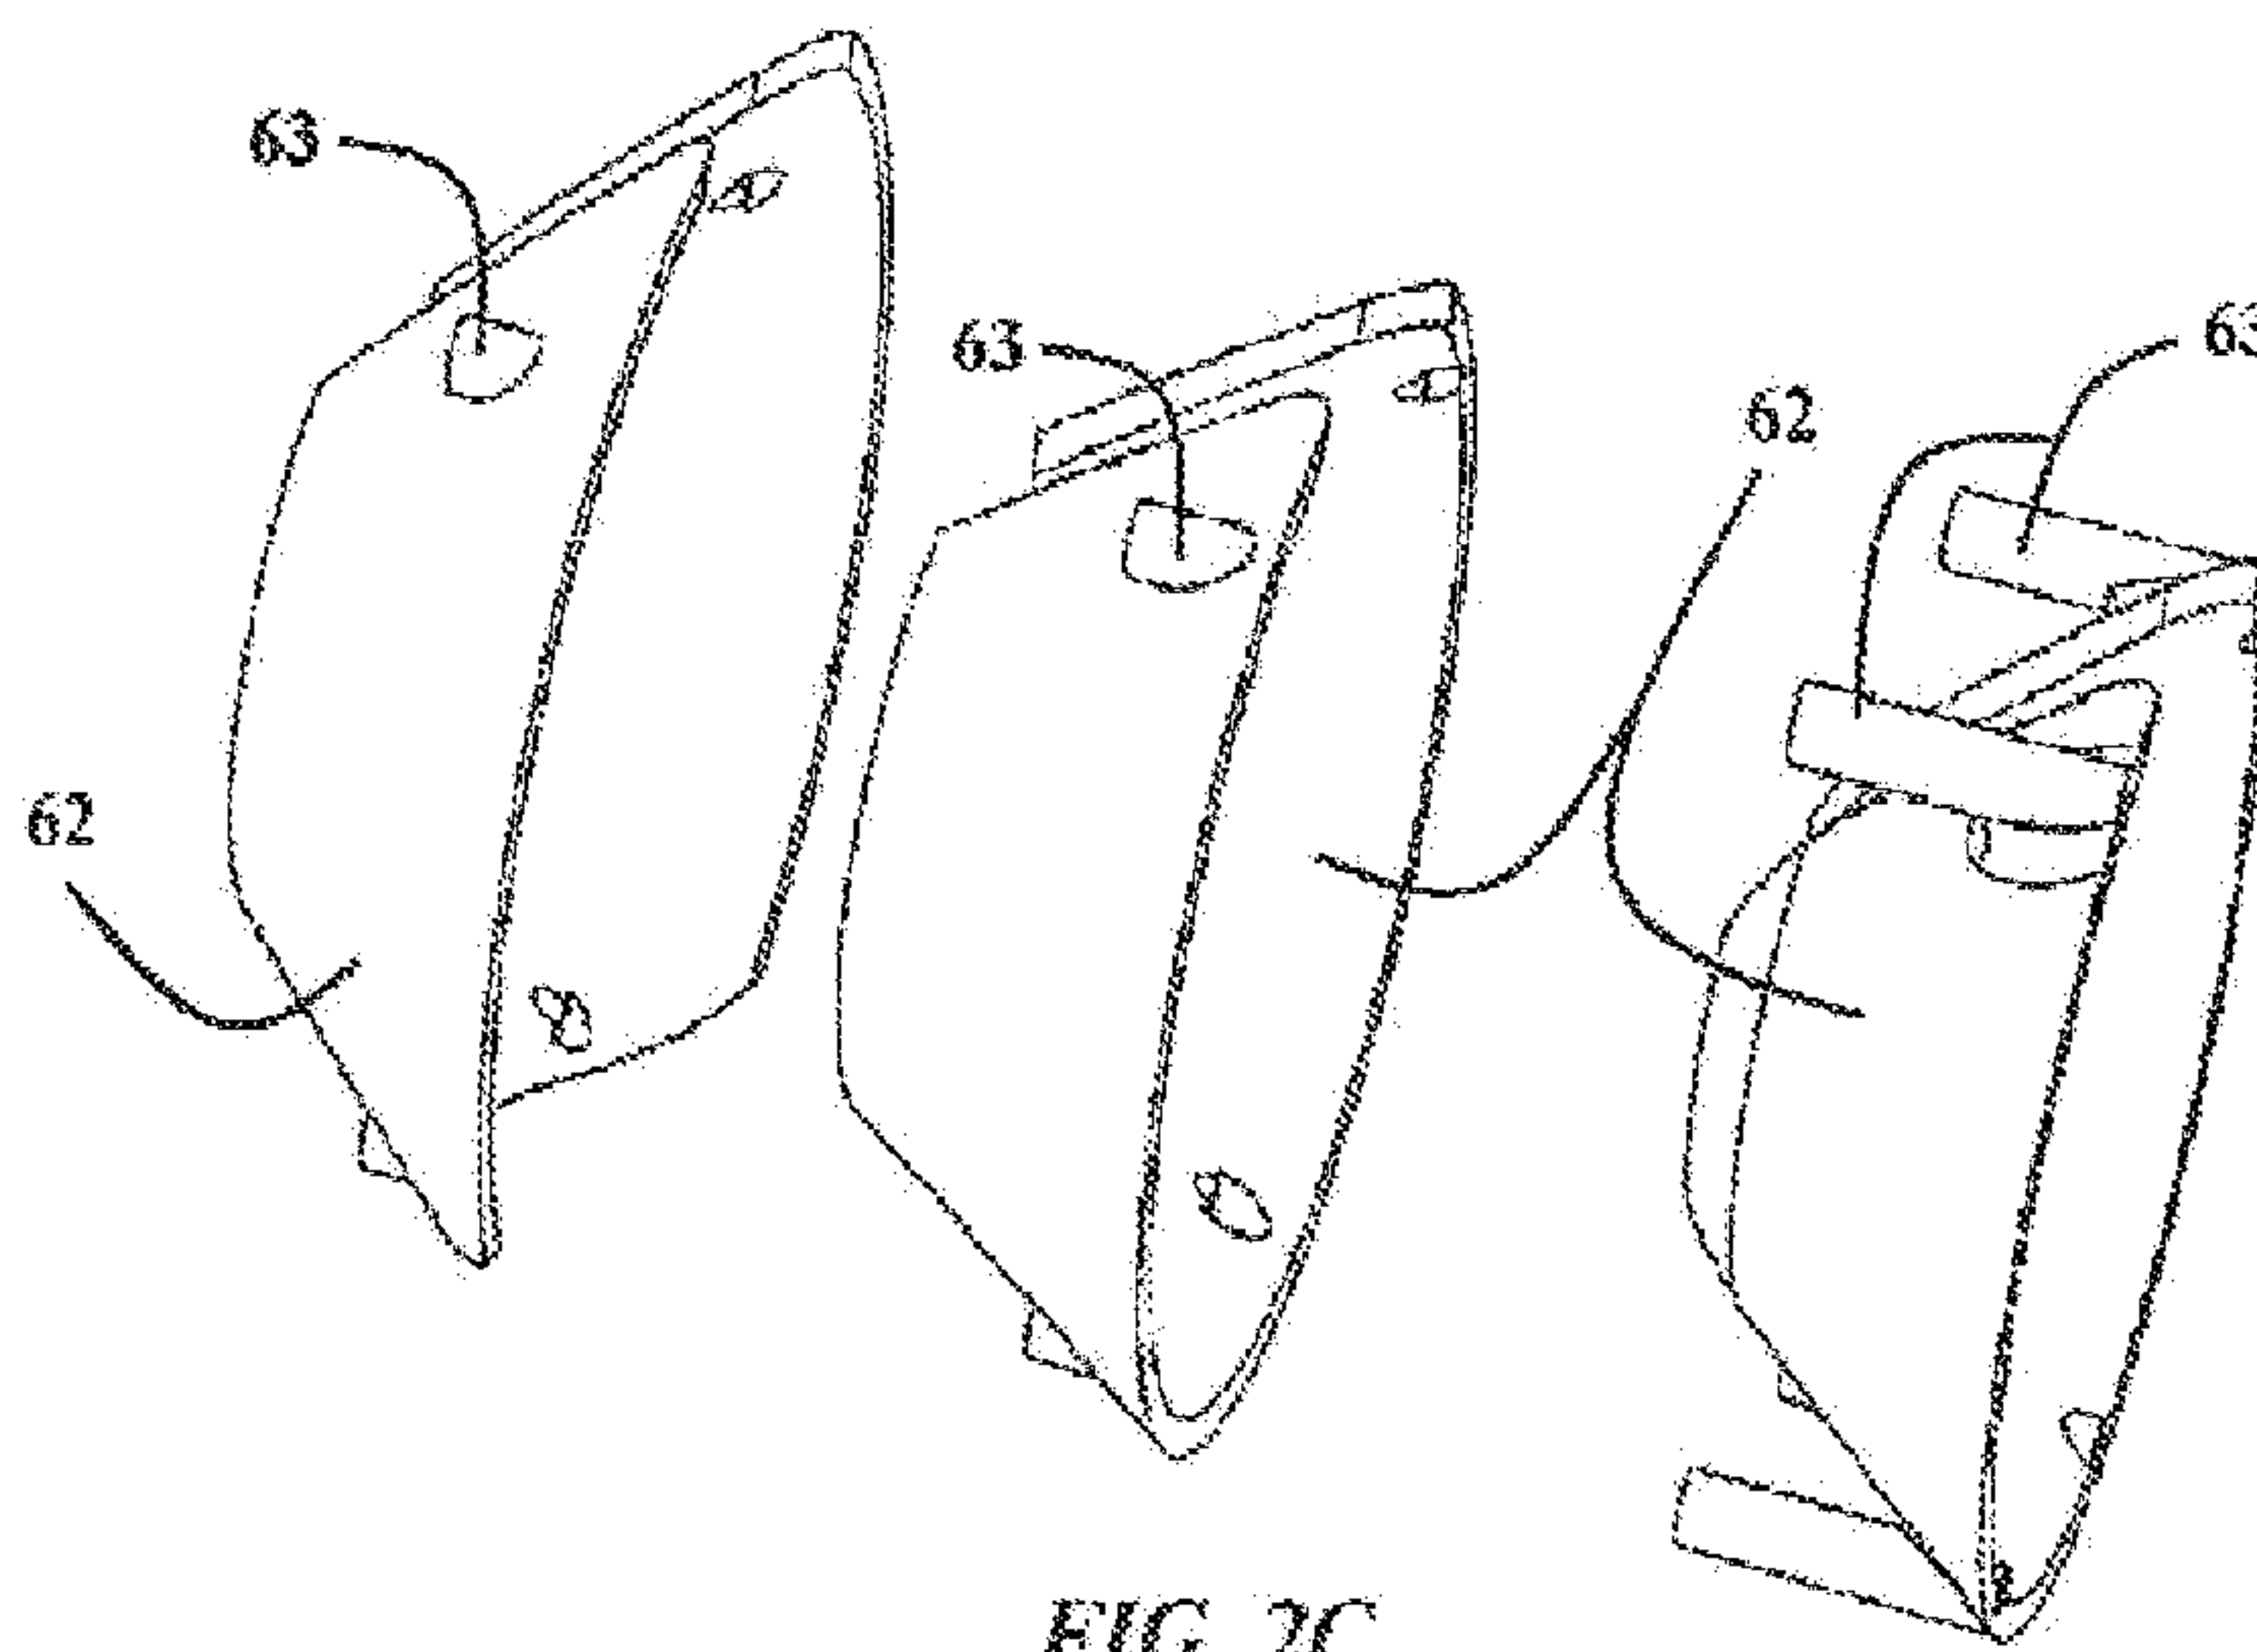


FIG. 2C

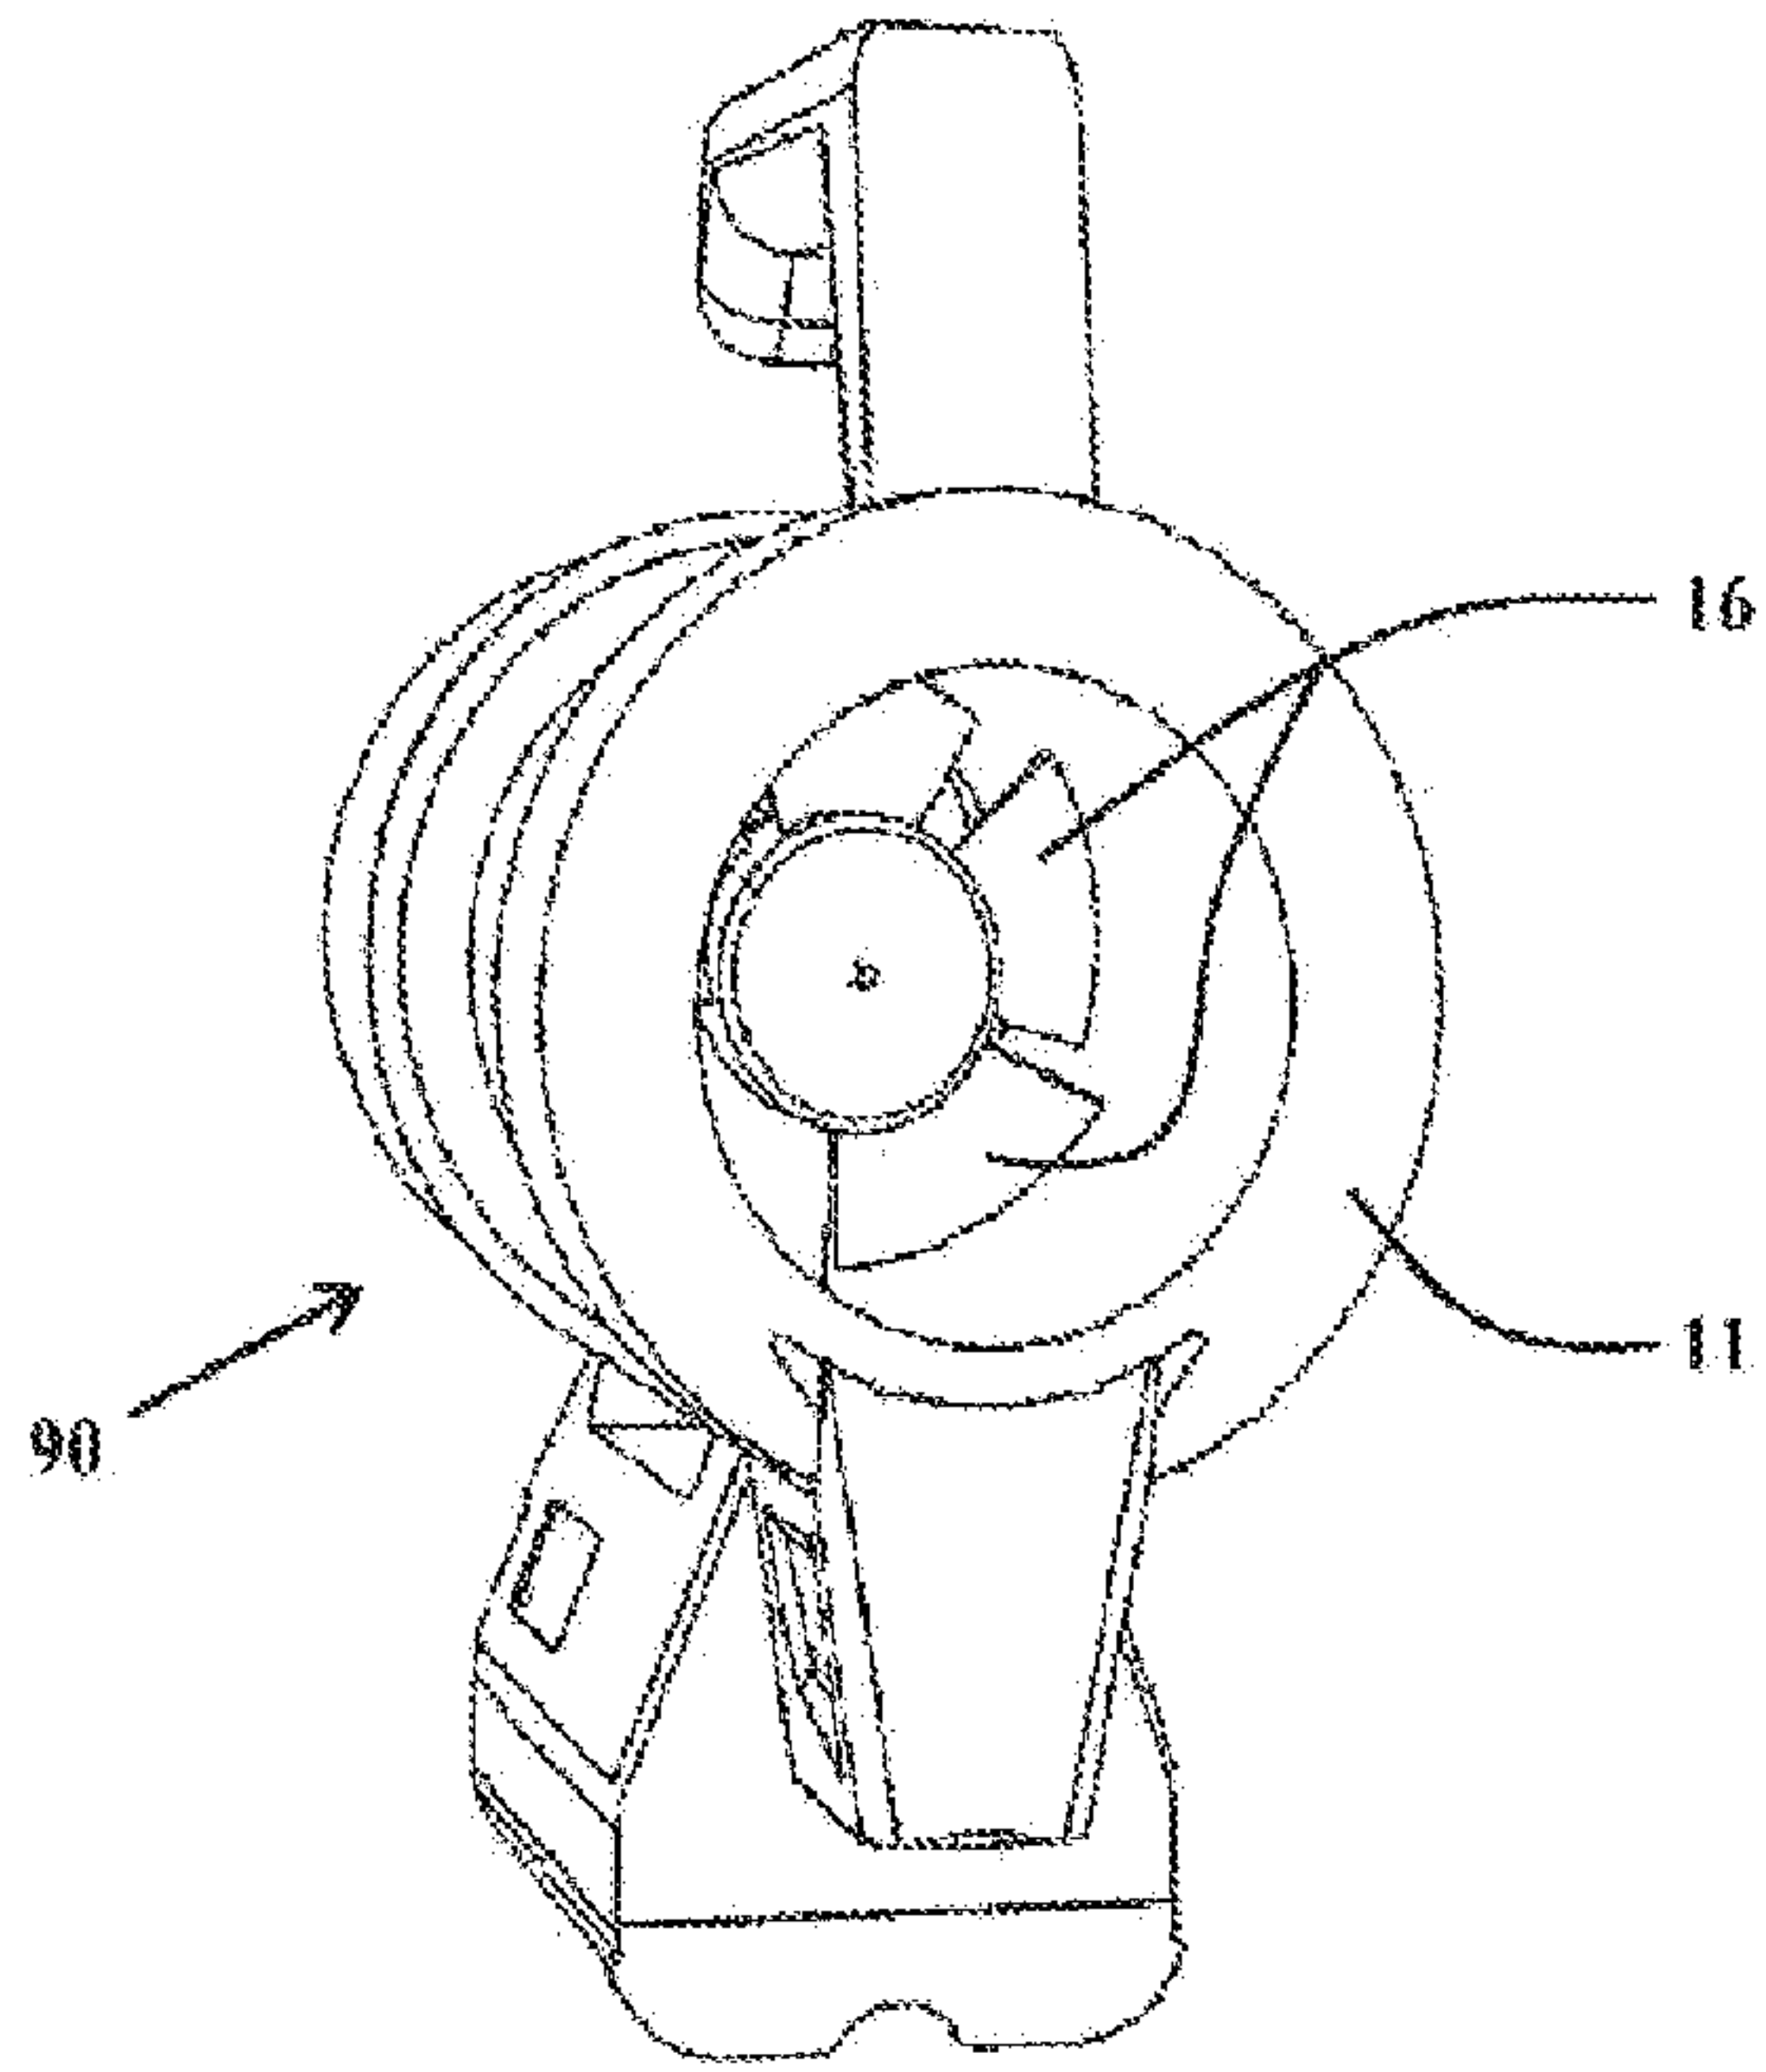


FIG. 2D

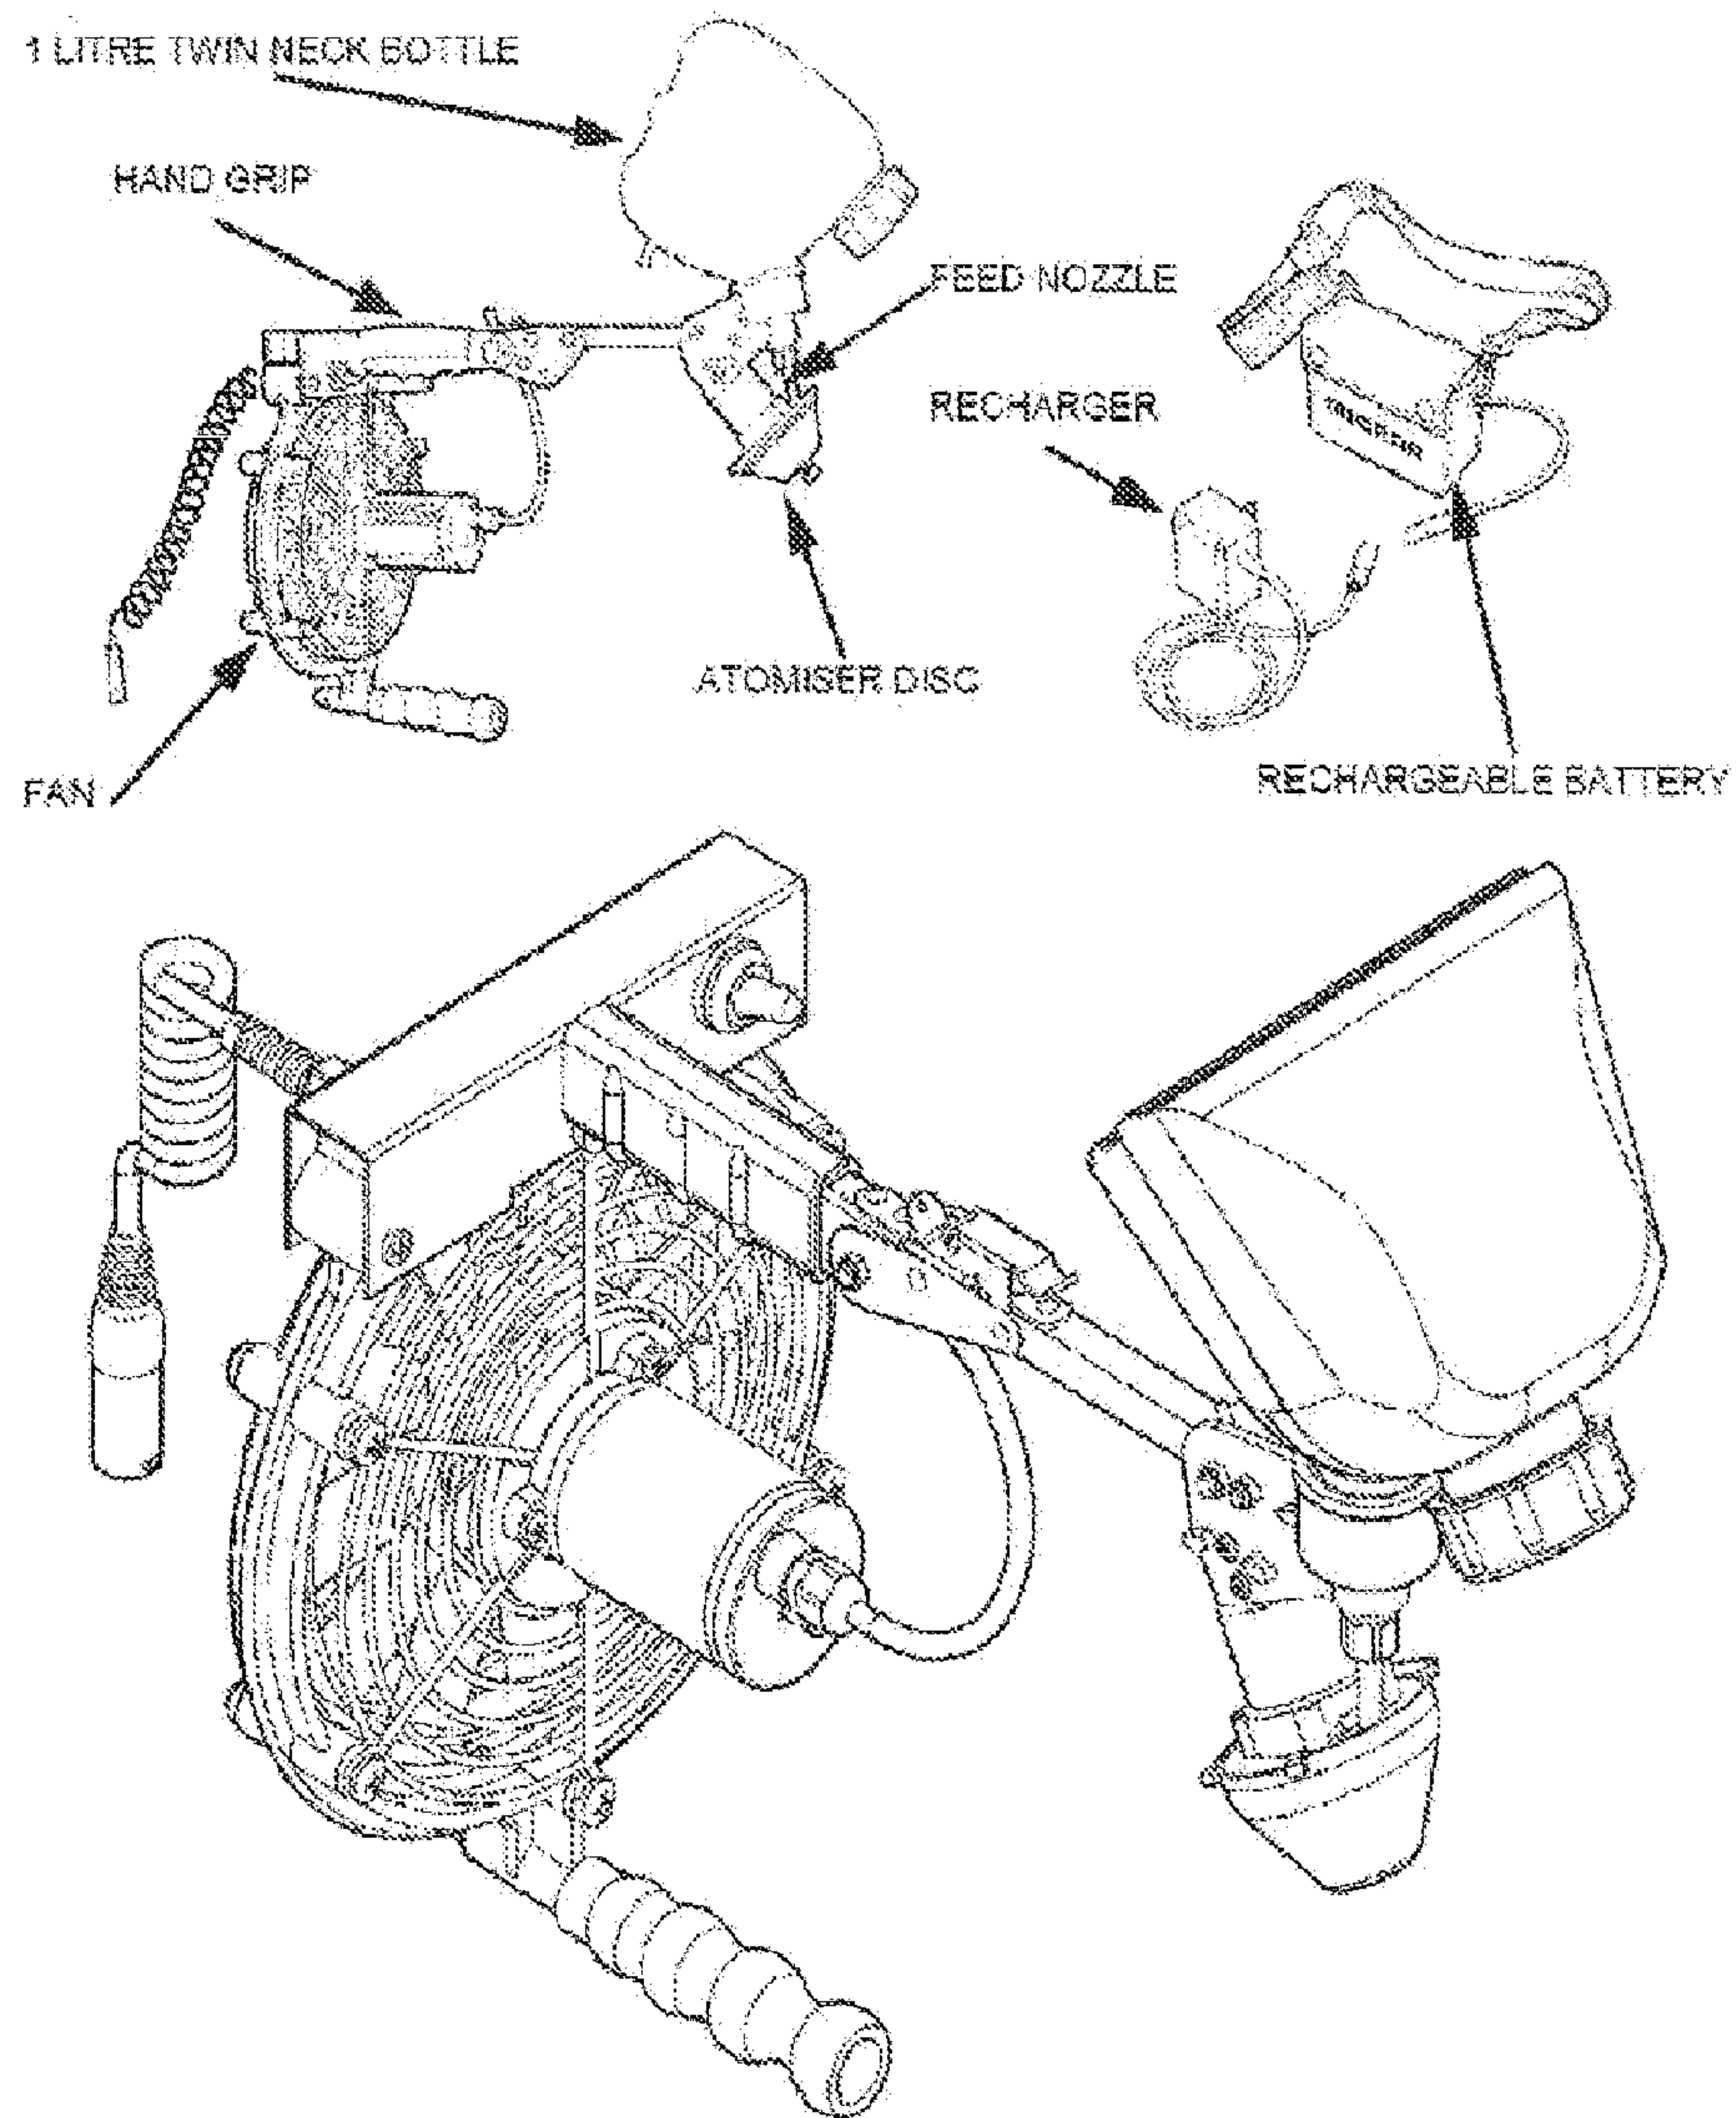


FIG. 3A (Prior Art)

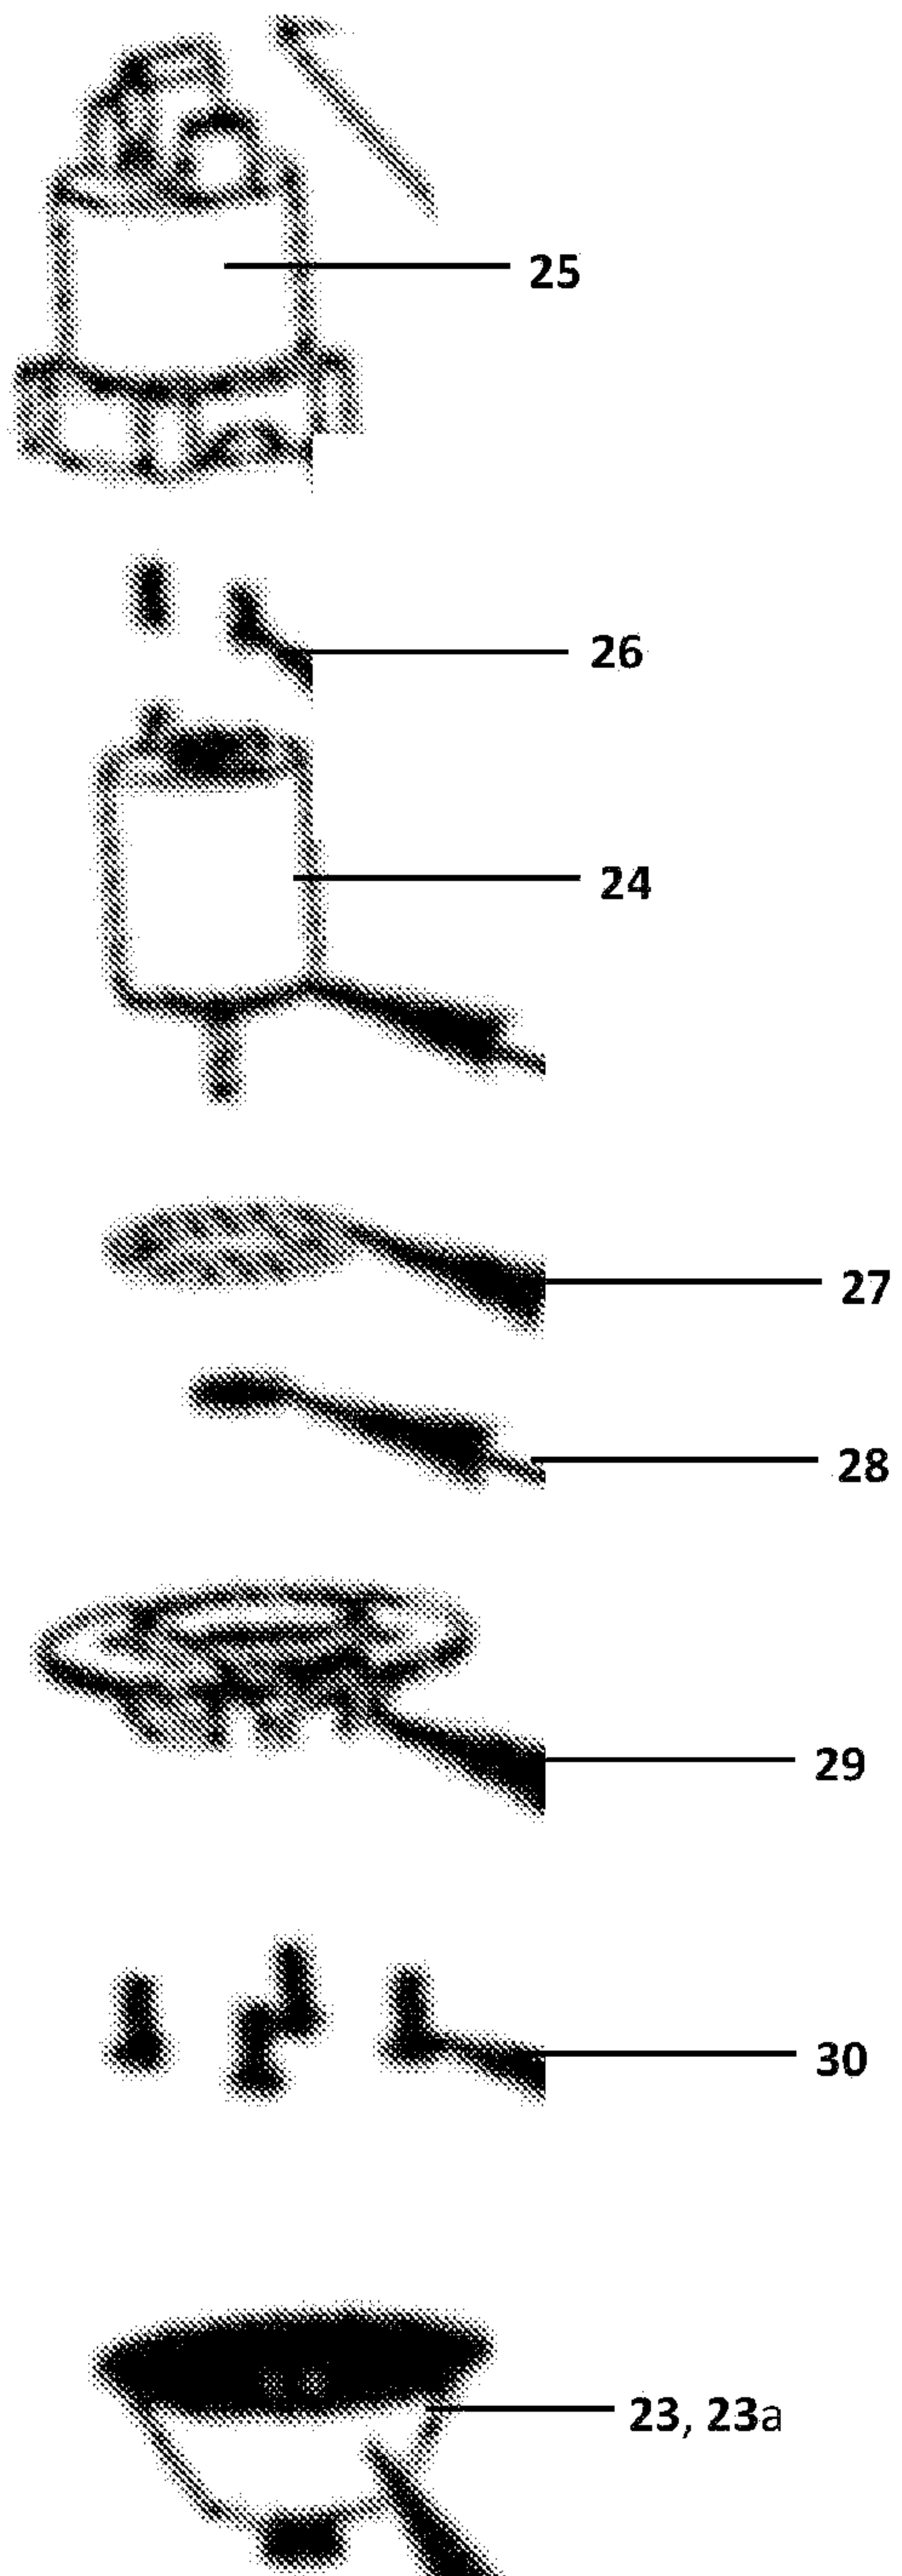


FIG. 3B (Prior Art)

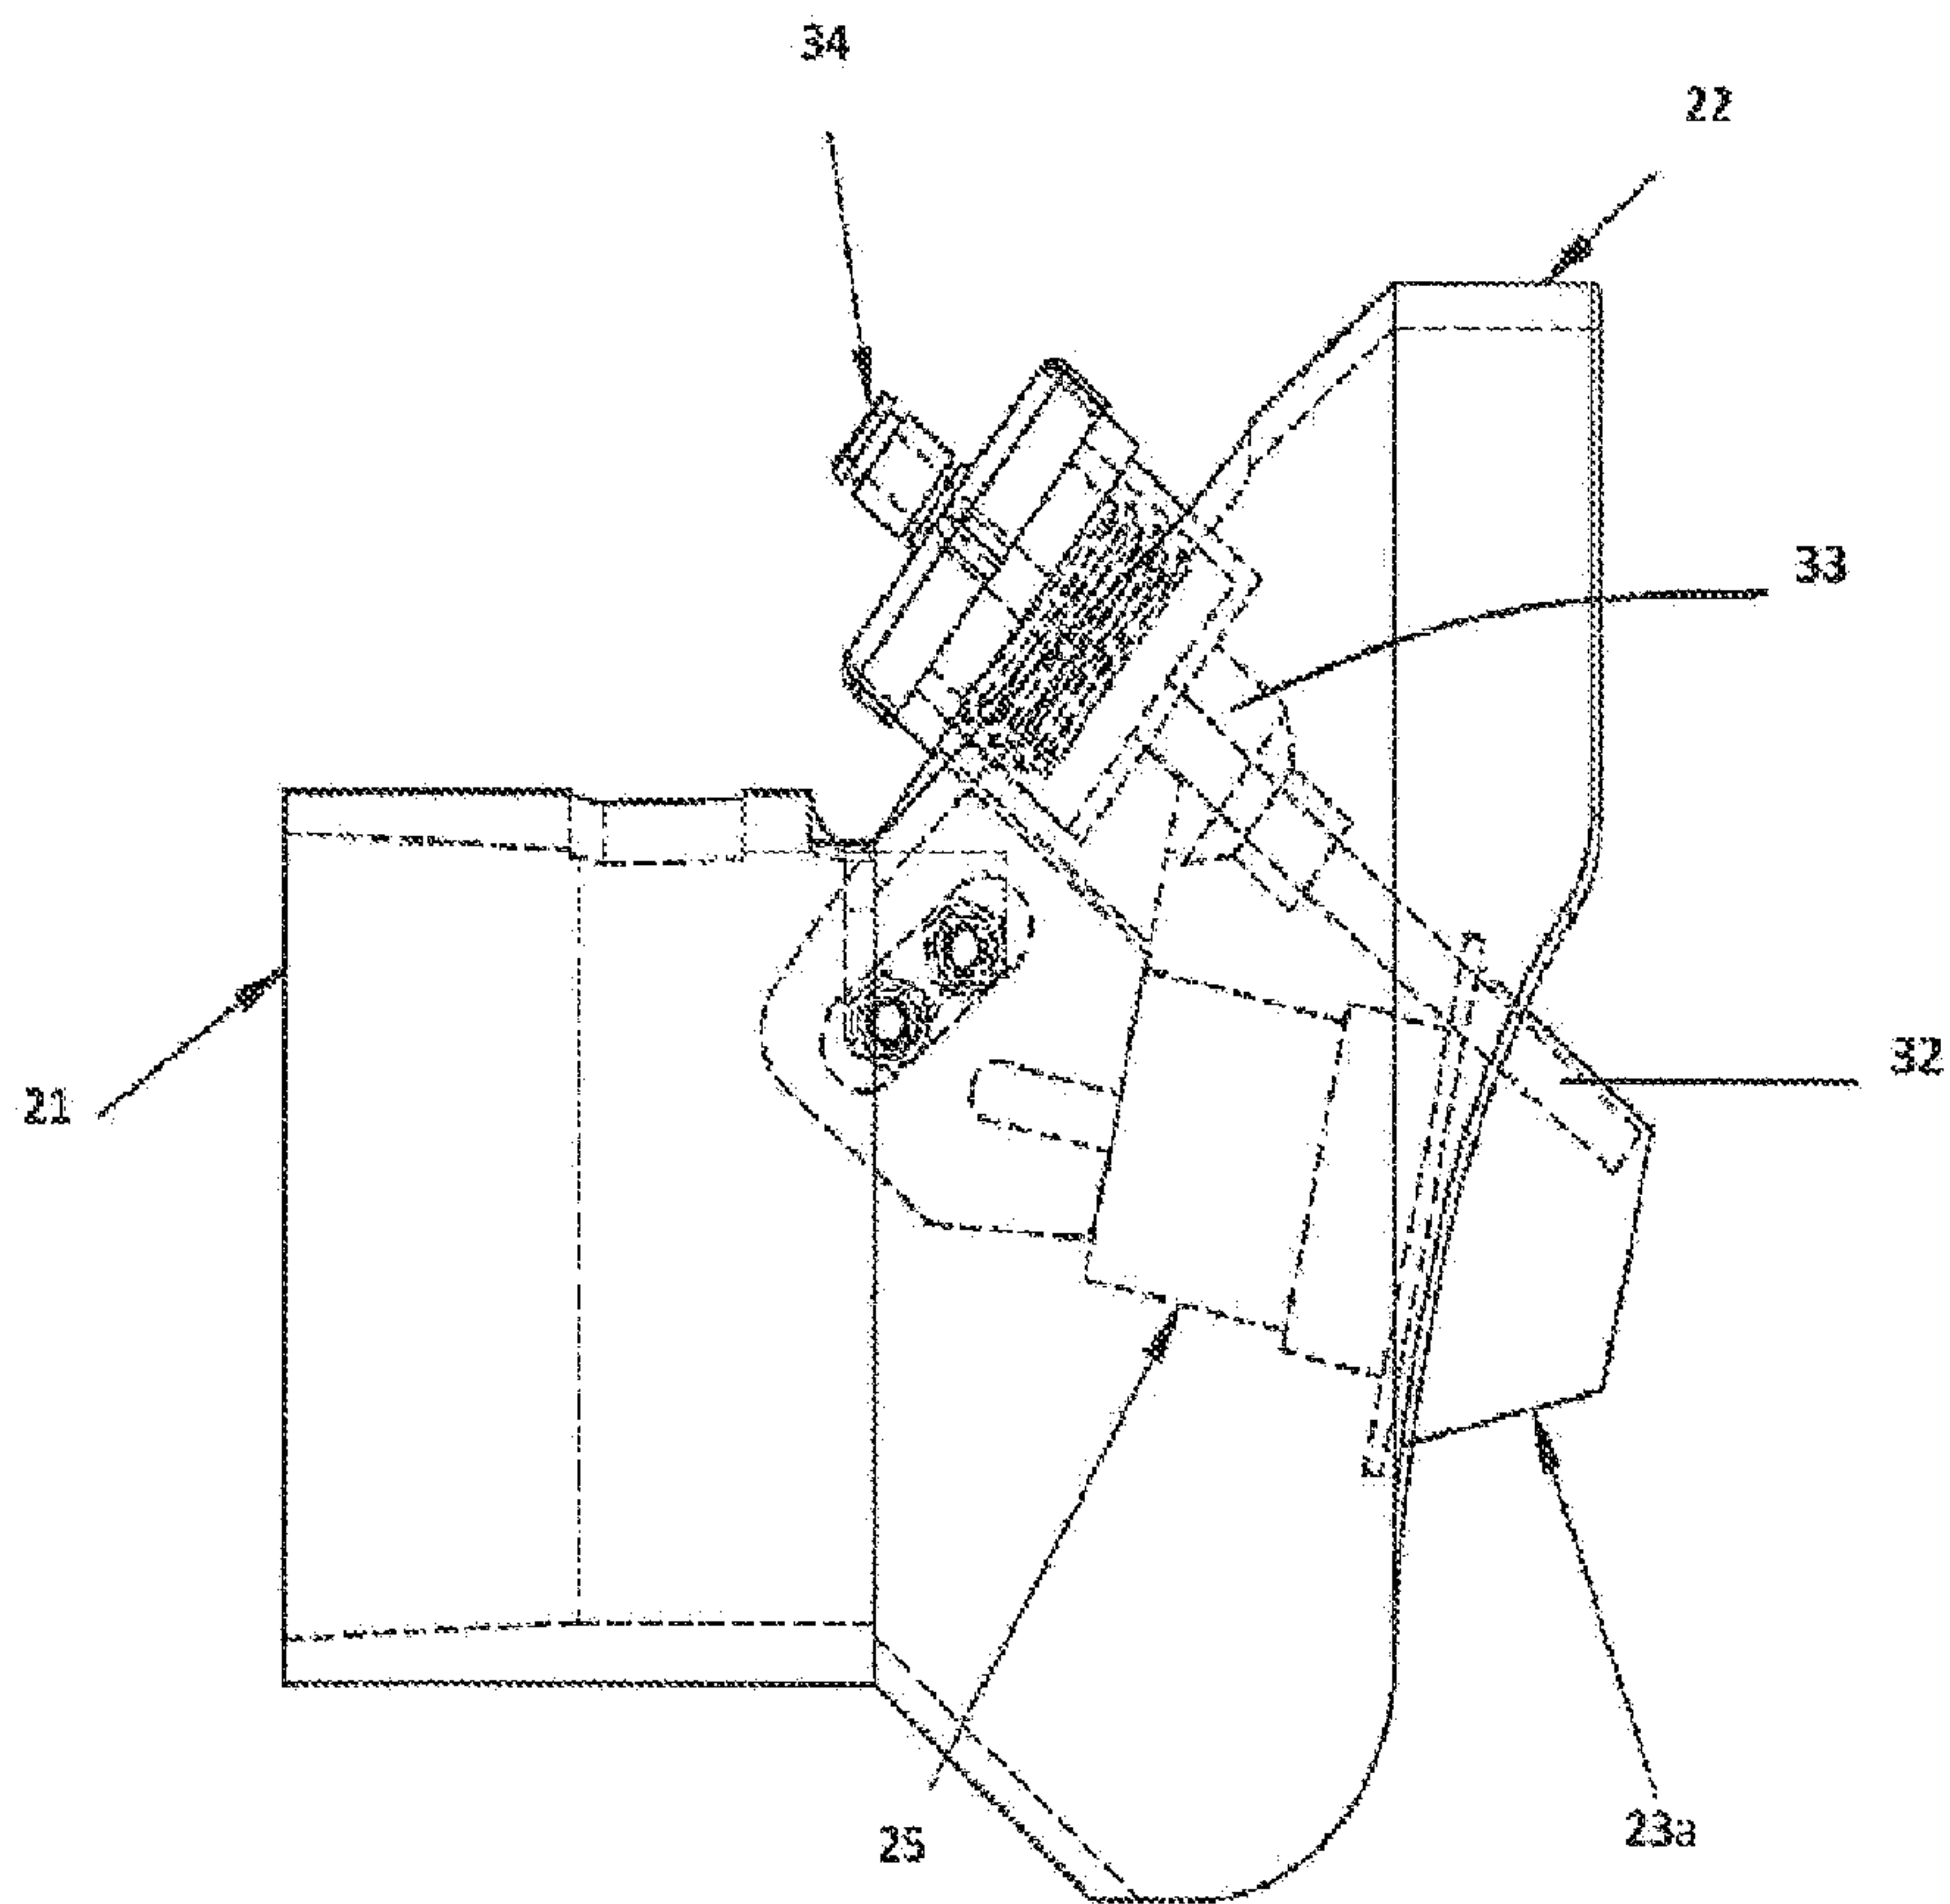


FIG. 4A

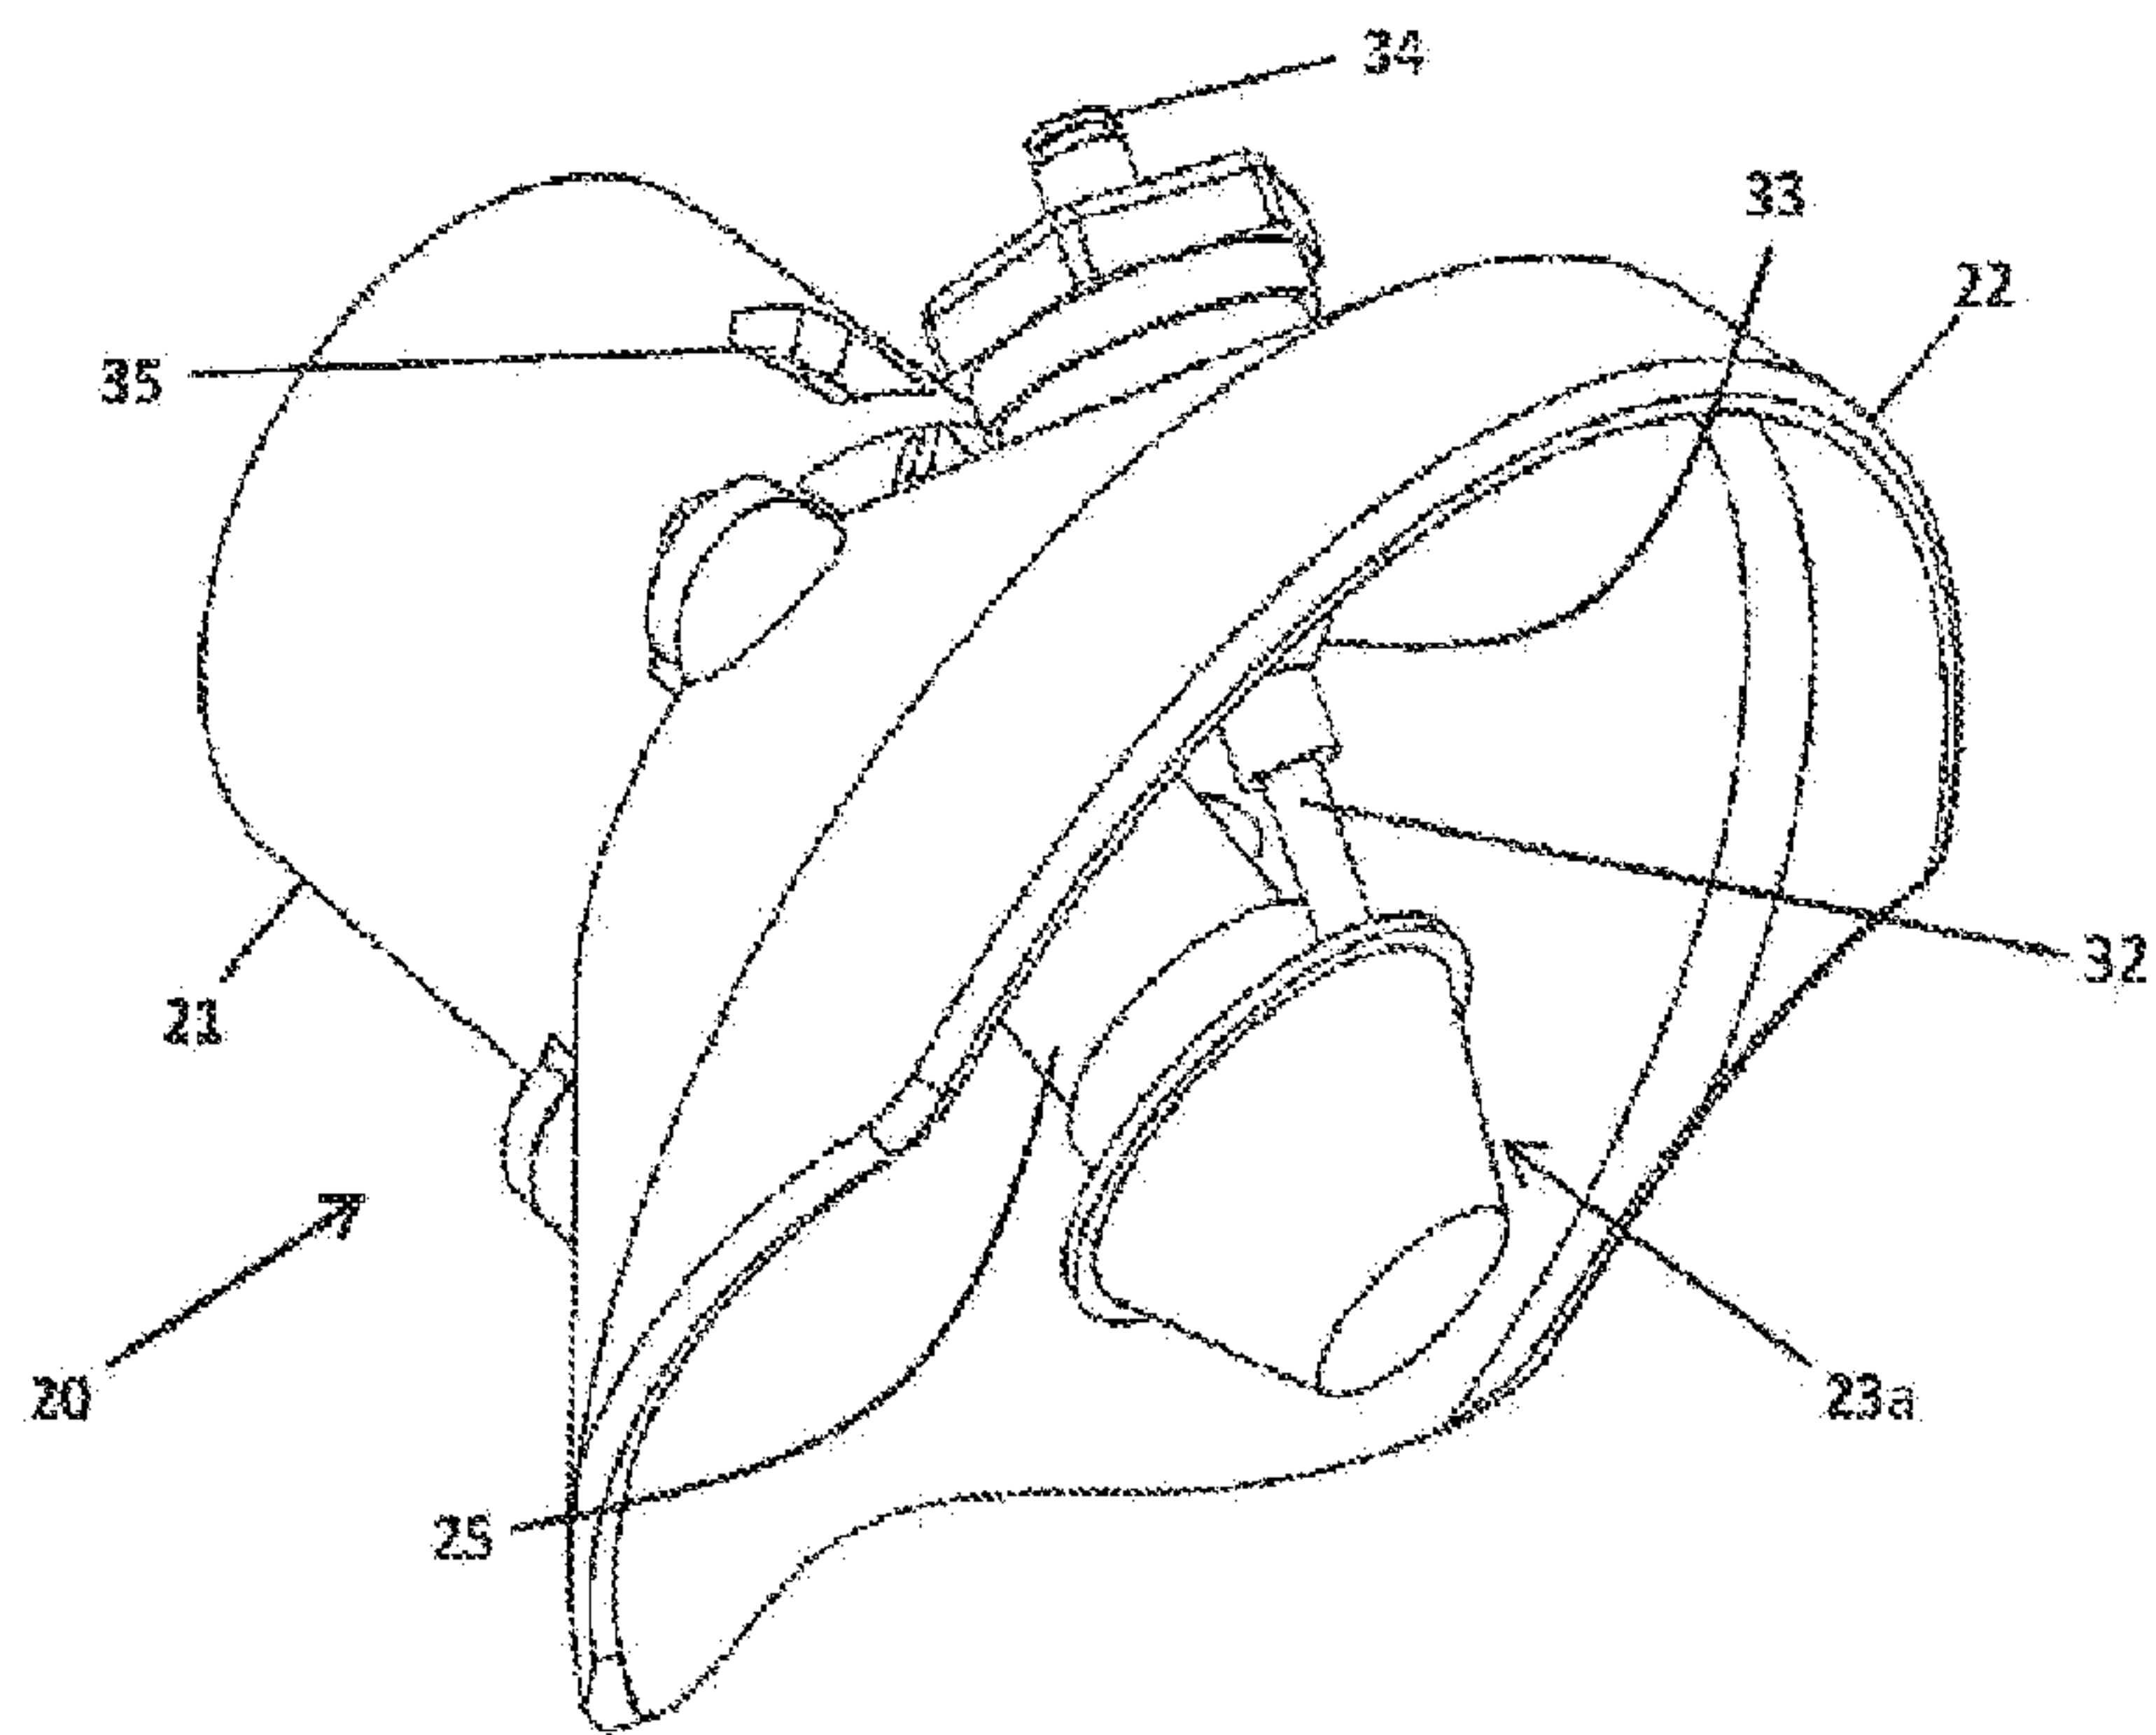


FIG. 4B

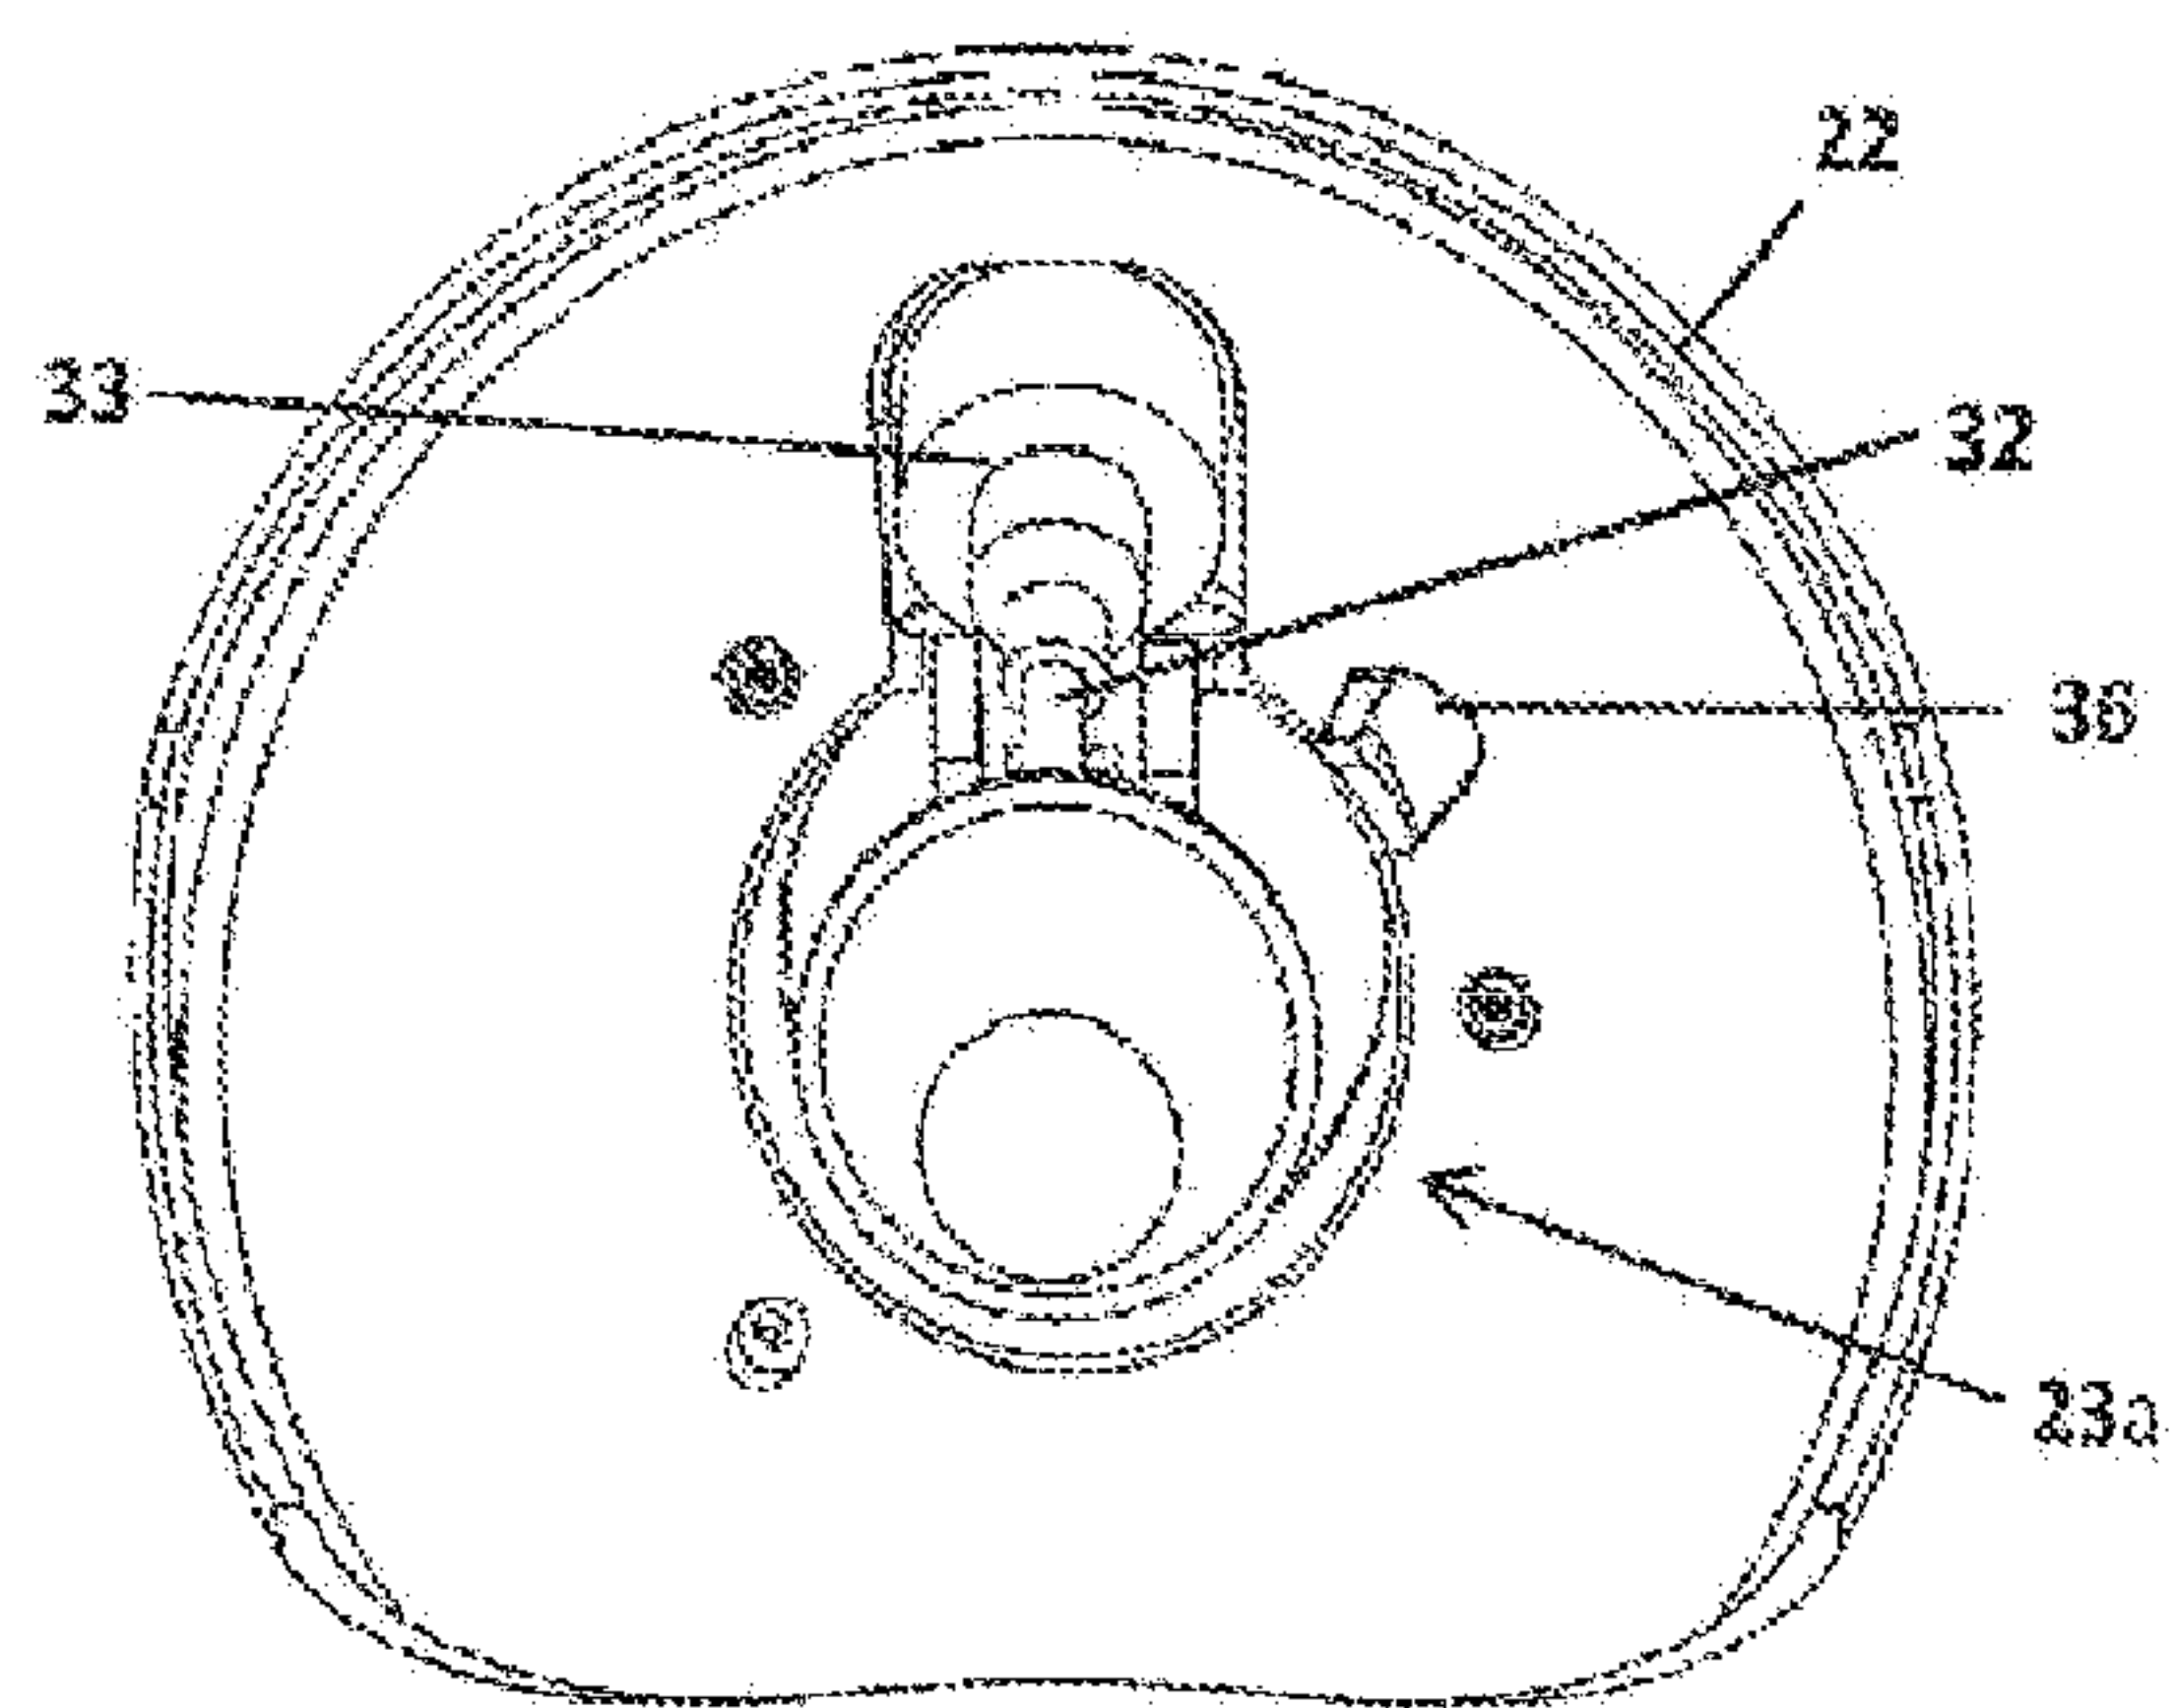


FIG. 4C

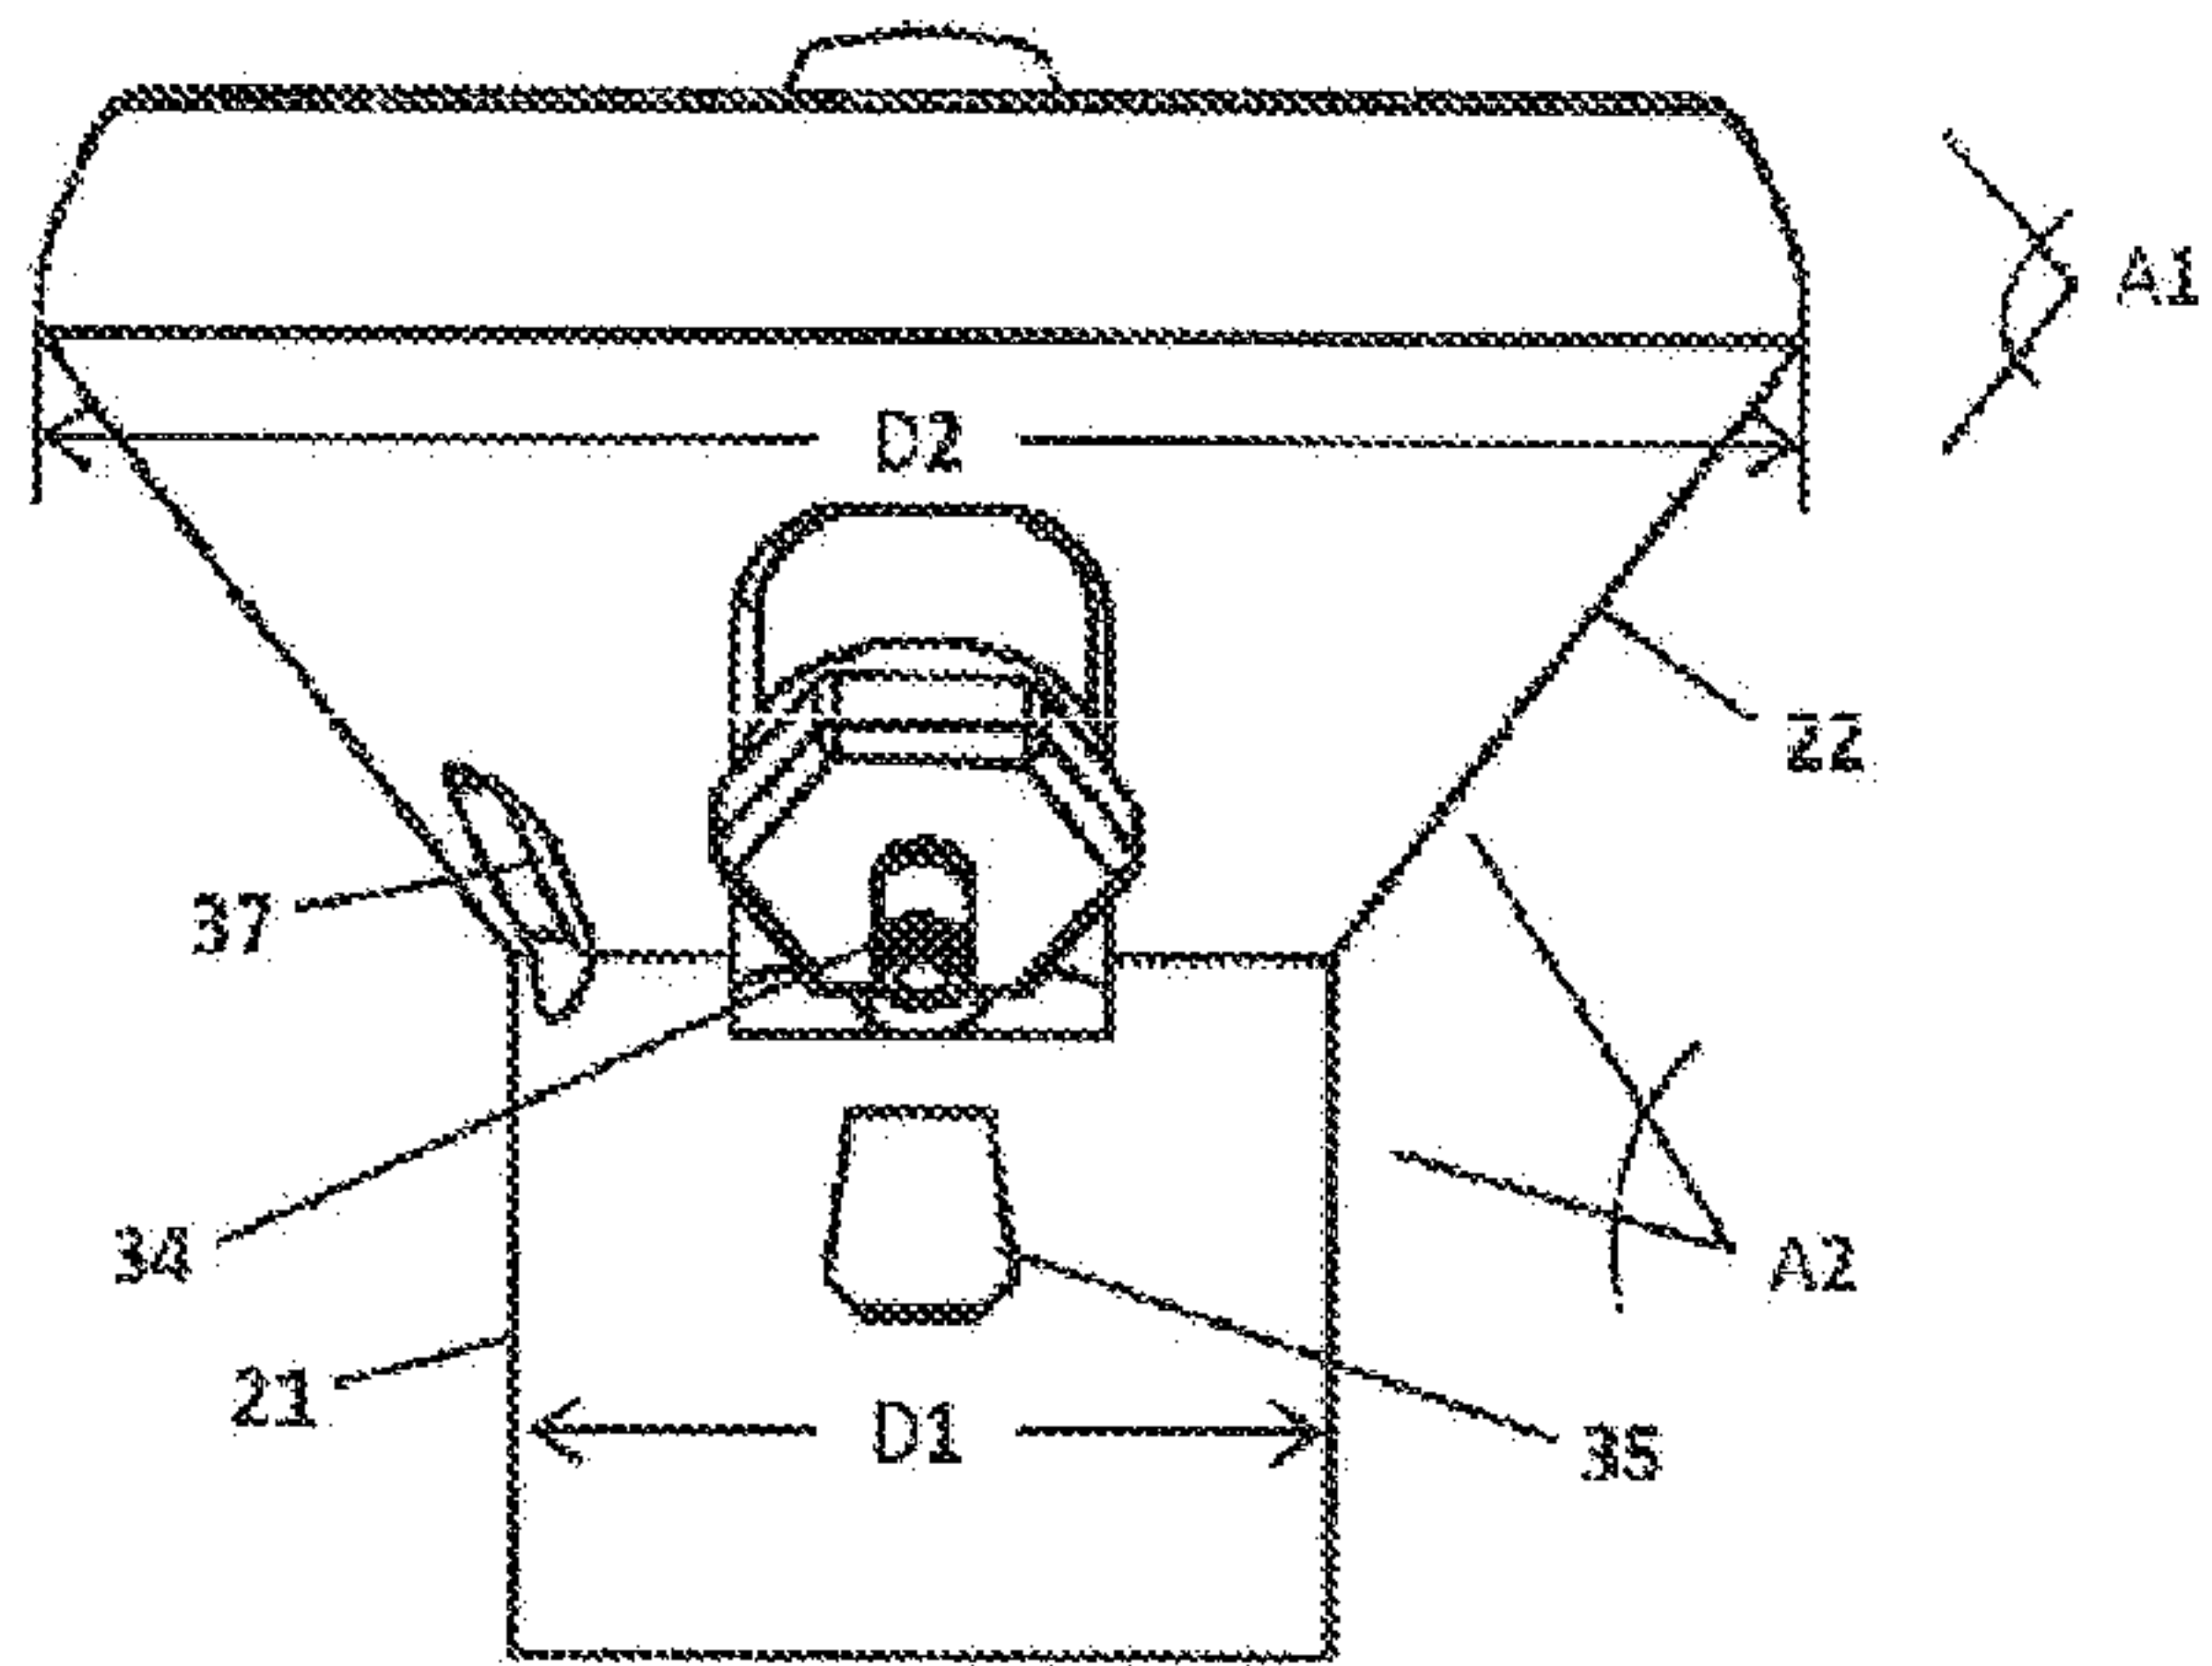


FIG. 4D

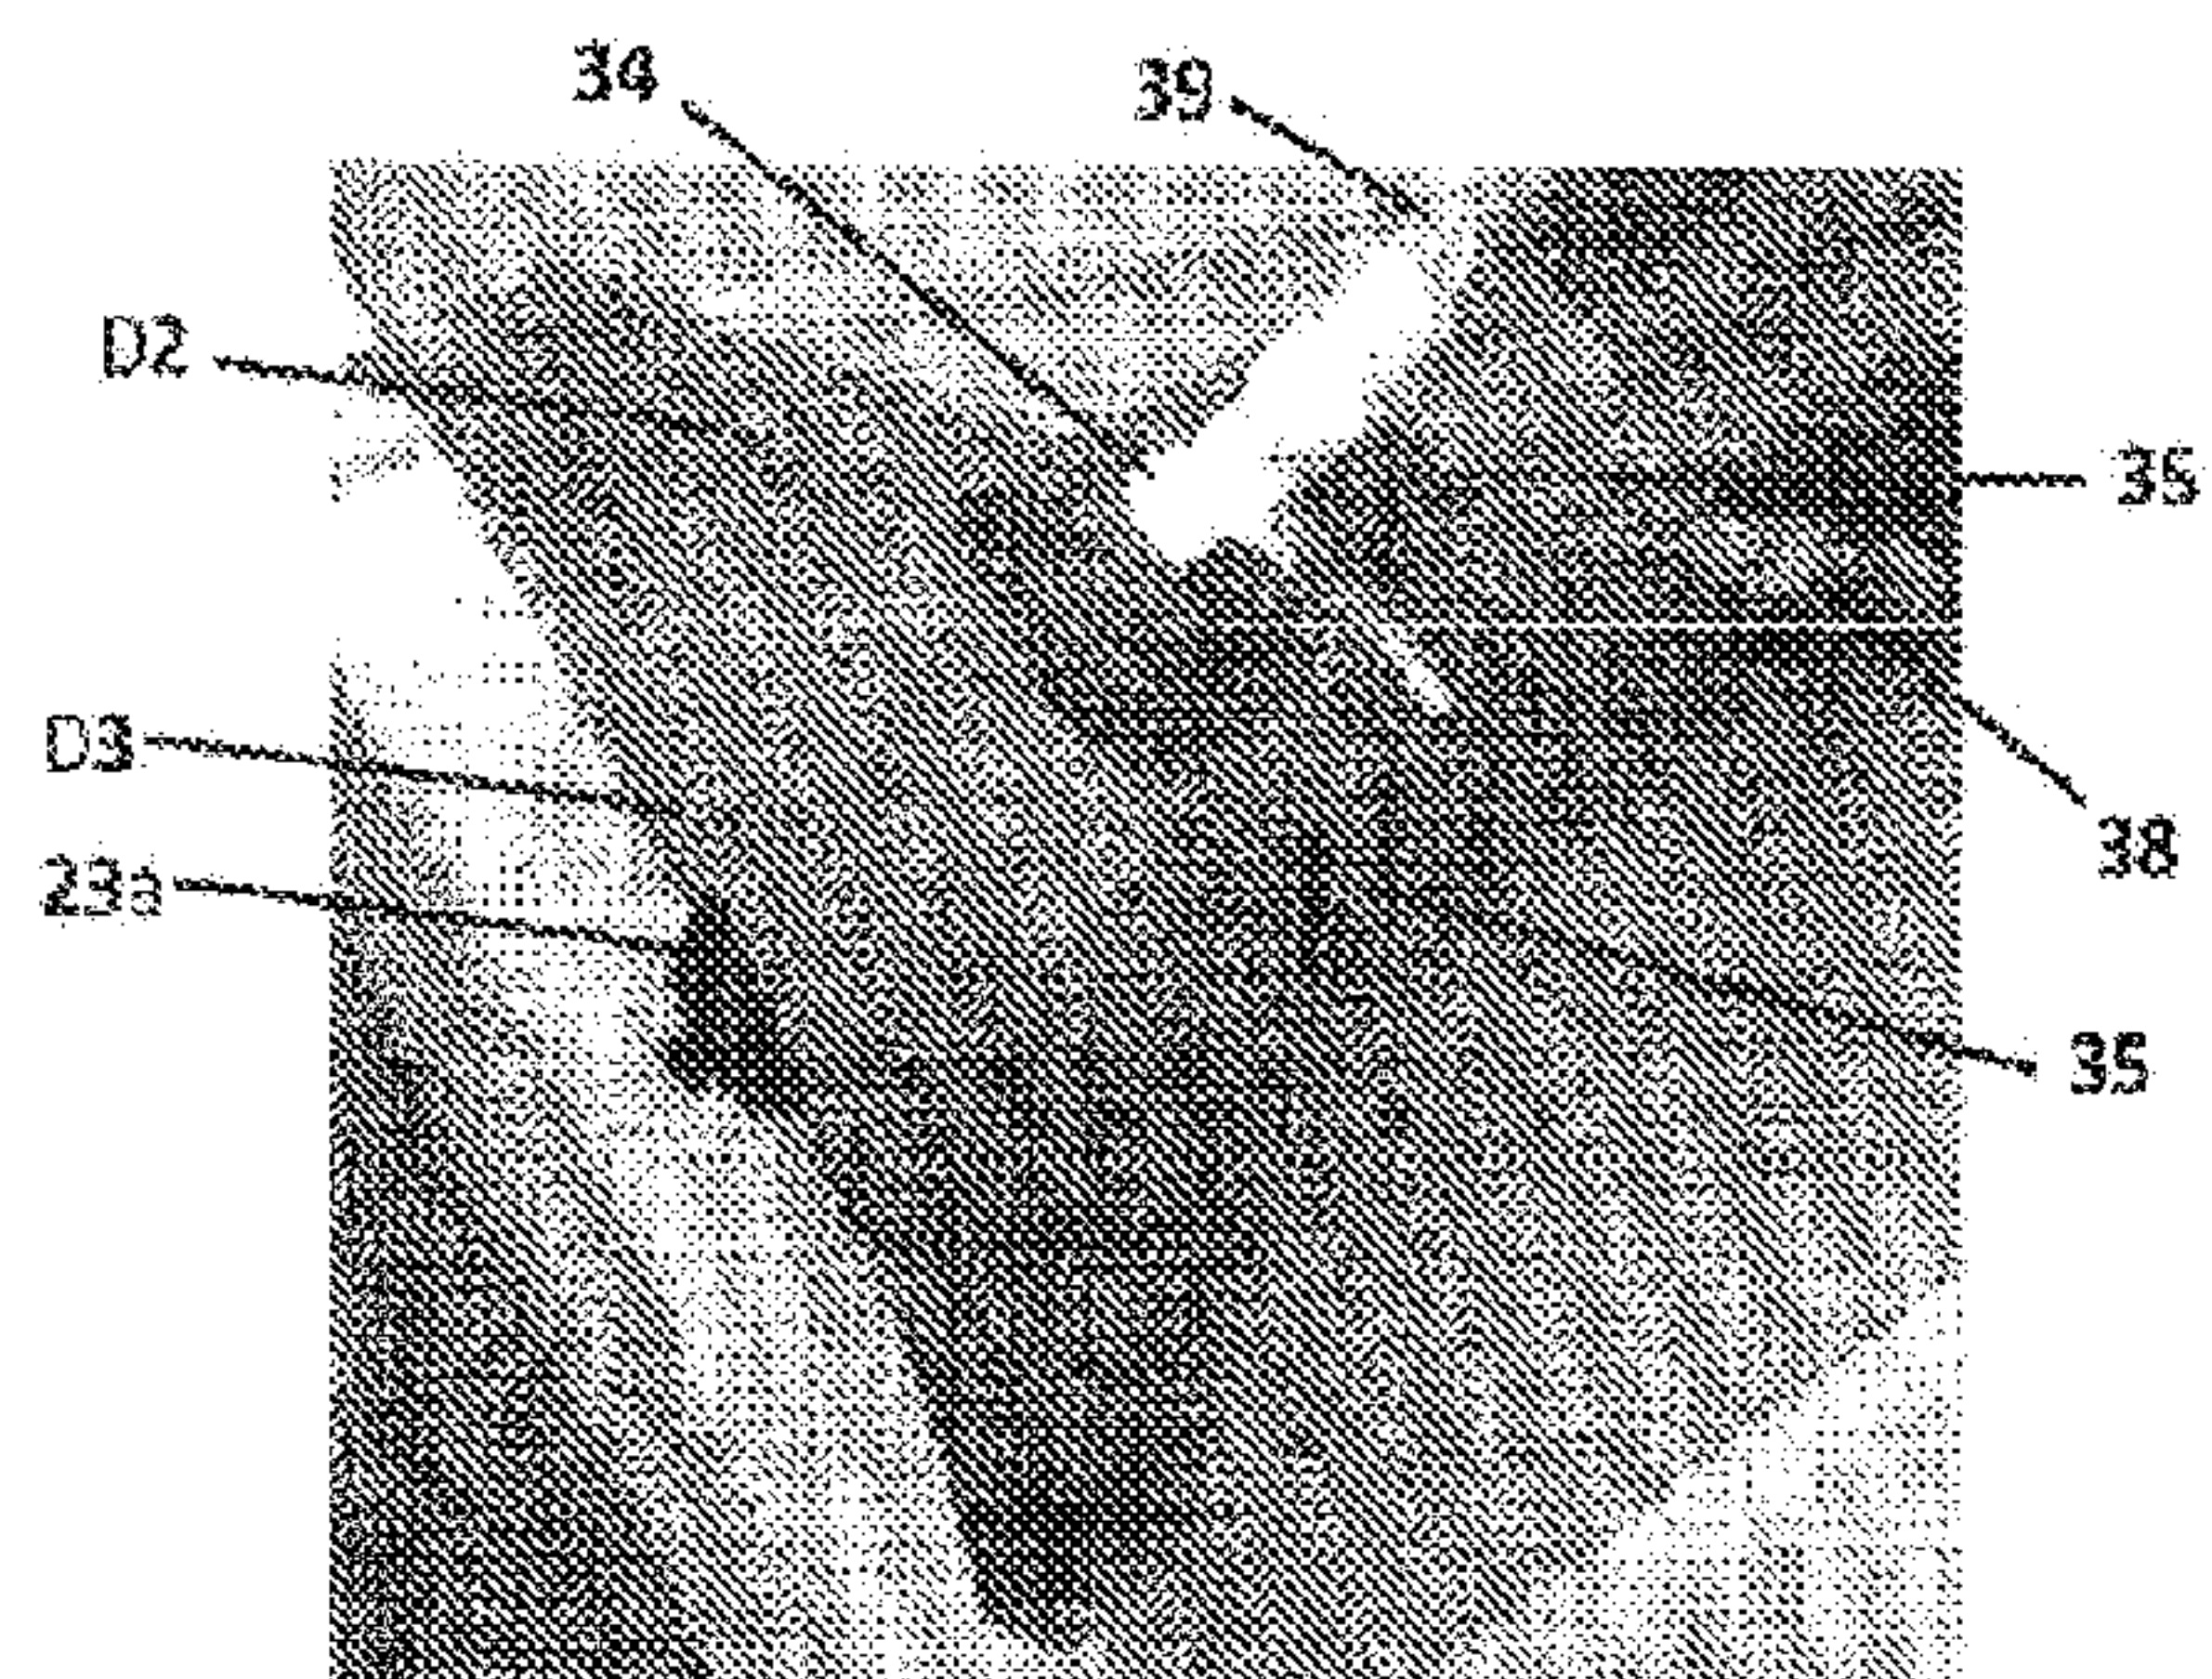


FIG. 4E

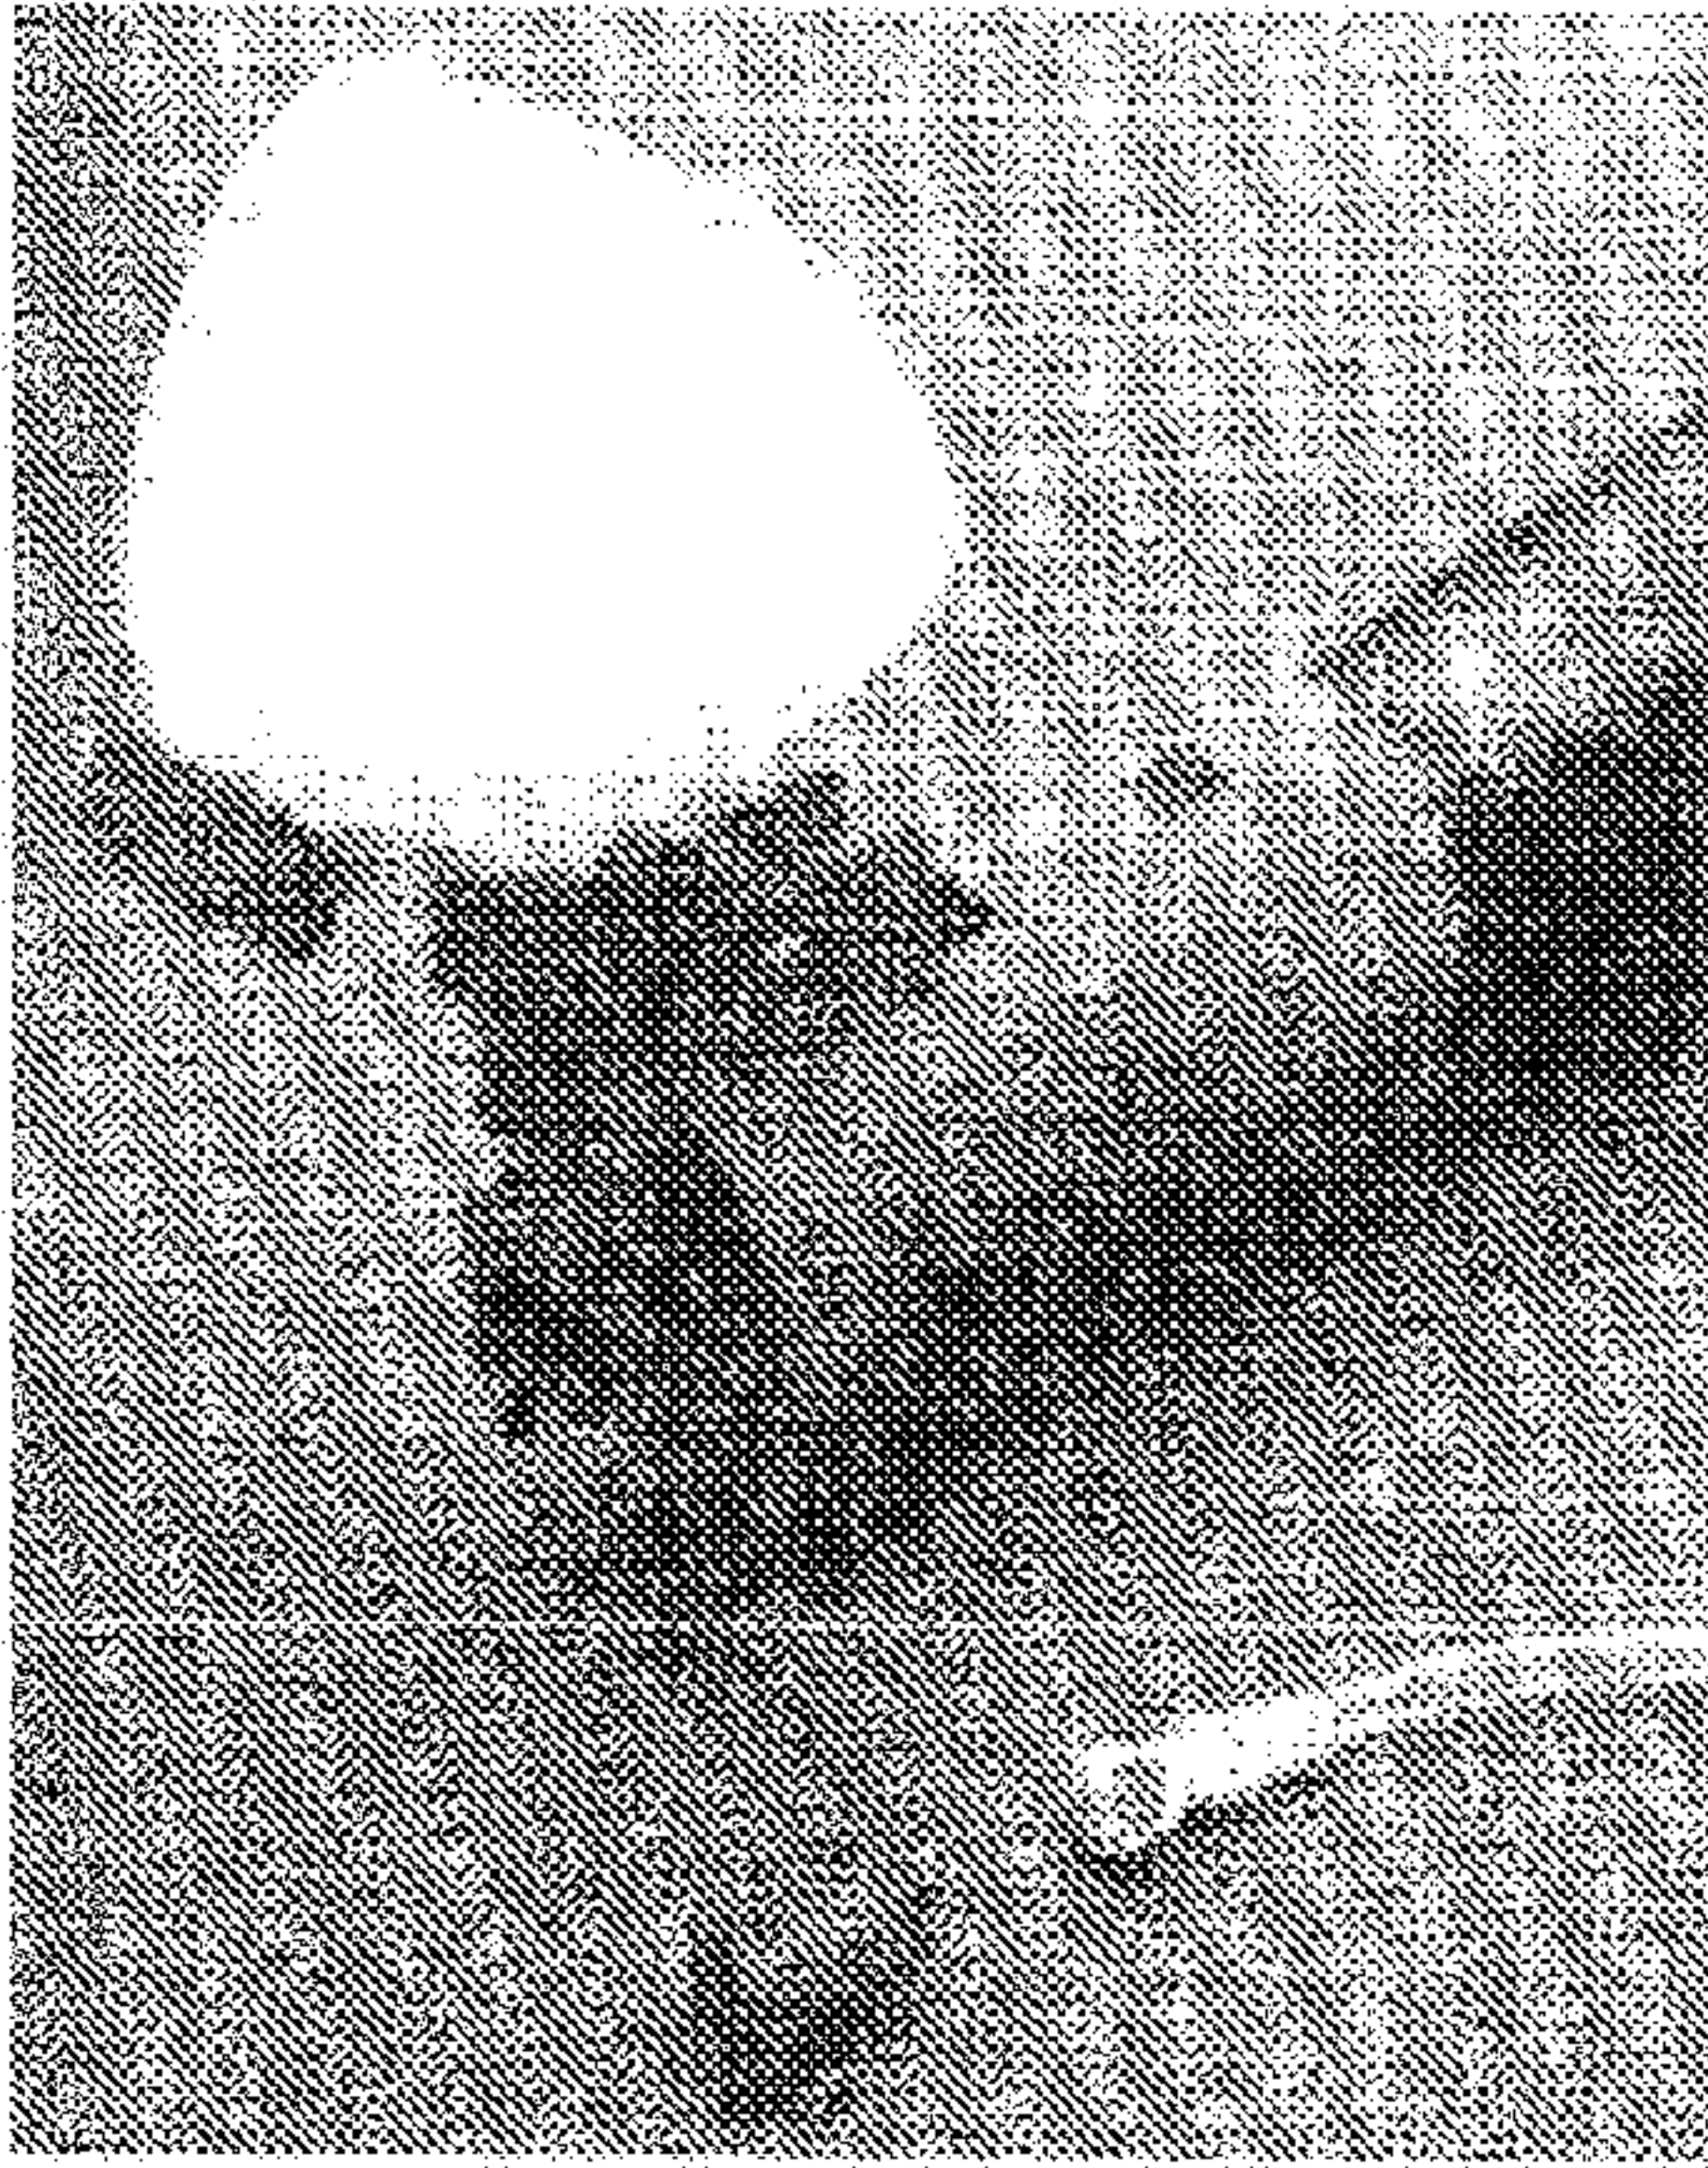


FIG. 5A

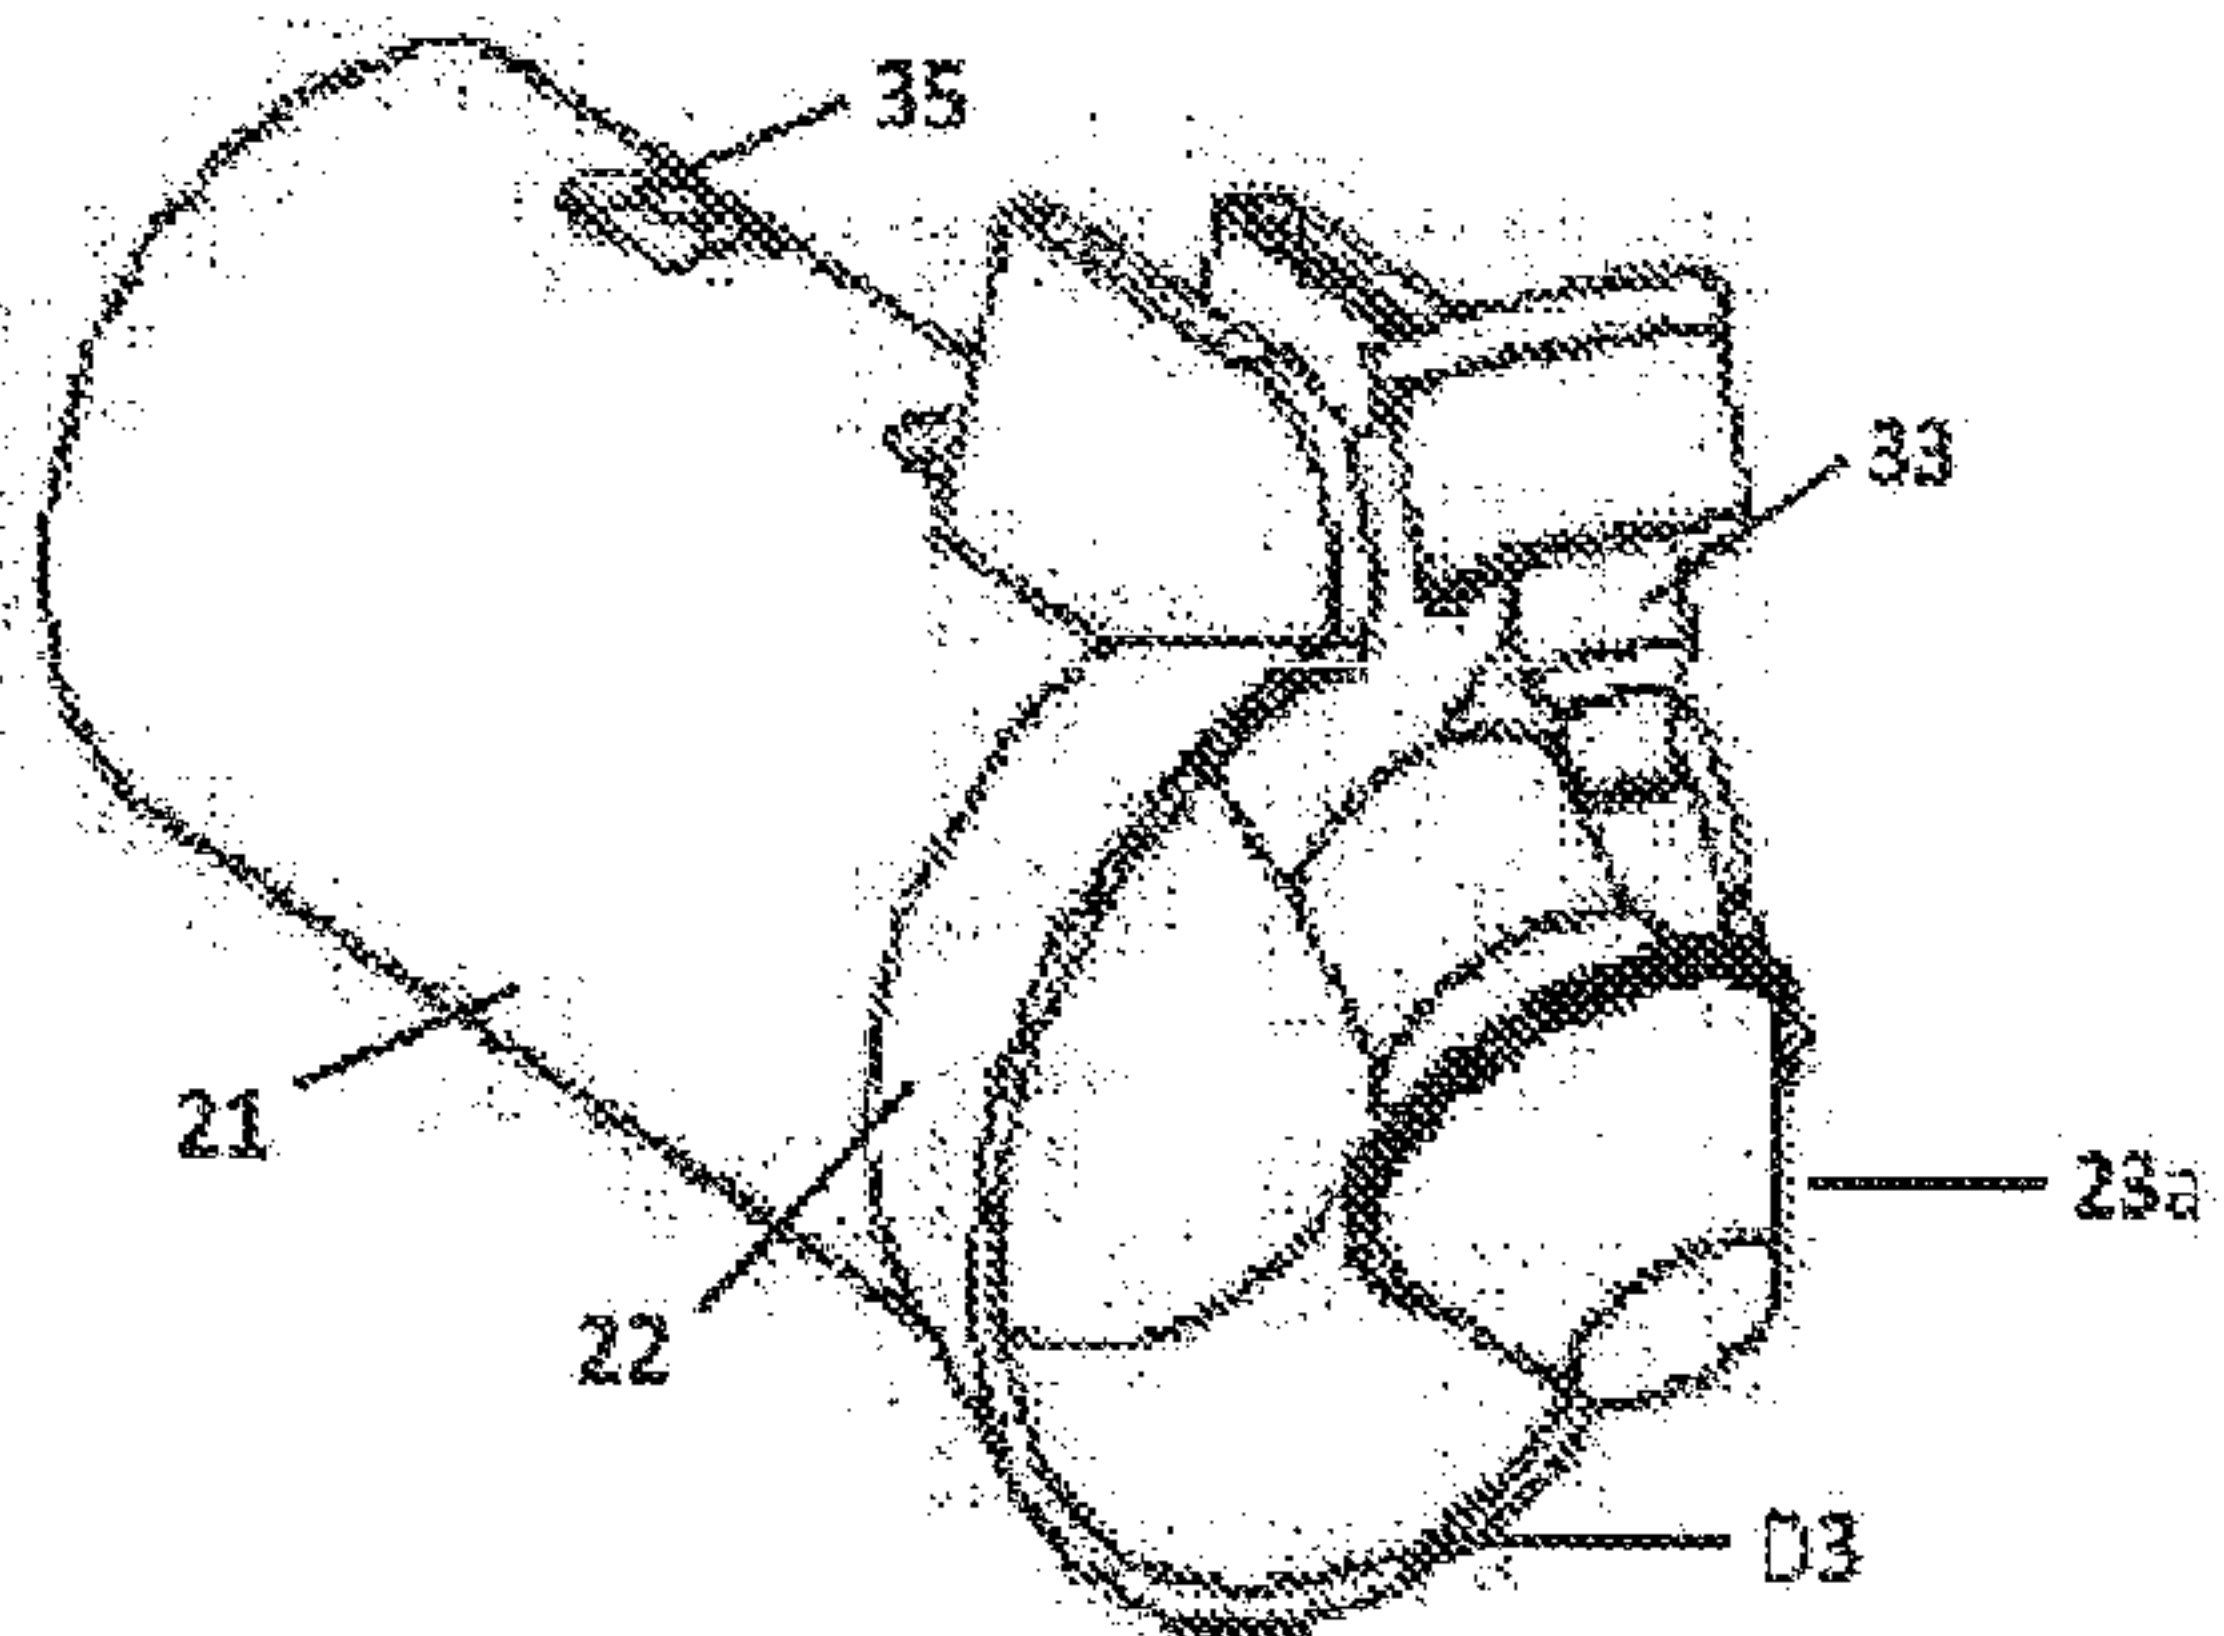


FIG. 5B

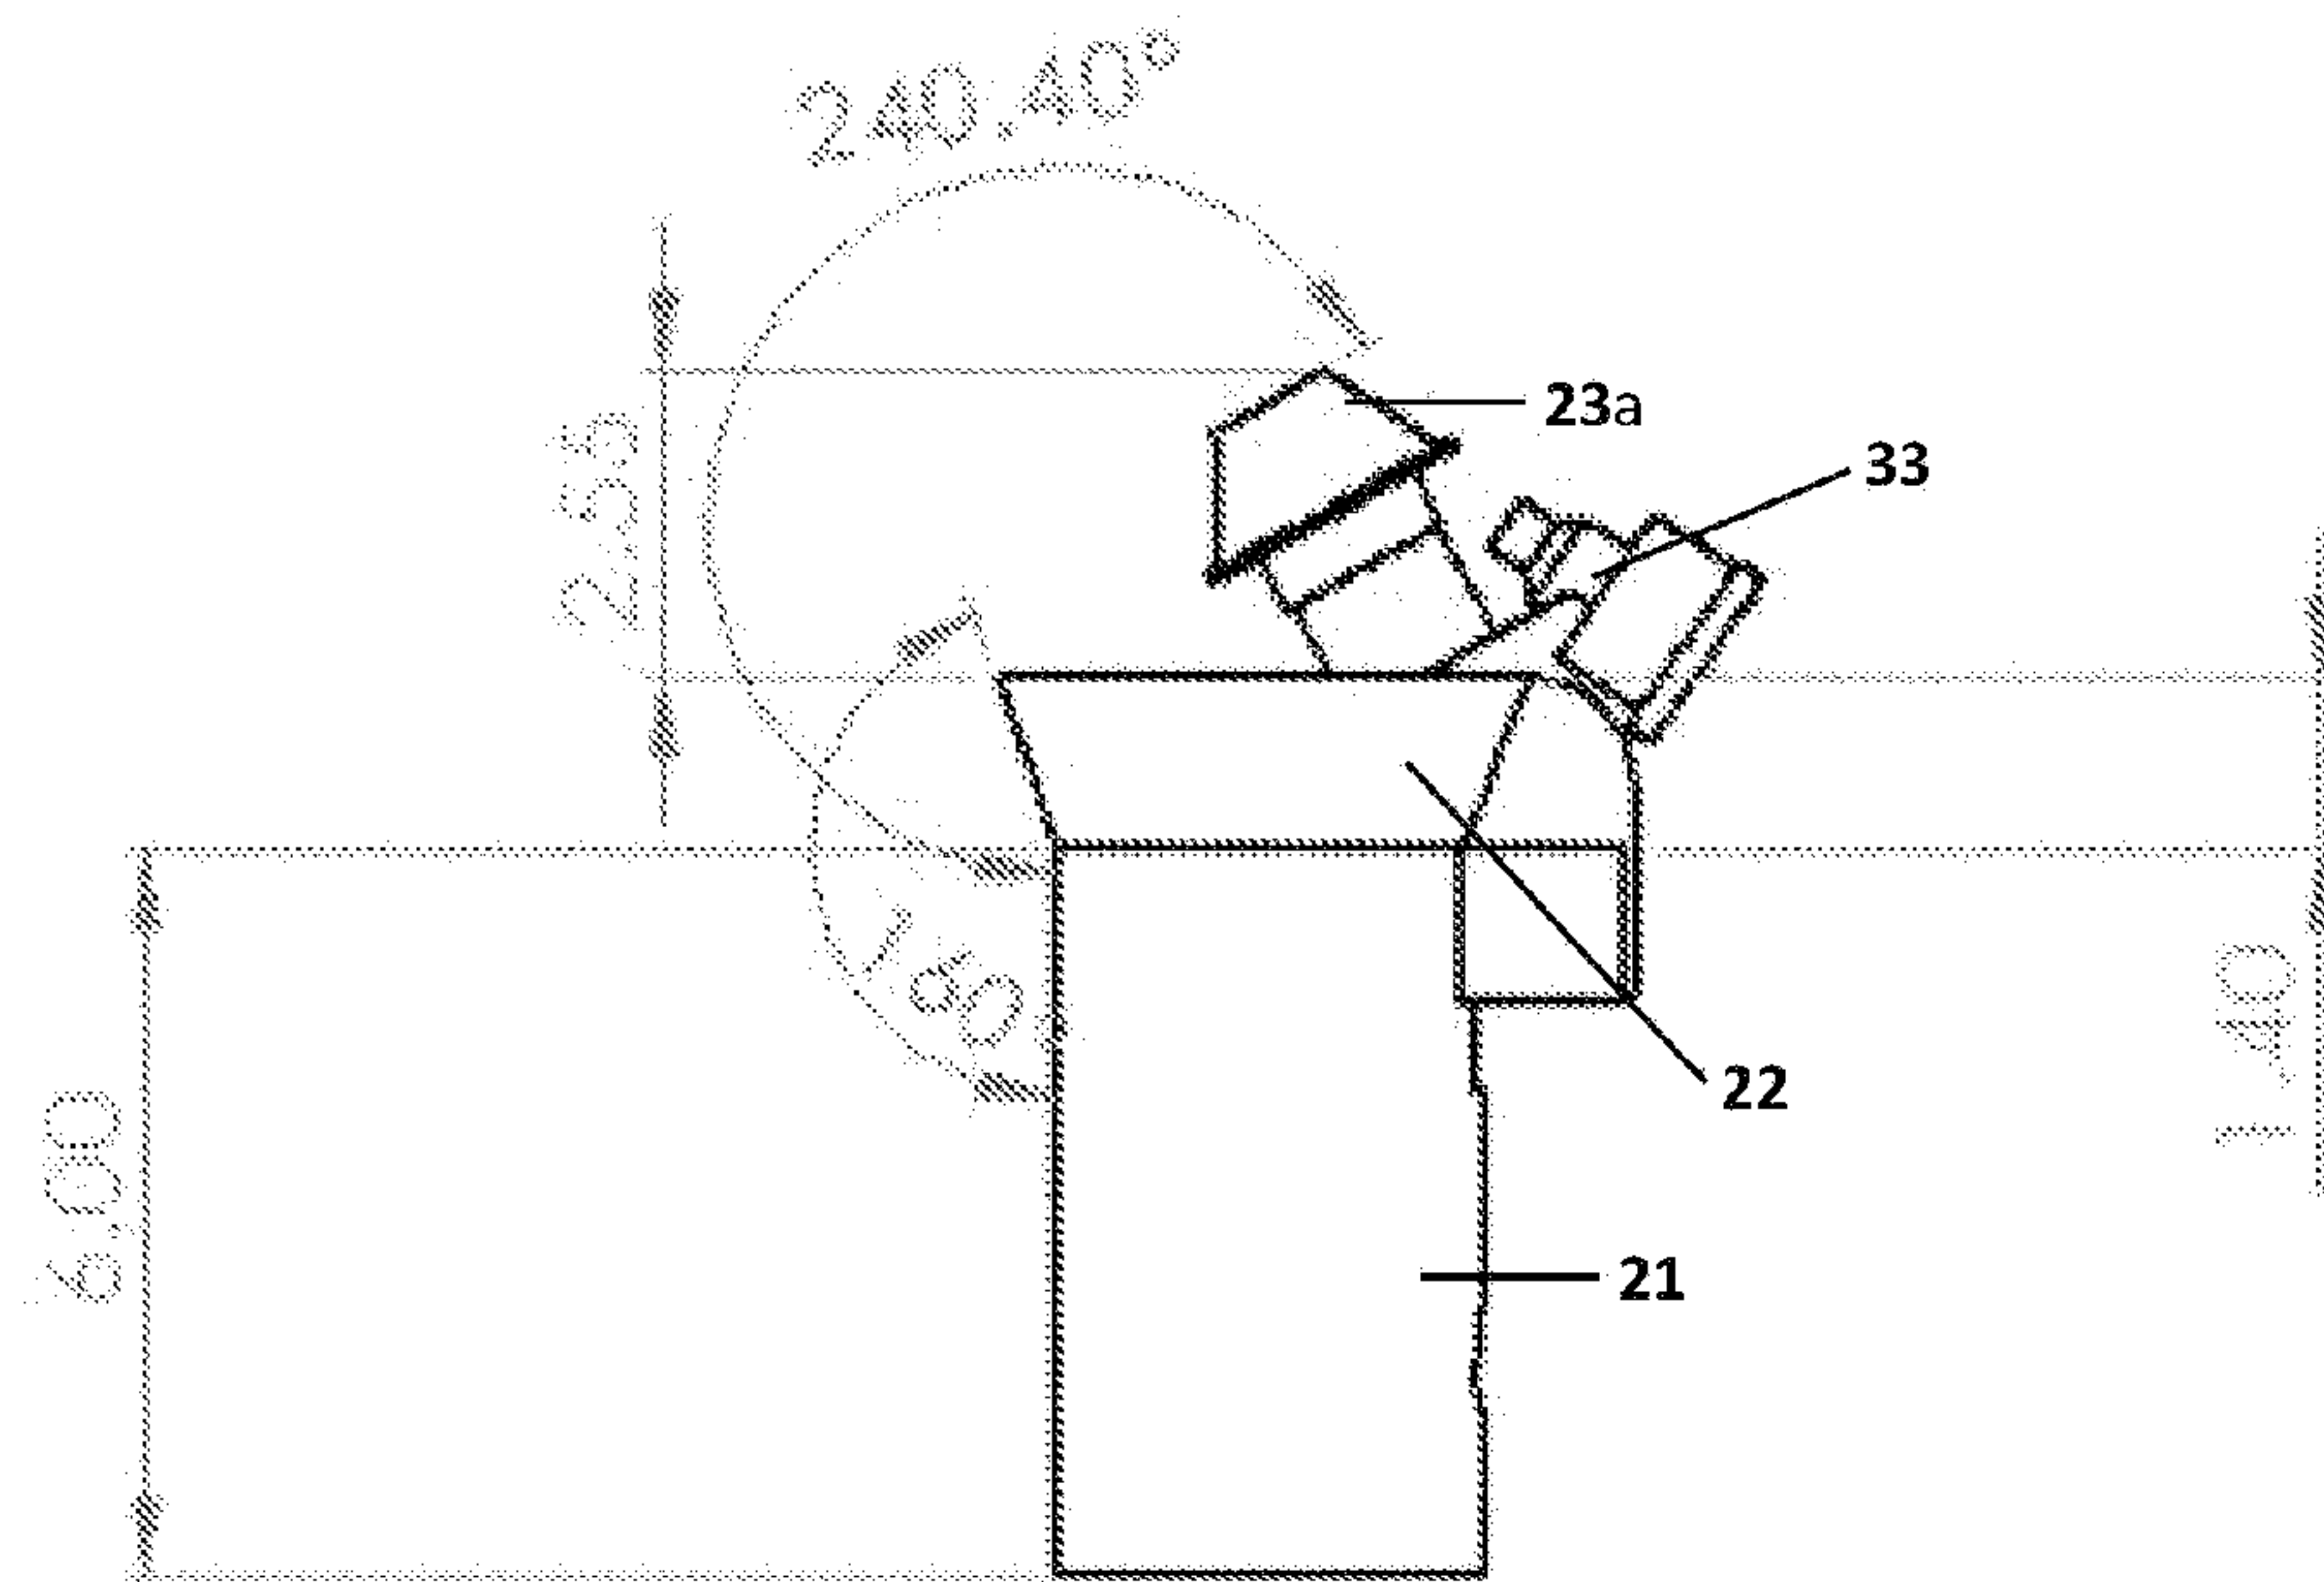


FIG. 5C

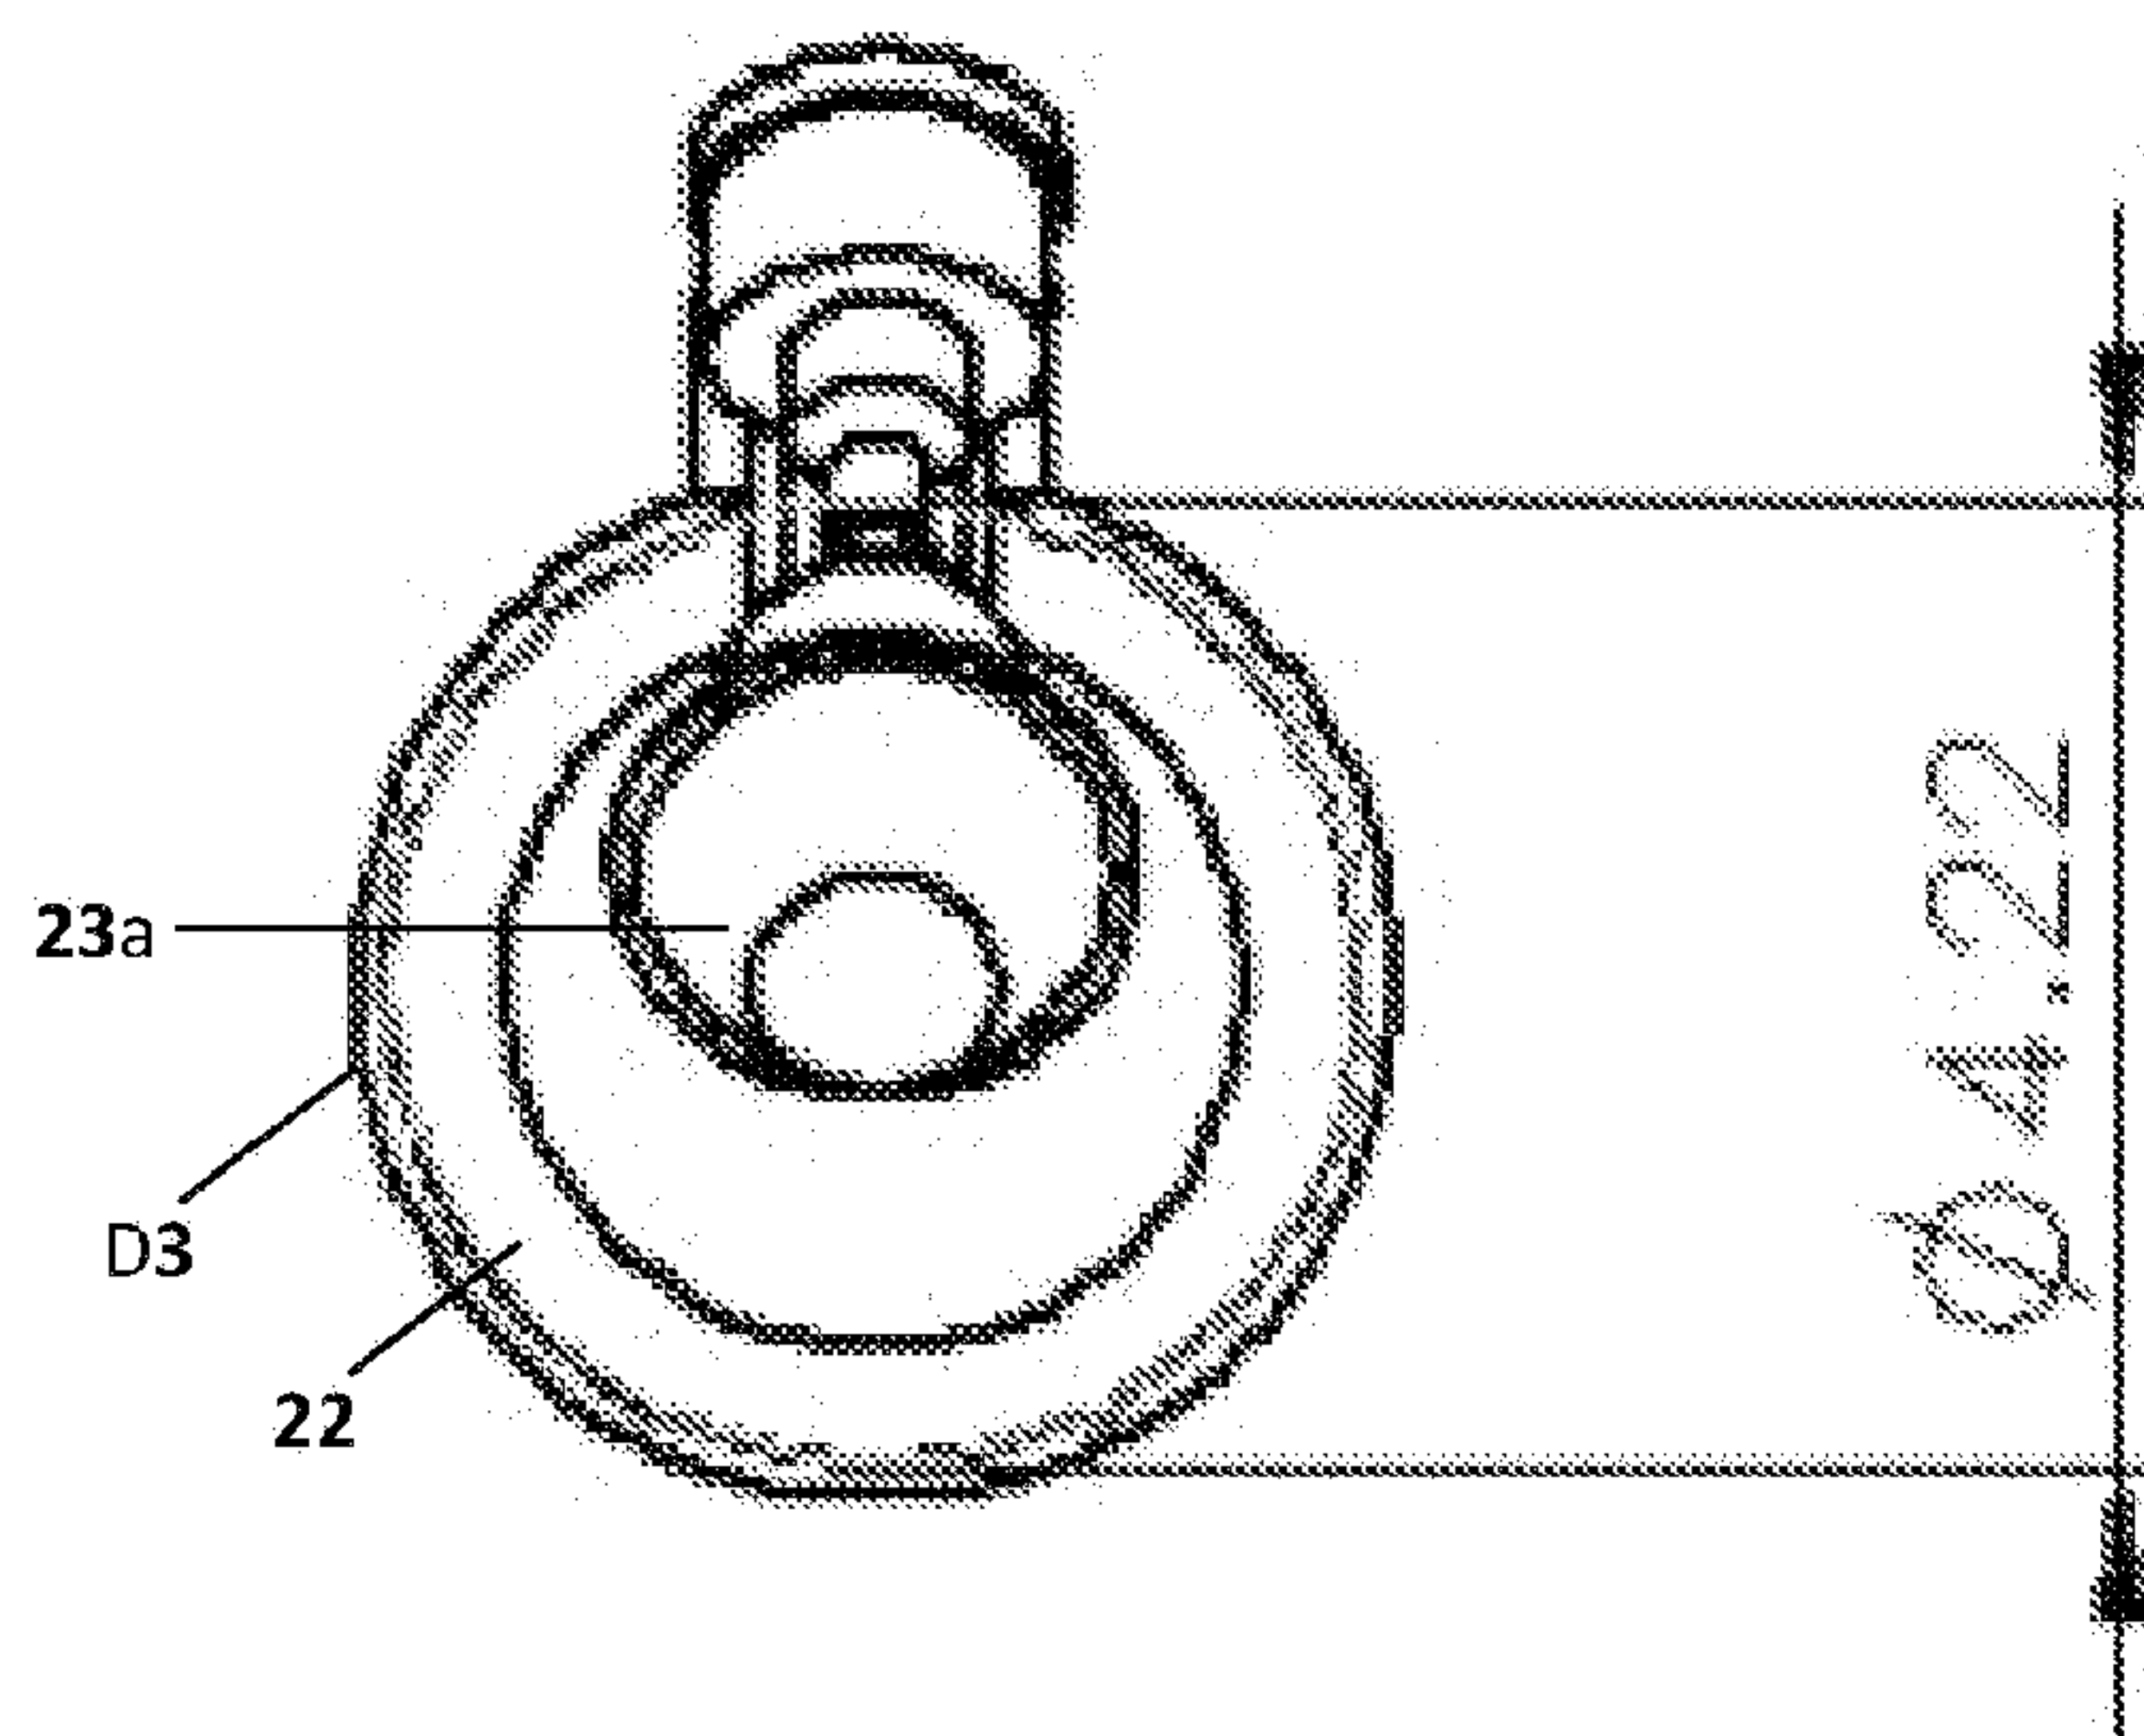


FIG. 5D

Shroud Version 2

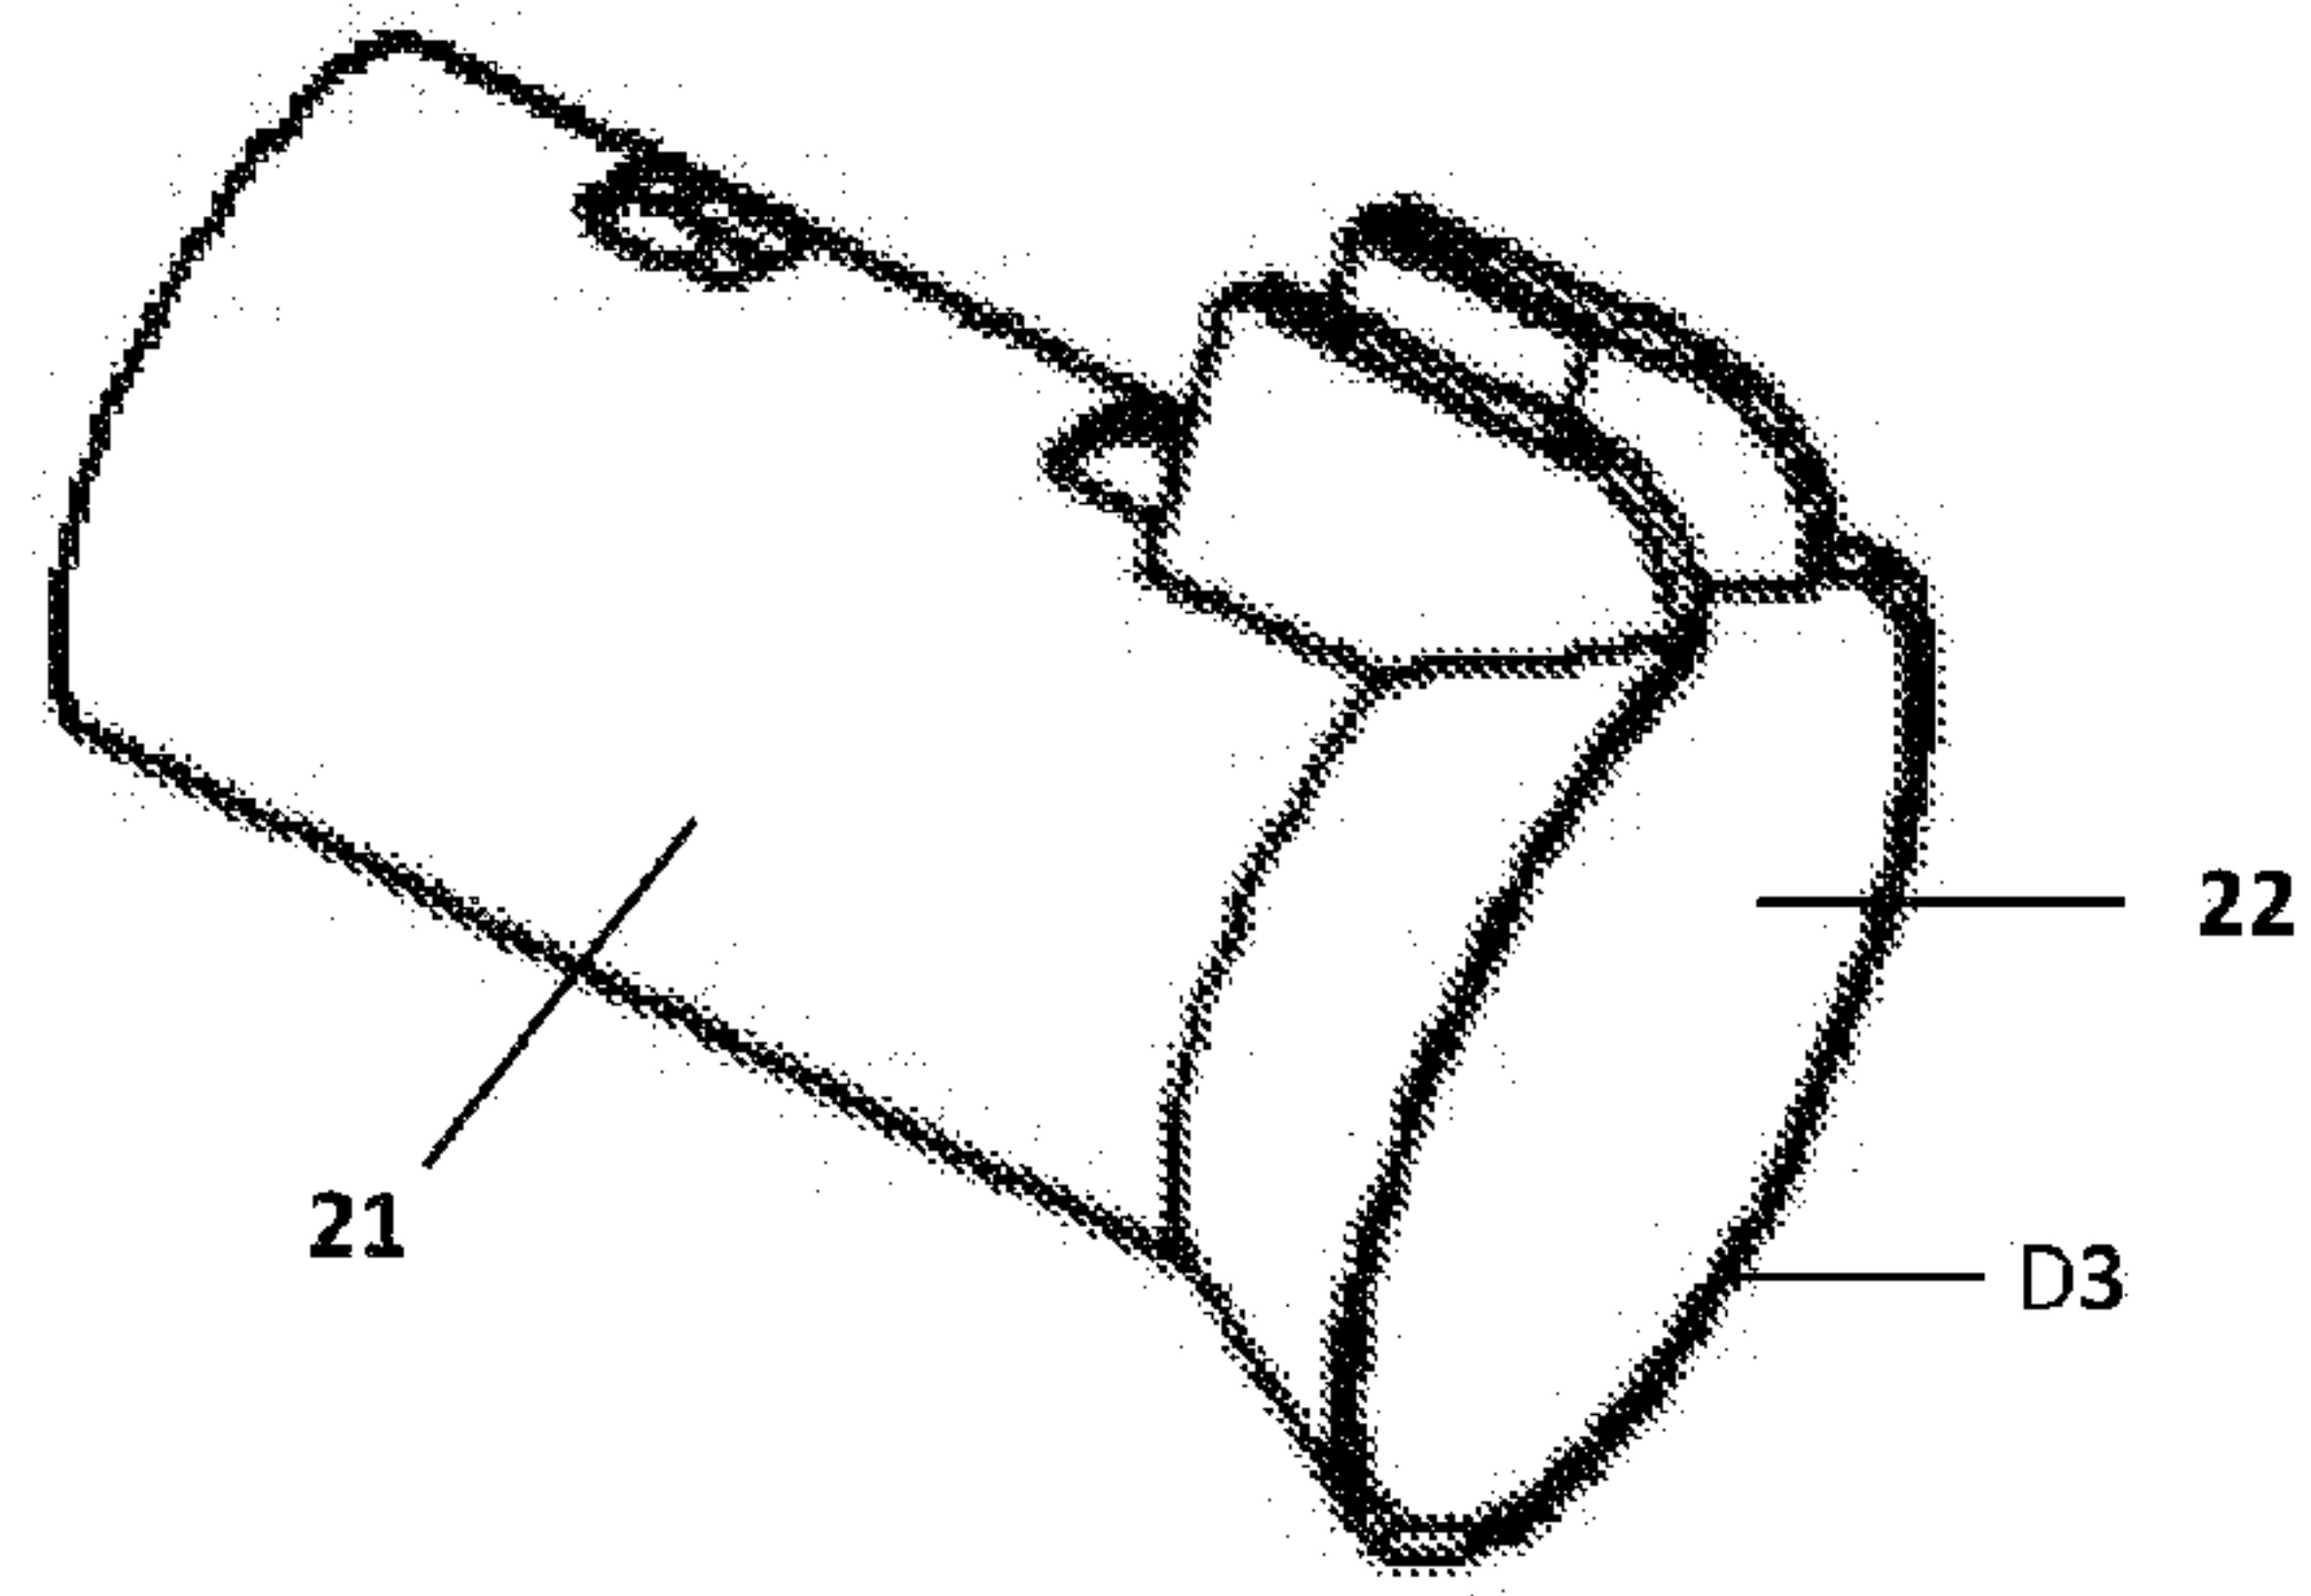


FIG. 6A

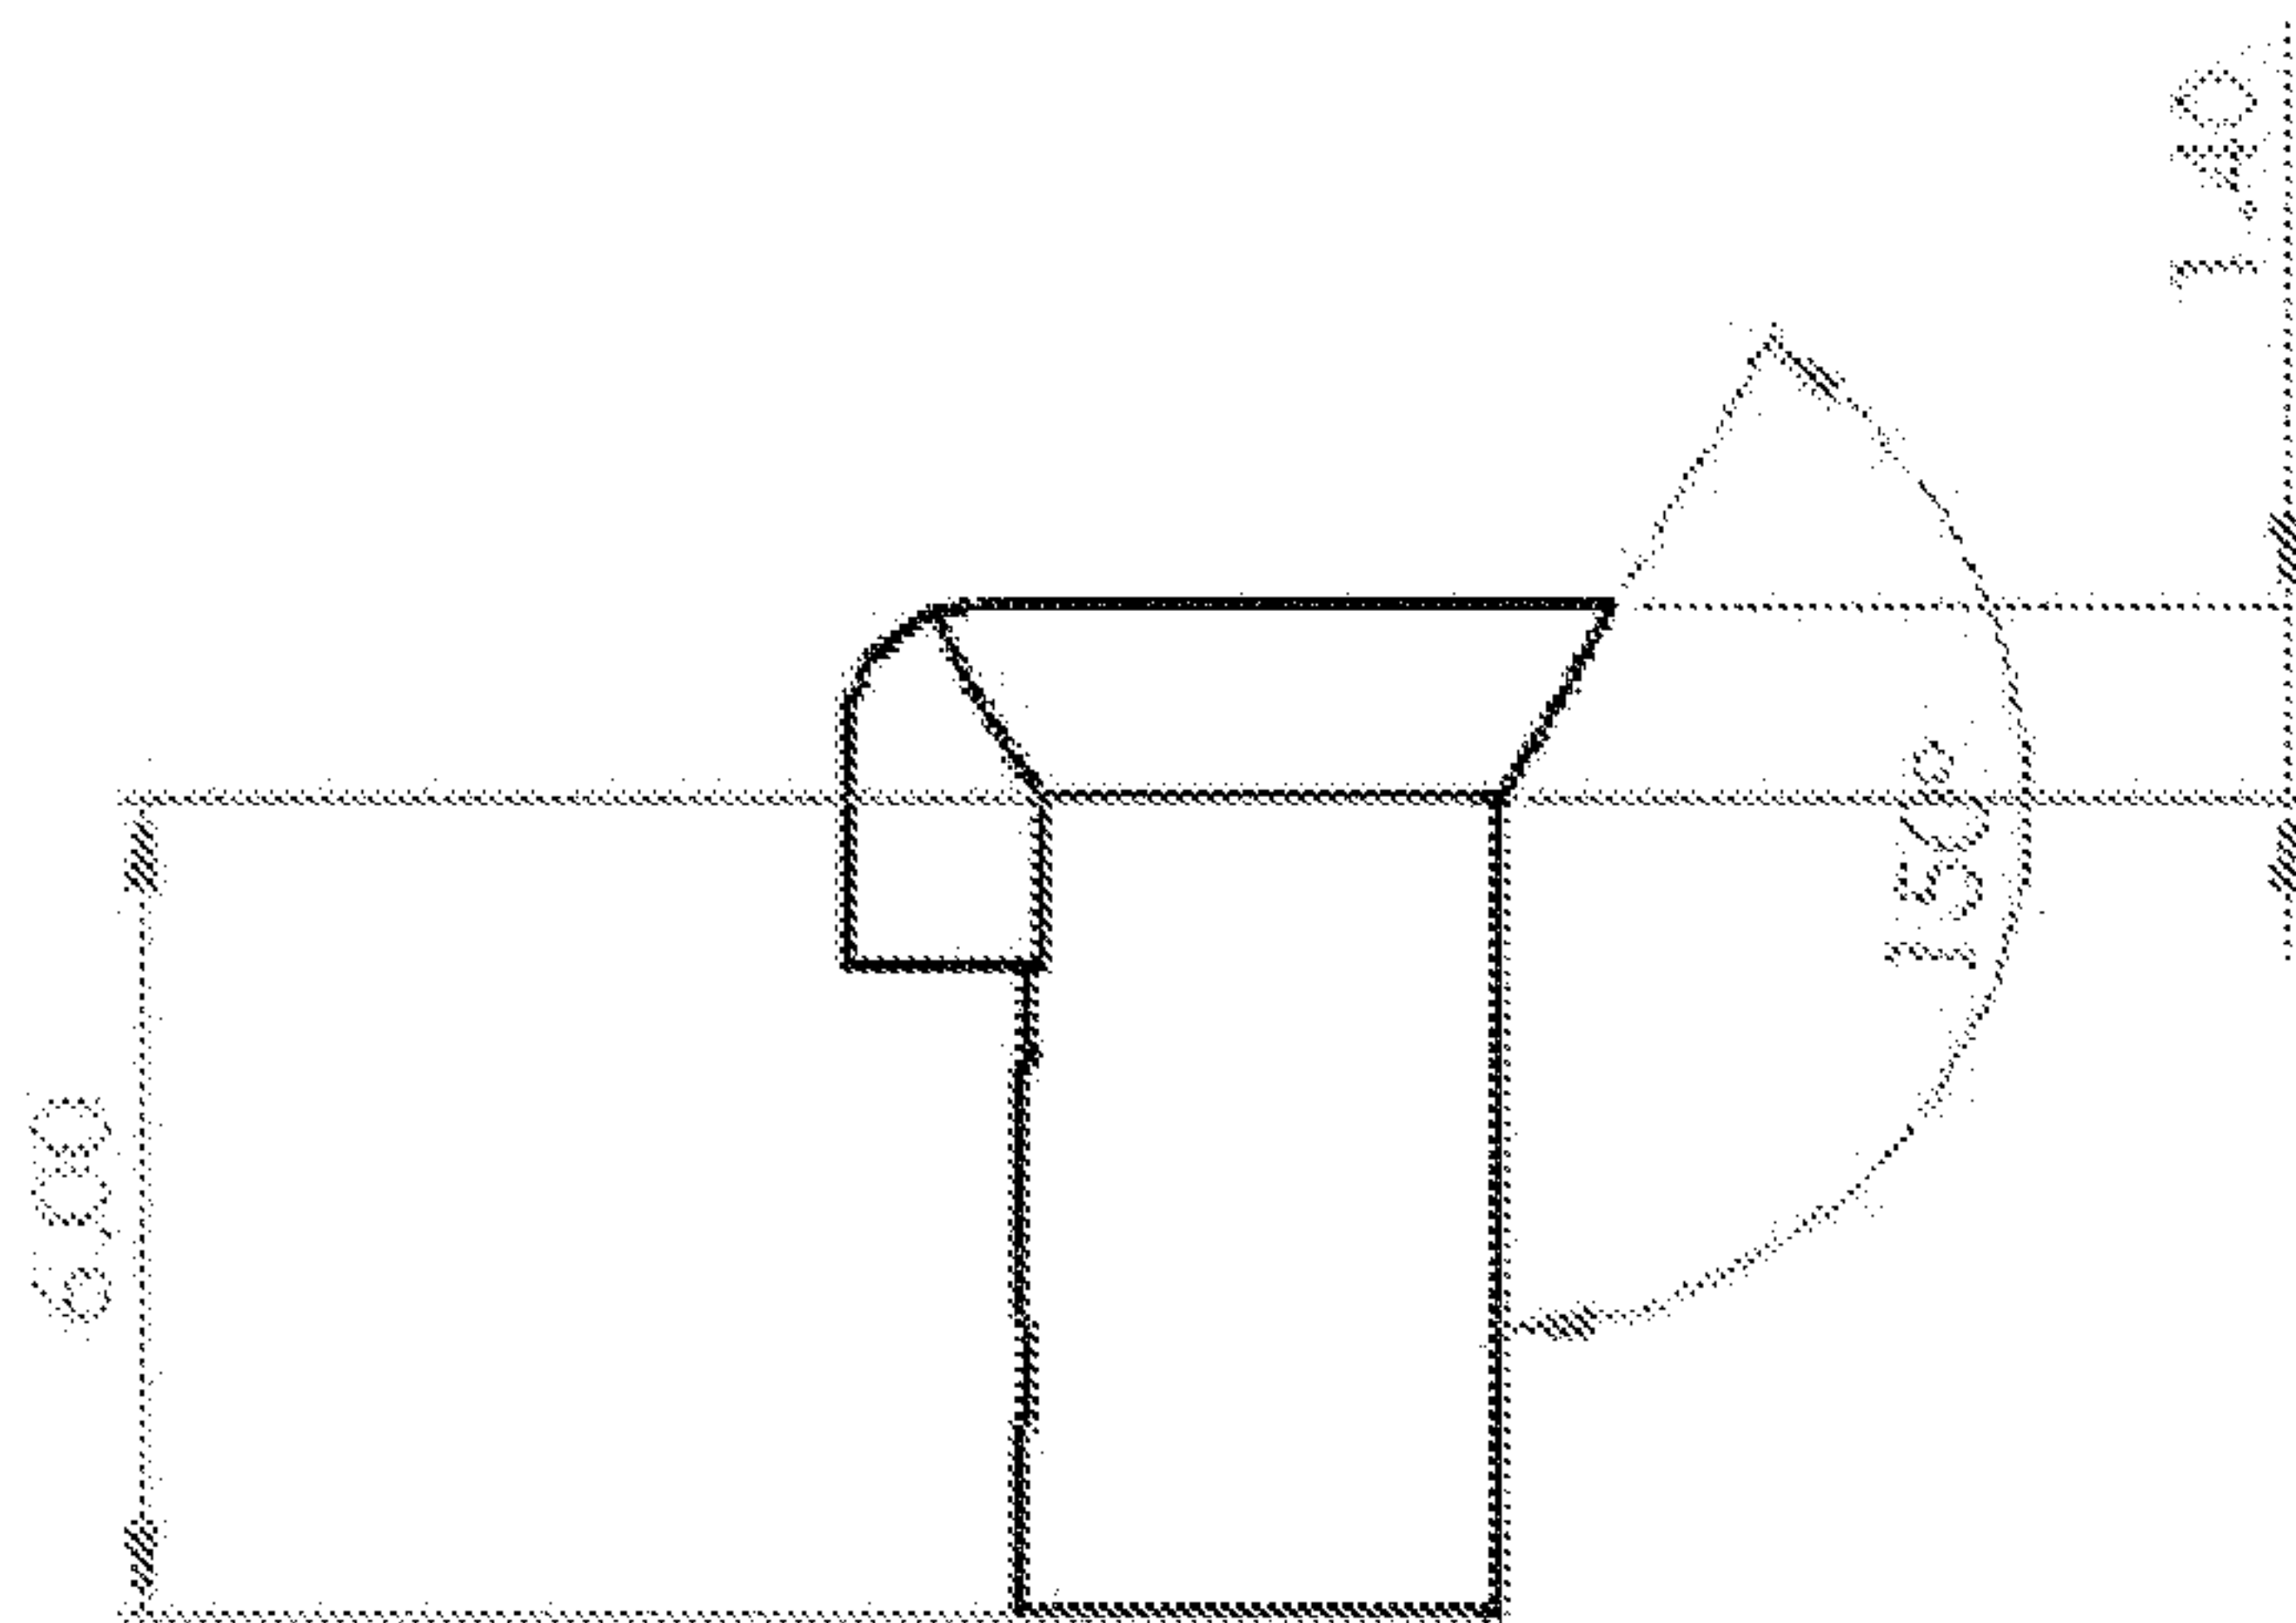


FIG. 6B

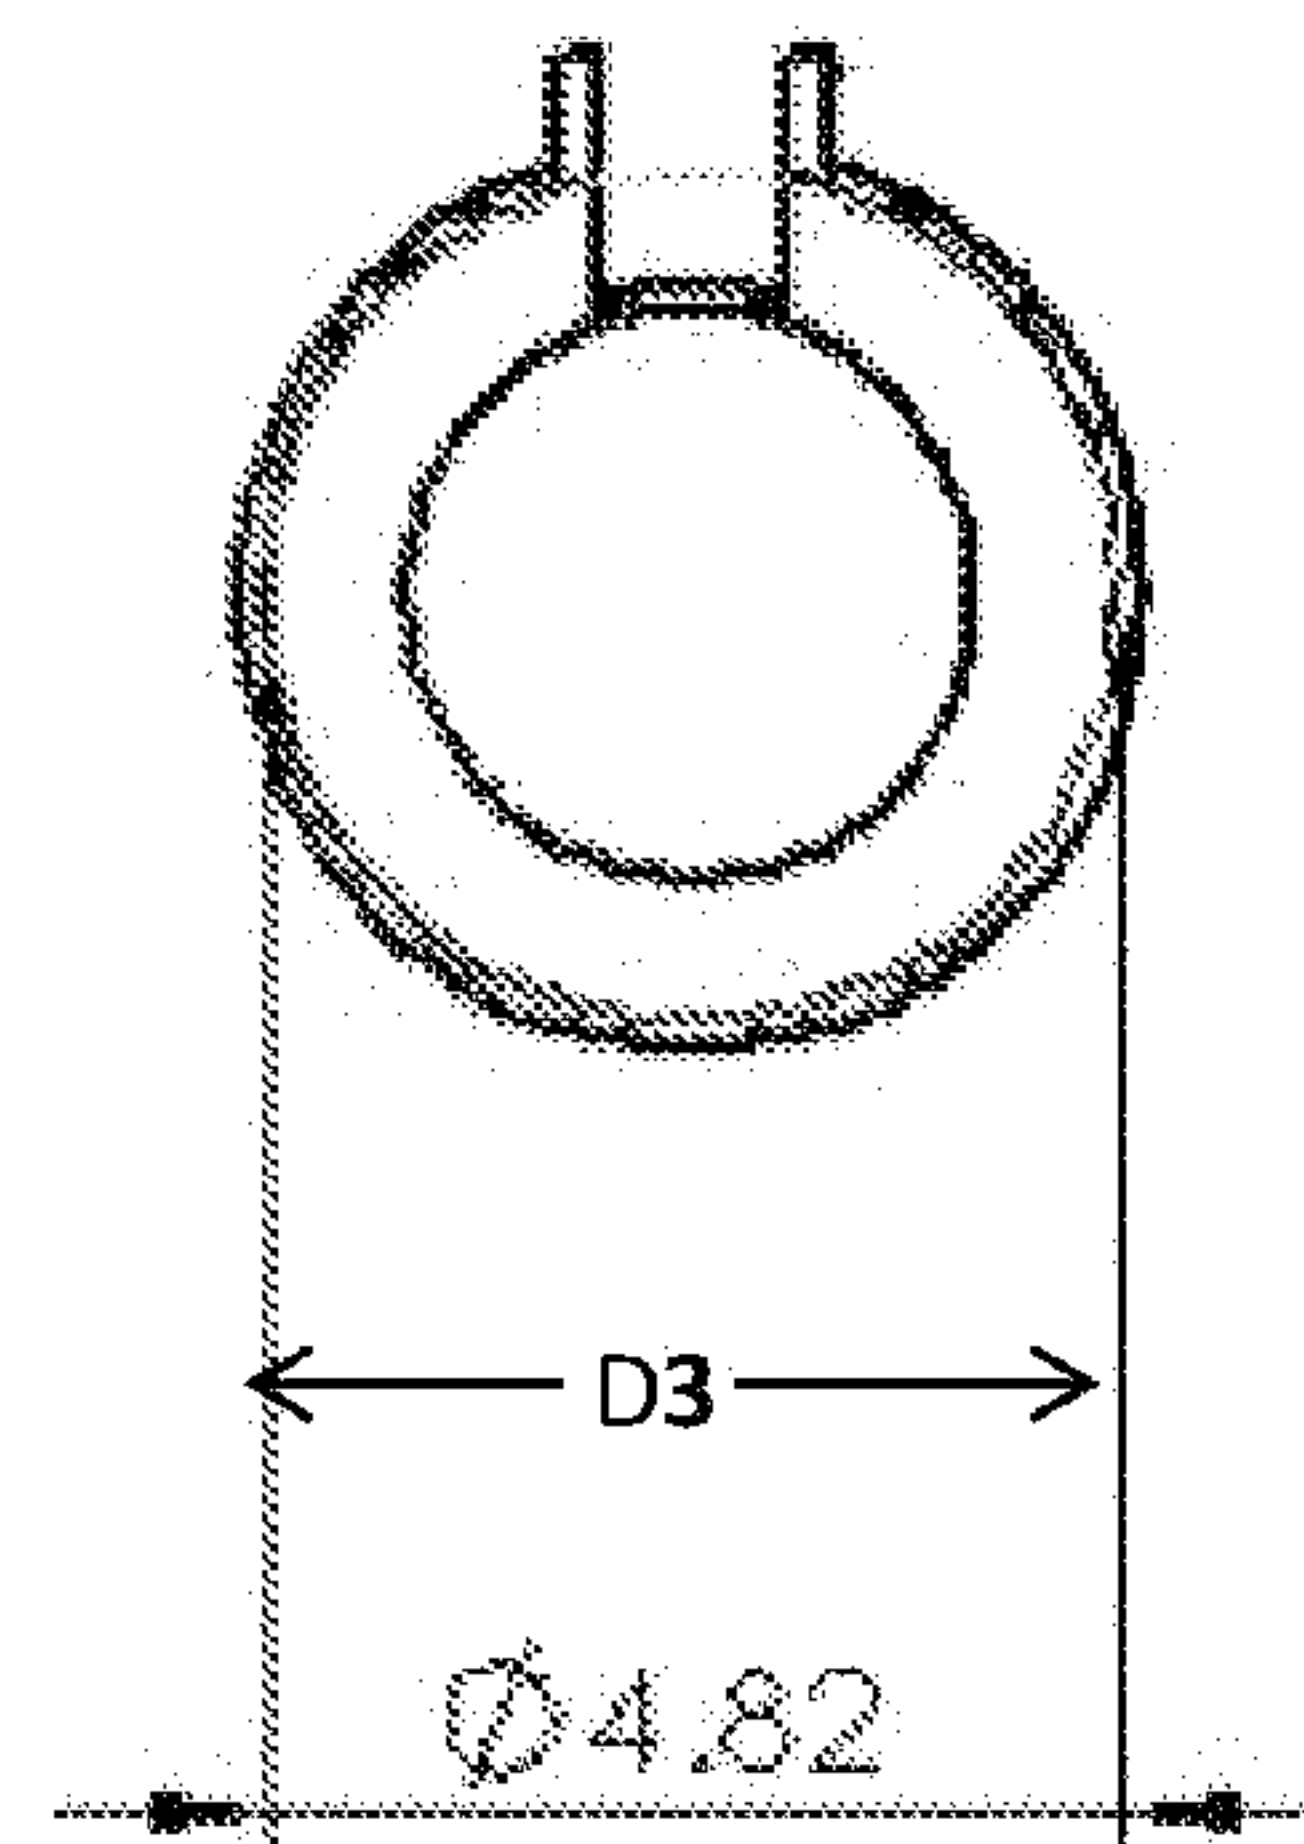


FIG. 6C

Shroud Version 3

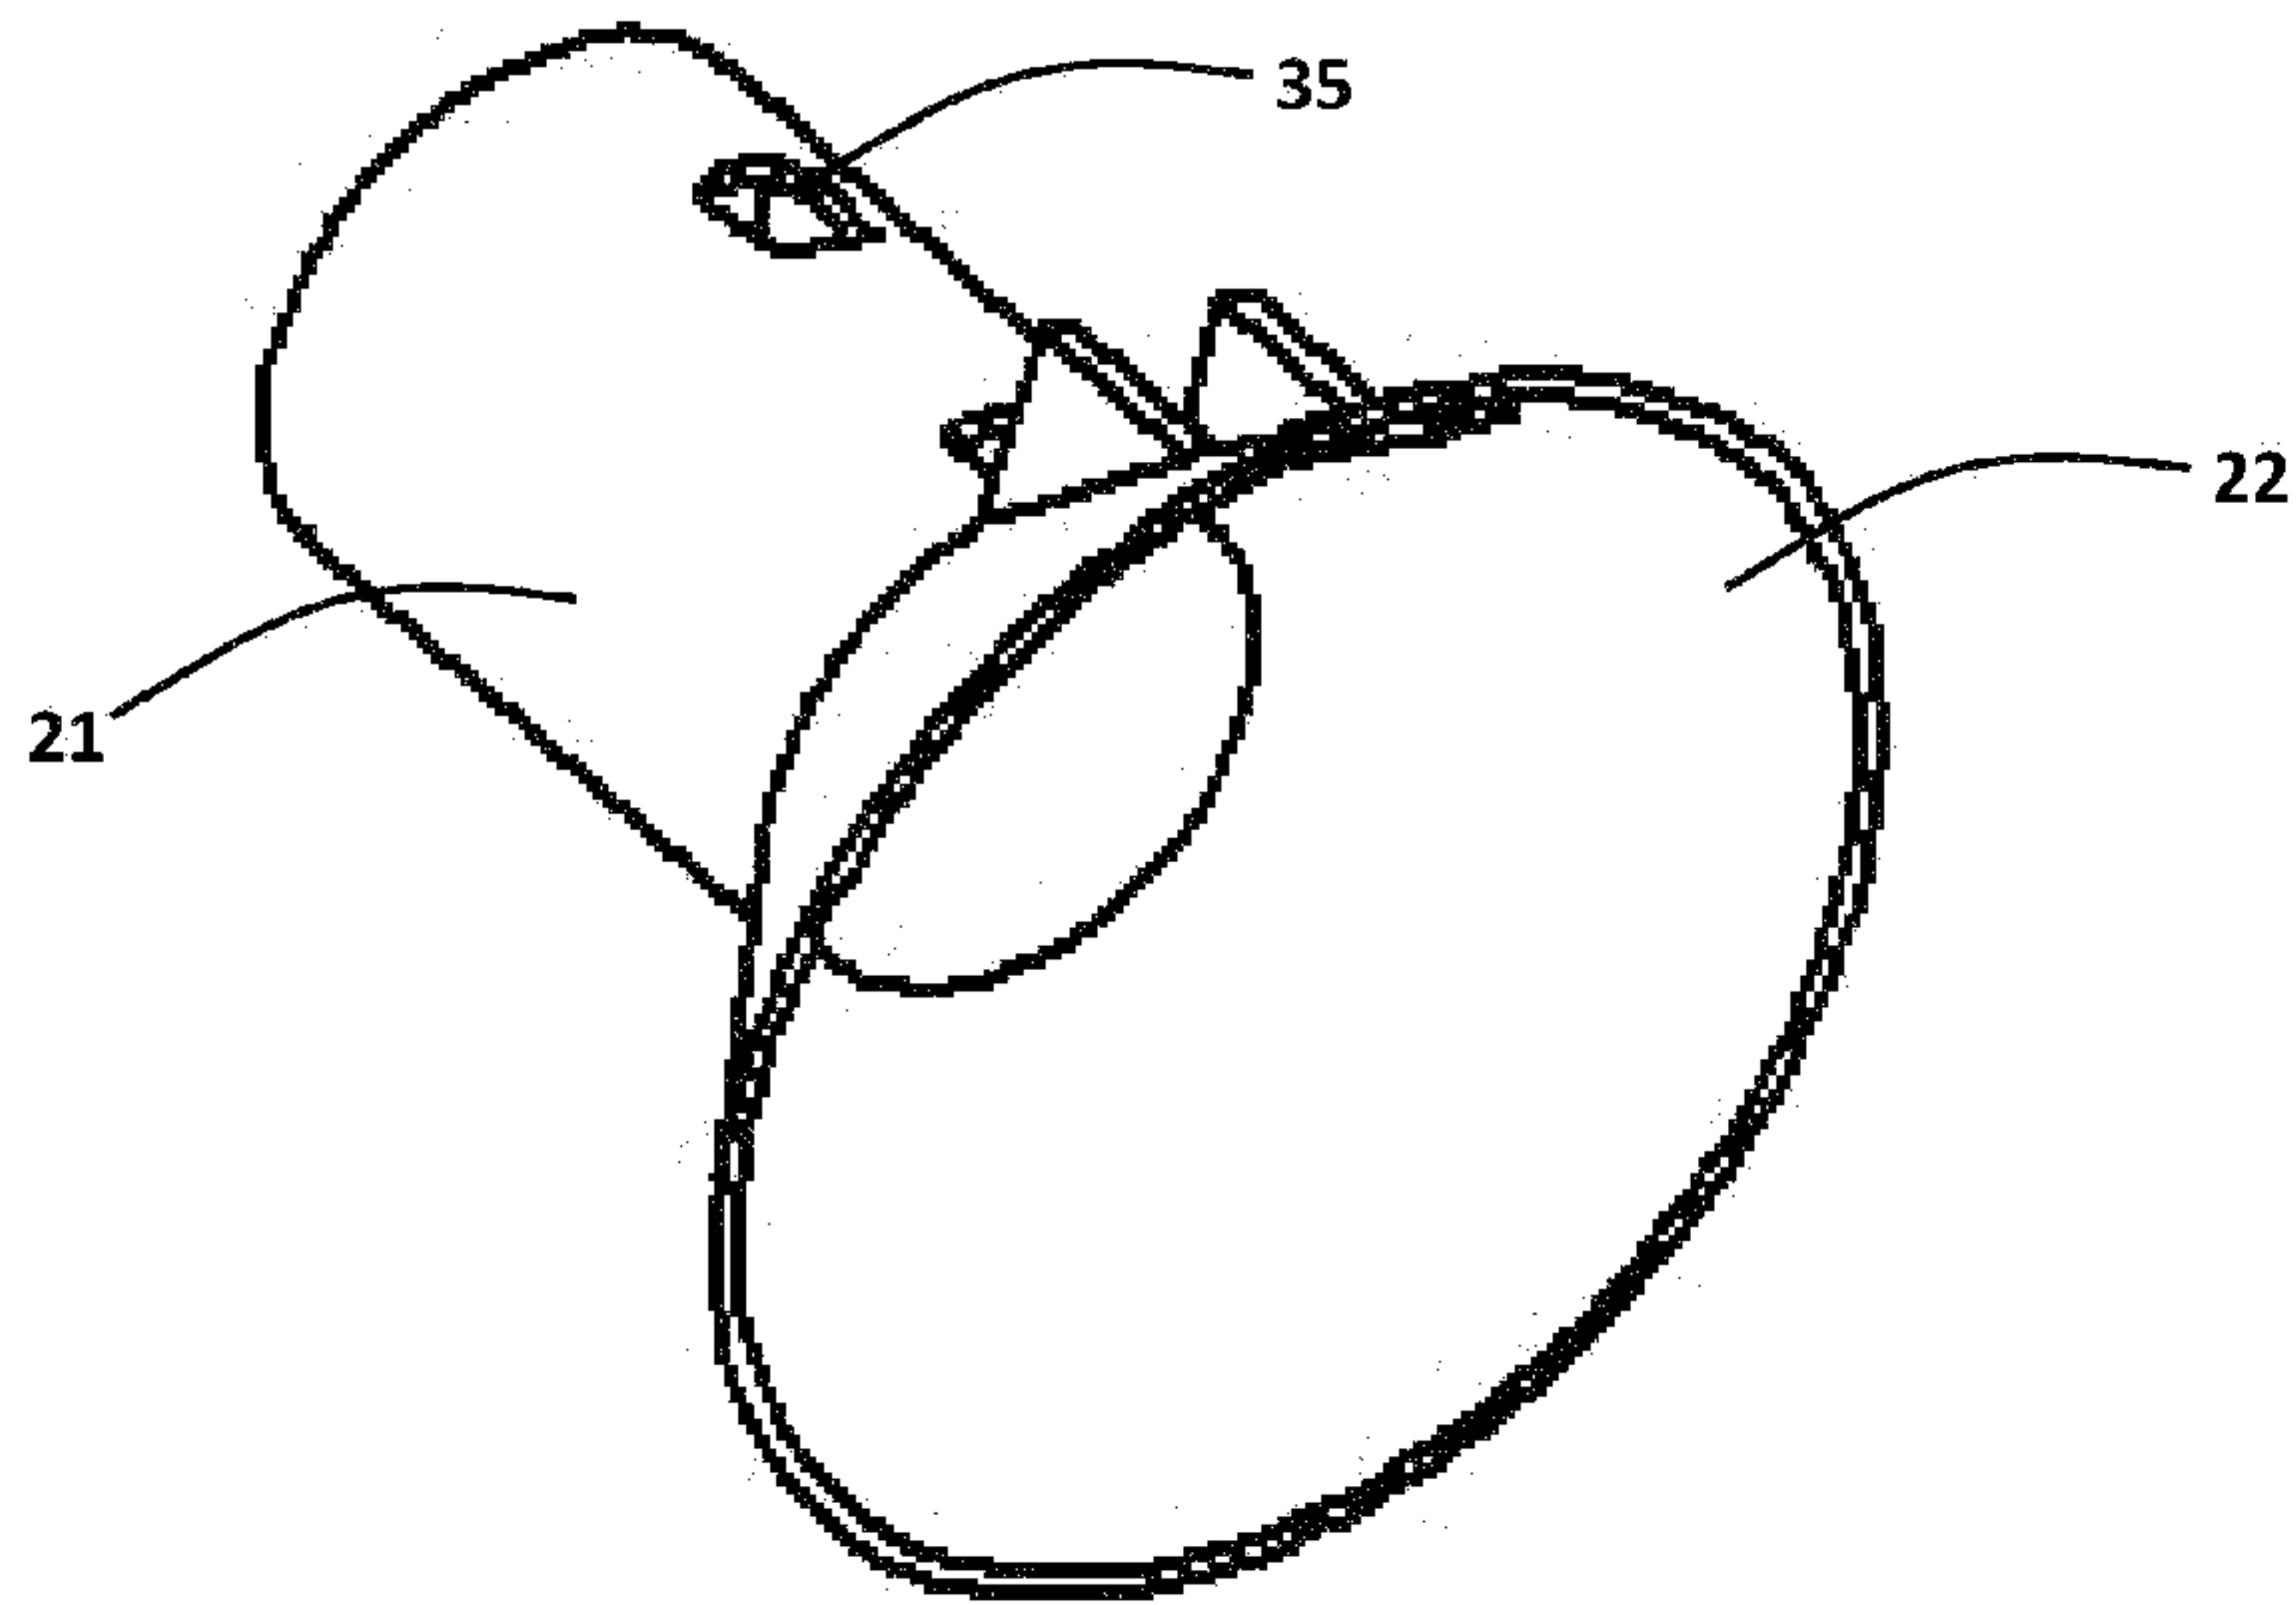


FIG. 7A

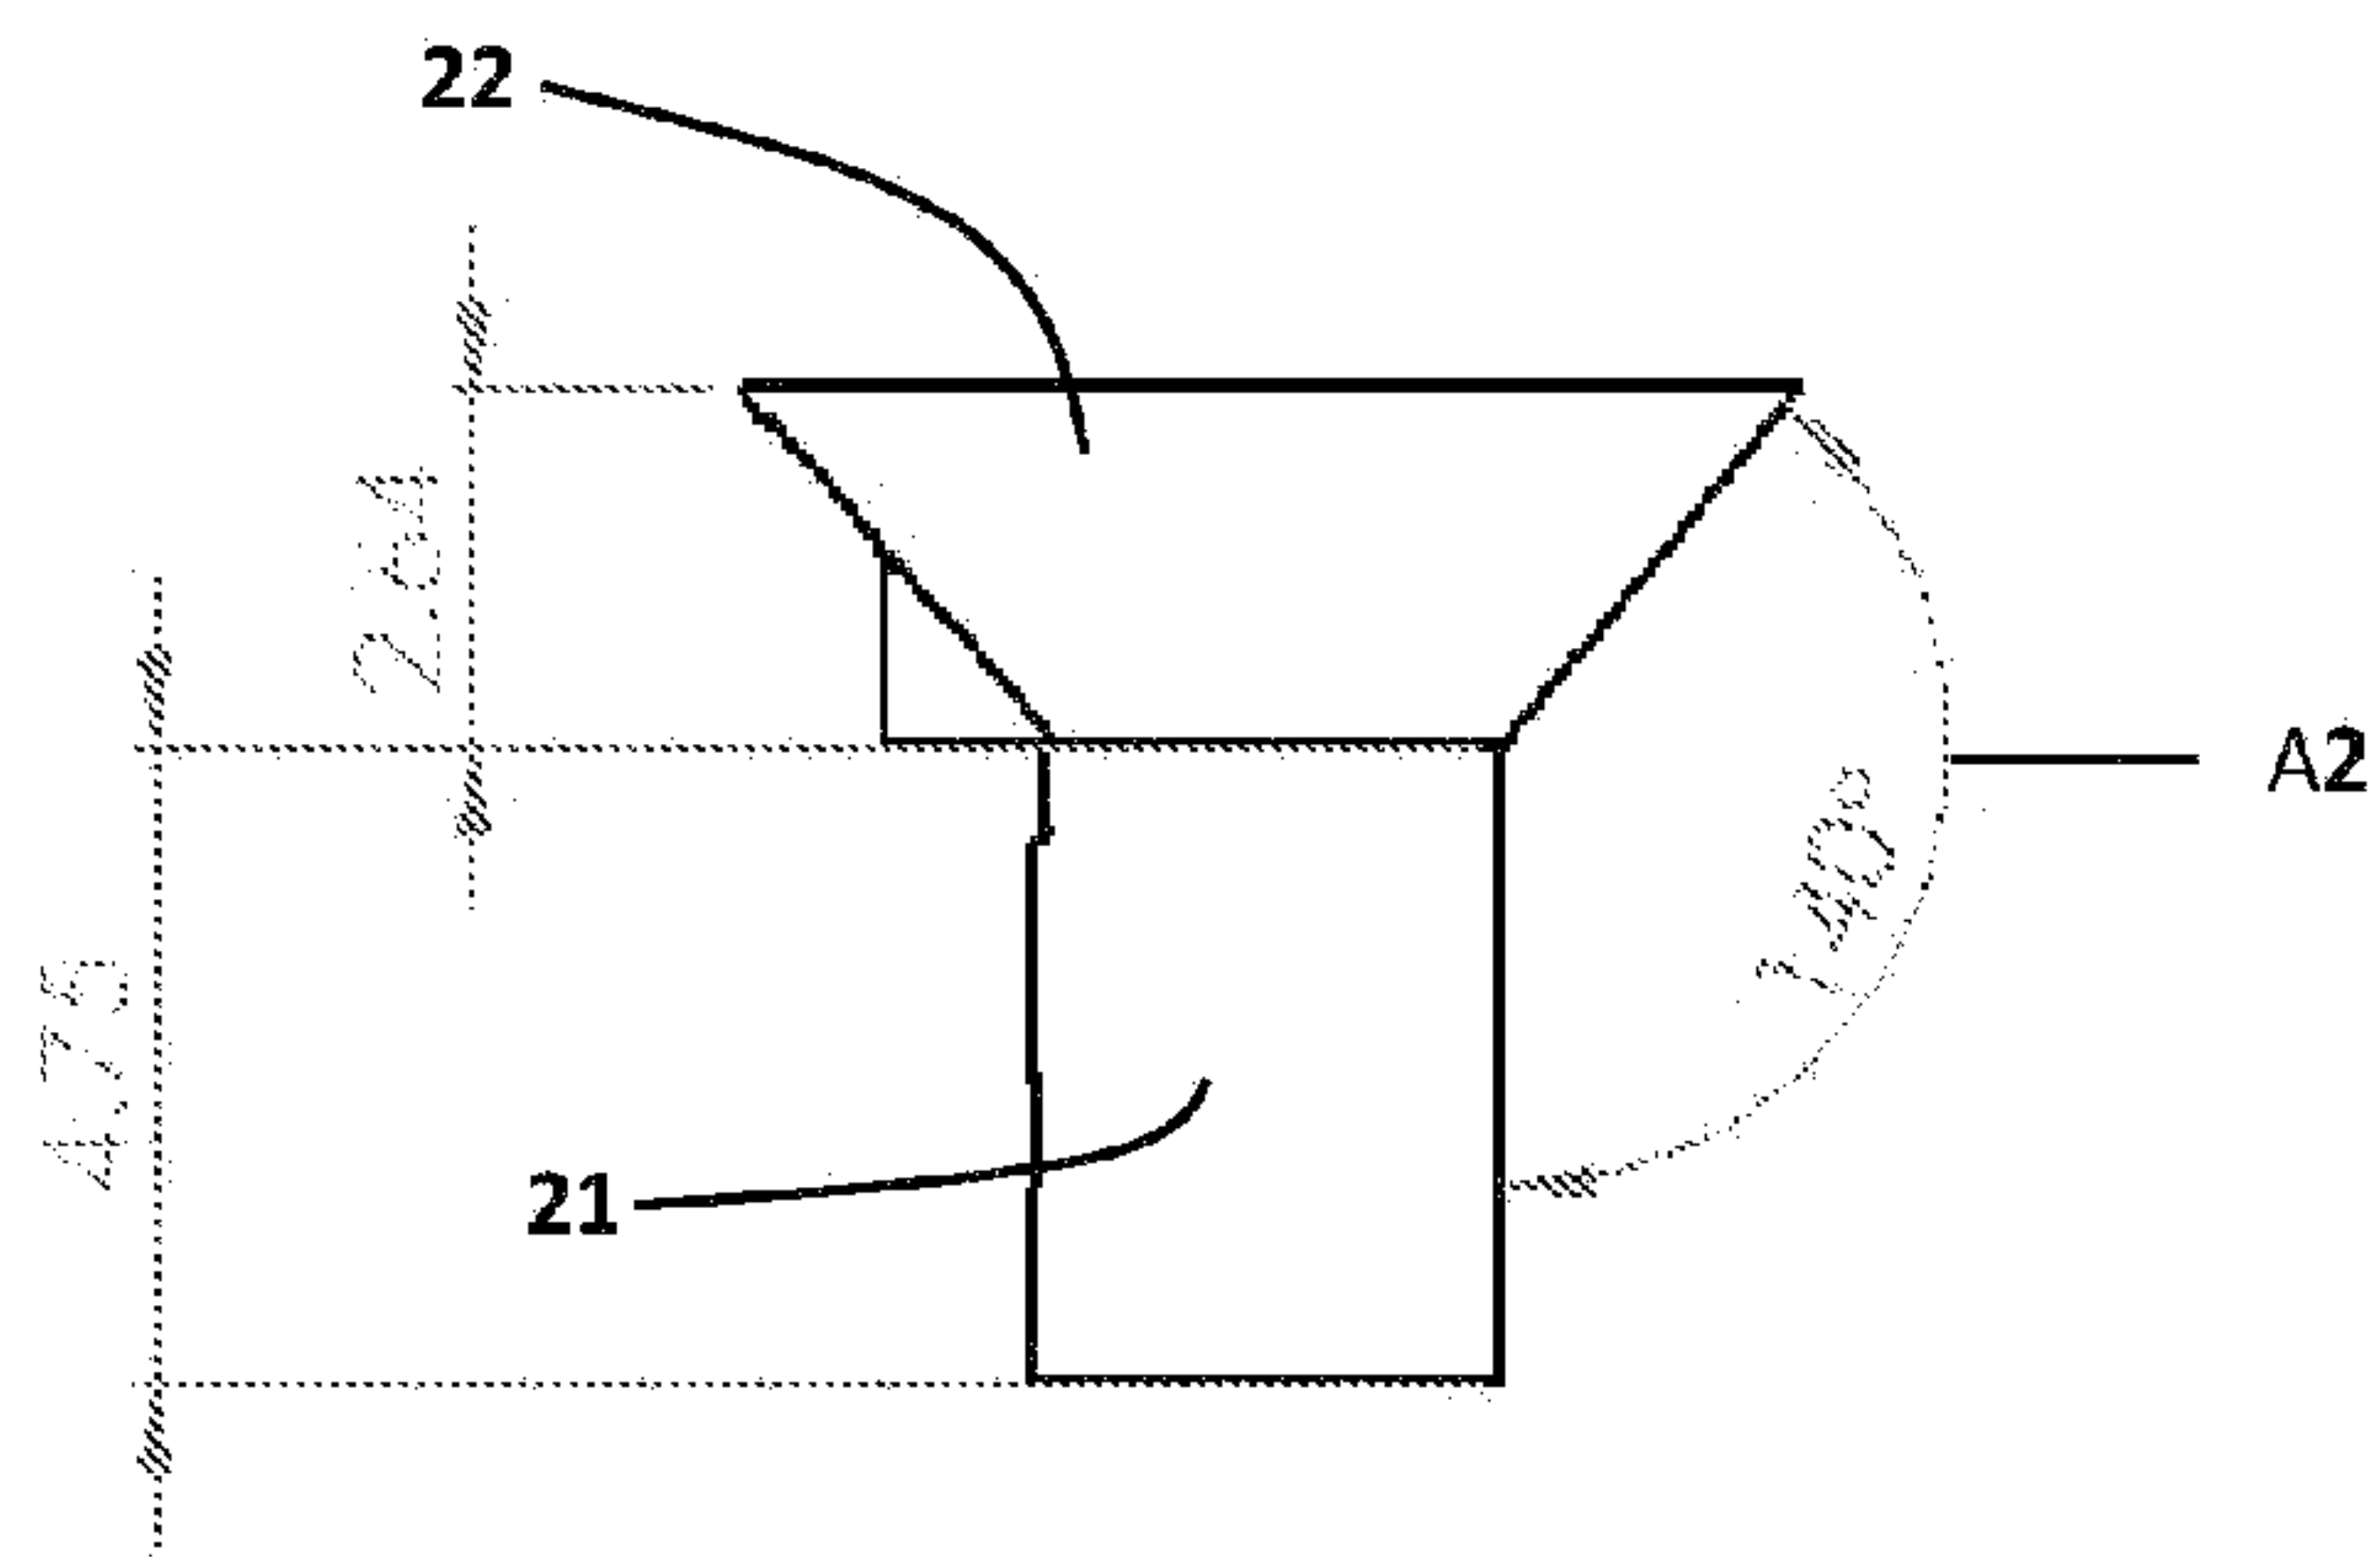


FIG. 7B




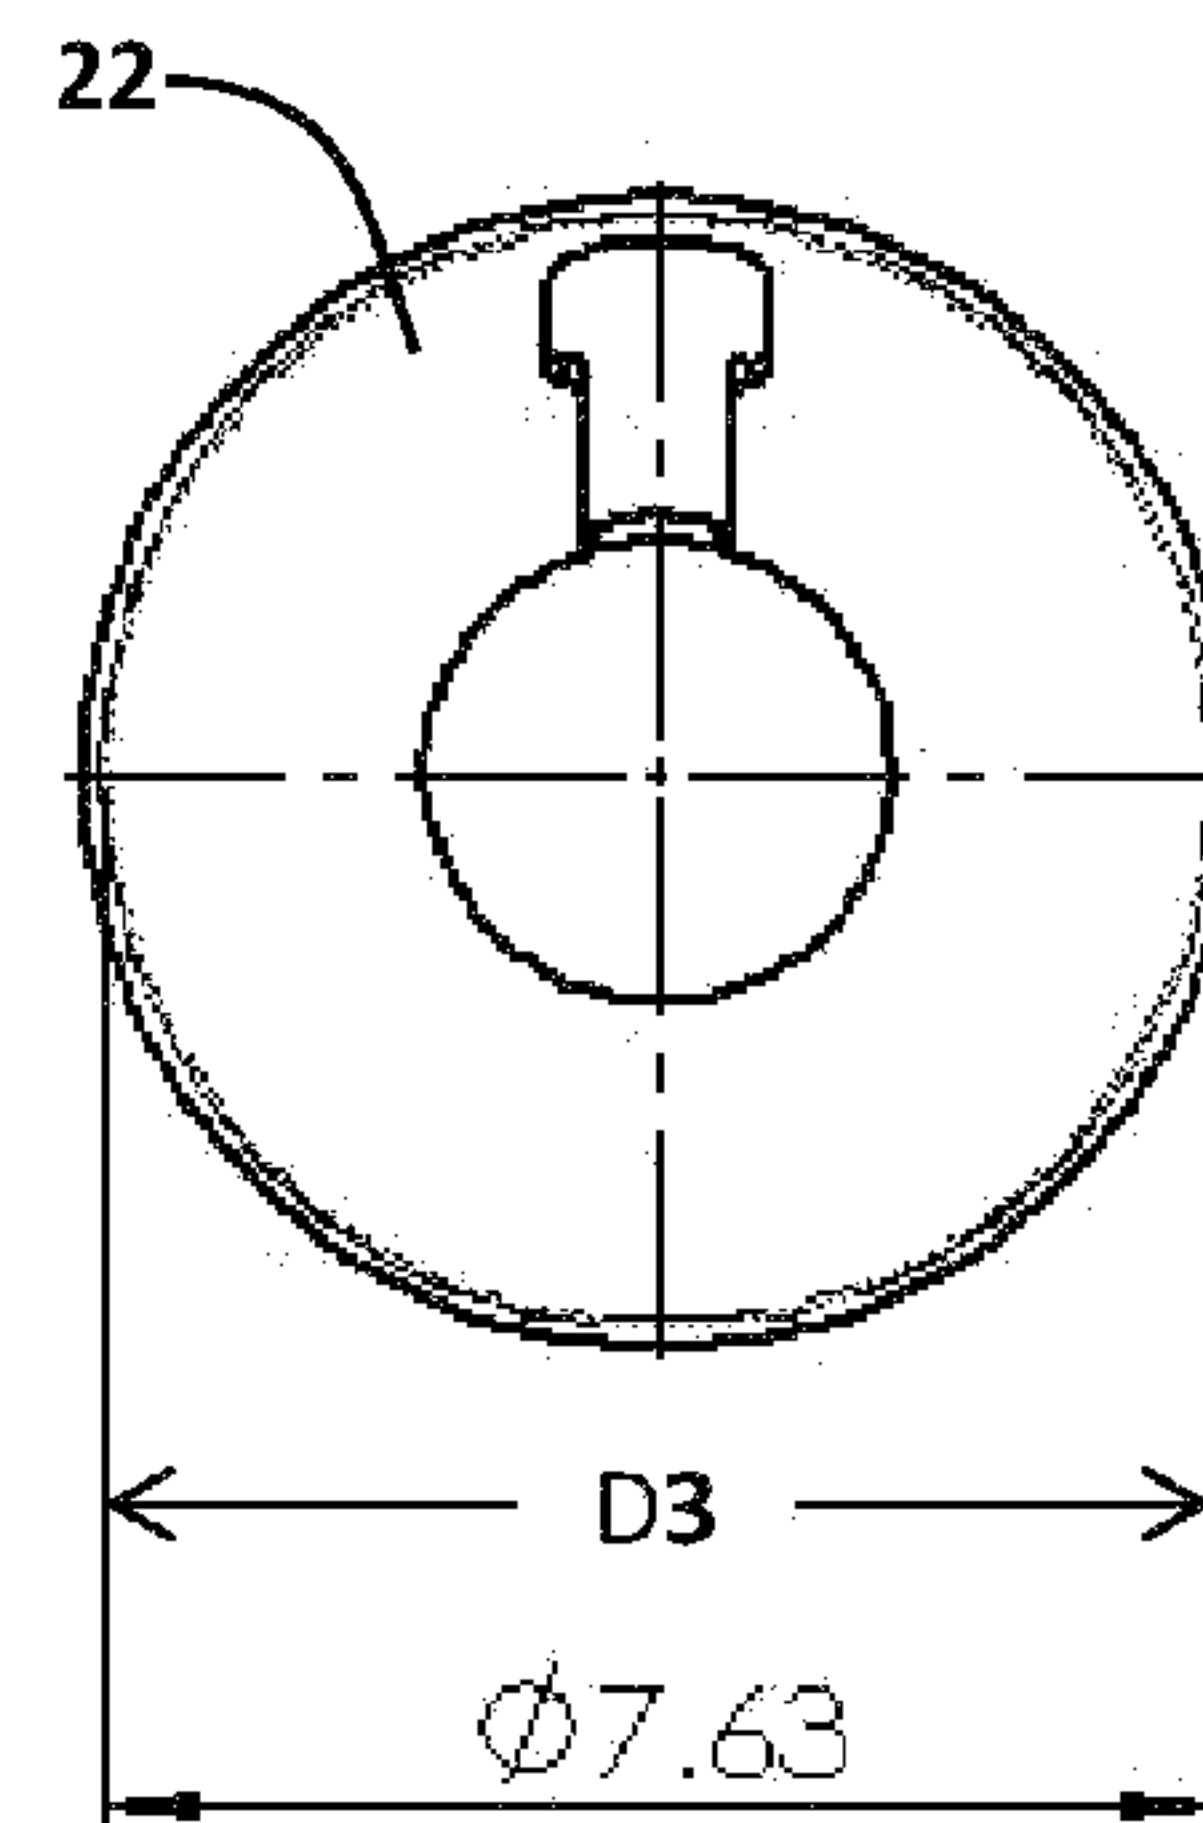


FIG. 7C

Shroud Version 4

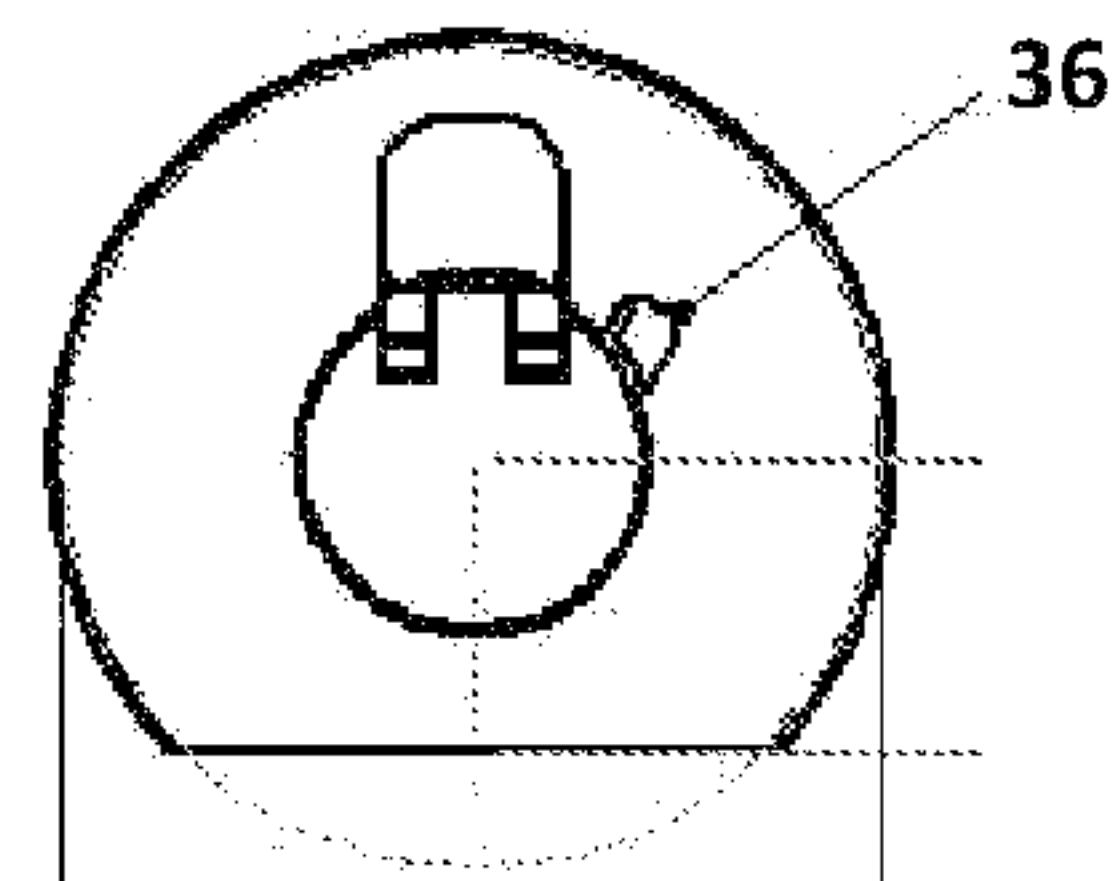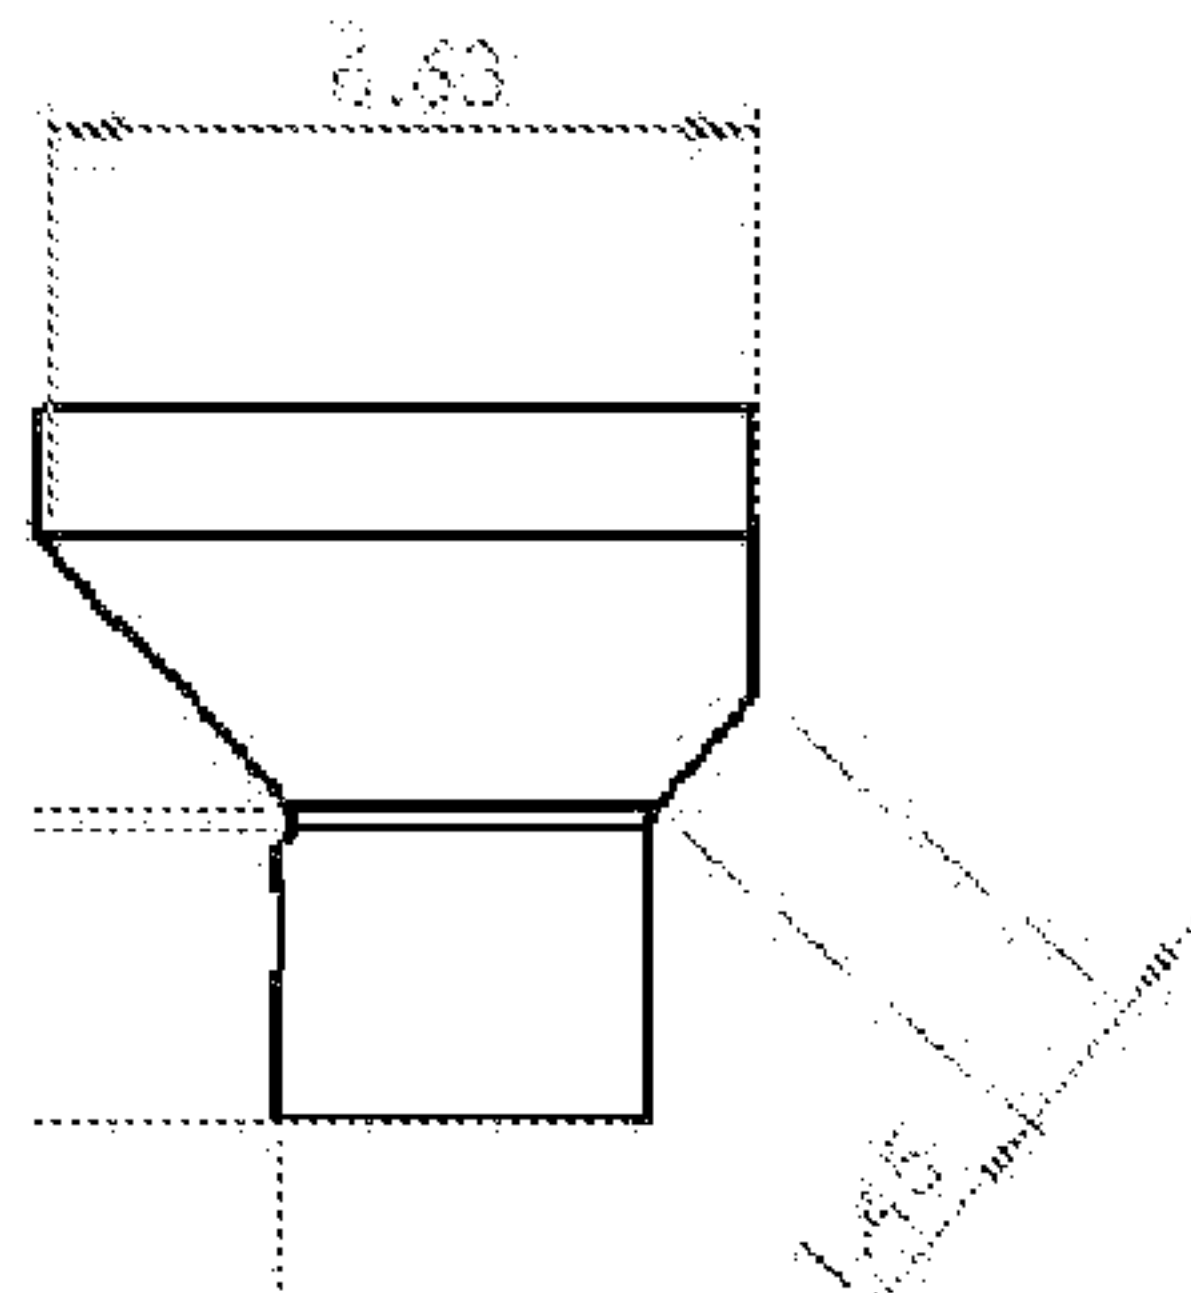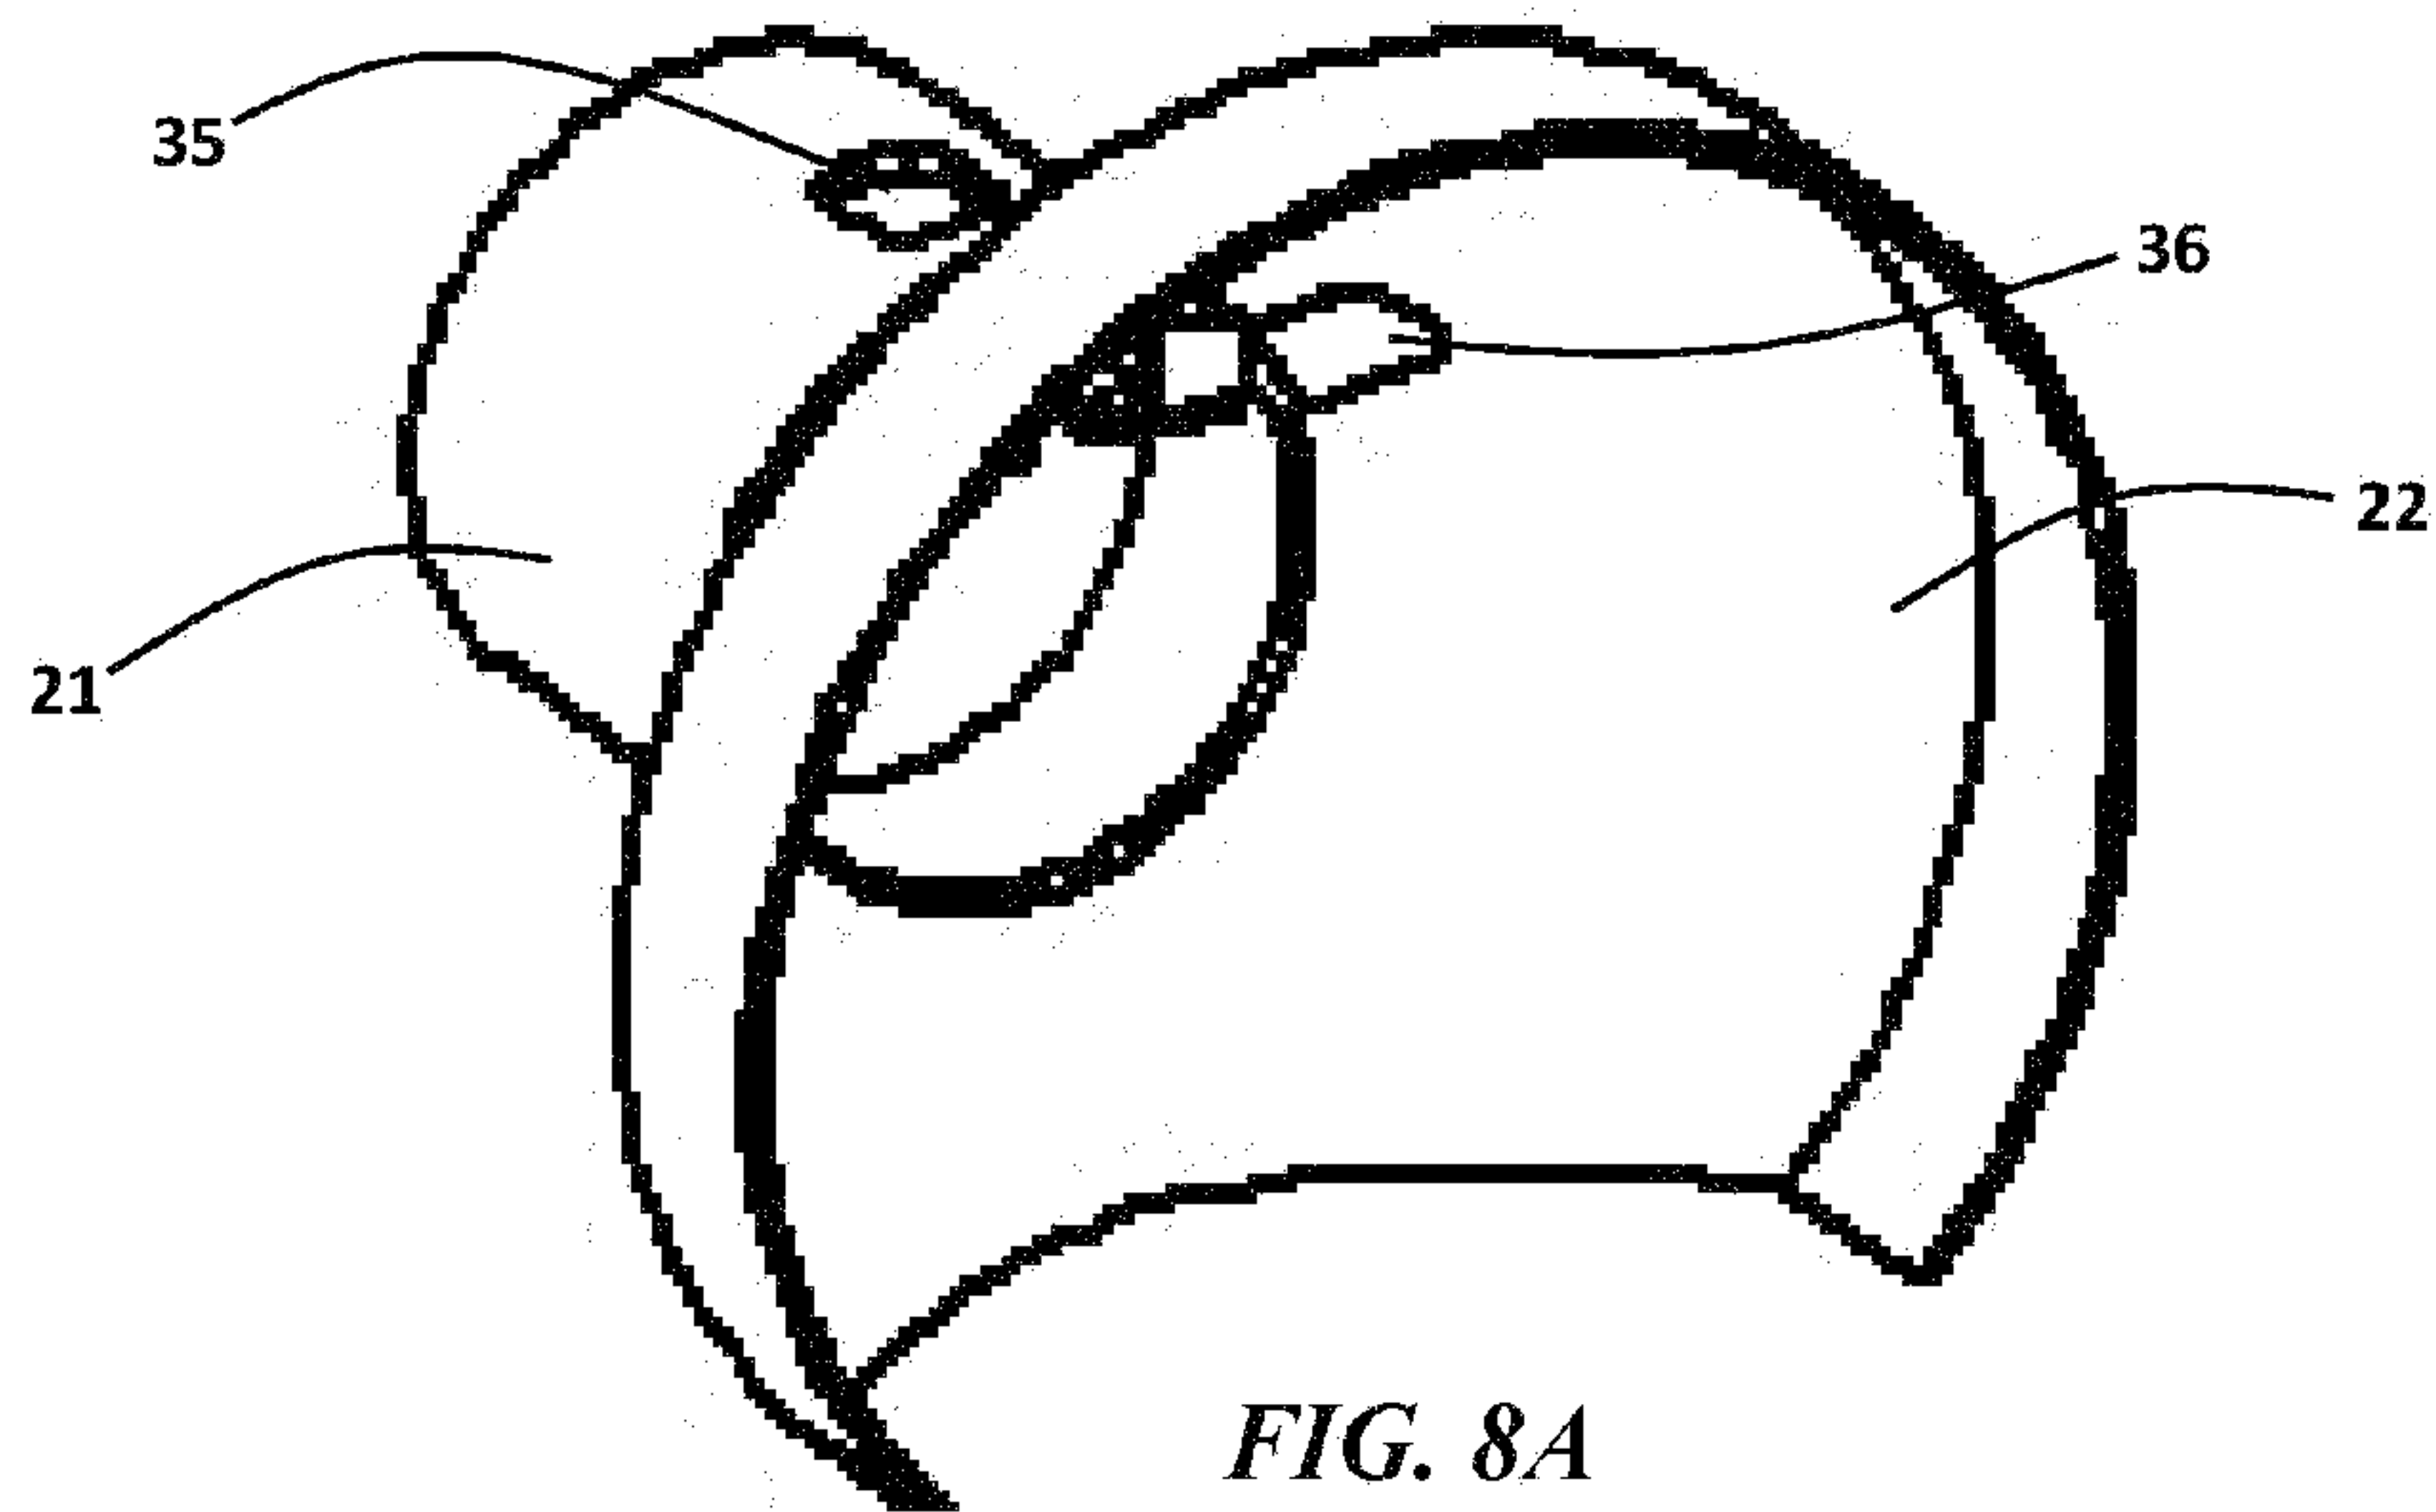

Shroud Version 5

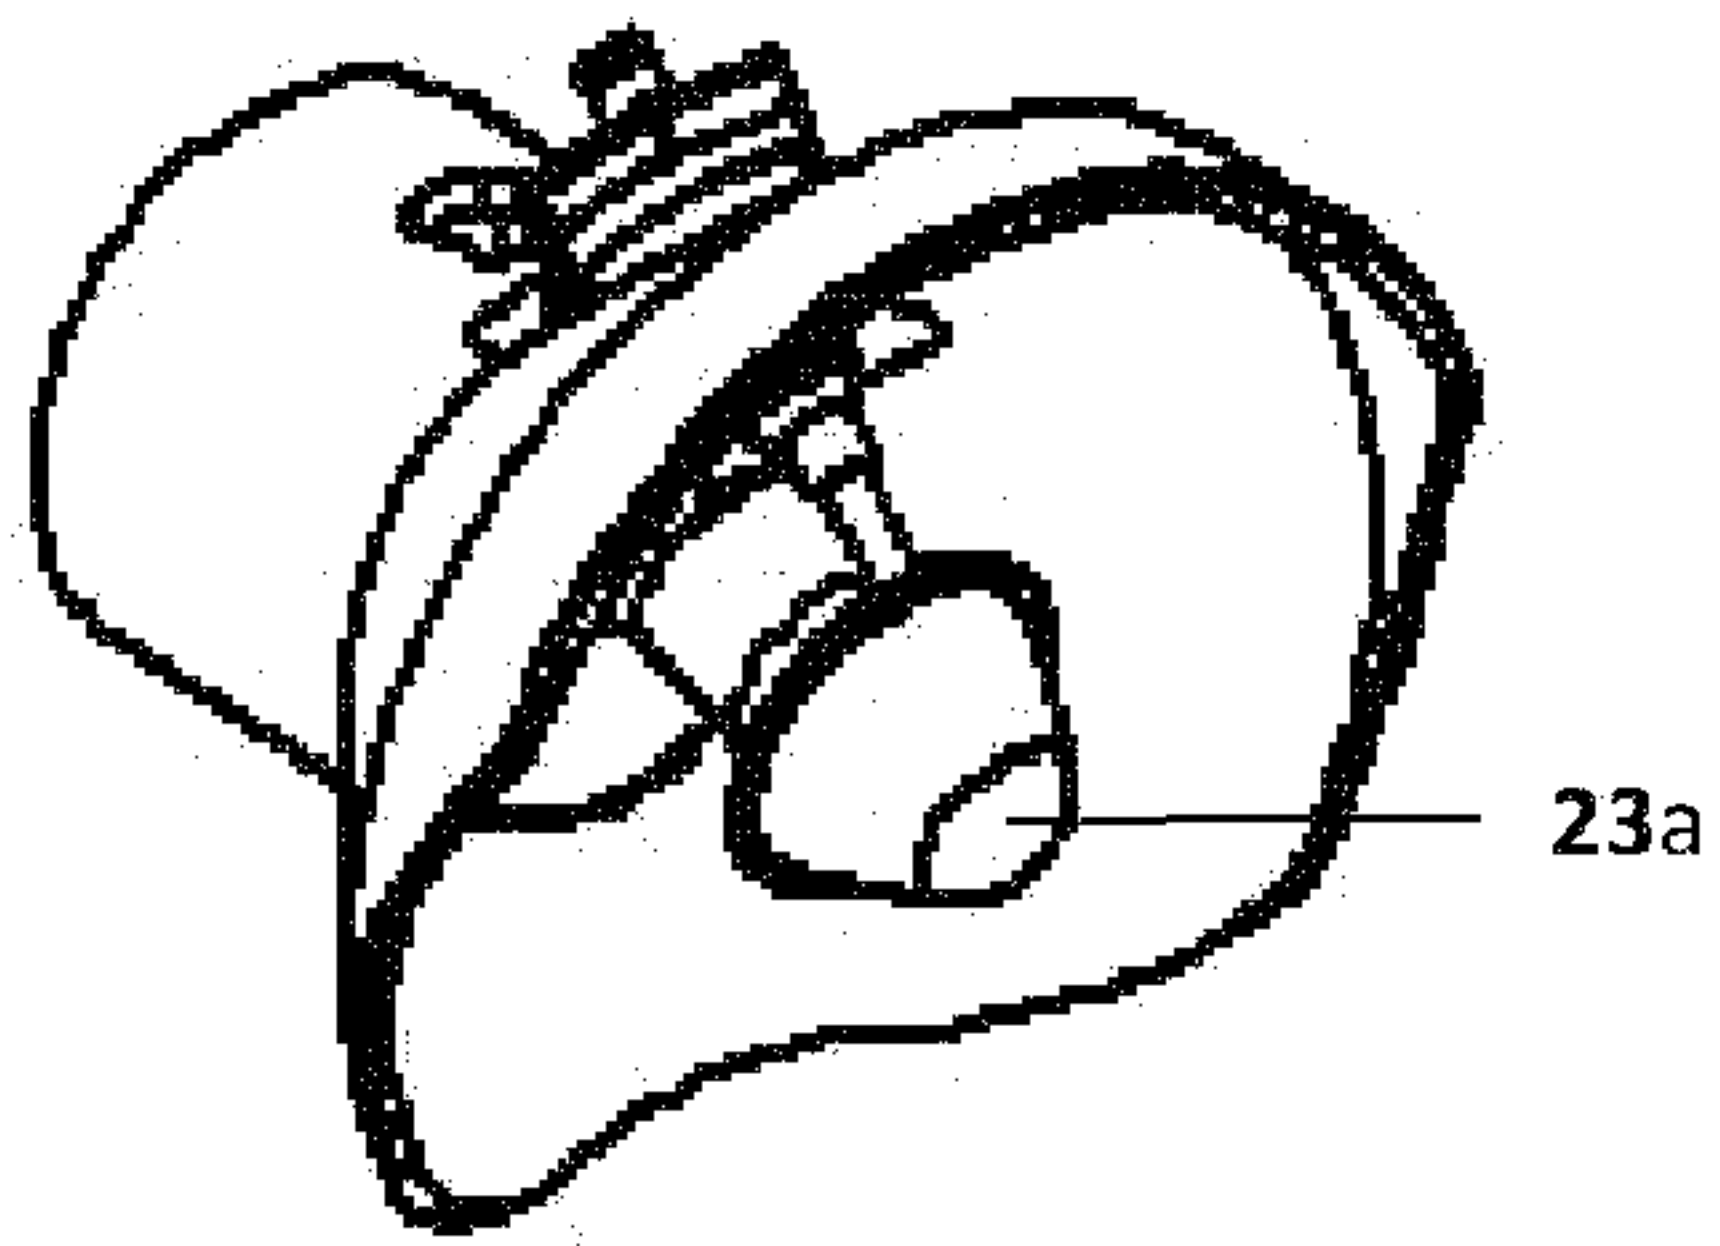


FIG. 9A

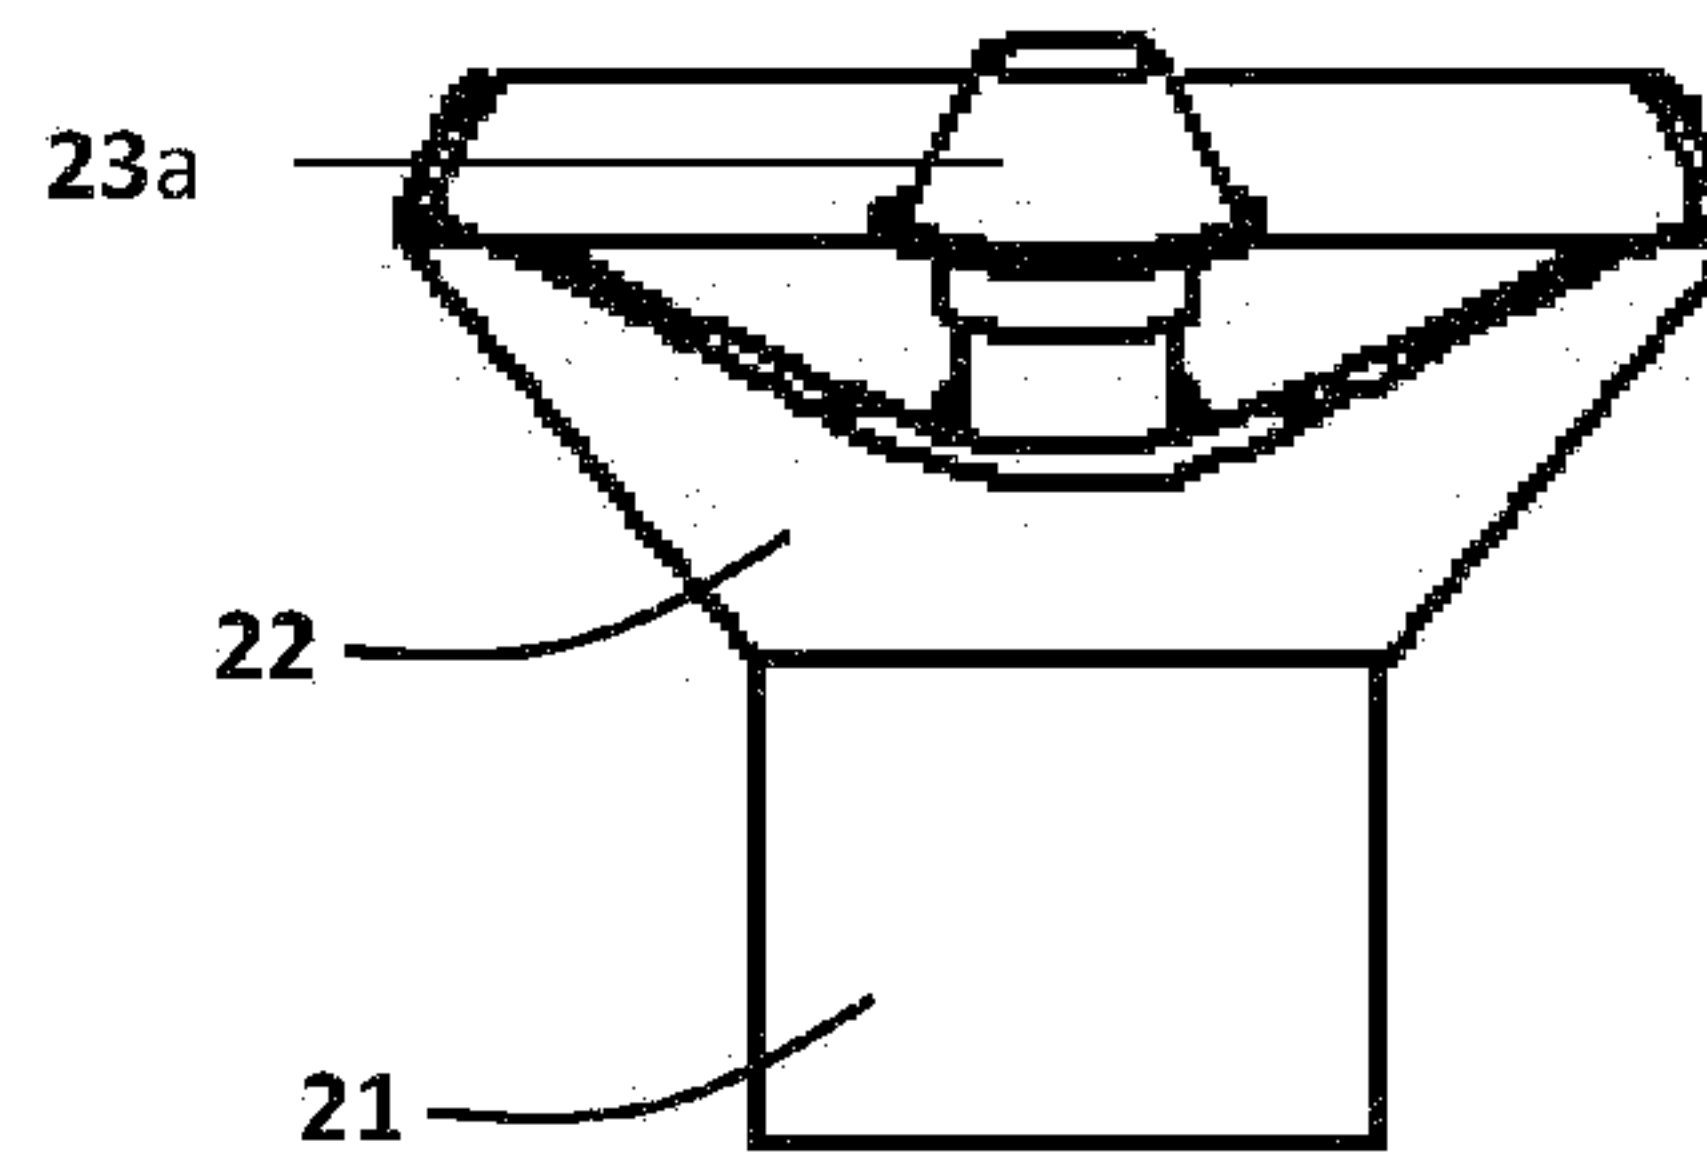


FIG. 9B

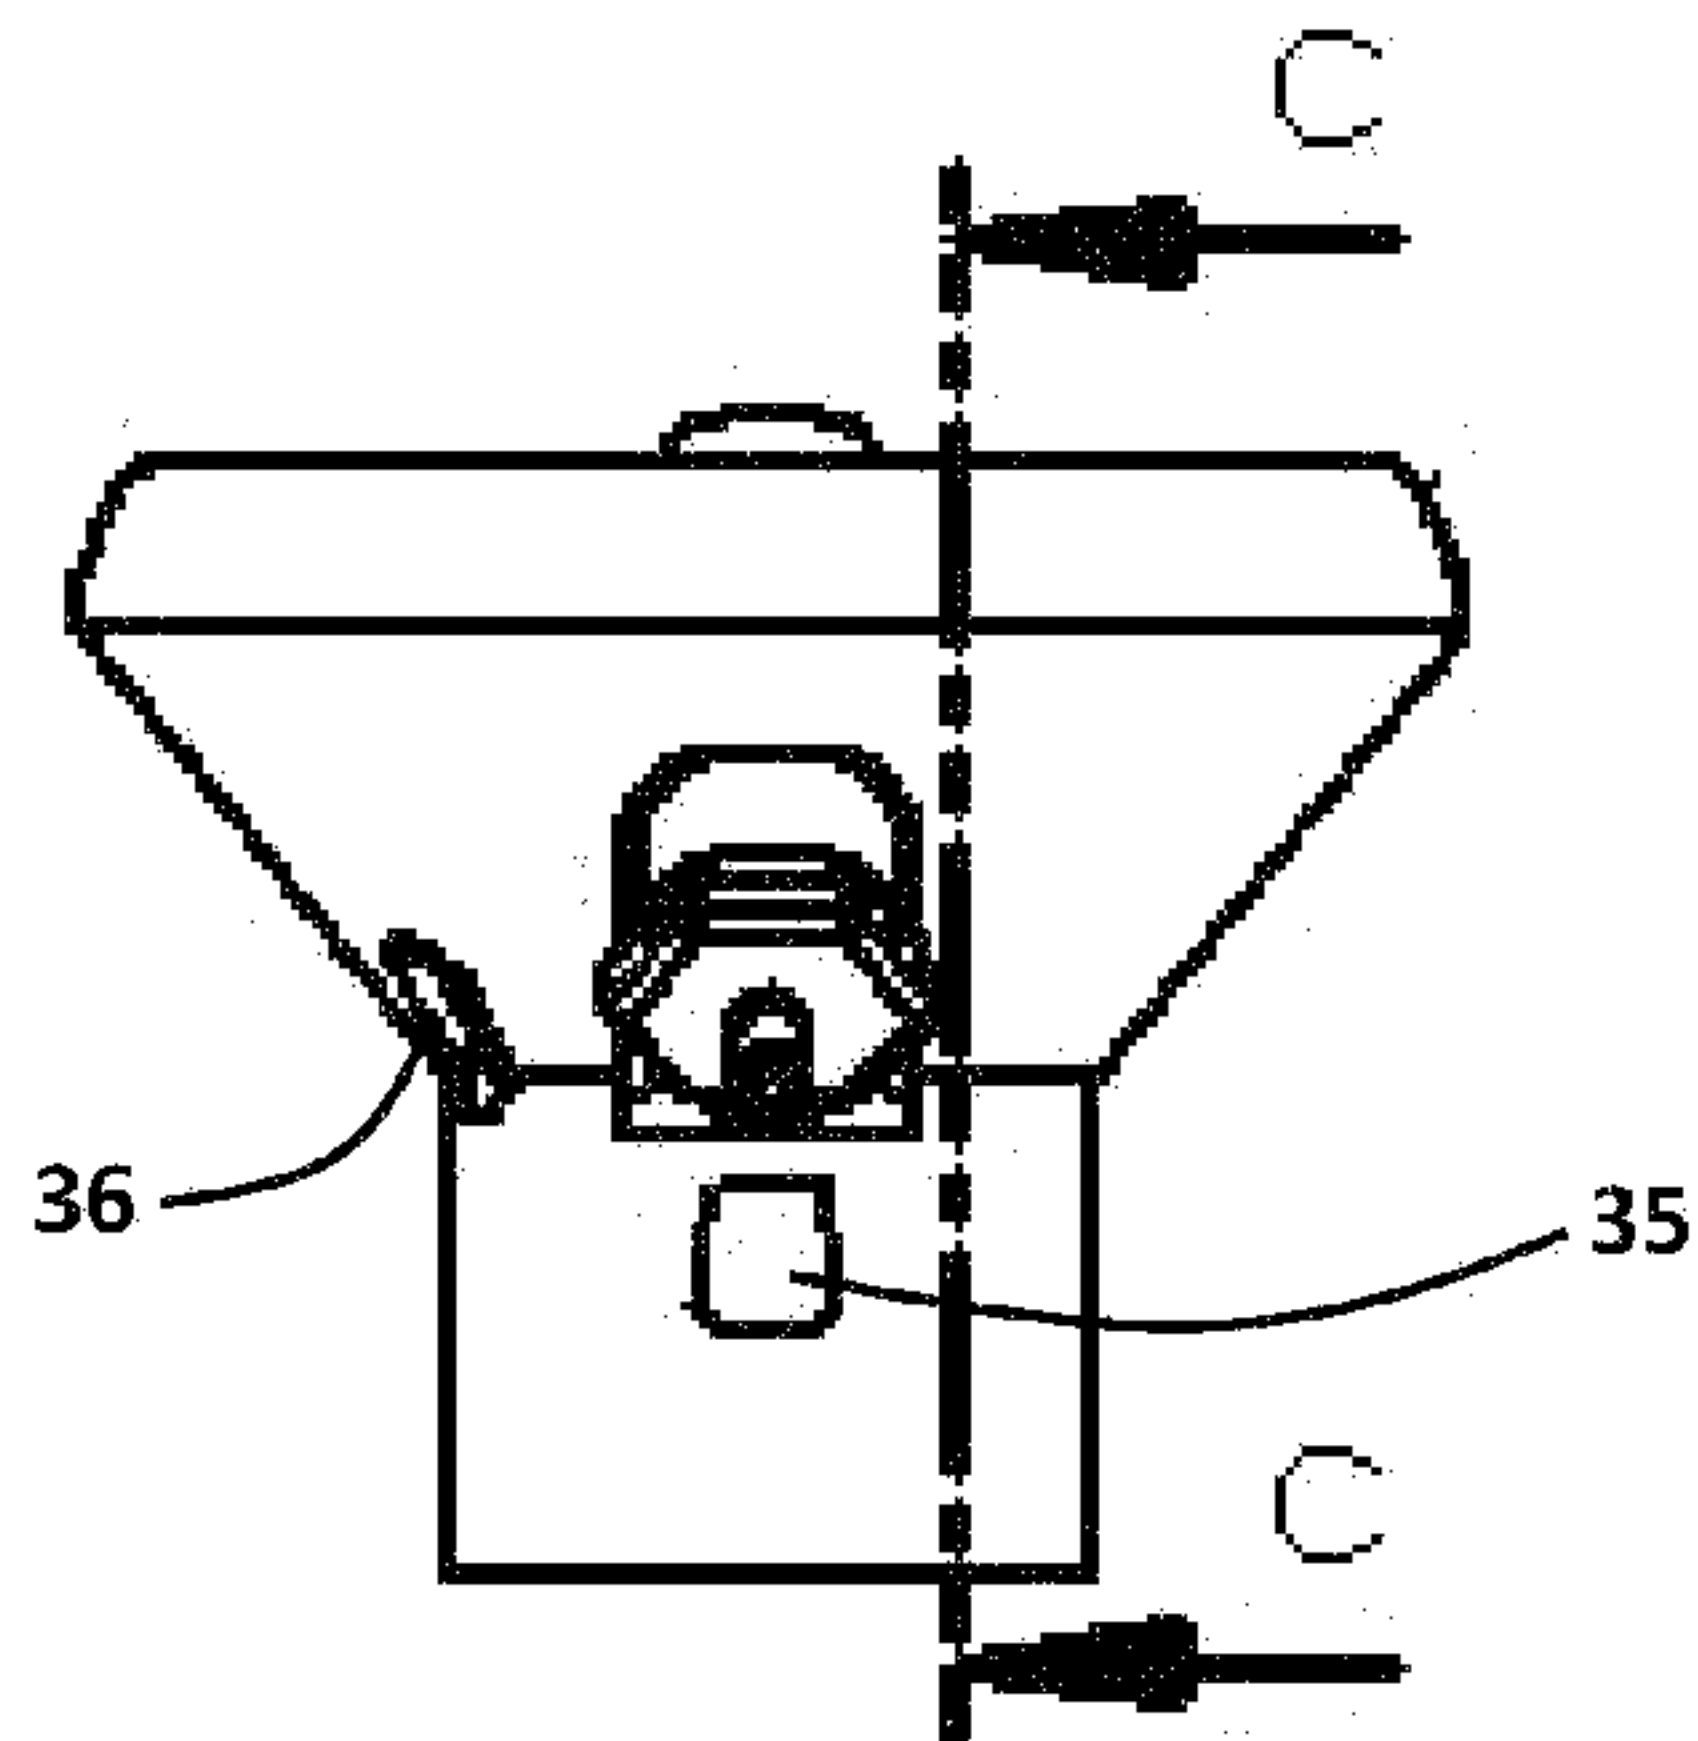


FIG. 9C

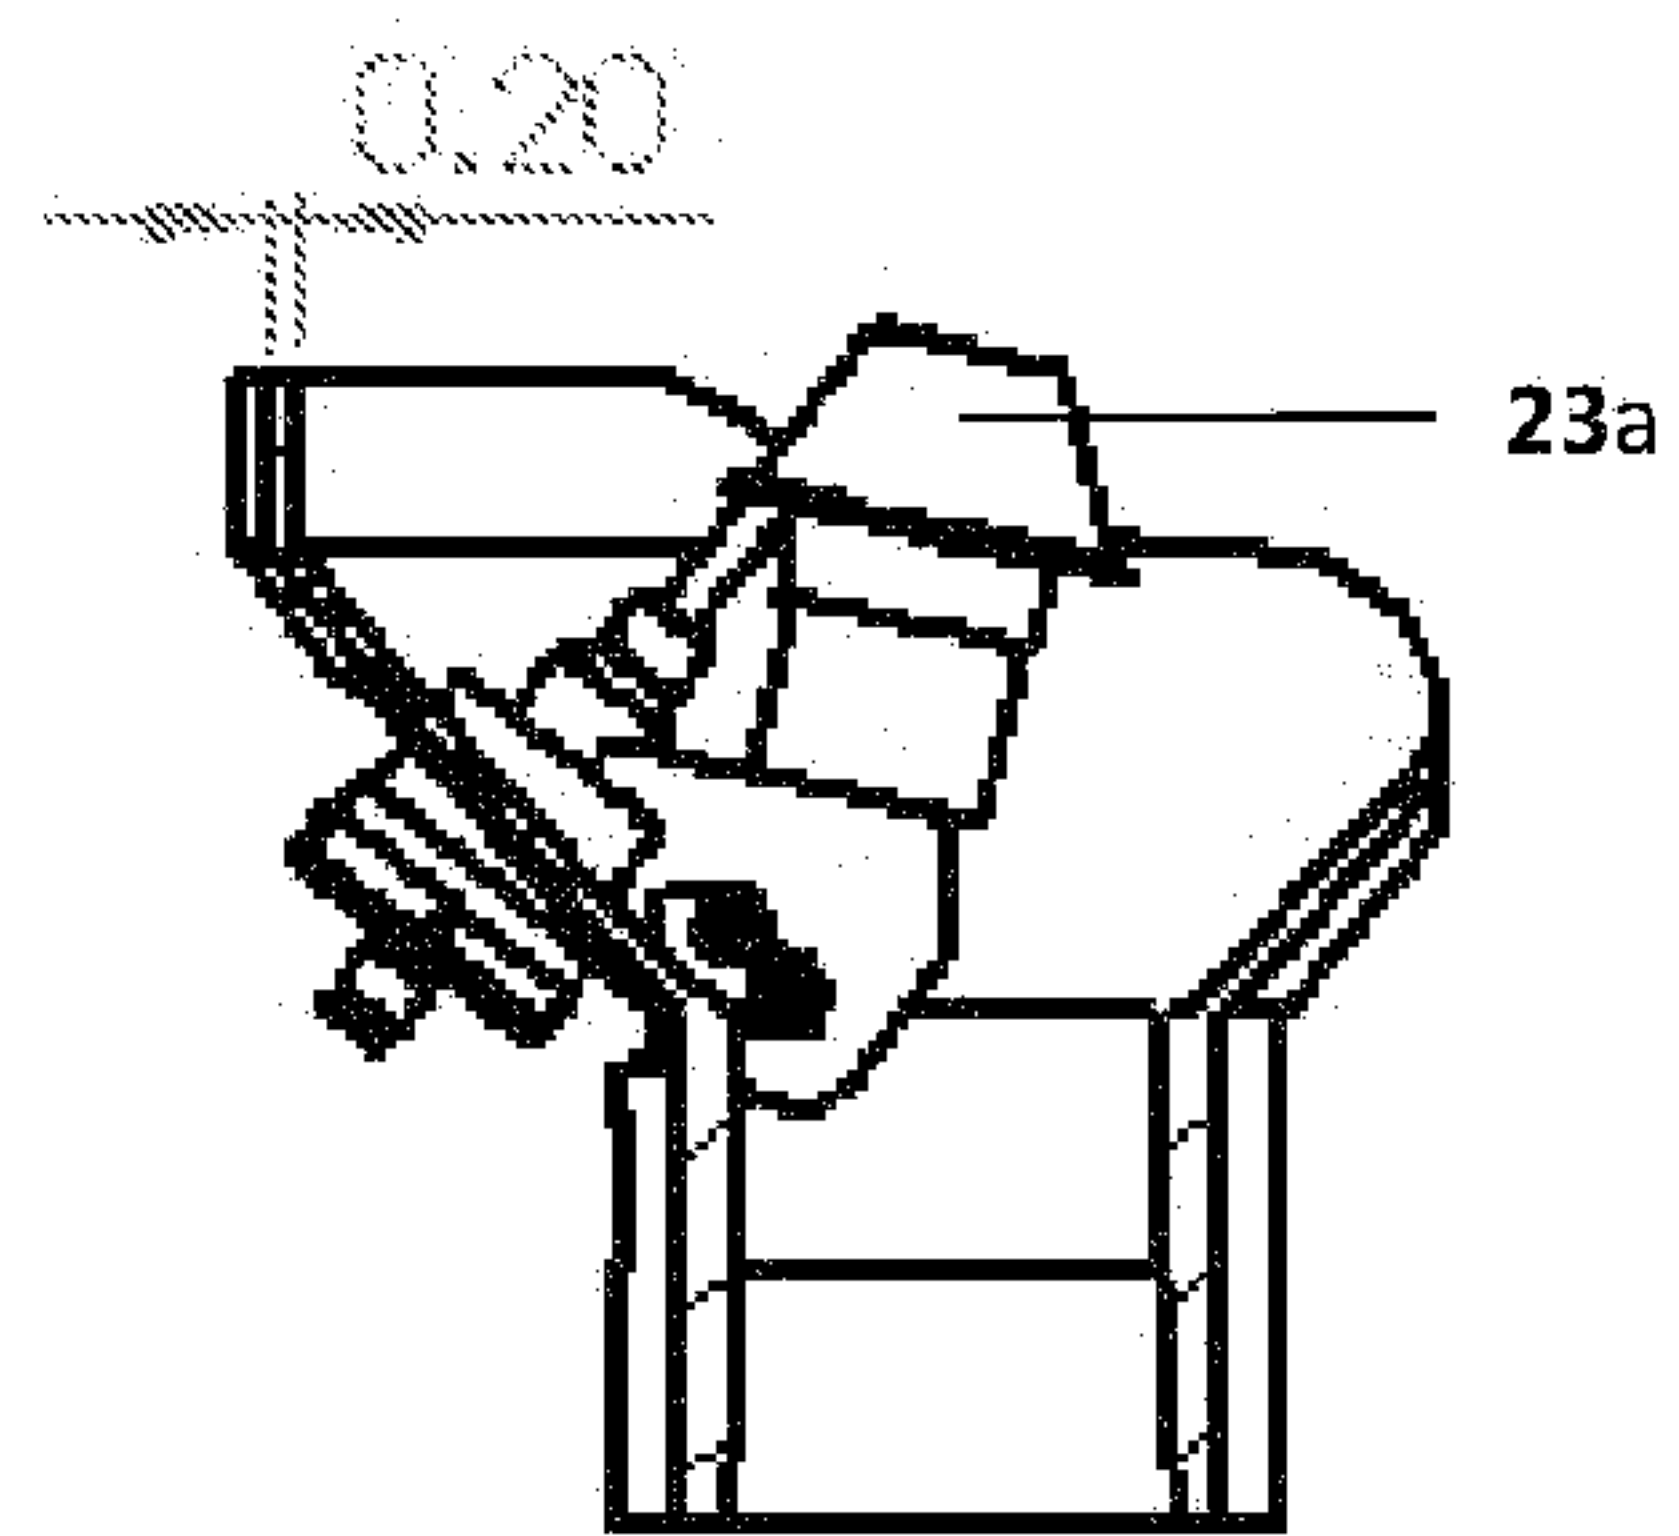


FIG. 9D

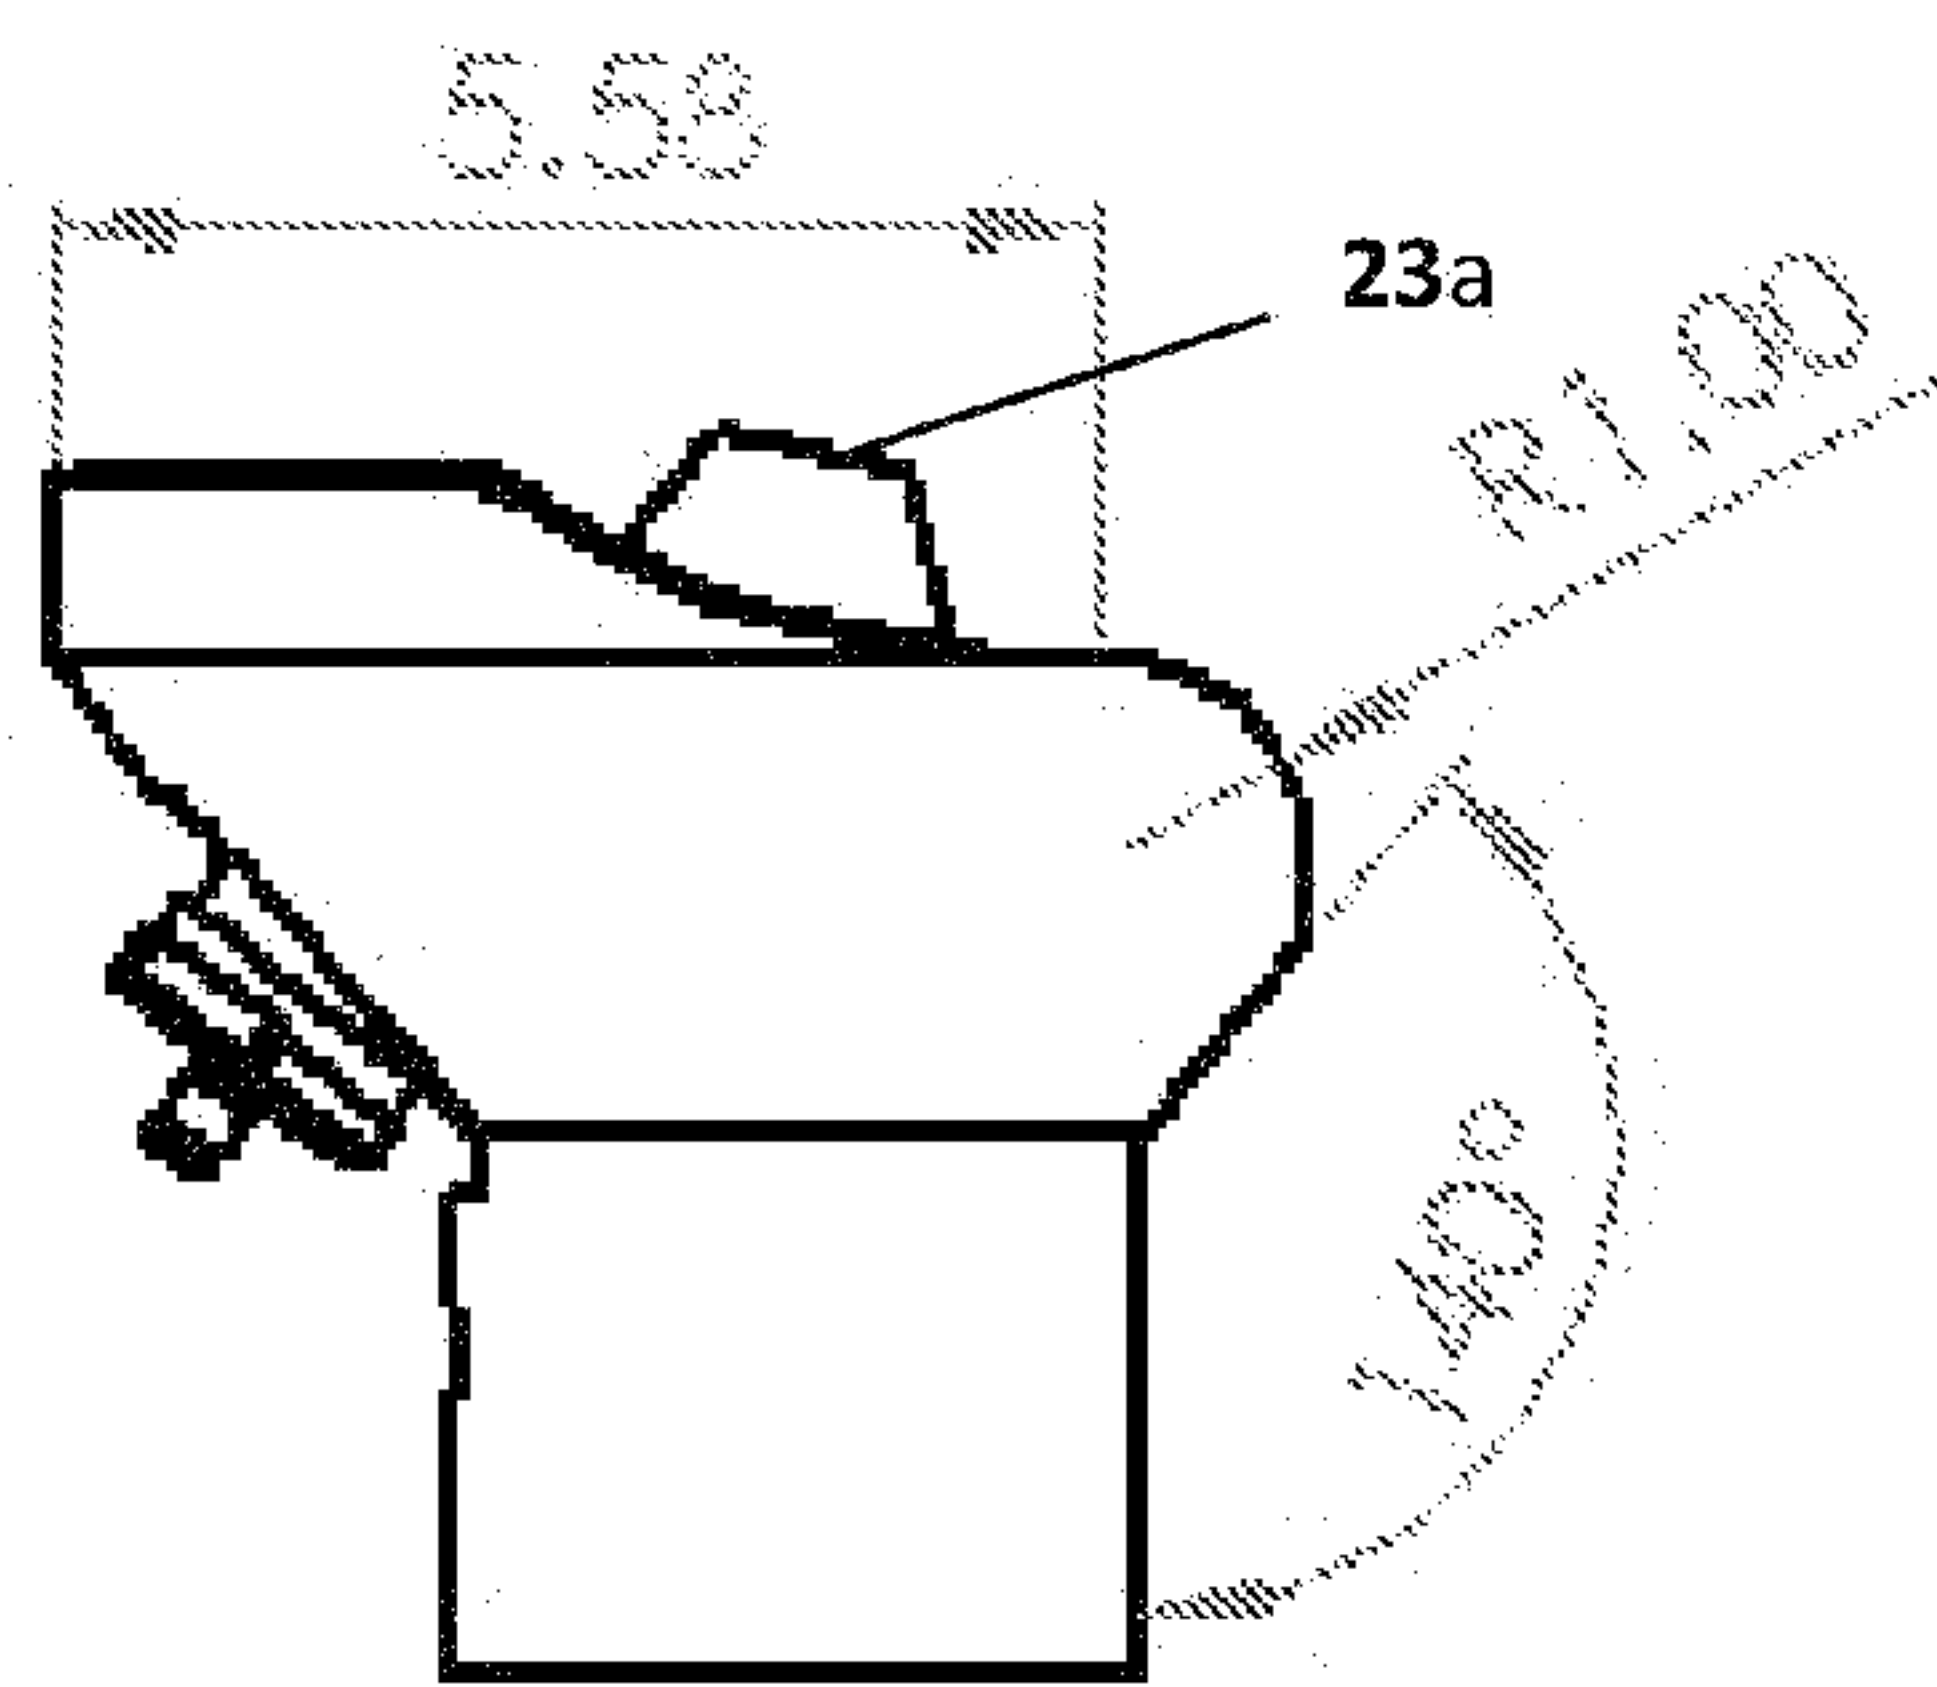


FIG. 9E

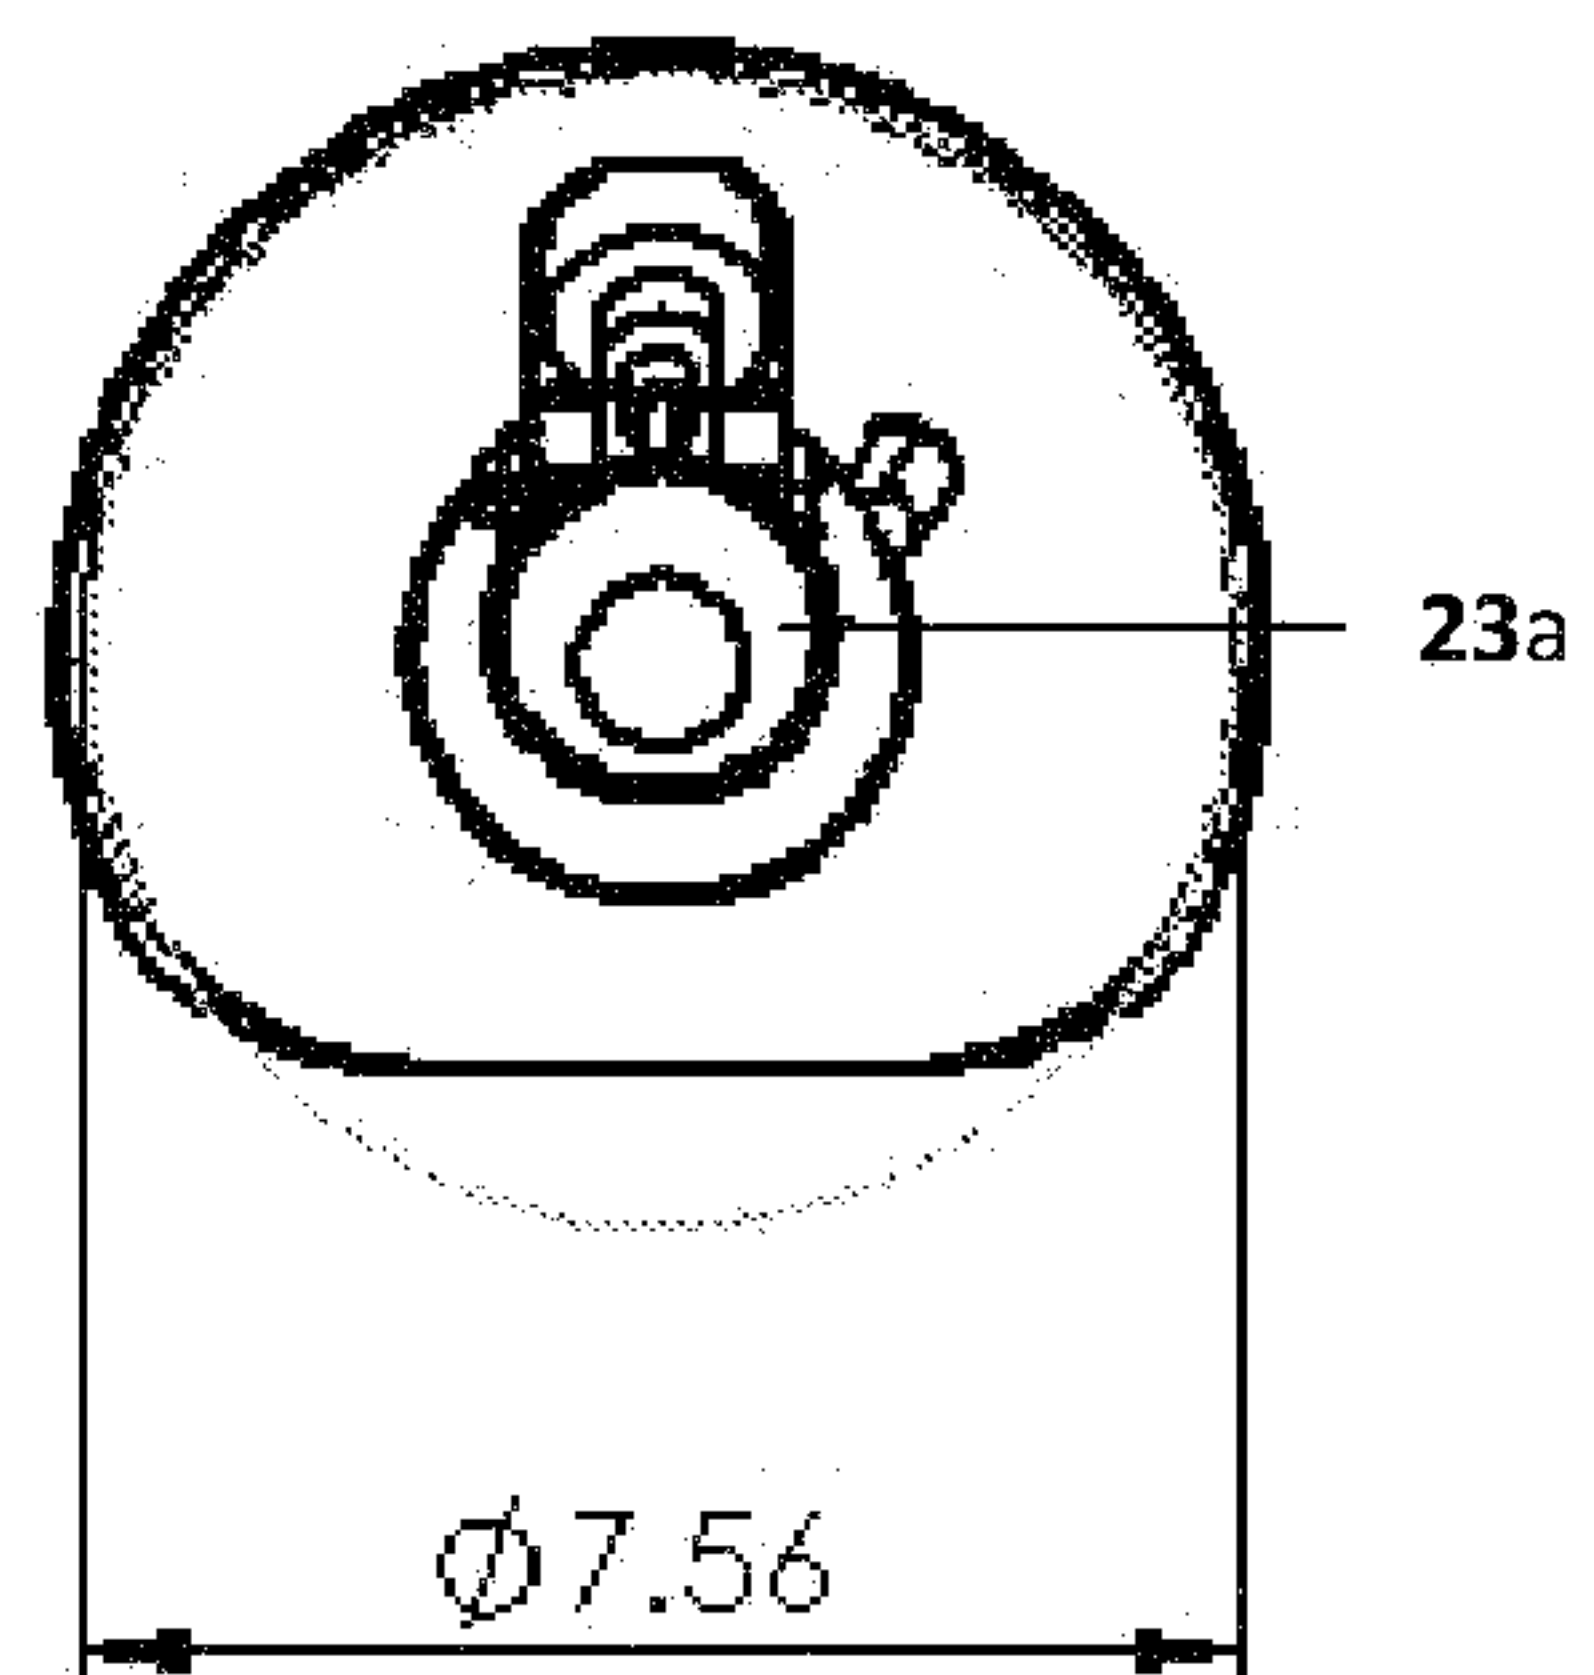


FIG. 9F

Shroud Version 6

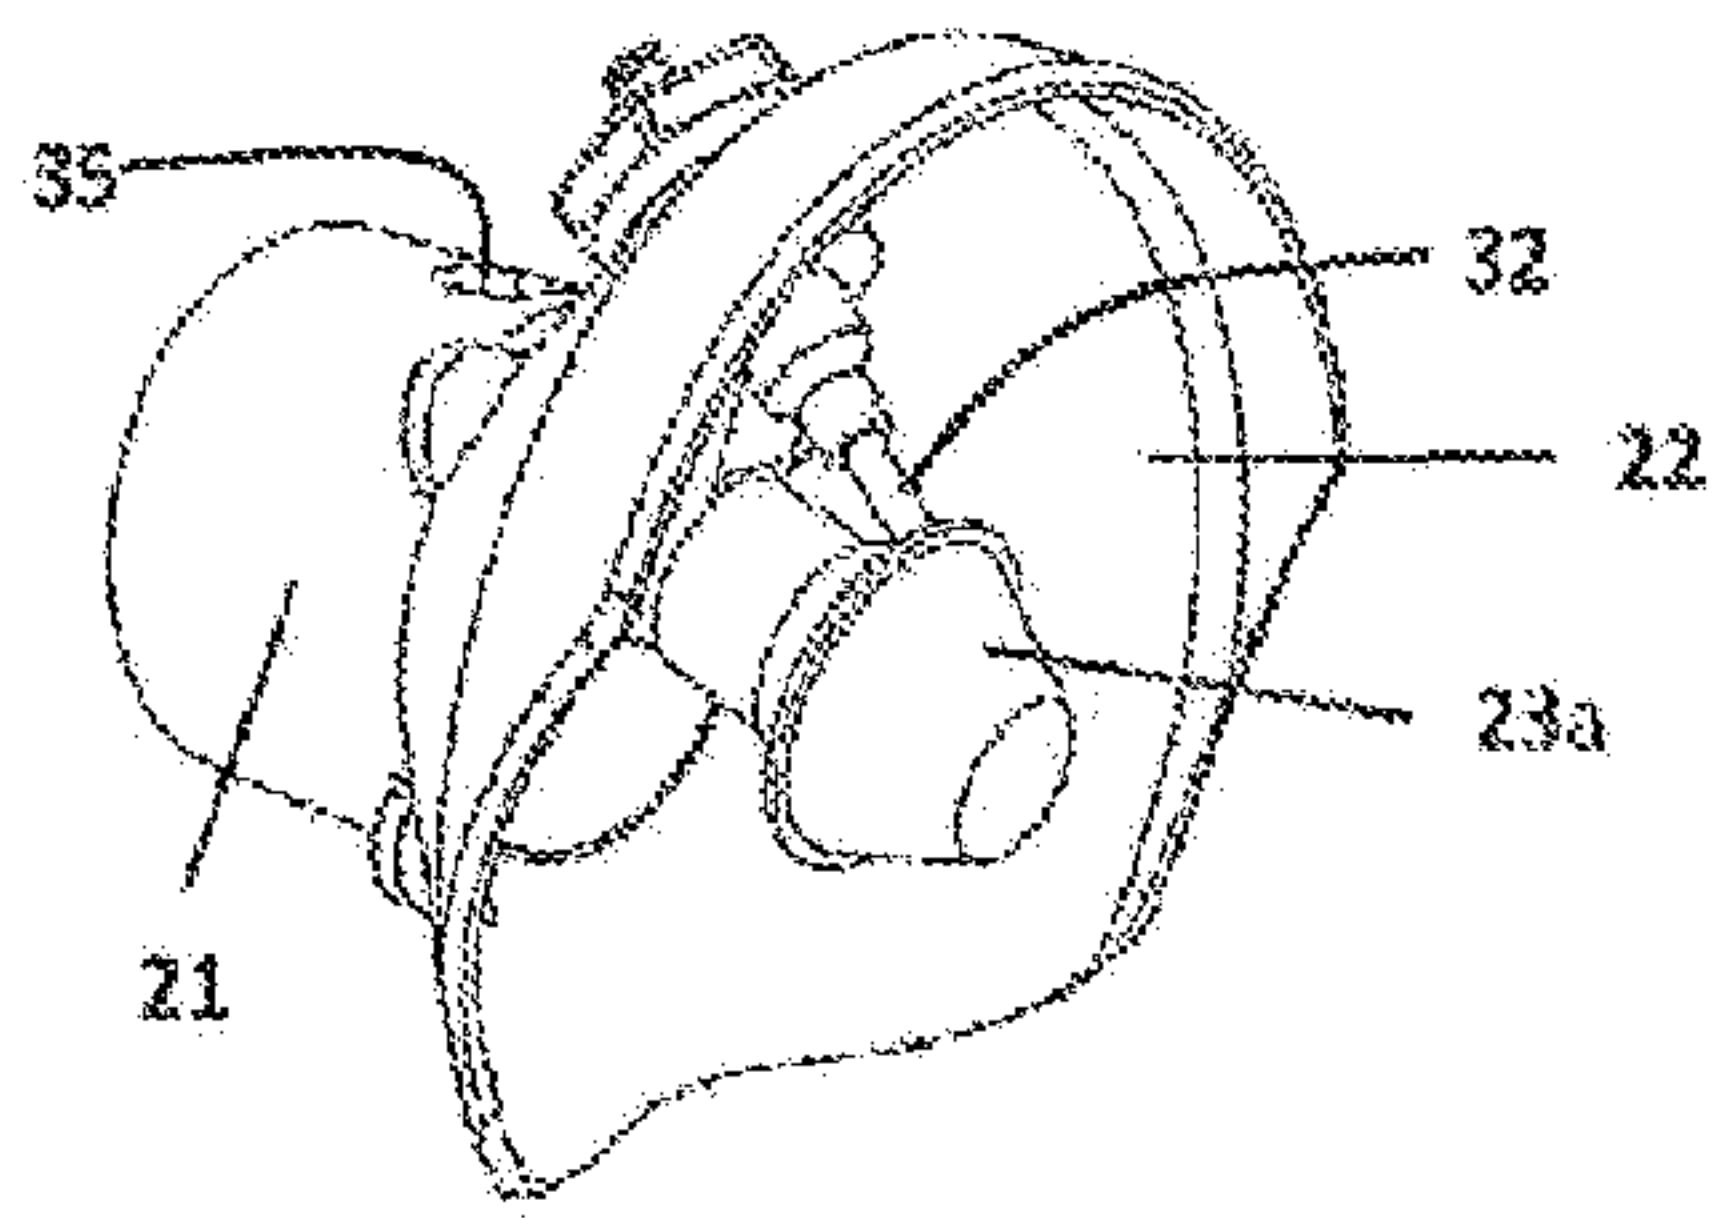


FIG. 10A

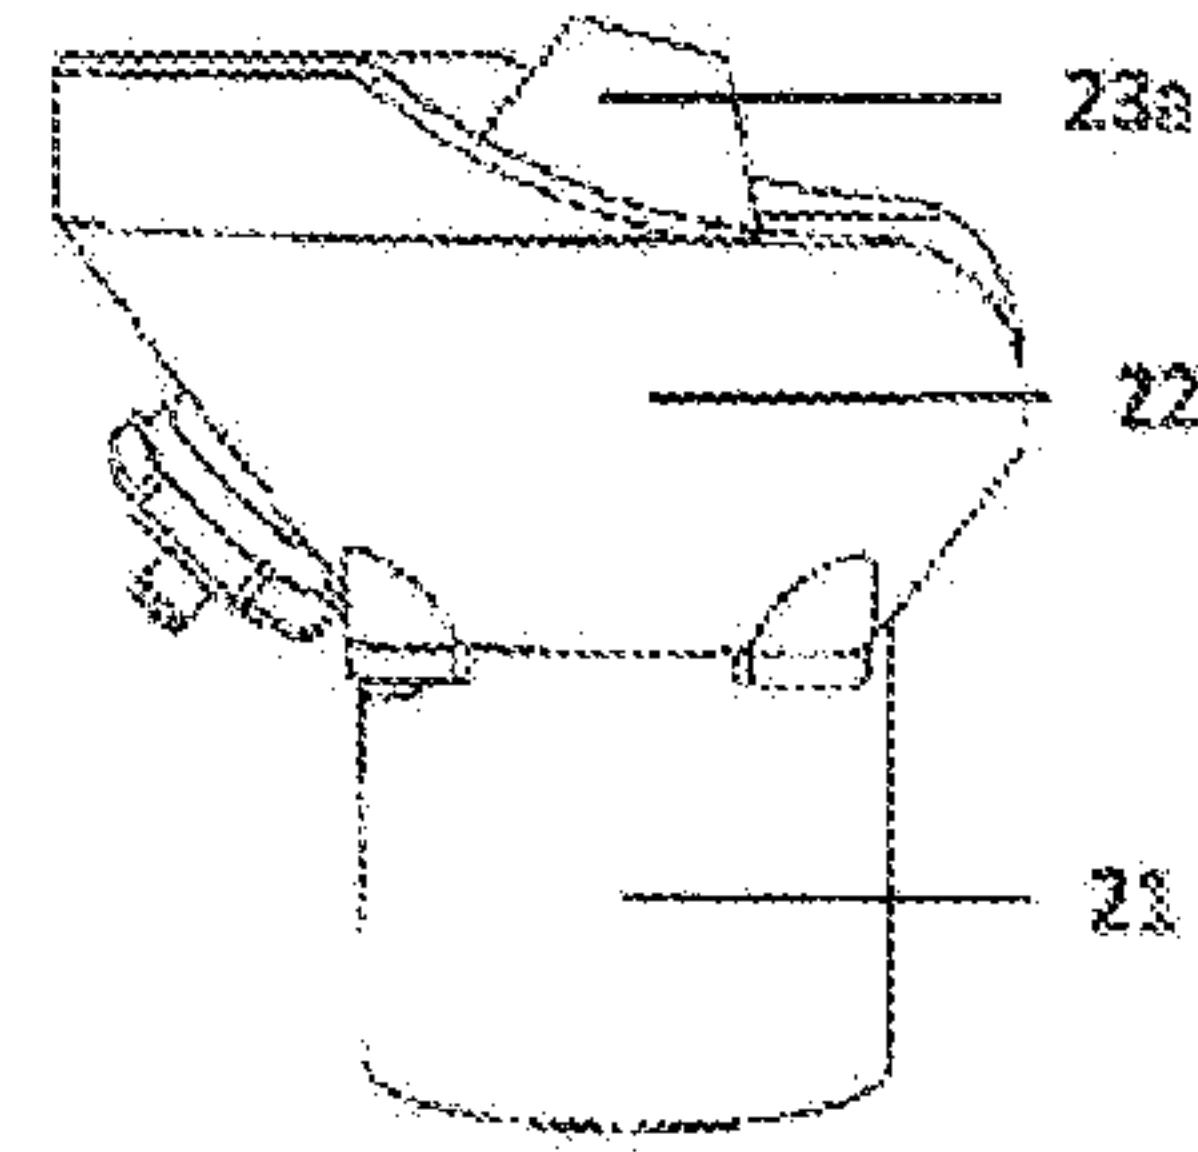


FIG. 10B

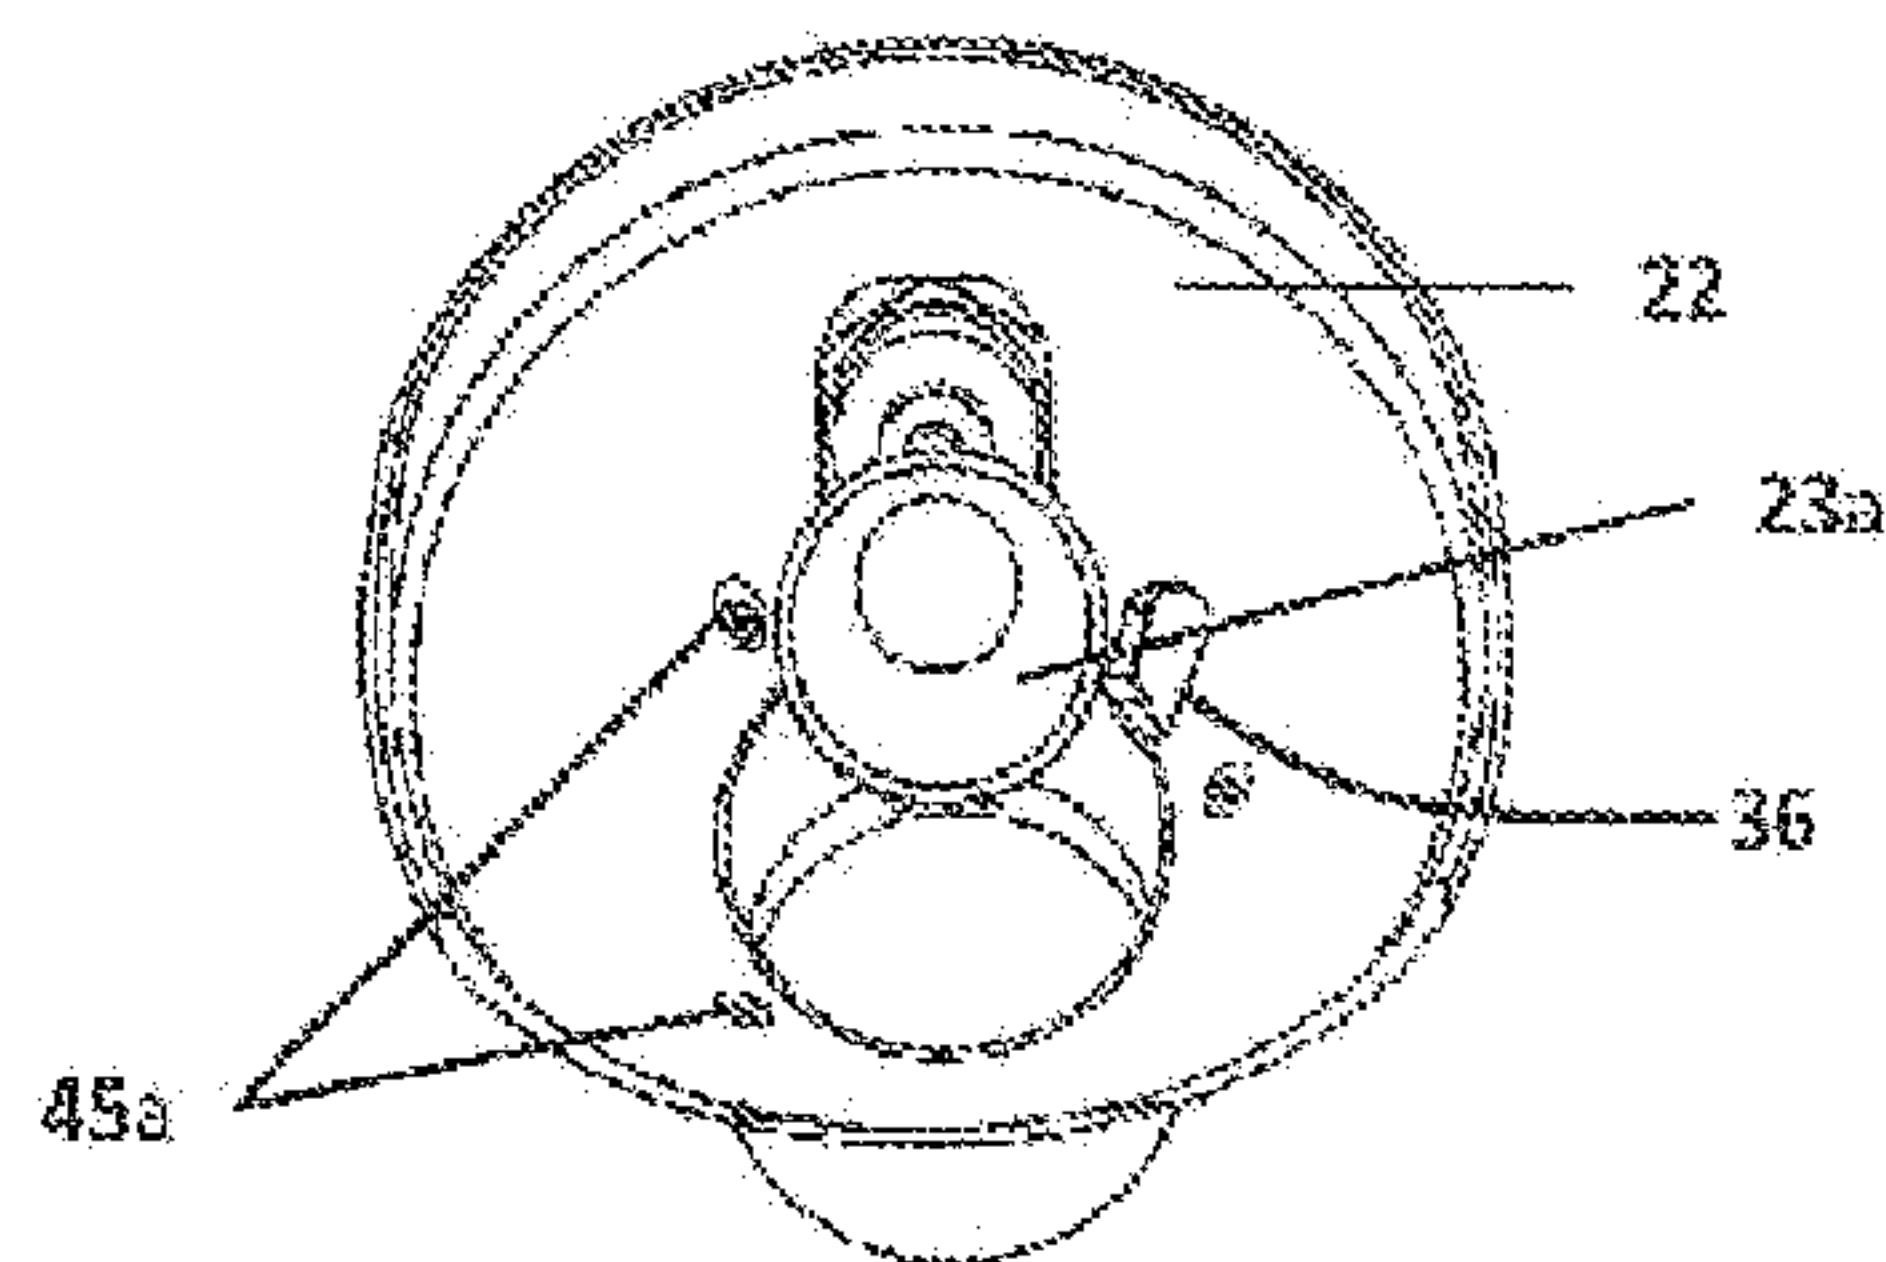


FIG. 10C

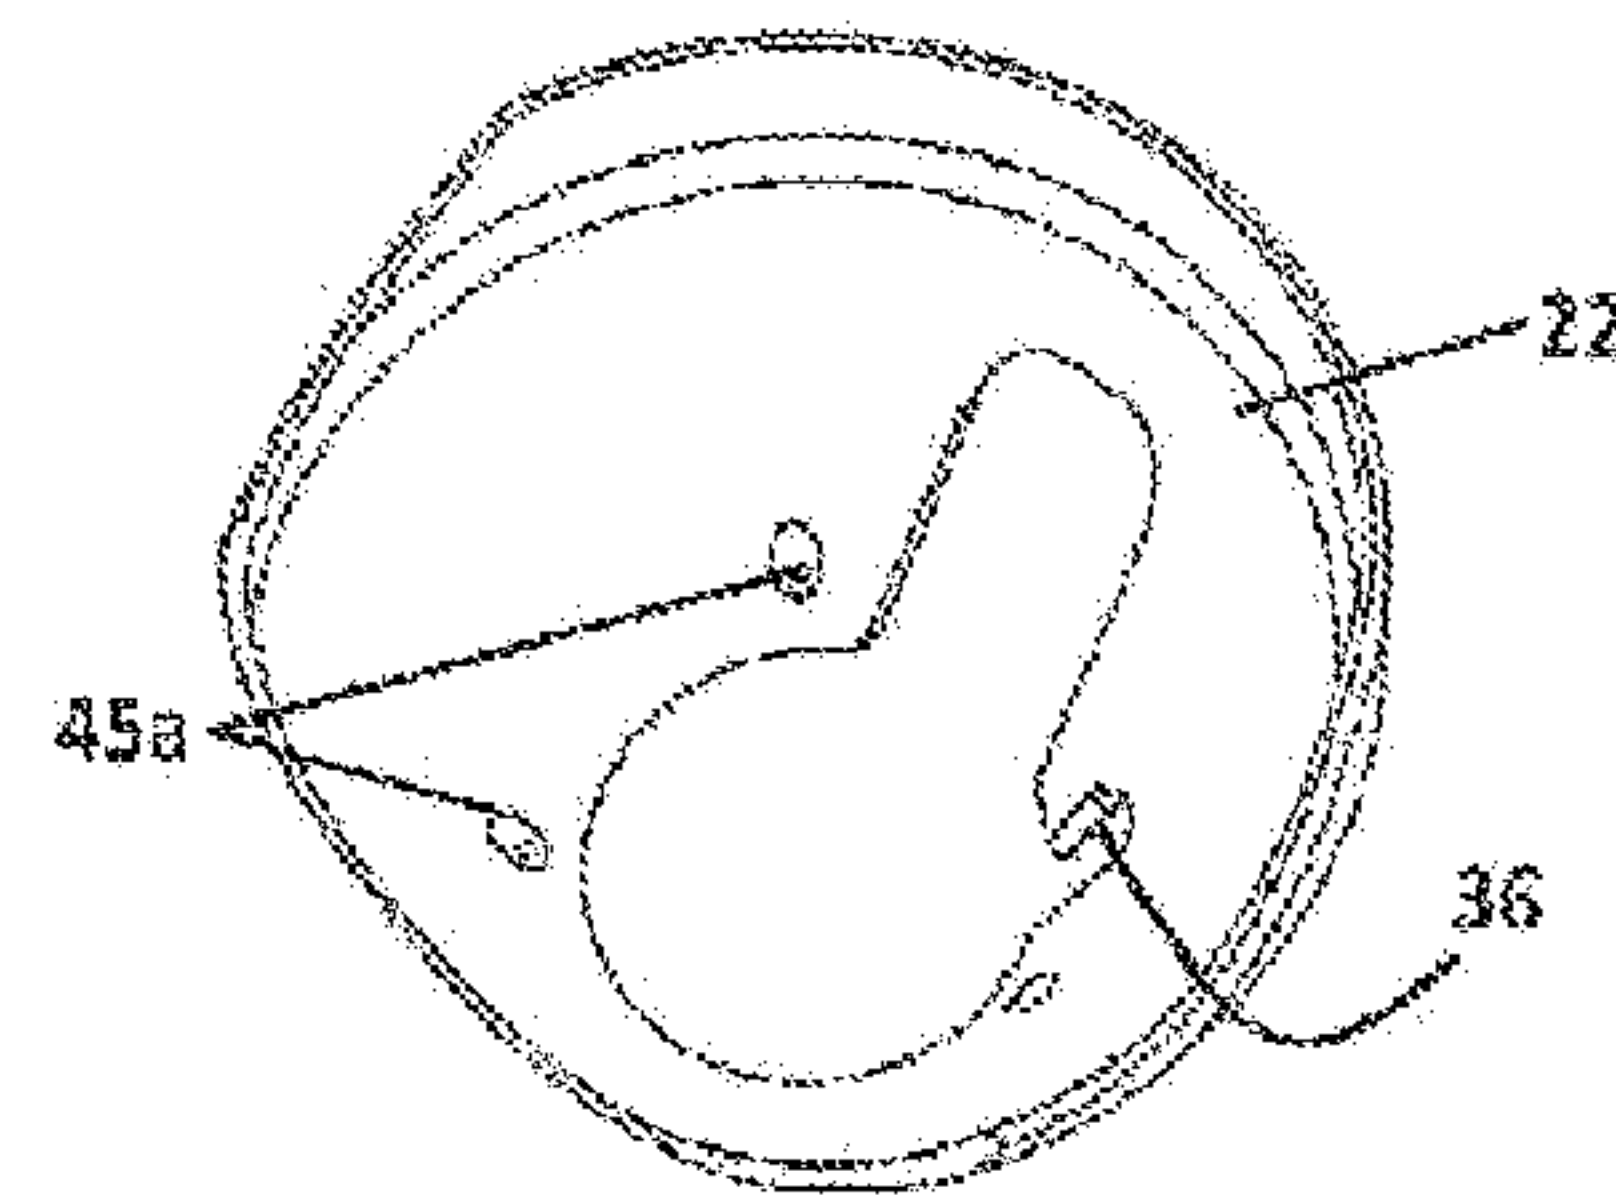


FIG. 10D

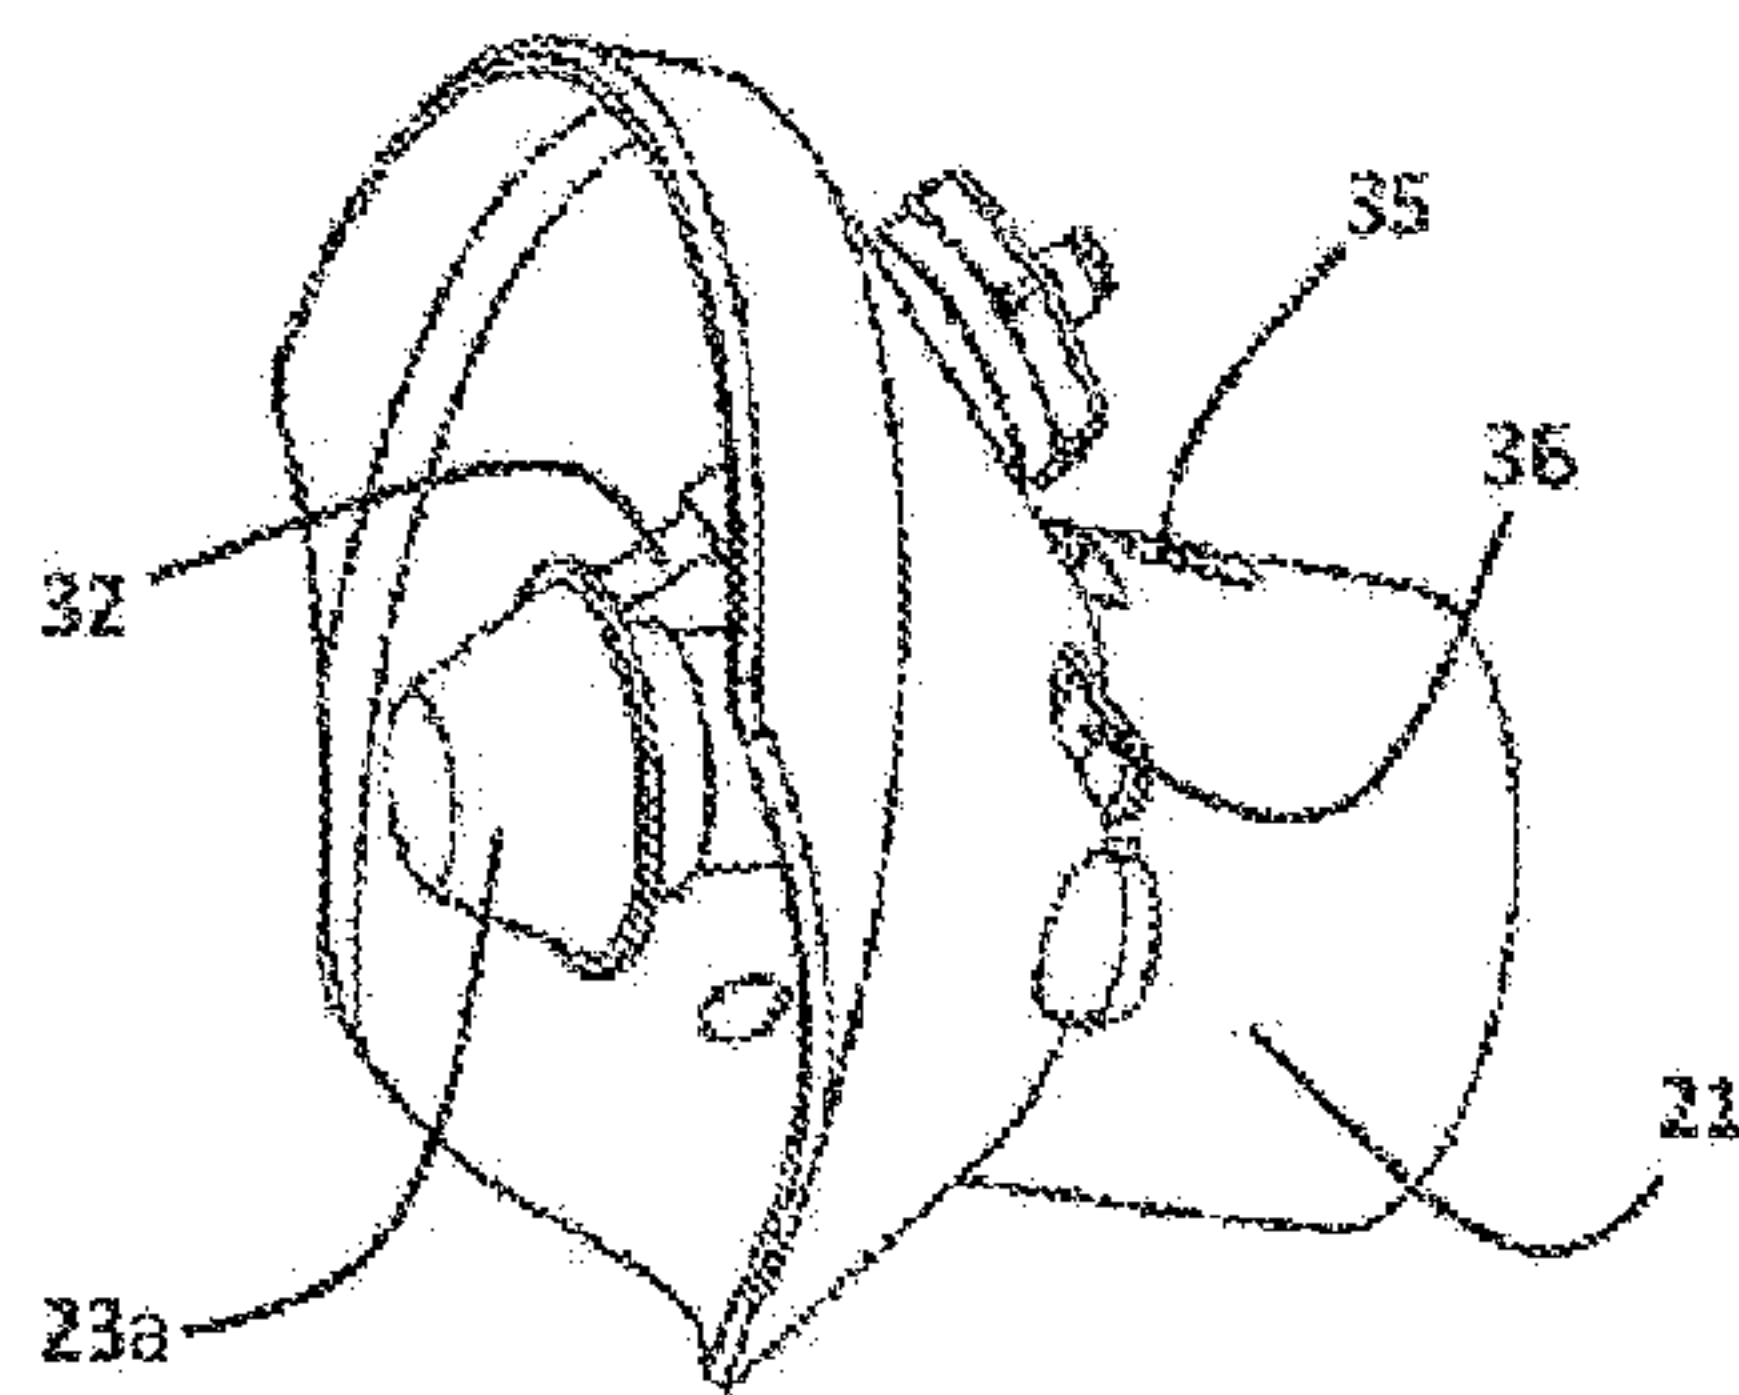
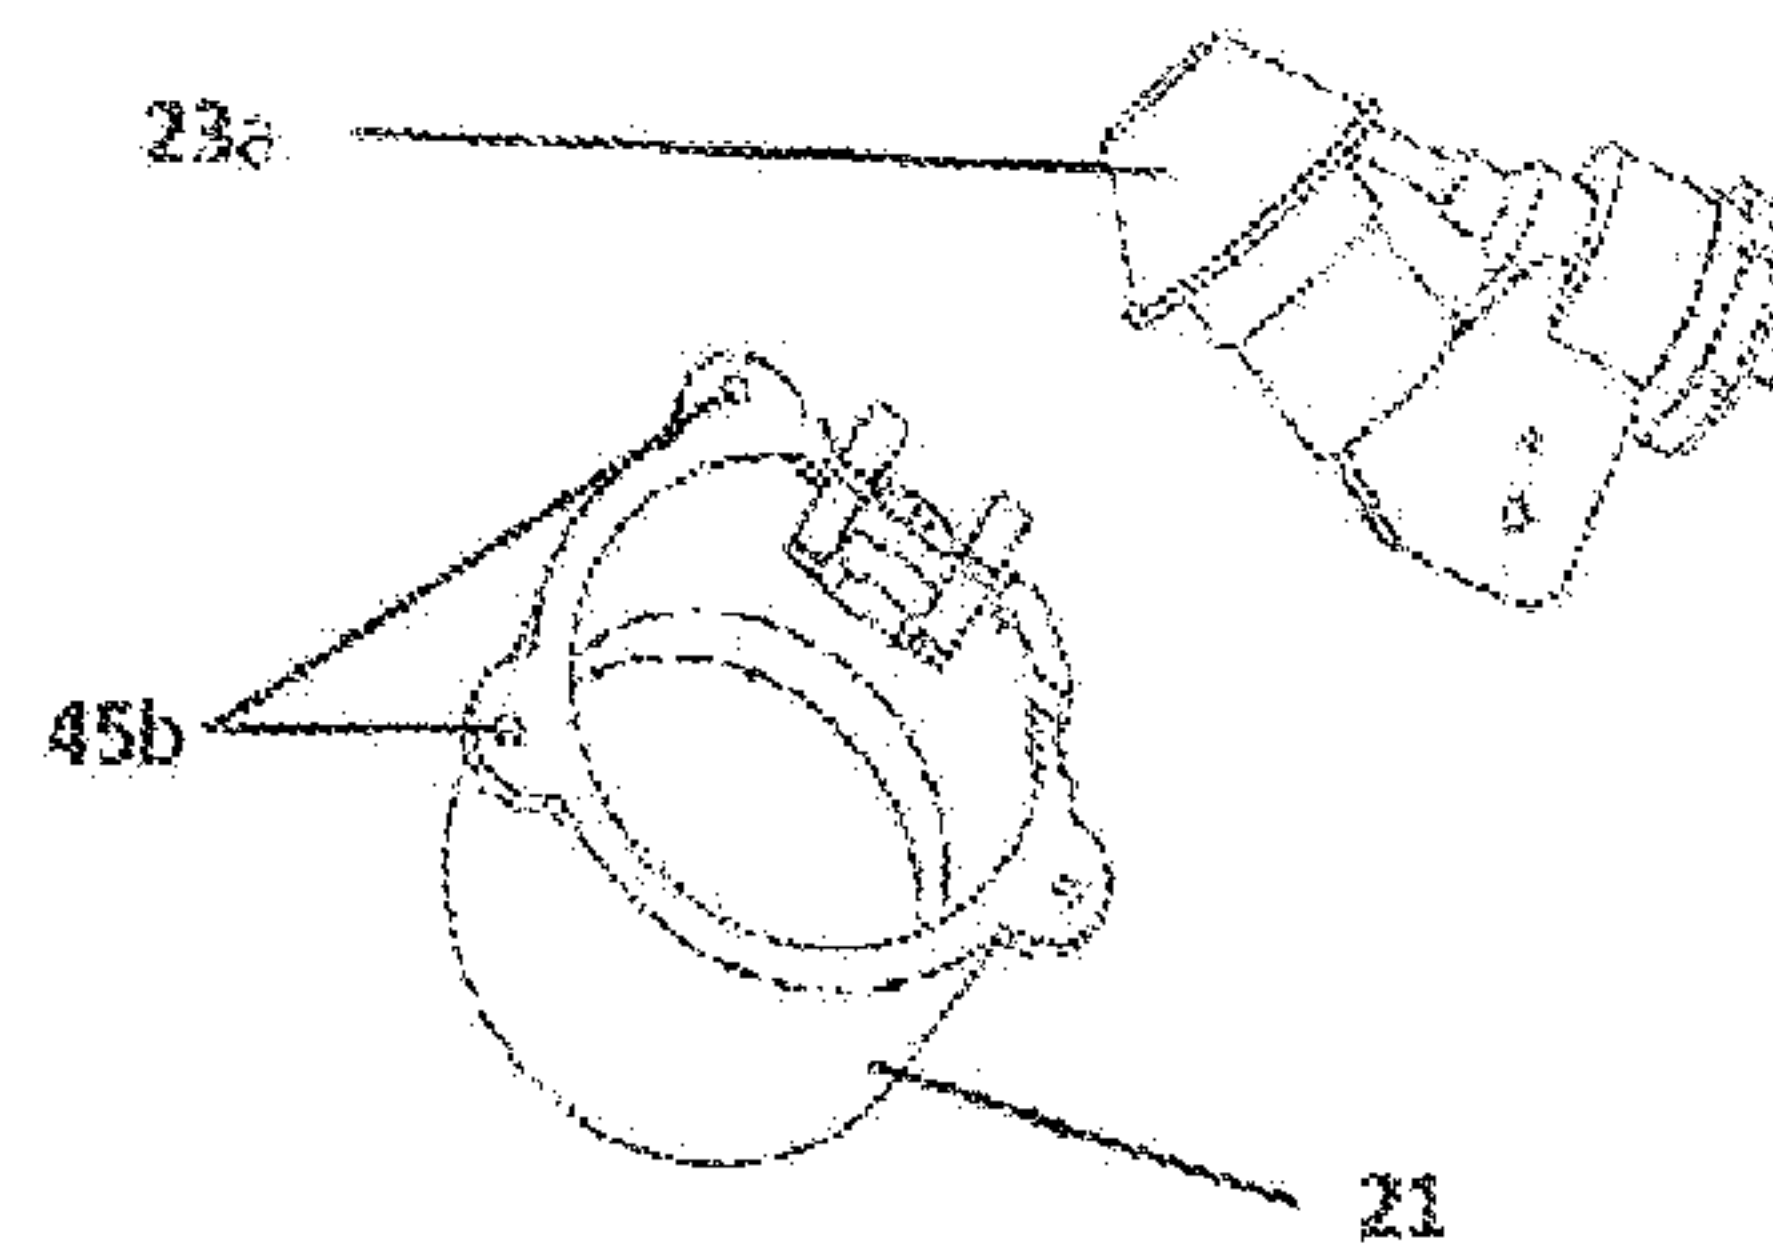


FIG. 10E



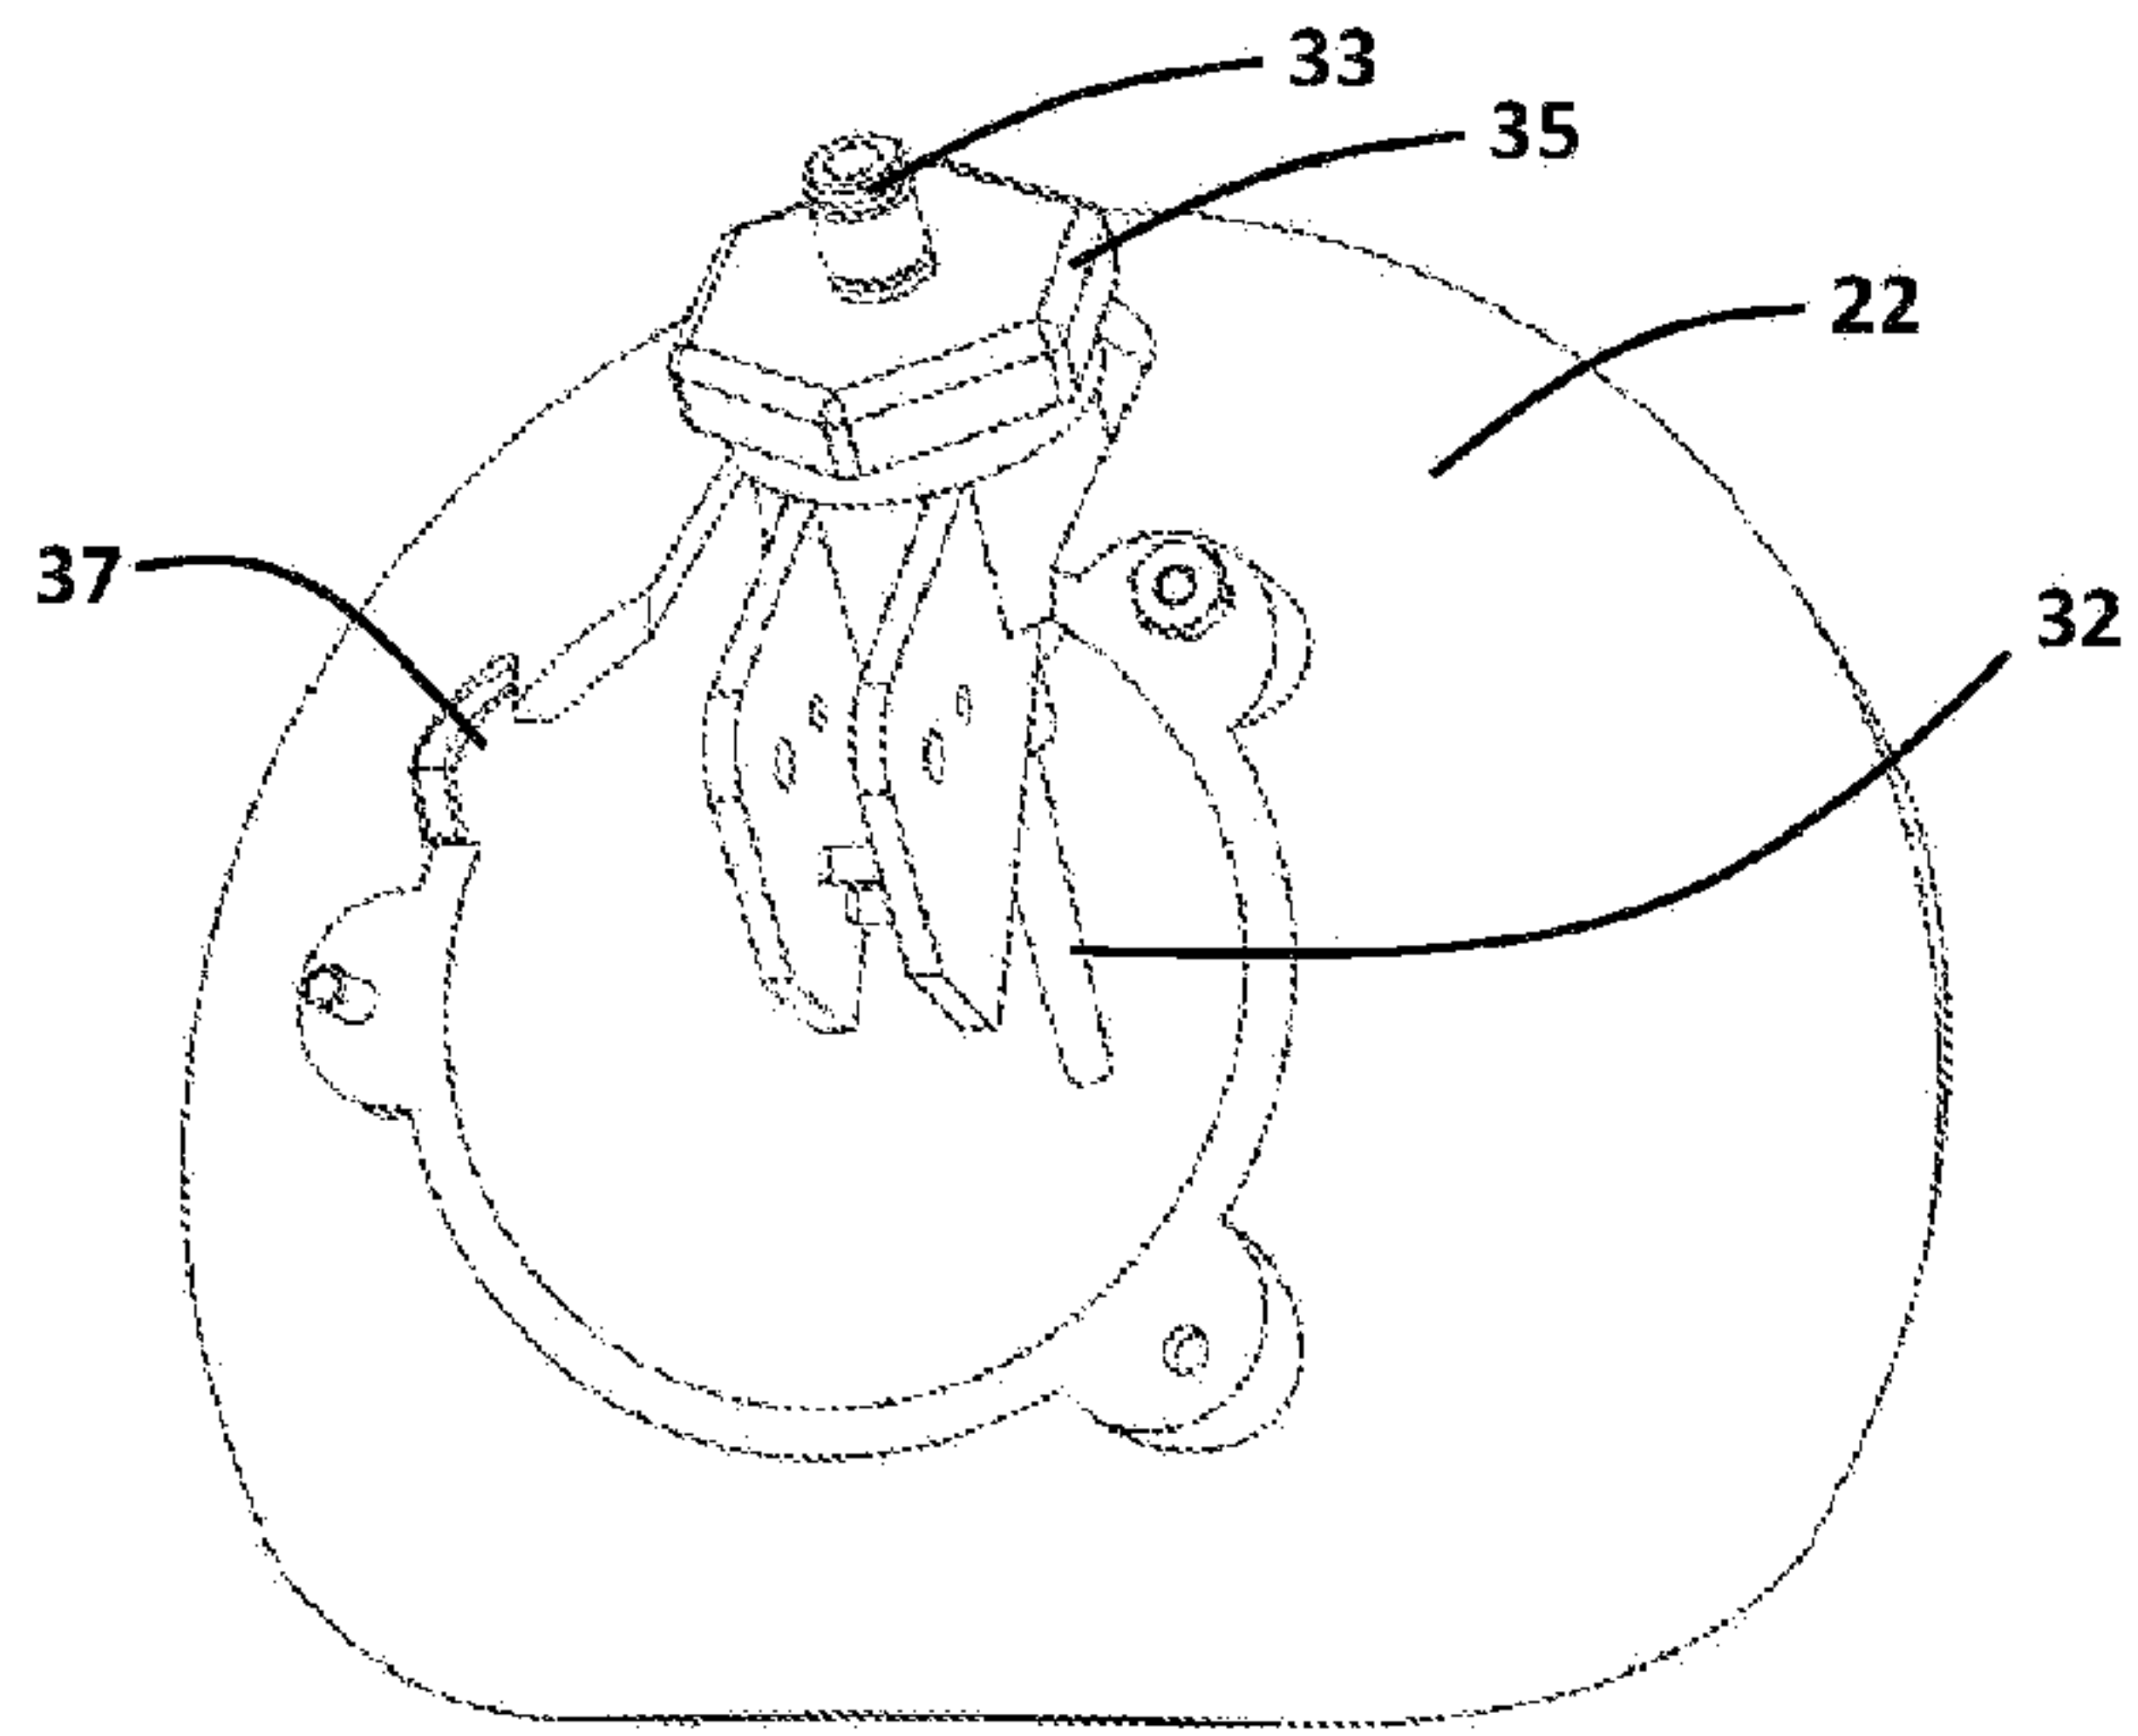


FIG. 10G

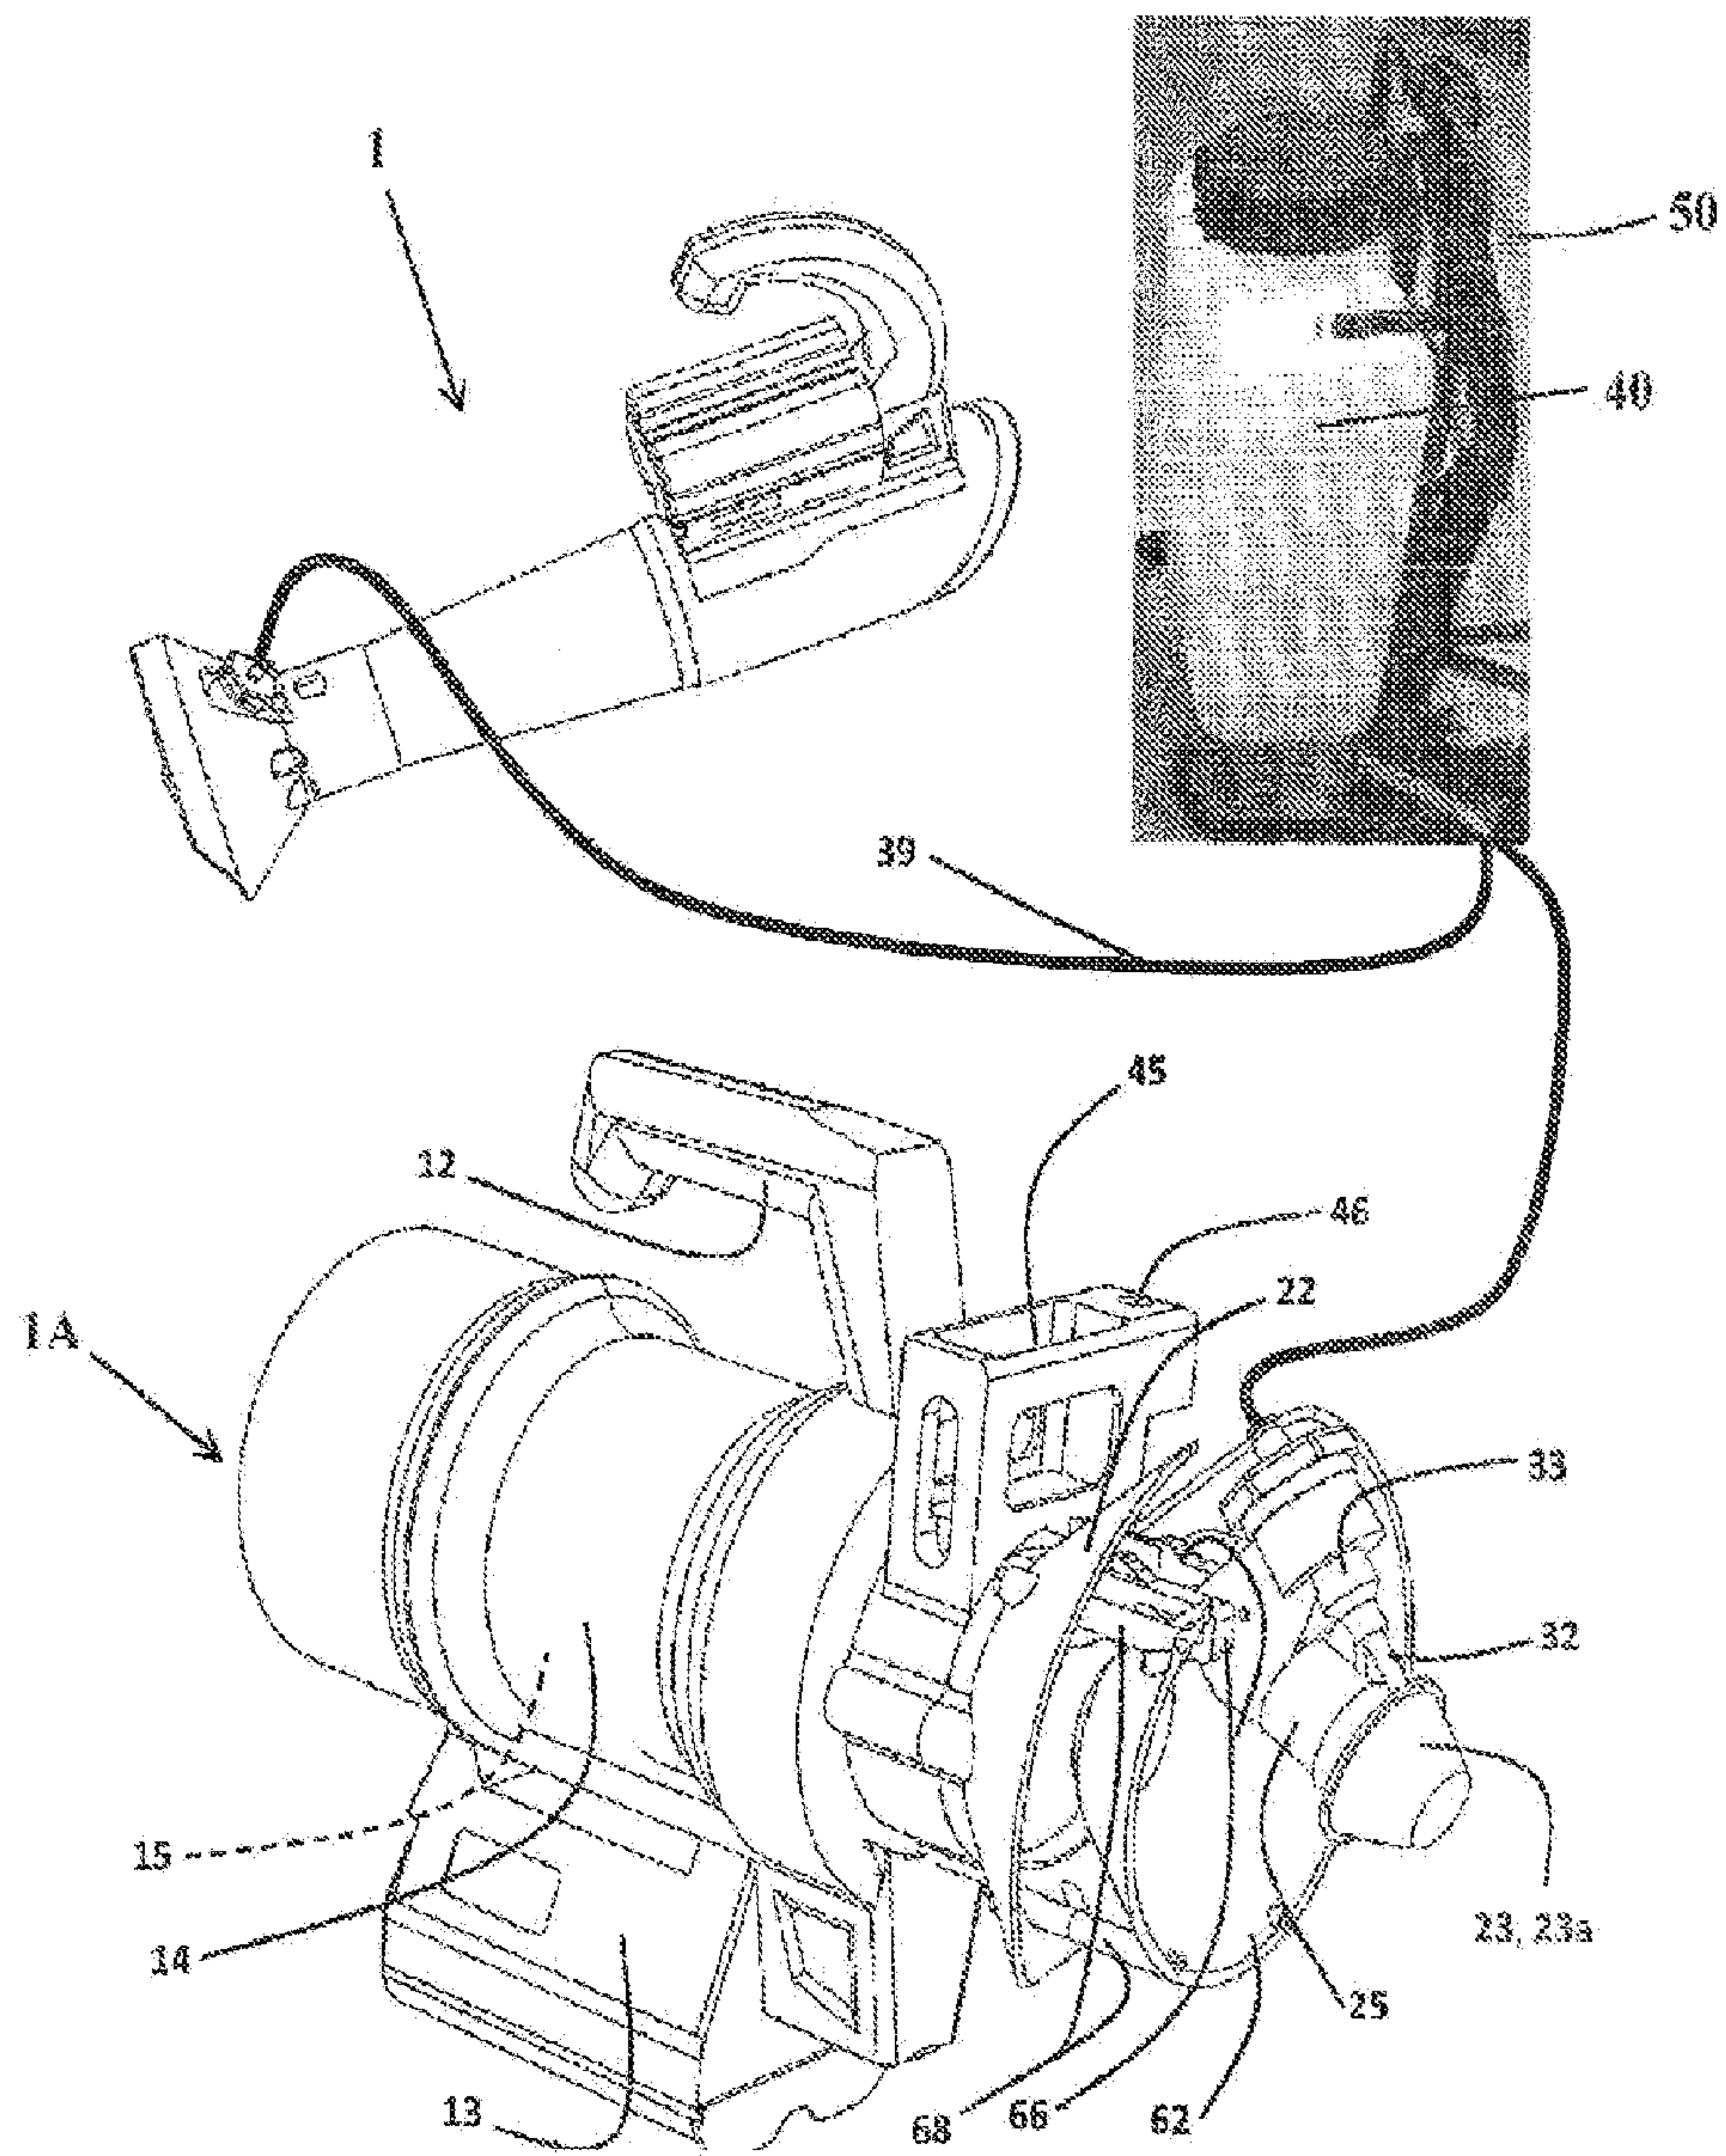
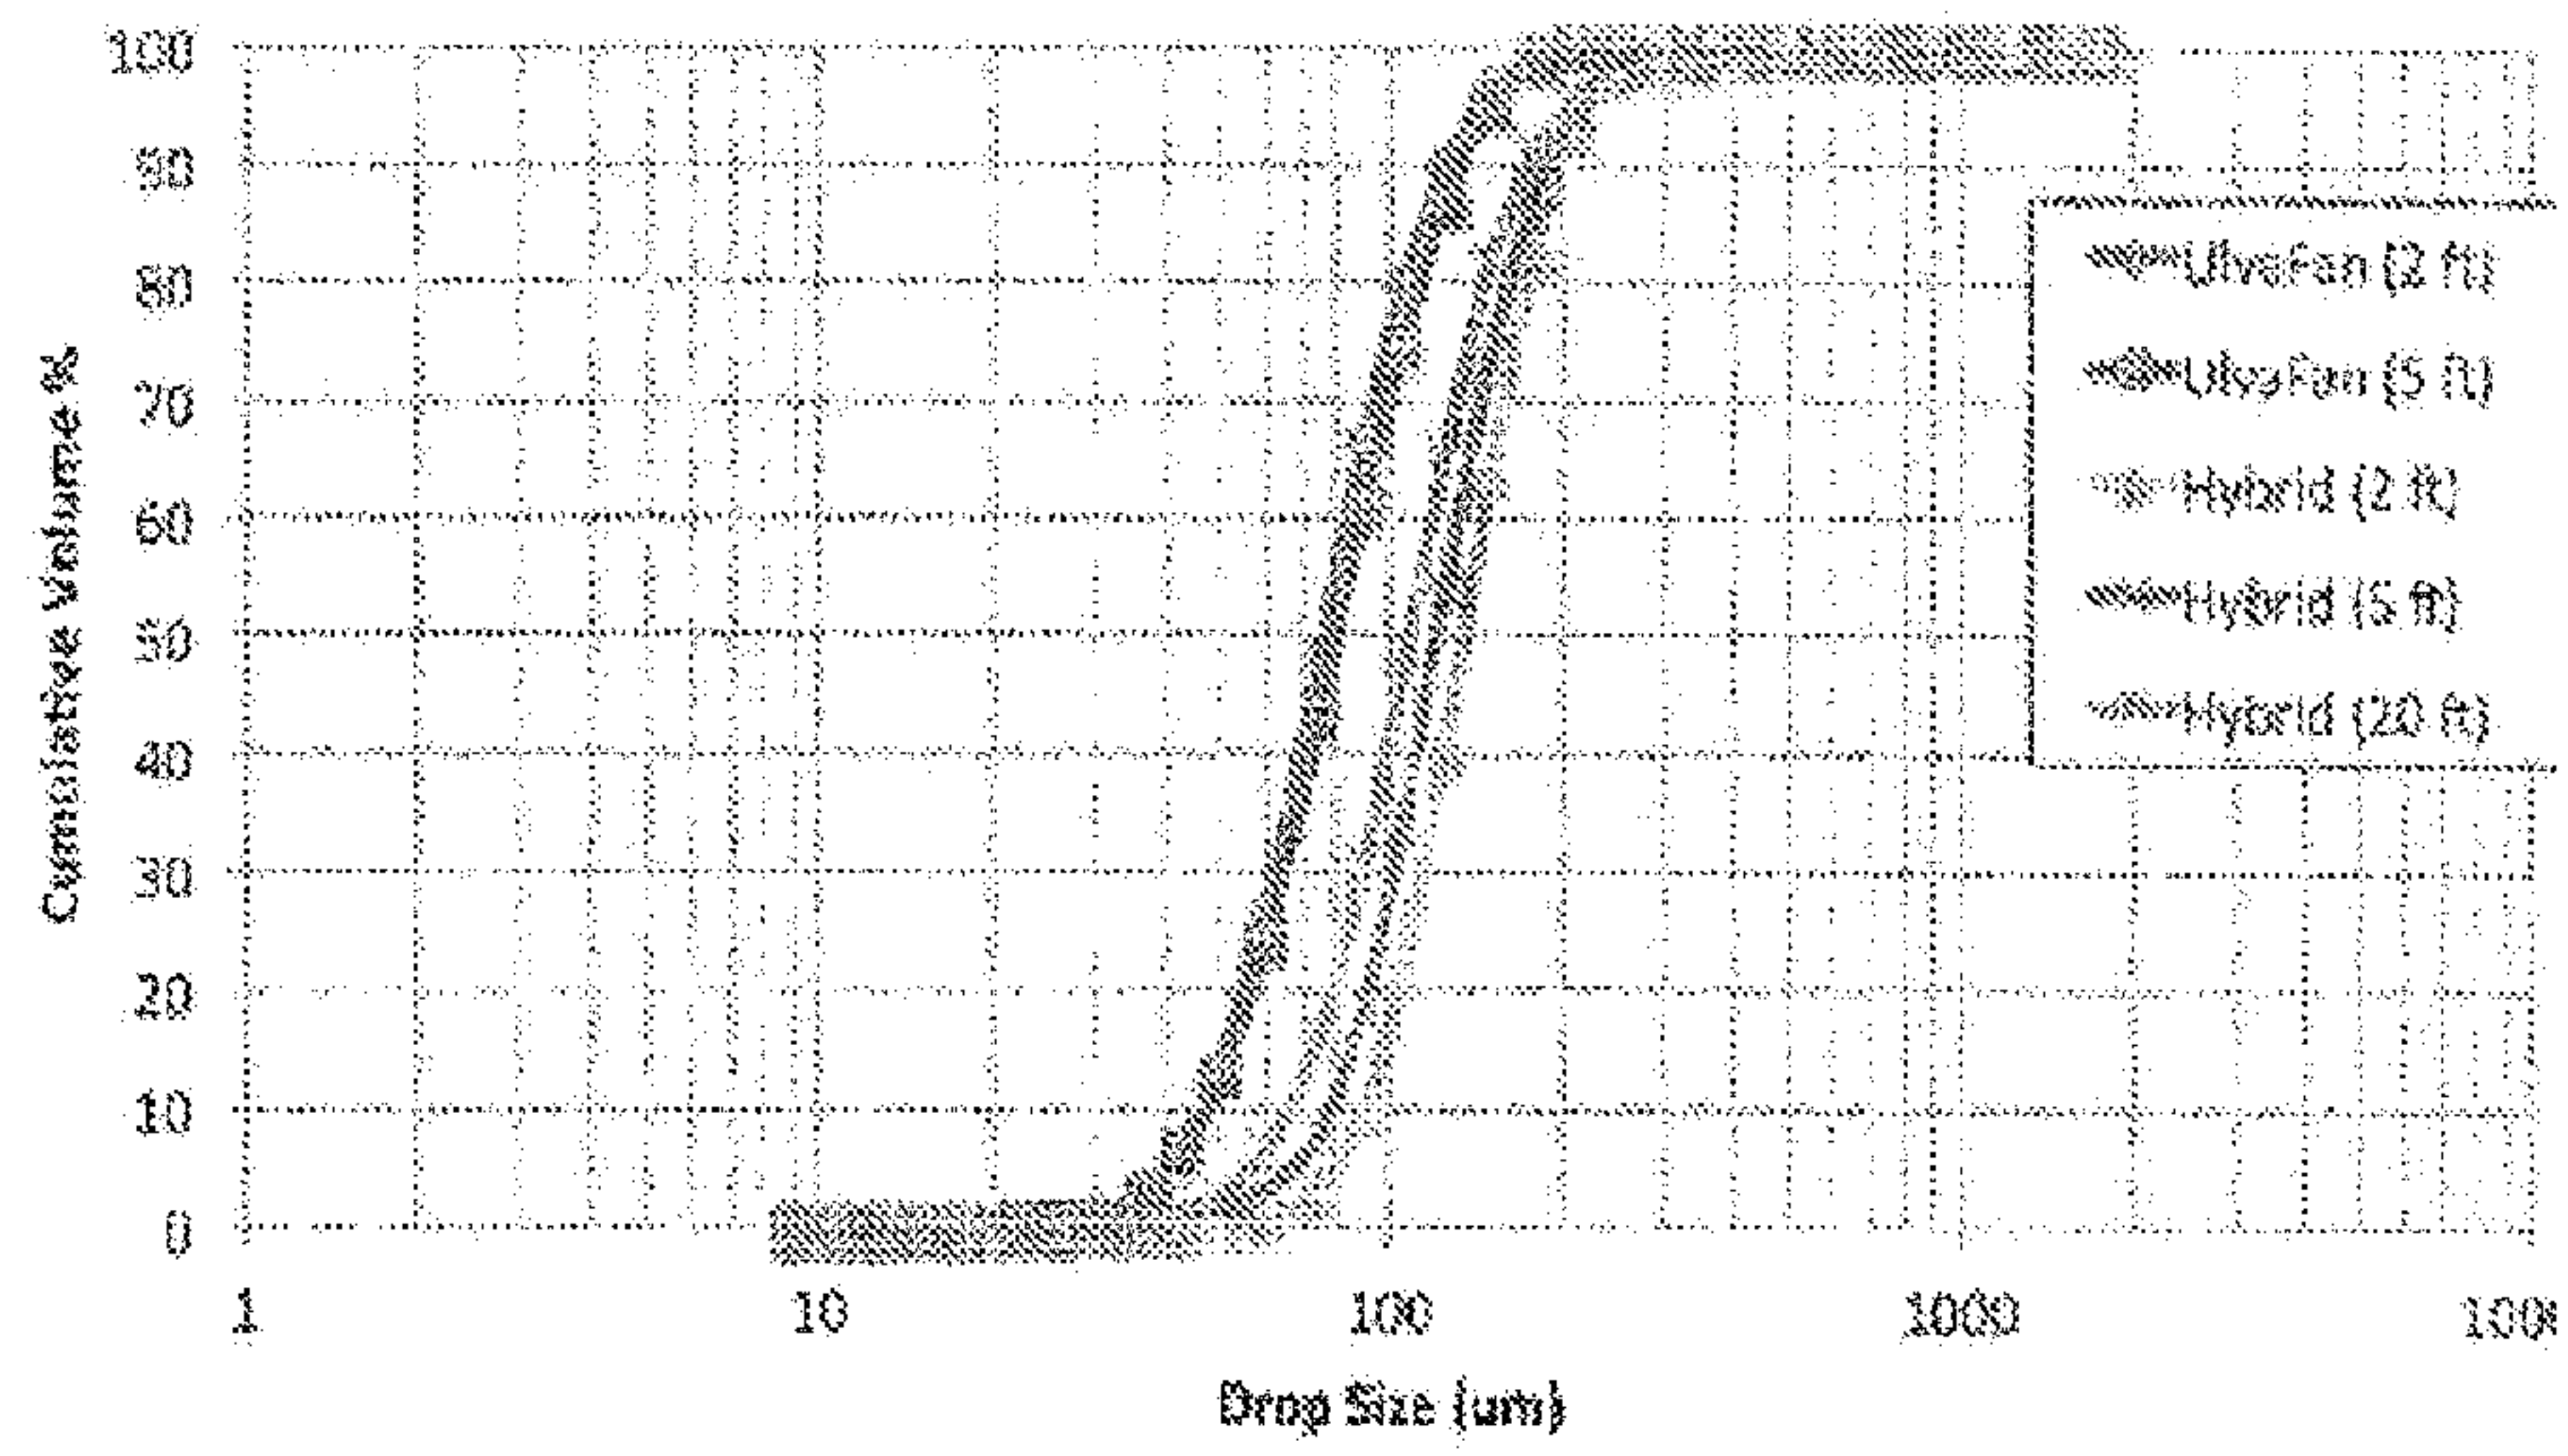


FIG. 11

*FIG. 12*

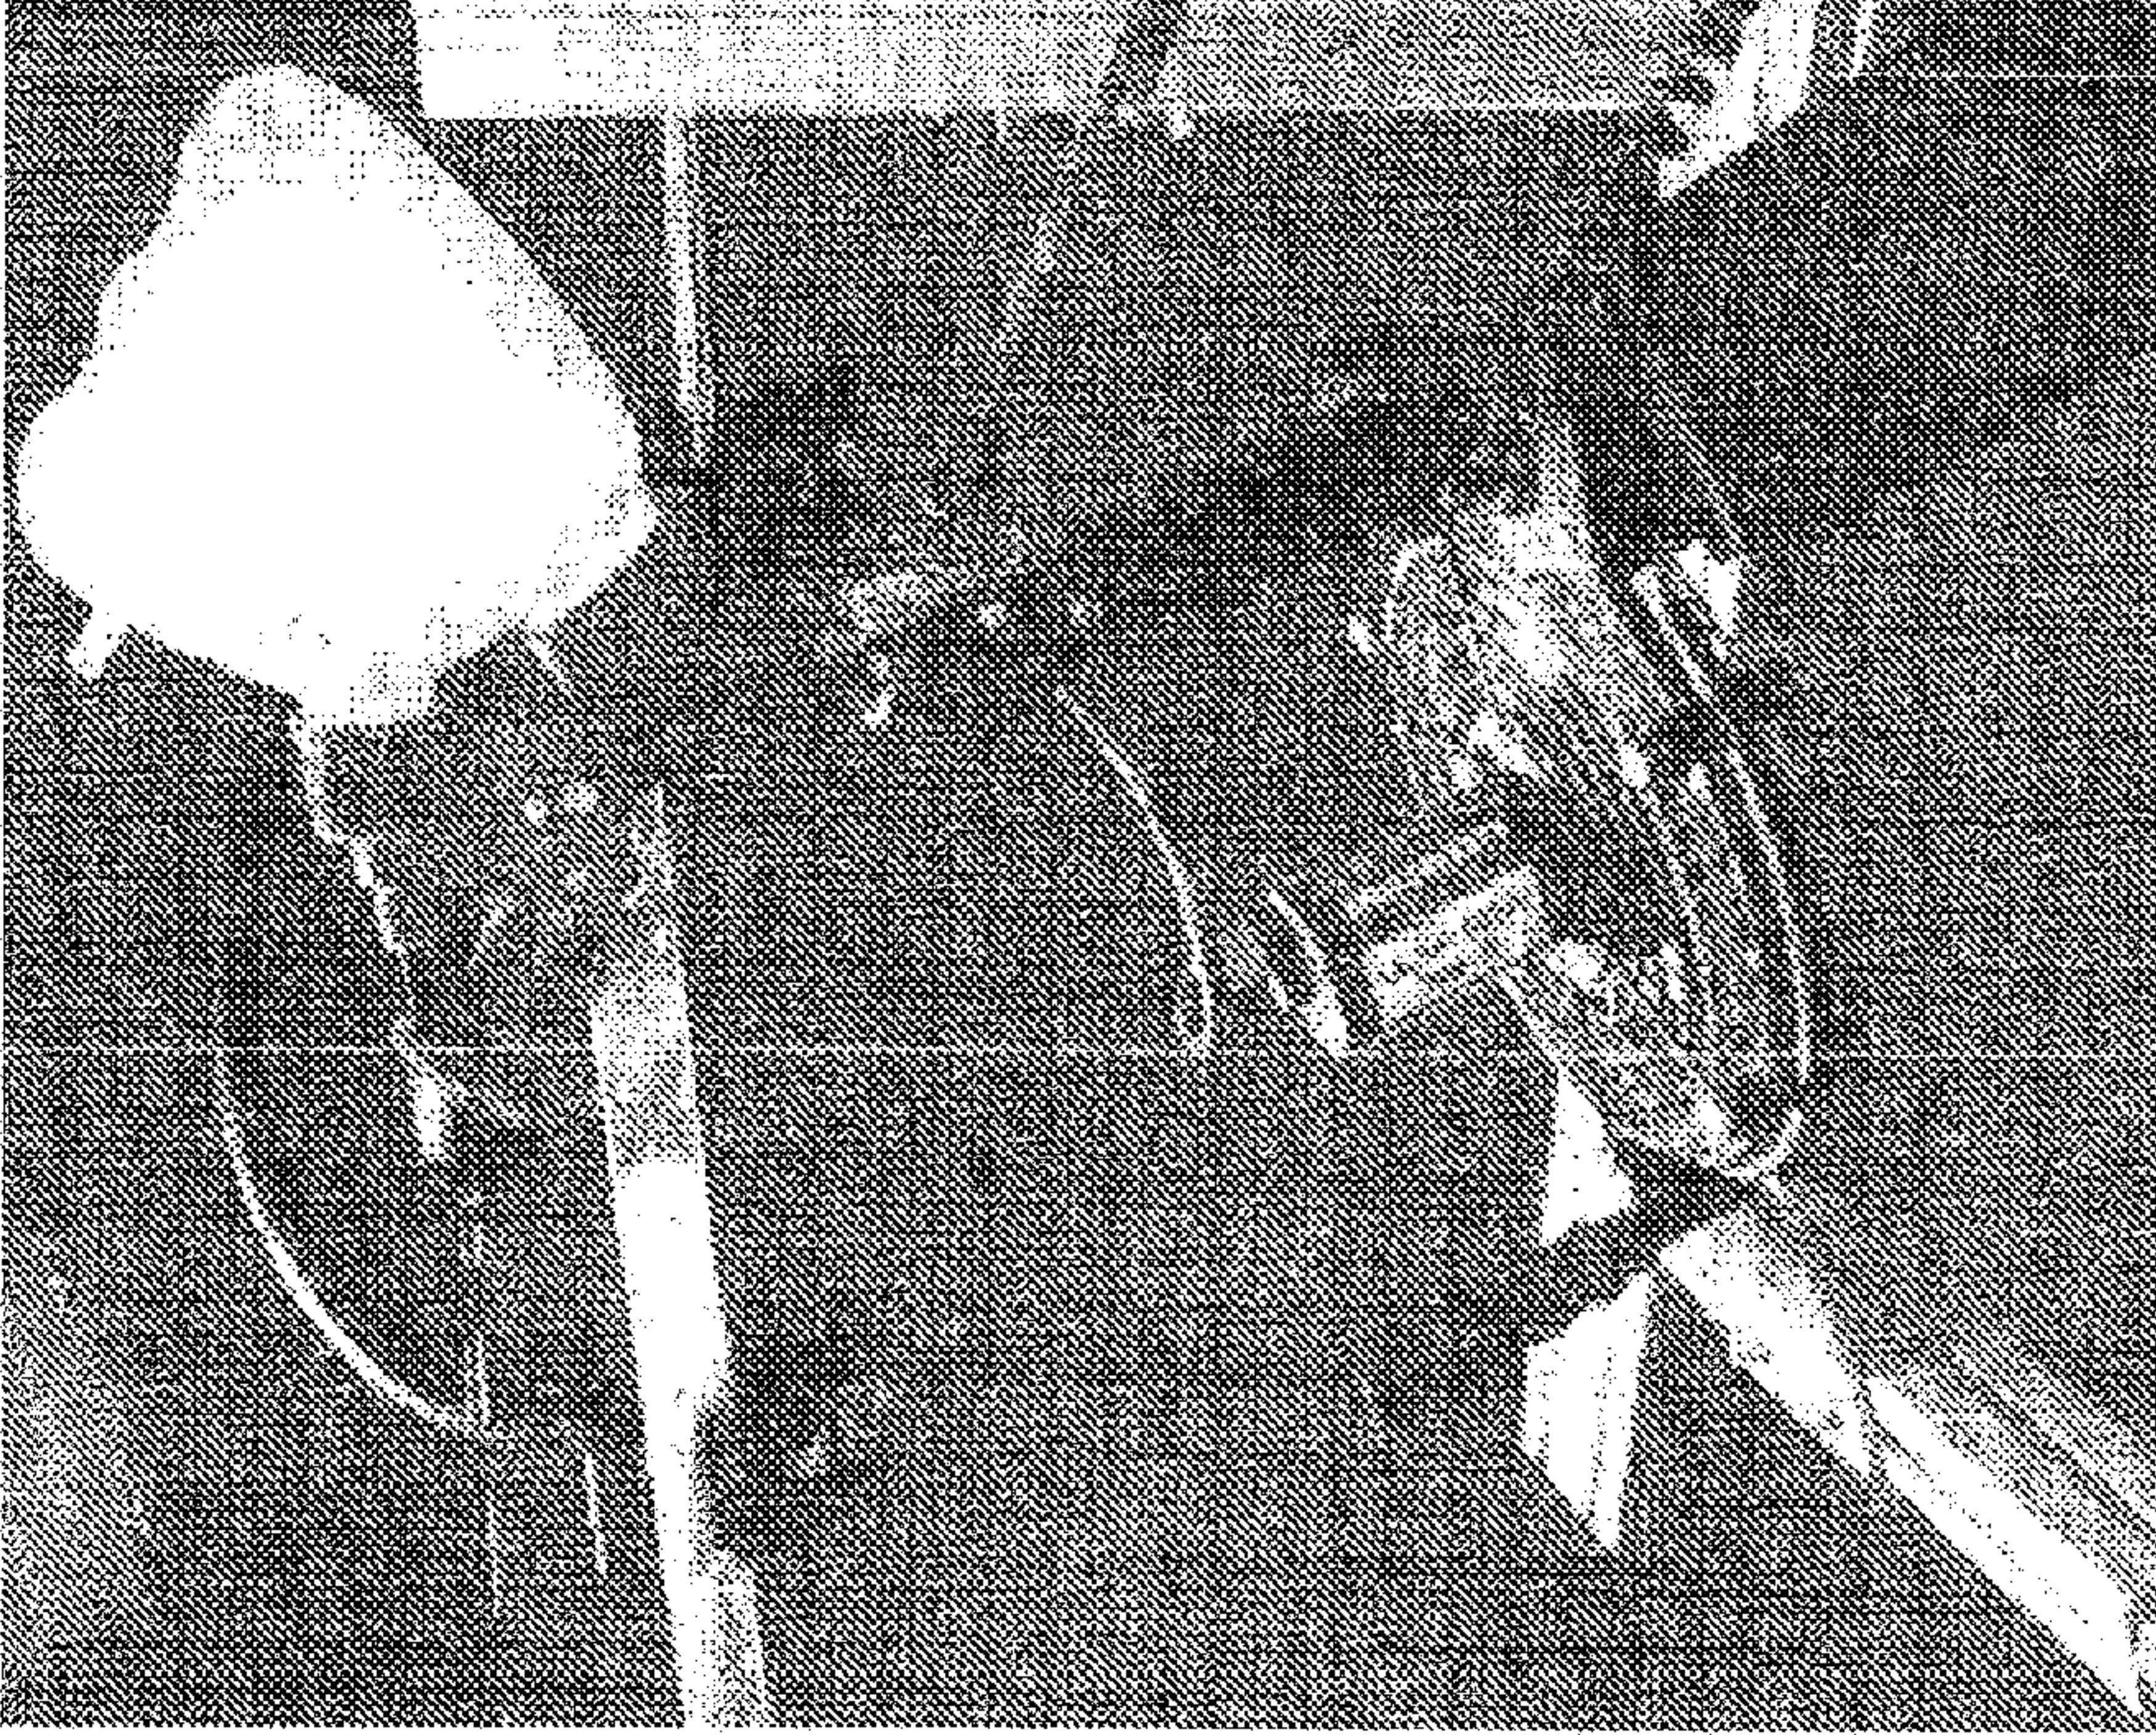


FIG. 13



FIG. 14

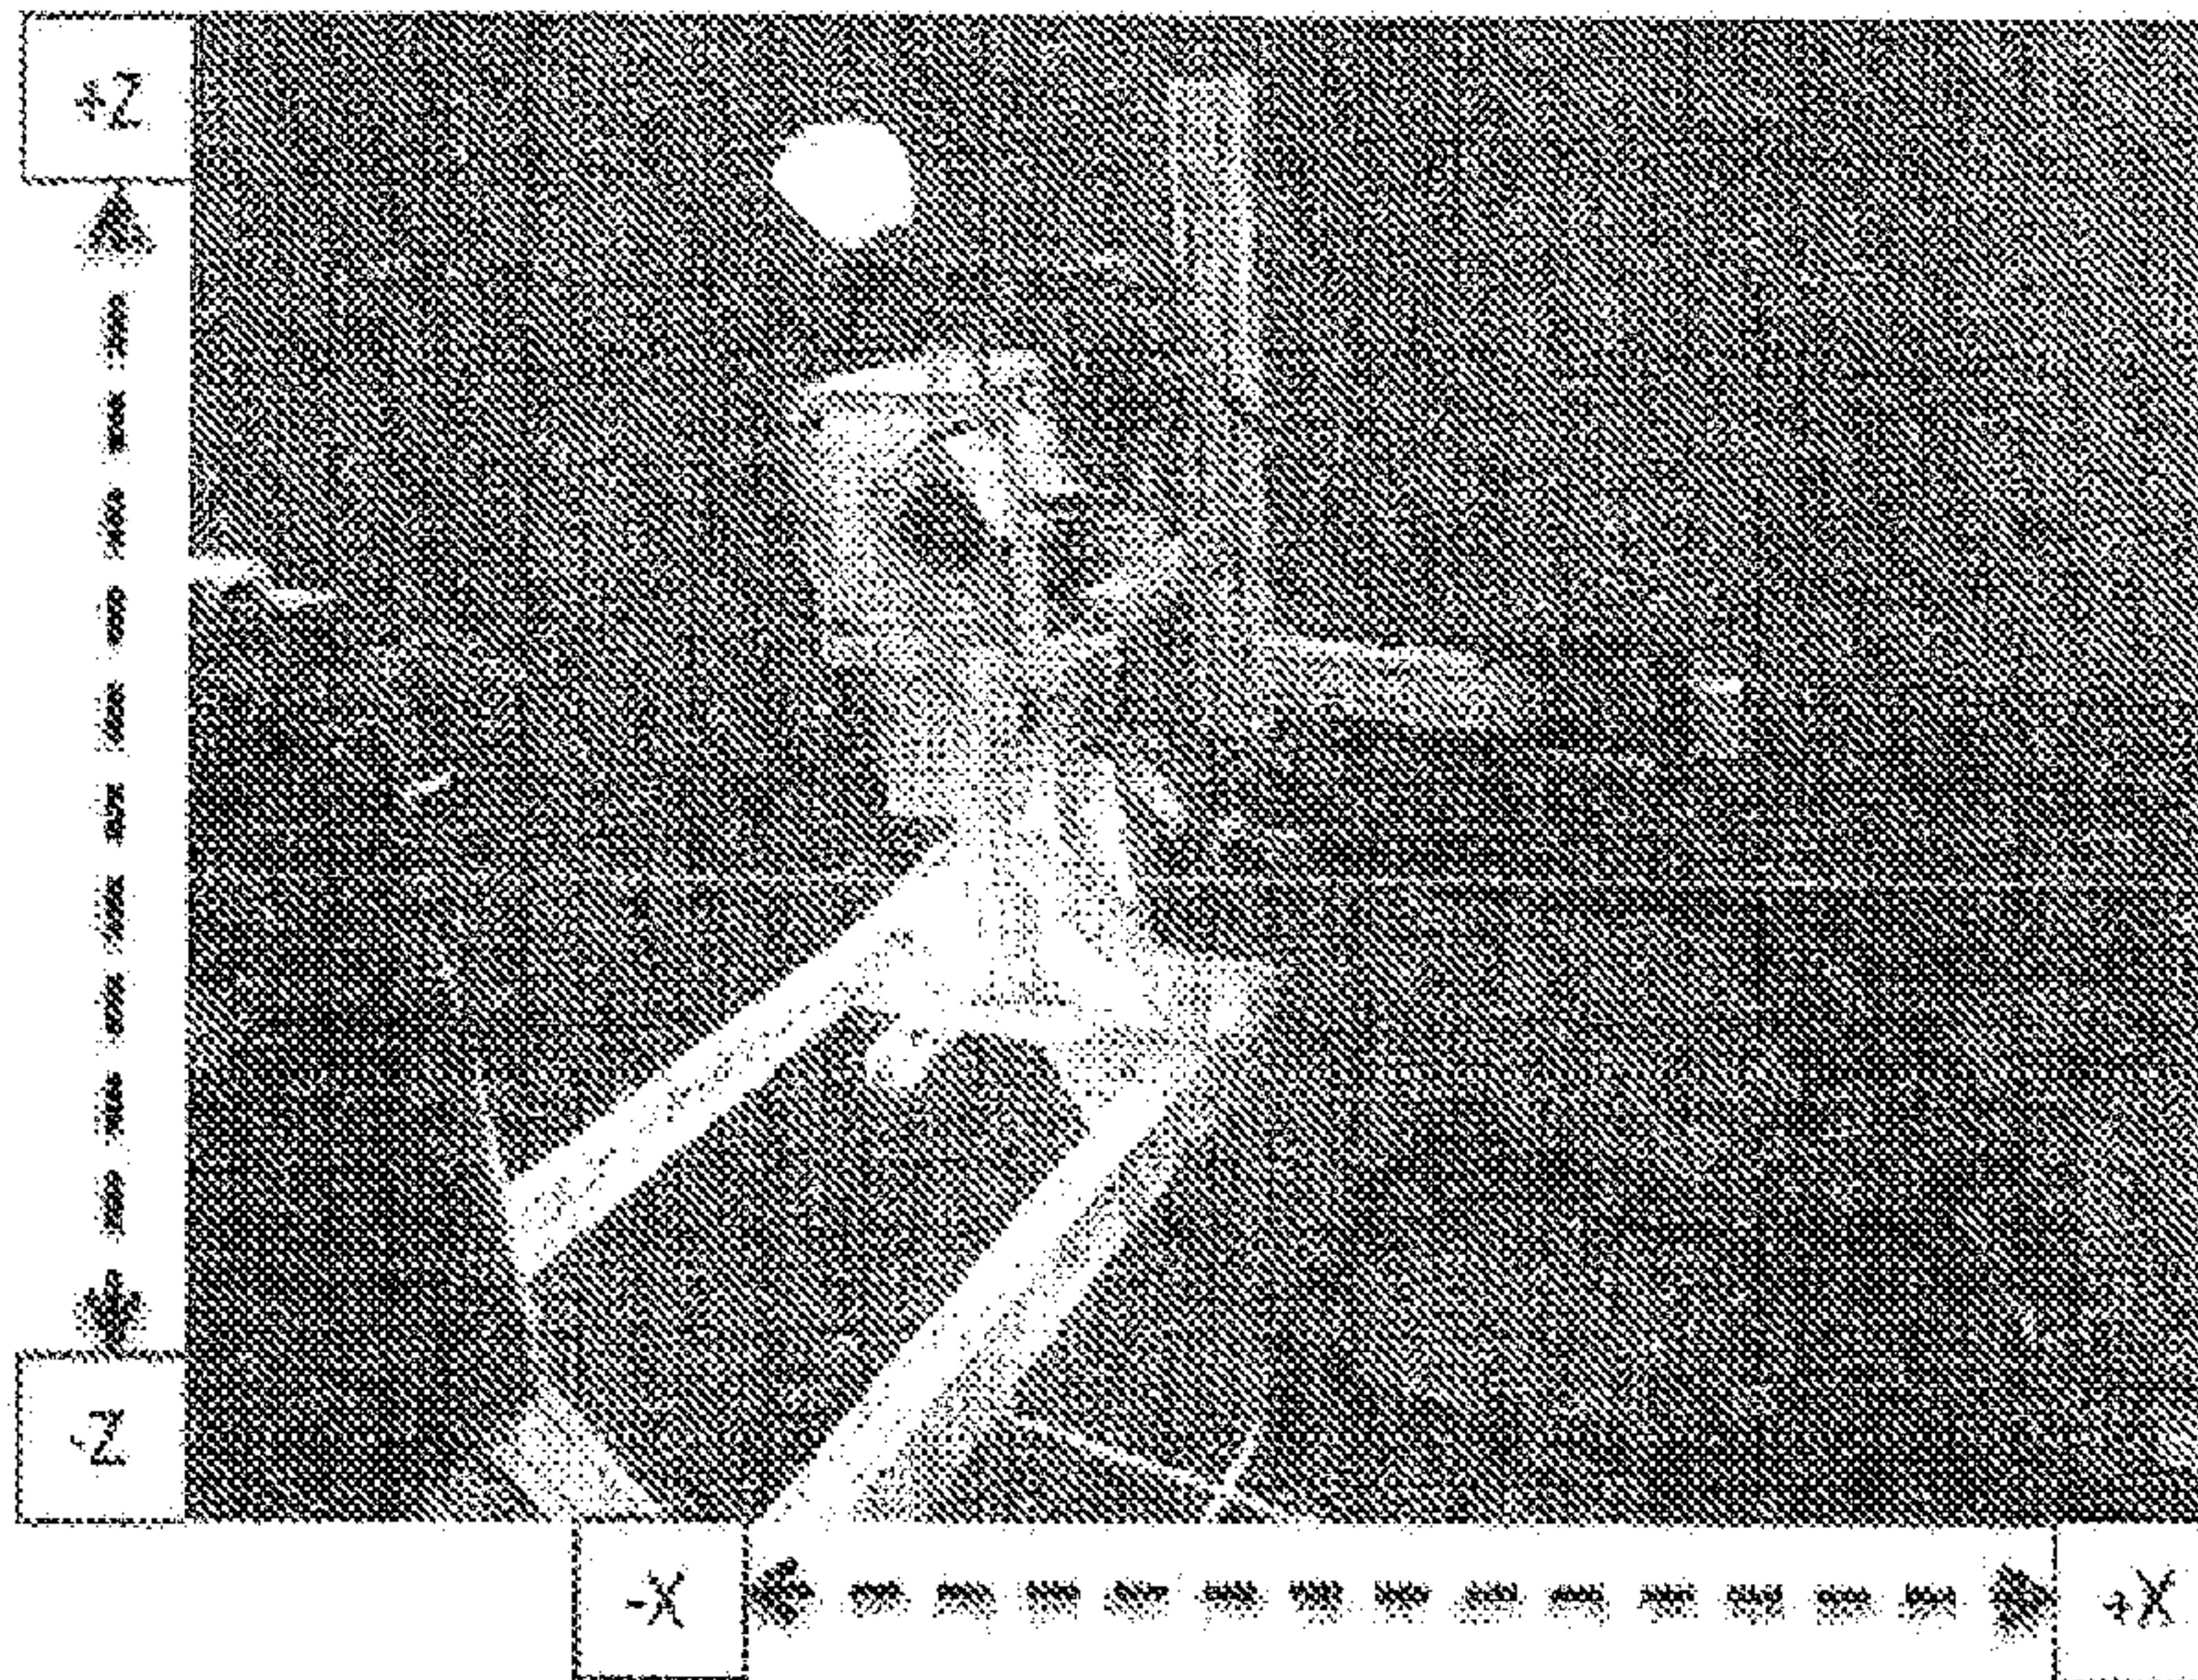


FIG. 15

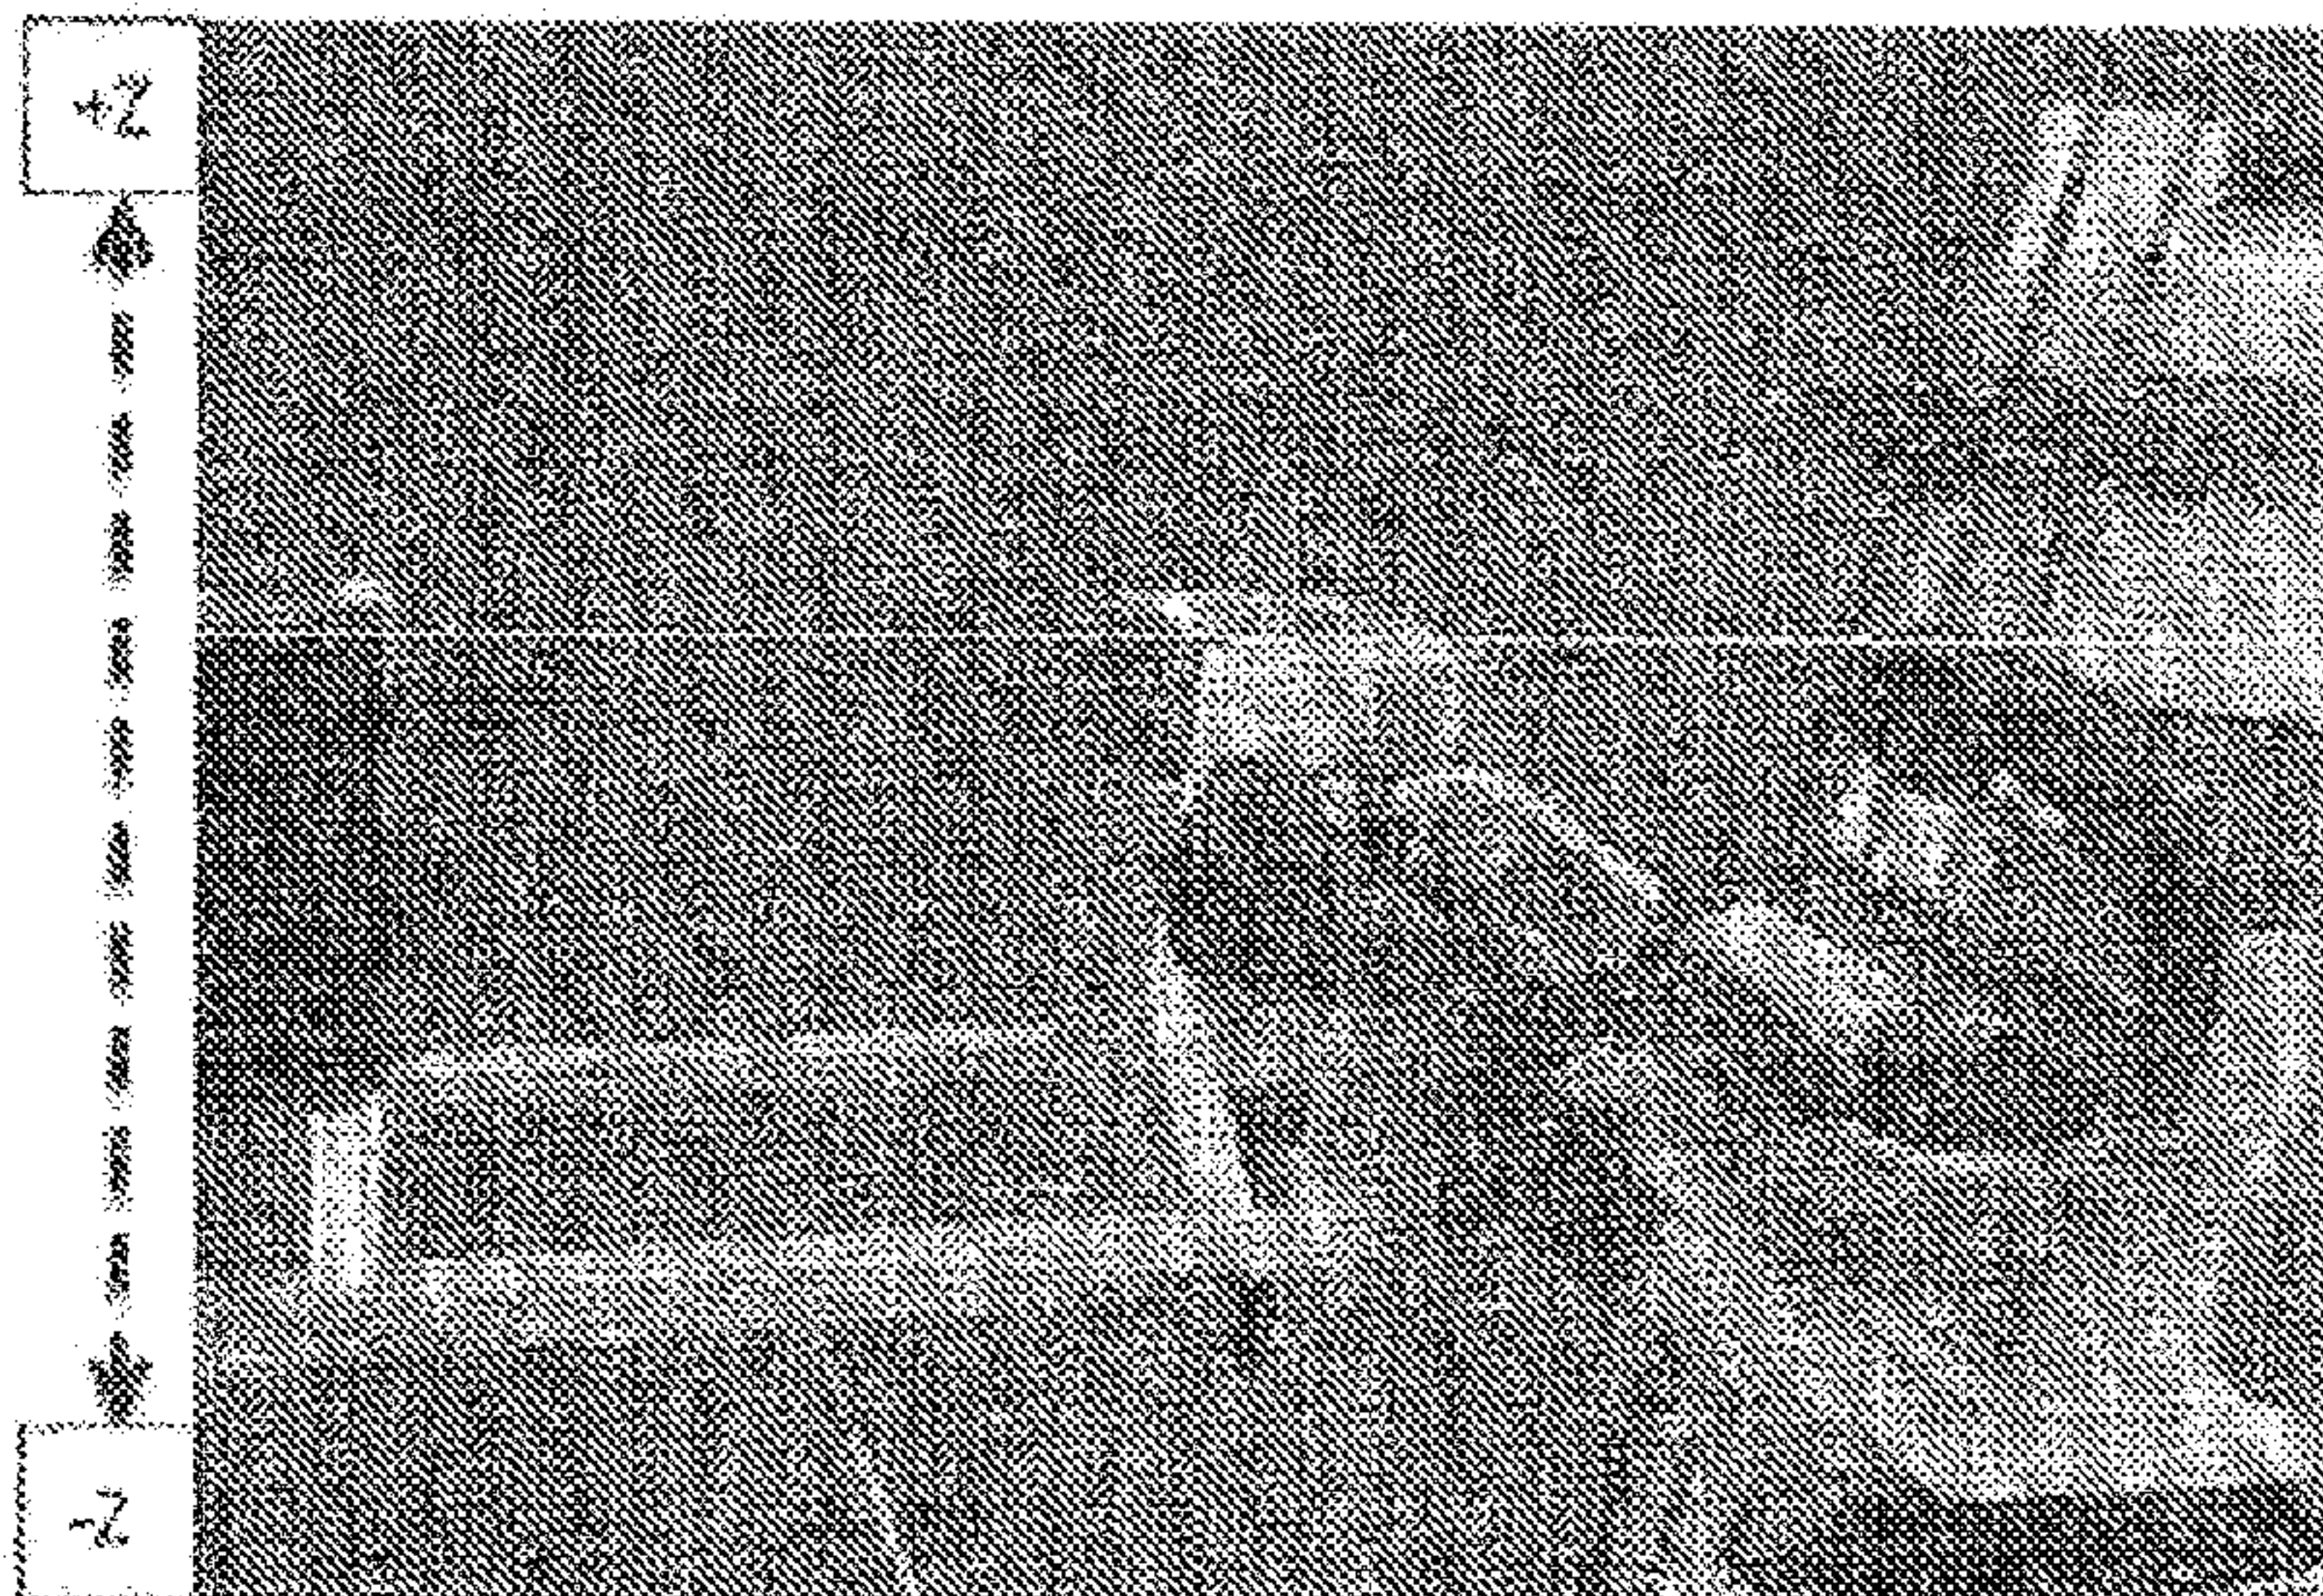


FIG. 16

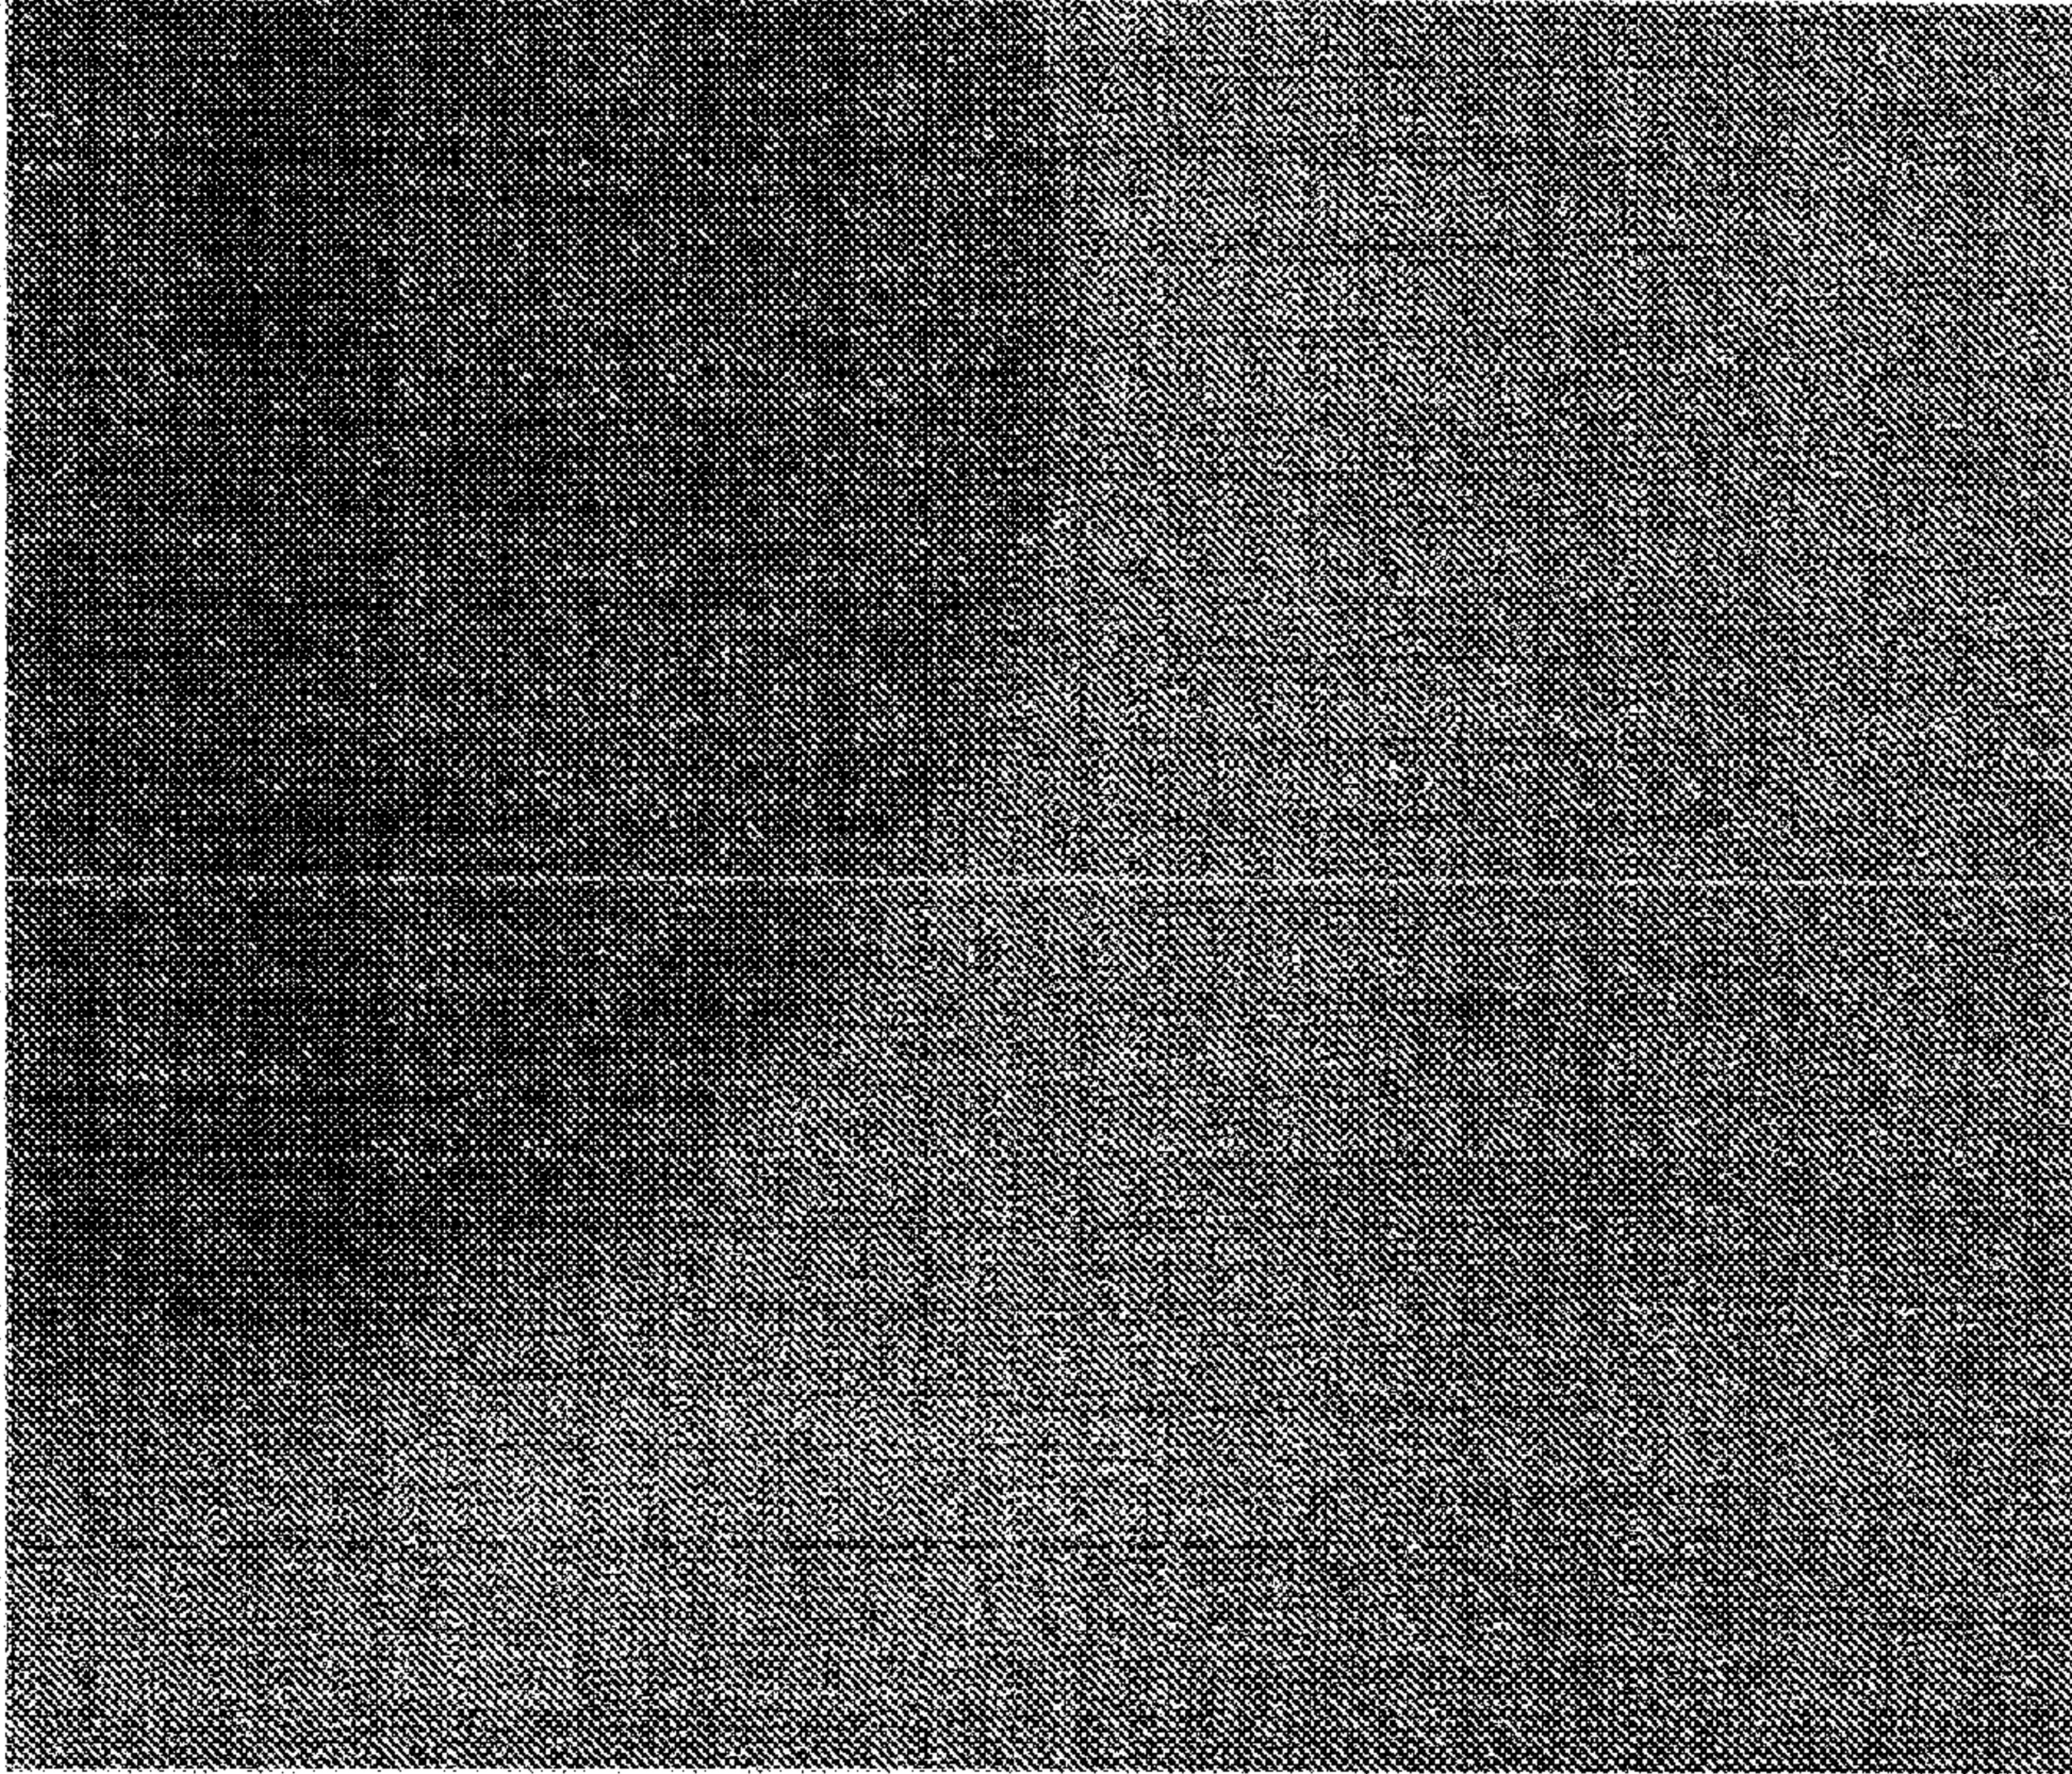


FIG. 17

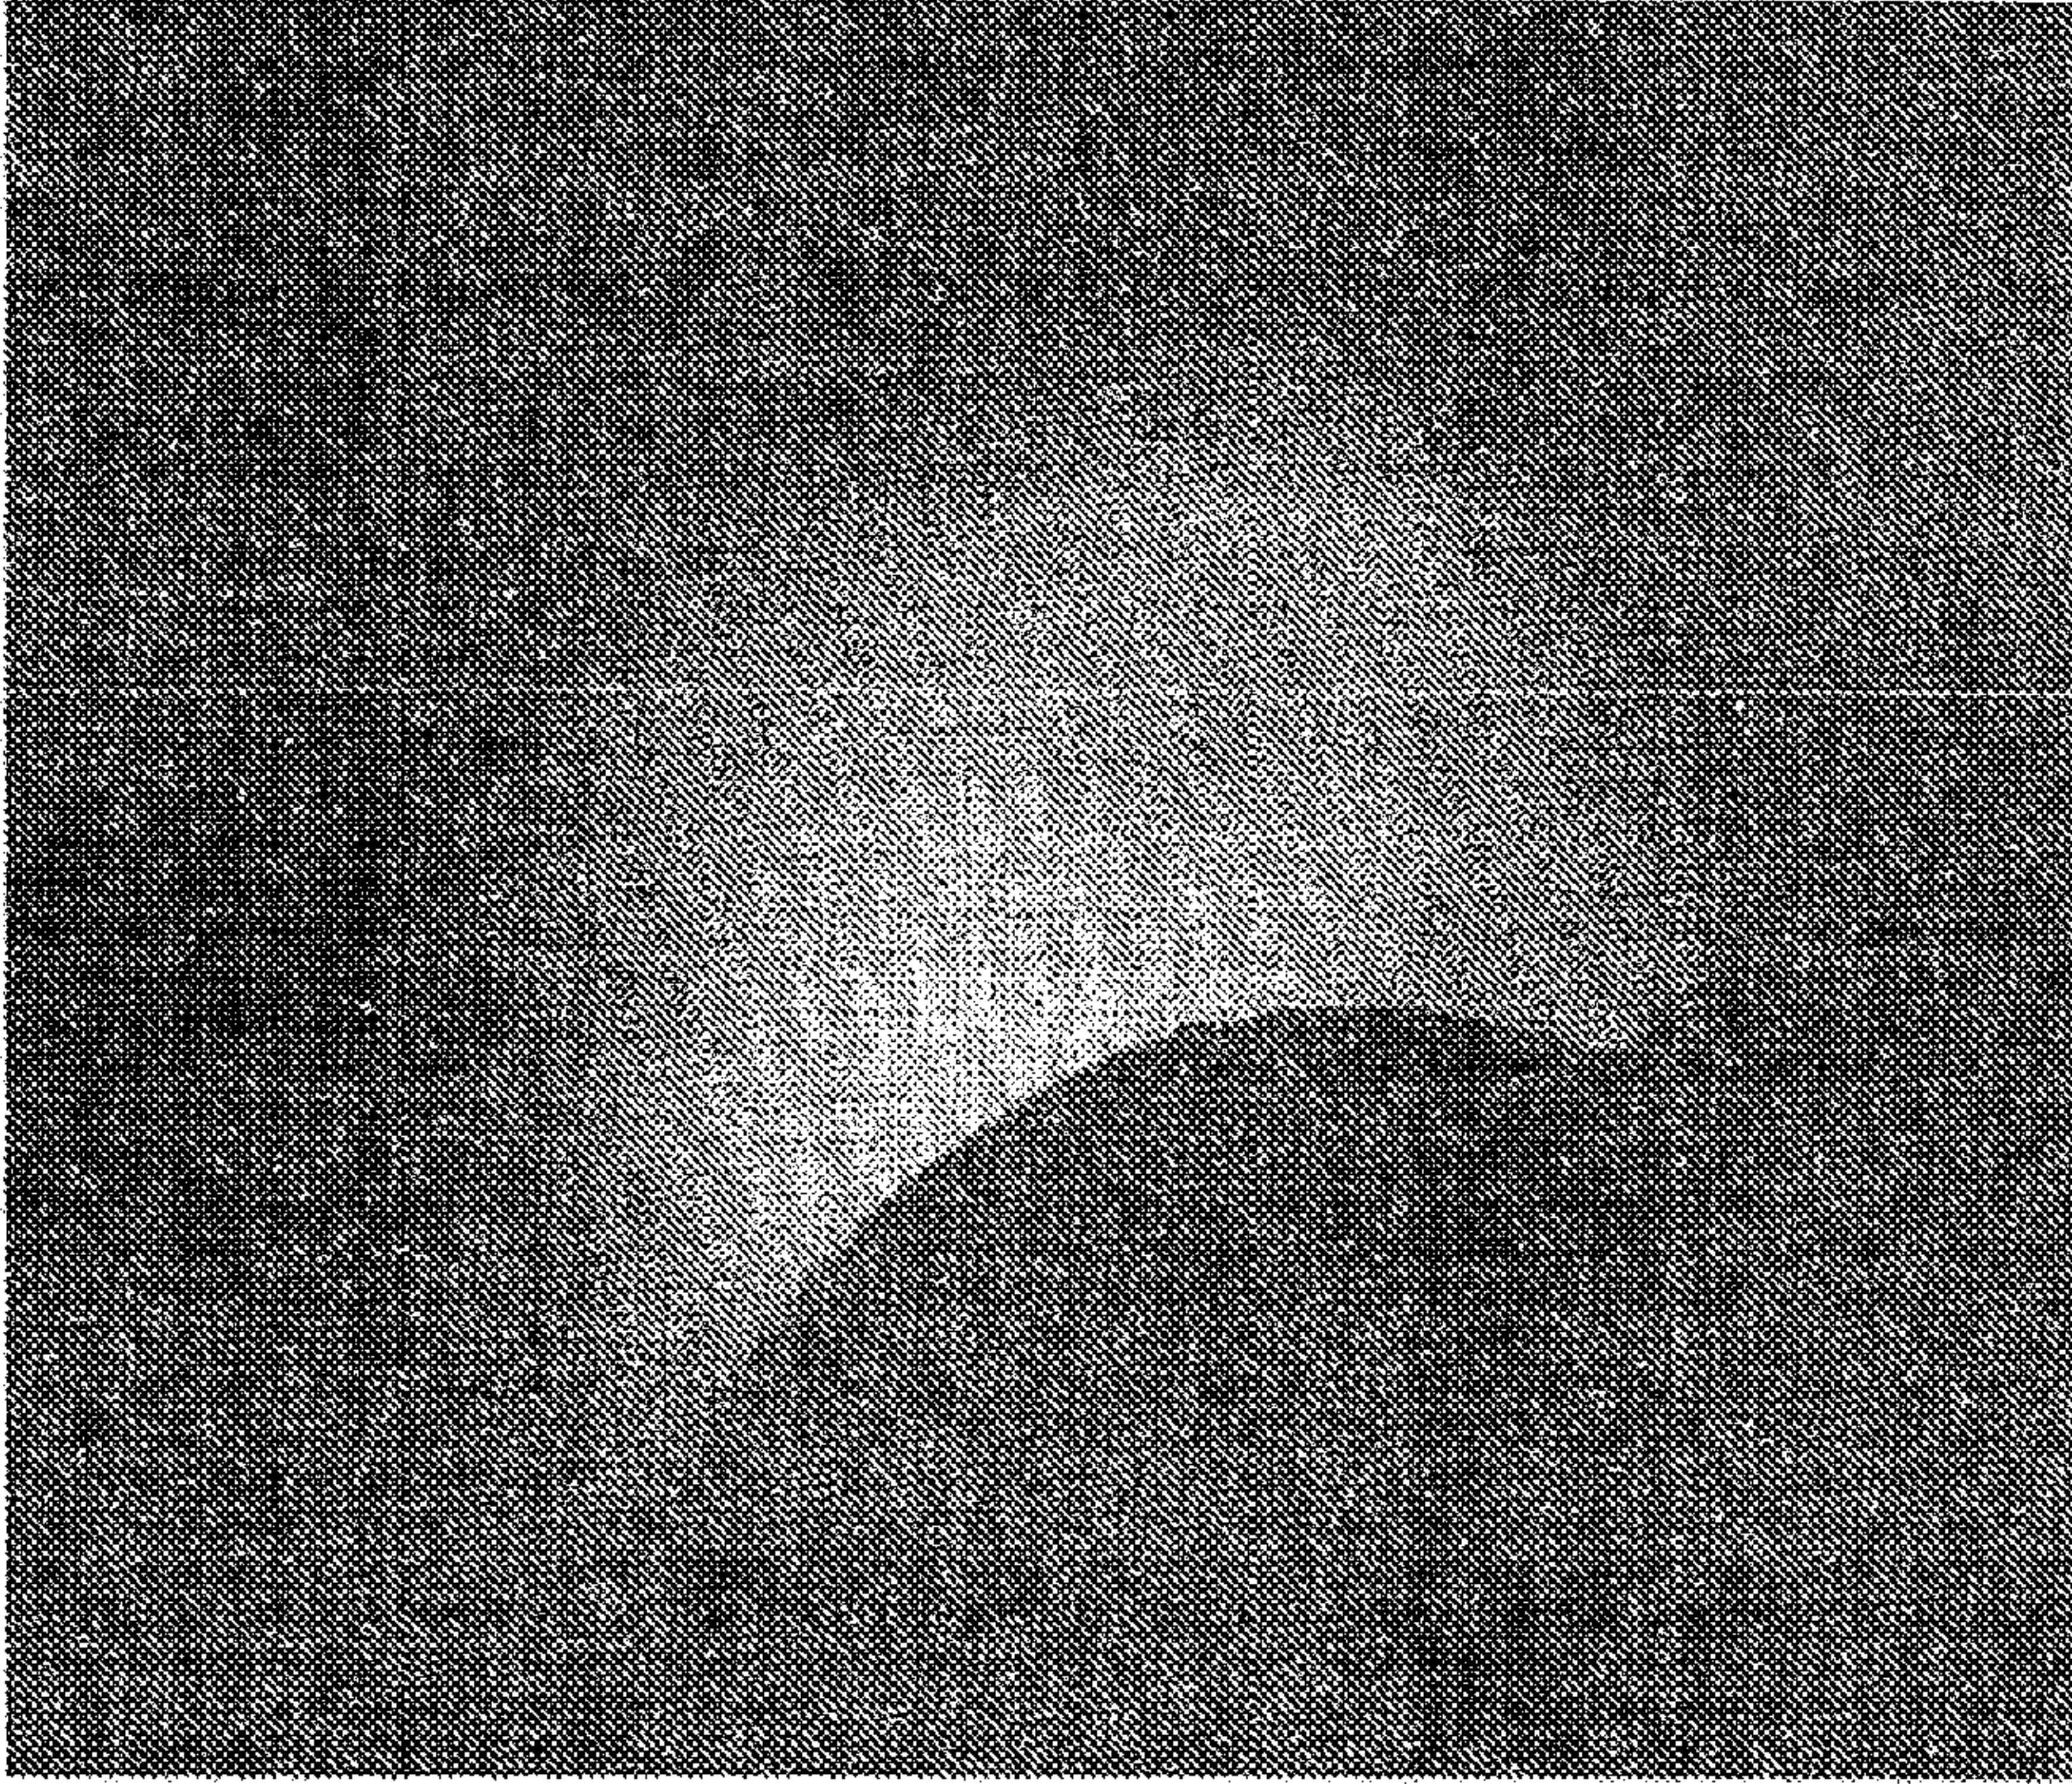


FIG. 18

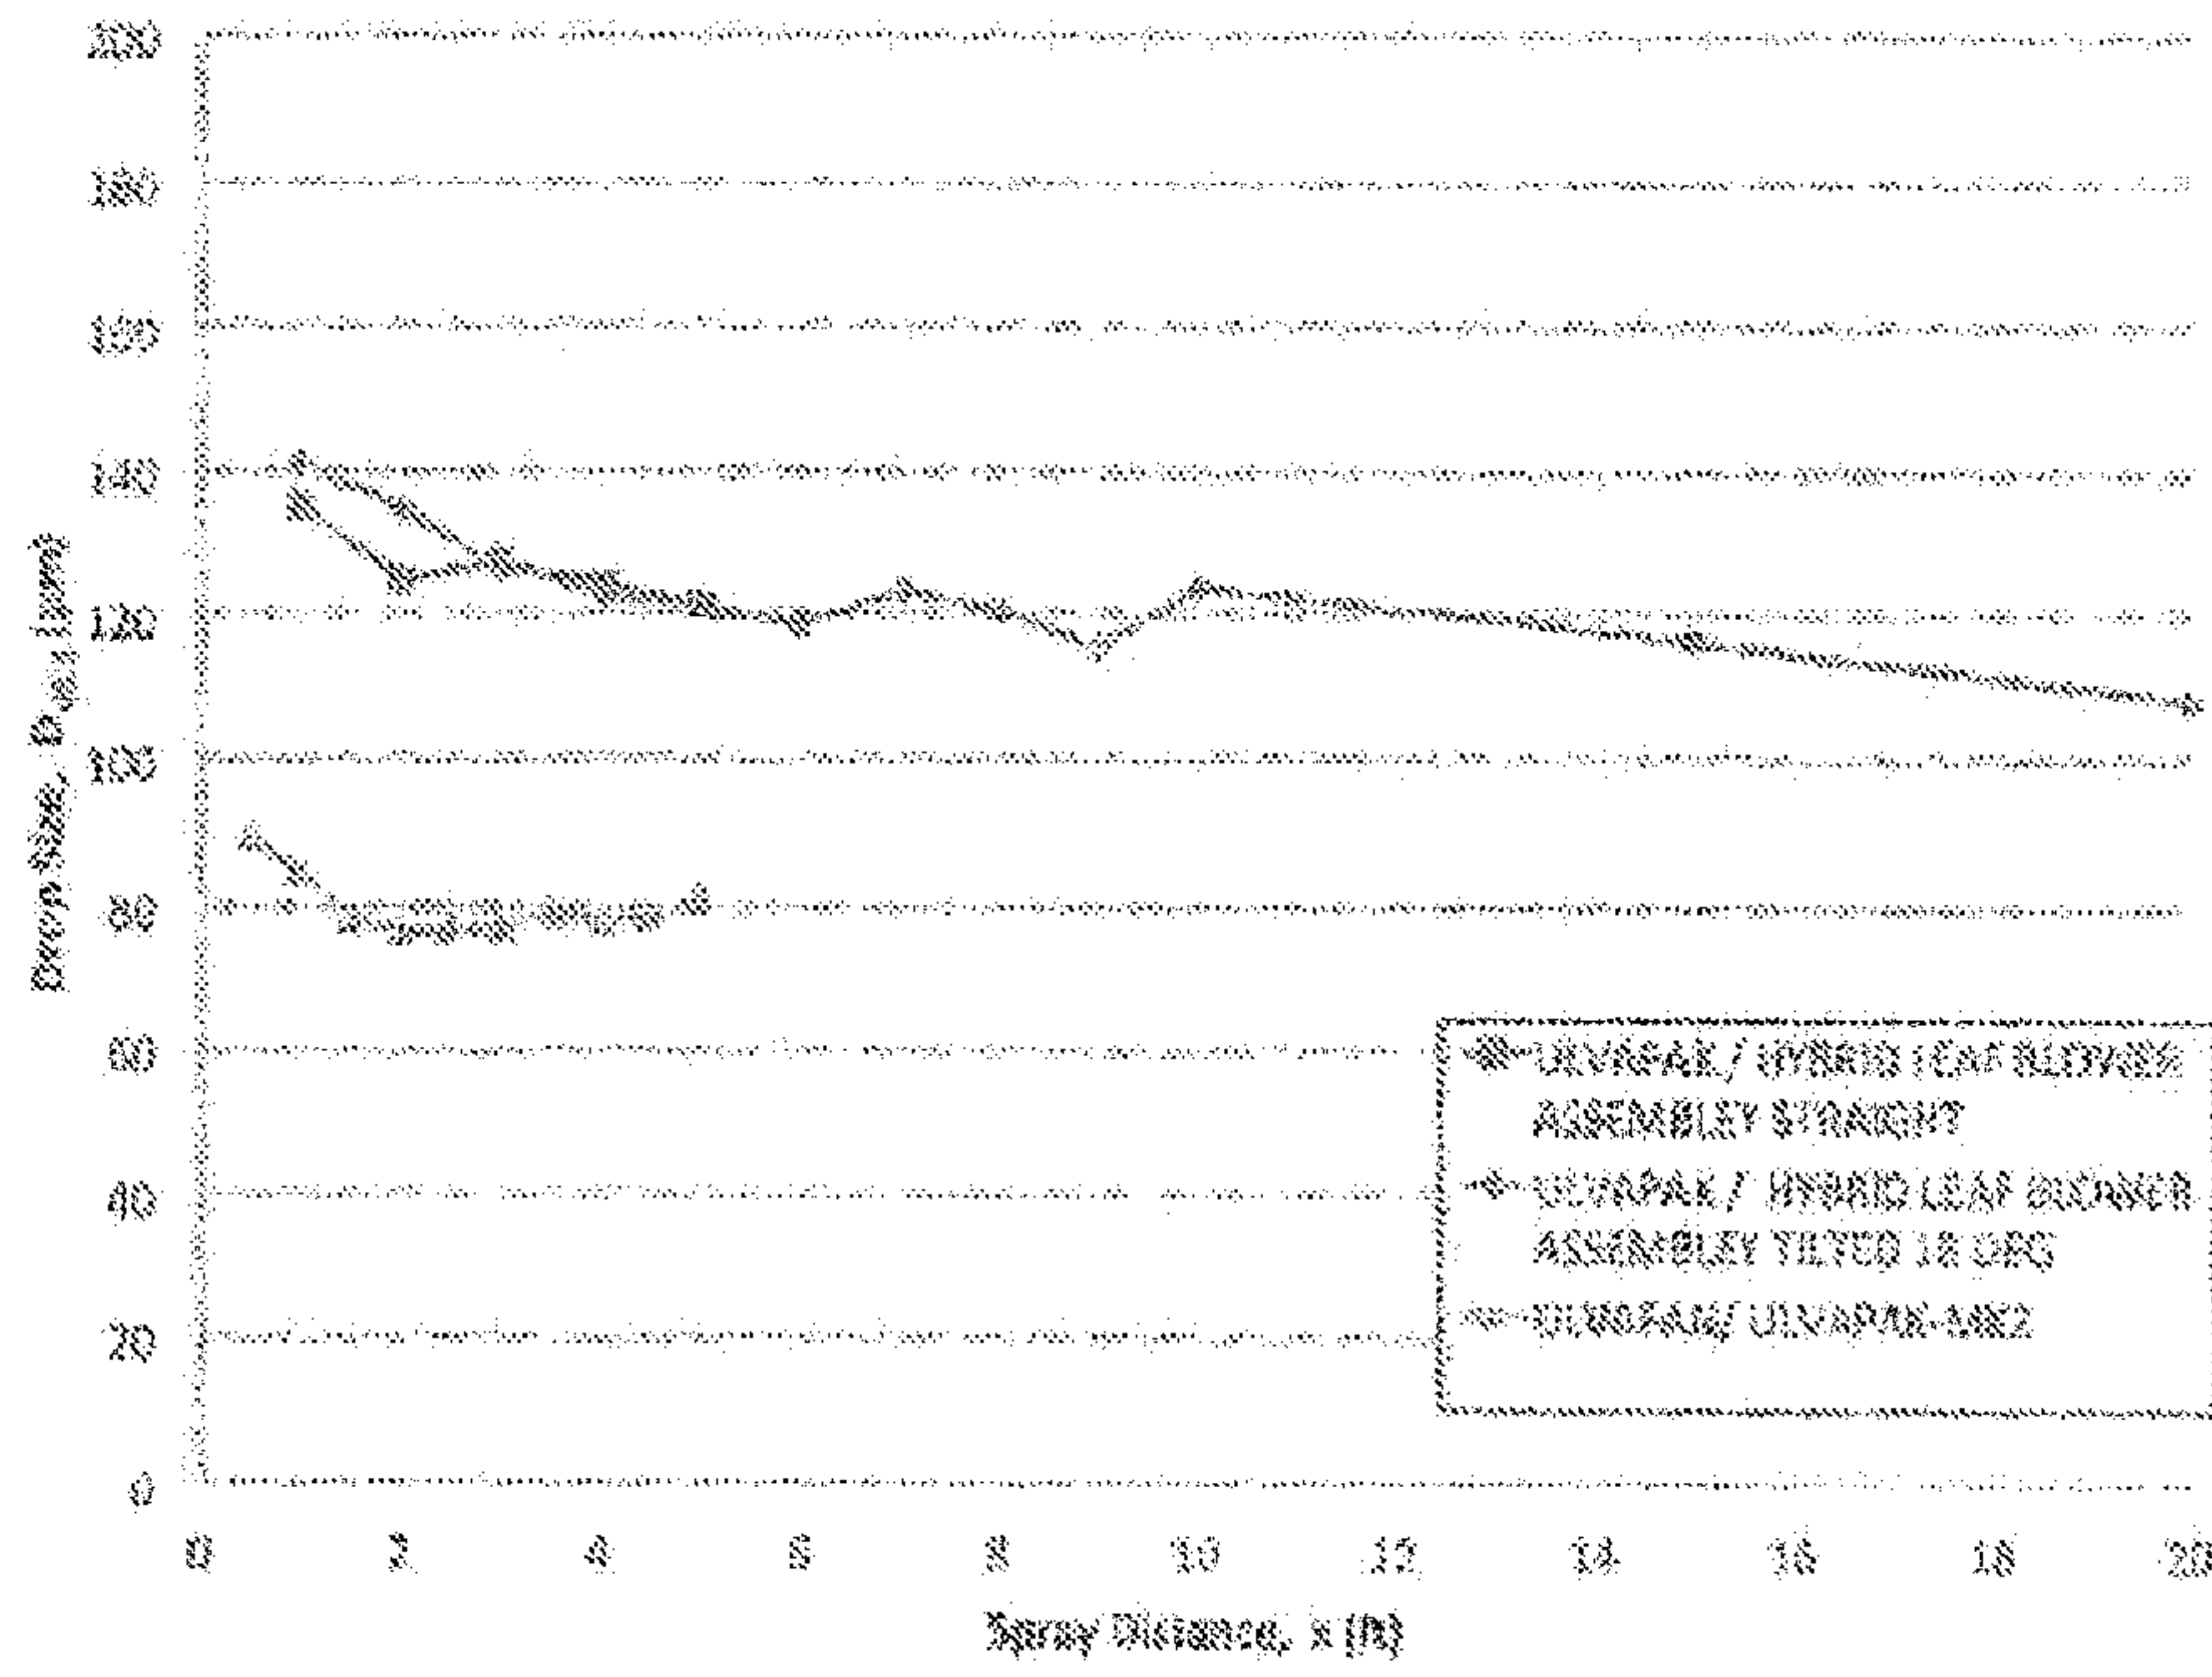


FIG. 19