




Aug. 27, 1929.

C. D. GALLOWAY

1,725,905

PORTABLE STORAGE BATTERY

Filed July 8, 1924

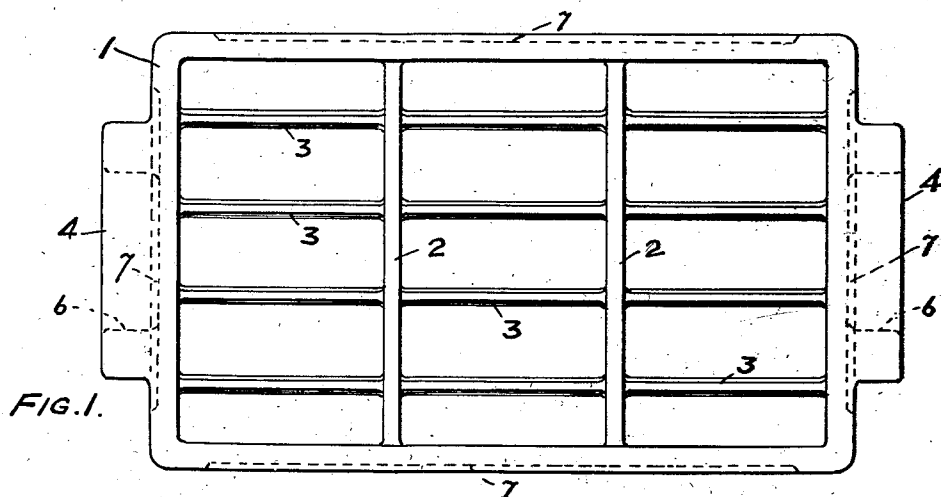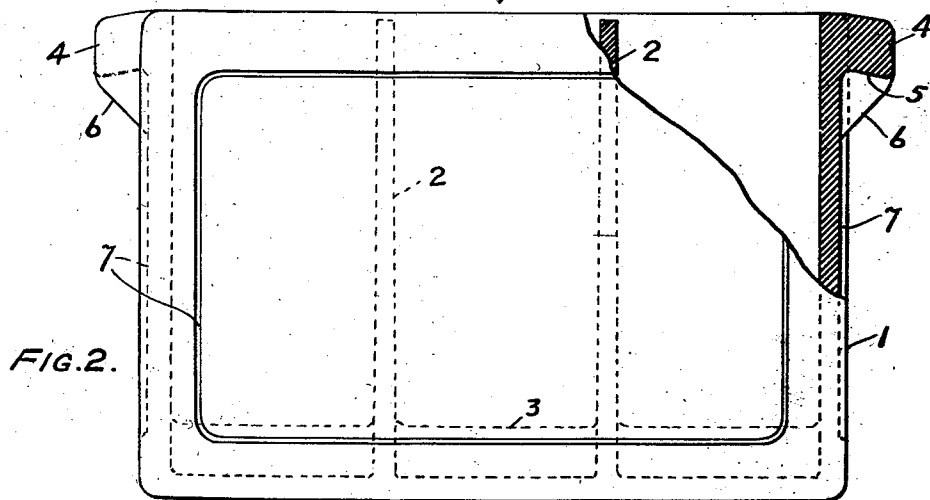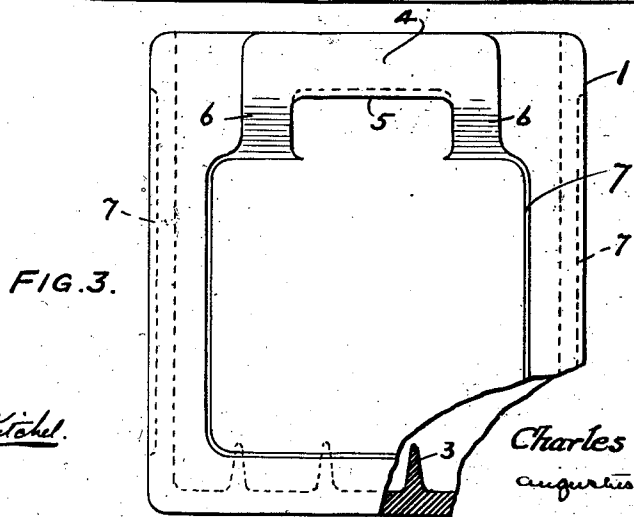

WITNESS:

Robt. R. Kitchel.

INVENTOR

Charles D. Galloway
BY
Augustus B. S. Houghton
ATTORNEY.

UNITED STATES PATENT OFFICE.

CHARLES D. GALLOWAY, OF PHILADELPHIA, PENNSYLVANIA.

PORTABLE STORAGE BATTERY.

Application filed July 8, 1924. Serial No. 724,757.

The principal object of the present invention is to provide a strong and durable storage battery container of hard rubber material consisting of one piece including the
5 necessary partitions, handle and other equipment and presenting an attractive appearance.

The invention will be claimed at the end hereof but will be first described in connection with the embodiment of it chosen for
10 illustration in the accompanying drawing forming part hereof and in which

Figure 1 is a top or plan view.

Fig. 2 is a side view with parts broken
15 away, and

Fig. 3 is an end view with parts broken away.

The storage battery container consists of a unitary self-sustaining open top boxlike
20 structure 1 of hard rubber material, and it is provided with crosswise ranging partitions 2 and lengthwise ranging ribs 3 upstanding from its bottom. The container is provided on the upper portion of the outer
25 faces of its end walls with centrally undercut integral reinforcements 4 providing hand grips 5 and braces 6 at the ends thereof. As shown the central portion 7 of the face of each enlargement is countersunk which

not only lightens the weight of the structure 30 without weakening it but also adds an attractive appearance.

The described element 7 is a depressed panel. 4 indicates a horizontal style ribbon above the depressed portion and a portion 35 of the style projects outwardly beyond the plane of the panel and constitutes a portion of the projecting part of the style.

I claim:

1. A portable storage battery container 40 consisting of a unitary self-sustaining open top boxlike structure of hard rubber material having crosswise ranging ribs upstanding from its bottom and provided below its top edge and on the upper portion 45 of the outer faces of its end walls with centrally undercut integral reinforcements providing hand grips and braces and provided with a countersunk surface beneath the hand grips.

2. In a container, a depressed panel, a horizontal style ribbon above said depressed panel, a portion of said style projecting outwardly beyond the plane thereof, the depth of said depressed panel constituting a portion 55 of said projecting portion of said style.

CHARLES D. GALLOWAY.