



- (51) **International Patent Classification:**
H02K 15/02 (2006.01) *H02K 16/02* (2006.01)
- (21) **International Application Number:**
PCT/CN2012/085044
- (22) **International Filing Date:**
22 November 2012 (22.11.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** EMERSON ELECTRIC CO. [US/US]; 8000 West Florissant Avenue, St. Louis, Missouri 63136 (US).
- (72) **Inventors; and**
- (71) **Applicants (for US only):** CAO, Pingshan [CN/US]; 8000 West Florissant Avenue, St. Louis, Missouri 63136 (US). LI, Xin [CN/US]; 8000 West Florissant Avenue, St. Louis, Missouri 63136 (US). LI, Xin [CN/US]; 8000 West Florissant Avenue, St. Louis, Missouri 63136 (US). ZHUANG, Yan [CN/US]; 8000 West Florissant Avenue, St. Louis, Missouri 63136 (US).
- (74) **Agent:** ZHONGZI LAW OFFICE; 7F, New Era Building, 26 Pinganli Xidajie, Xicheng District, Beijing 100034 (CN).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** ELECTRIC MACHINES, STATORS AND COMPRESSORS AND METHODS OF MANUFACTURING SAME

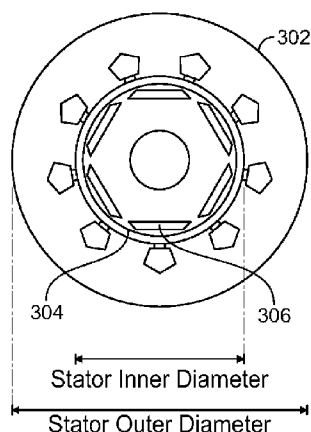


FIG. 3

(57) **Abstract:** A method of manufacturing dynamoelectric machines includes producing a first plurality and a second plurality of stator and rotor laminations using a die press, forming a first rotor from the first plurality of rotor laminations, and forming a second rotor from the second plurality of rotor laminations. The first plurality and the second plurality of stator laminations have the same inner and outer diameters. The first plurality and the second plurality of rotor laminations have the same inner and outer diameters. The first plurality of rotor laminations have a first magnet slot configuration and the second plurality of rotor laminations have a second magnet slot configuration different than the first magnet slot configuration. The first rotor and the second rotor may have the same or different stack heights. Preferably, a ratio of each stator lamination's inner diameter to outer diameter is at least 60%.



ELECTRIC MACHINES, STATORS AND COMPRESSORS AND METHODS OF MANUFACTURING SAME

FIELD

[0001] The present disclosure relates to electric machines, stators and compressors and methods of manufacturing same.

BACKGROUND

[0002] This section provides background information related to the present disclosure which is not necessarily prior art.

[0003] An electric machine commonly includes a stationary component called a stator, and a rotating component called the rotor. The stators and rotors are usually formed by stacking multiple layers of electrical-grade steel, called laminations. These laminations may be produced using a die press of various kinds. For example, a progressive die can be configured to produce stator and rotor laminations for a particular electric machine design. Subsequently, the dies in some or all stages of the progressive die can be changed to configure the progressive die to produce stator and rotor laminations for another electric machine design.

[0004] For various reasons, a ratio of the inner diameter to the outer diameter of known stators for brushless permanent magnet (BPM) motors having interior permanent magnets for hermetic applications is typically about 55% or less, and no greater than %.

SUMMARY

[0005] This section provides a general summary of the disclosure, and is not a comprehensive disclosure of its full scope or all of its features.

[0006] According to one aspect of the present disclosure, a method of manufacturing electric machines is provided. The method includes producing a first plurality of stator and rotor laminations using a die press, producing a second plurality of stator and rotor laminations using the die press, using the first plurality of rotor laminations to form a first rotor, and using the second plurality of rotor laminations to form a second rotor. The first plurality of stator laminations and the second plurality of stator laminations have the same inner diameter and the same outer diameter. The first plurality of rotor laminations and the second plurality of rotor laminations have the same inner diameter and the same outer diameter. The first plurality of rotor laminations have a first magnet slot configuration and the second plurality of rotor laminations have a second magnet slot configuration that is different than the first magnet slot configuration.

[0007] According to another aspect of the present disclosure, a stator for an electric machine includes a stator core having an inner bore defining an inner diameter of the stator core and an outer periphery defining an outer diameter of the stator core. A ratio of the inner diameter of the stator core to the outer diameter of the stator core is greater than or equal to about sixty percent (60%).

[0008] According to yet another aspect of the present disclosure, a stator for an electric machine includes a stator core having an inner bore defining an inner diameter of the stator core and an outer periphery defining an outer diameter of the stator core. A ratio of the inner diameter of the stator core to the outer diameter of the stator core permits the stator to be used with a rotor having a permanent magnet comprising a first magnet material to achieve a first rated full-load efficiency greater than or equal to about 92.5%, and with a rotor having a permanent magnet comprising a second magnet material that is different than the first magnet material to achieve a second rated full-load efficiency greater than or equal to about 92.5%.

[0009] Further aspects and areas of applicability will become apparent from the description provided herein. It should be understood that various aspects of this disclosure may be implemented individually or in combination with one or more other aspects. It should also be understood that the description and specific examples herein are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.

DRAWINGS

[0010] The drawings described herein are for illustrative purposes only of selected embodiments and not all possible implementations, and are not intended to limit the scope of the present disclosure.

[0011] Fig. 1A is a top view of a progressive die illustrating cutting operations in each stage of the die.

[0012] Fig. 1B is a top view of a steel sheet as it progresses through the progressive die of Fig. 1A, illustrating how stator and rotor laminations are progressively formed.

[0013] Fig. 2 is a top view similar to Fig. 1A, illustrating changes in the second and third stages of the progressive die to change magnet slot configurations in the rotor laminations.

[0014] Fig. 3 is a top view of stator and rotor laminations according to one example embodiment of the present disclosure.

[0015] Fig. 4 is a top view of stator and rotor laminations according to another example embodiment of the present disclosure.

[0016] Fig. 5 is a side view of a rotor formed from multiple rotor laminations having the configuration shown in Fig. 3.

[0017] Fig. 6 is a side view of a rotor formed from multiple rotor laminations having the configuration shown in Fig. 4.

[0018] Fig. 7 is a graph illustrating efficiency as a function of stator ID/OD ratio for electric motors employing neodymium and ferrite magnets.

[0019] Fig. 8 is a front sectional view of a compressor including an electric motor according to another example embodiment of this disclosure.

DETAILED DESCRIPTION

[0001] Example embodiments will now be described more fully with reference to the accompanying drawings.

[0002] Example embodiments are provided so that this disclosure will be thorough, and will fully convey the scope to those who are skilled in the art. Numerous specific details are set forth such as examples of specific components, devices, and methods, to provide a thorough understanding of embodiments of the present disclosure. It will be apparent to those skilled in the art that specific details need not be employed, that example embodiments may be embodied in many different forms and that neither should be construed to limit the scope of the disclosure. In some example embodiments, well-known processes, well-known device structures, and well-known technologies are not described in detail.

[0003] The terminology used herein is for the purpose of describing particular example embodiments only and is not intended to be limiting. As used herein, the singular forms "a," "an," and "the" may be intended to include the plural forms as well, unless the context clearly indicates otherwise. The terms "comprises," "comprising," "including," and "having," are inclusive and therefore specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. The method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed.

[0004] When an element or layer is referred to as being "on," "engaged to," "connected to," or "coupled to" another element or layer, it may be directly on, engaged, connected or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on," "directly engaged to," "directly connected to," or "directly coupled to" another element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., "between" versus "directly between," "adjacent" versus "directly adjacent," etc.). As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0005] Although the terms first, second, third, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer or section from another region, layer or section. Terms such as "first," "second," and other numerical terms when used herein do not imply a sequence or order unless clearly indicated by the context. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the example embodiments.

[0006] Spatially relative terms, such as "inner," "outer," "beneath," "below," "lower," "above," "upper," and the like, may be used herein for ease of

description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. Spatially relative terms may be intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the example term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0007] A method of manufacturing dynamoelectric machines (including electric motors and generators) according to one example embodiment of the present disclosure will now be described with reference to Figs. 1-6. In this particular example, stator and rotor laminations for electric machines are produced by feeding a sheet of electrical-grade steel (or another suitable material) through a progressive die having multiple cutting stages. This is illustrated generally in Figs. 1A and 1B for a particular electric machine design. Fig. 1A illustrates the cutting operations in each stage of the progressive die, and Fig. 1B illustrates how the stator and rotor laminations are progressively formed.

[0008] As shown in Fig. 1A, the inner bore of each rotor lamination is stamped in the first stage of the progressive die (on the left side of Fig. 1A). In the second stage, three magnet slots are stamped around the inner bore that was formed in the first stage. In the third stage of the progressive die, three

additional magnet slots are formed. In the fourth stage, an additional cut is made to define the outer perimeter of the rotor lamination. At this point in the process, formation of the rotor lamination is complete, as shown in Fig. 1B, and the rotor lamination is separated from the steel sheet. In the fifth stage, additional material is removed from the steel sheet to define the inner bore, slots and teeth of a stator lamination. In the sixth stage, an additional cut is made to define the outer perimeter of the stator lamination. At this point in the process, formation of the stator lamination is complete, as shown in Fig. 1B, and the stator lamination is separated from the steel sheet.

[0009] For illustrative purposes, the complete rotor lamination is also shown in the fifth and sixth stages in Fig. 1B. Additionally, the direction of the workpiece (e.g., the steel sheet) is indicated by the arrow (i.e., left to right) in Fig. 1B.

[0010] By changing the dies in the second and third stages of the progressive die (i.e., the magnet slot forming dies), the magnet slot configuration of the rotor laminations can be changed. This is shown generally in Fig. 2. The top portion of Fig. 2 is the same as Fig. 1A, and illustrates the cutting operations in each stage of the progressive die for a particular electric machine design. The bottom portion of Fig. 2 illustrates the cutting operations in each stage of the progressive die -- after the dies in the second and third stages are changed -- for another electric machine design.

[0011] Fig. 3 illustrates an example stator lamination 302 and an example rotor lamination 304 produced by the progressive die configuration

shown in the top portion of Fig. 2 (and Fig. 1A). Similarly, Fig. 4 illustrates an example stator lamination 402 and an example rotor lamination 404 produced by the progressive die configuration shown in the bottom portion of Fig. 2. The stator laminations 302, 402 shown in Figs. 3 and 4 have the same inner diameter, the same outer diameter, and the same overall configuration. The rotor laminations 304, 404 also have the same inner diameter and the same outer diameter as one another.

[0012] Fig. 5 illustrates a rotor 500 formed by stacking multiple rotor laminations 304 of Fig. 3. Similarly, Fig. 6 illustrates a rotor 600 formed by stacking multiple rotor laminations 404 of Fig. 4.

[0013] Referring again to Figs. 3 and 4, the only differences in this example between the rotor lamination 304 of Fig. 3 and the rotor lamination 404 of Fig. 4 are the magnet slot configurations. Because the rotor laminations 304, 404 define -- via the magnet slots -- the same number of poles and the same pole spacing (i.e., a total of six poles spaced sixty degrees apart from one another), they can be used with identical stator laminations (i.e., stator lamination 302 and stator lamination 402). Alternatively, if the rotor laminations 304, 404 have different numbers of poles or different pole spacings, it may be necessary or desirable to change the die in the fifth stage of the exemplary progressive die, so the stator laminations 302, 402 have tooth and slot configurations that are compatible with the poles and pole spacings defined by their associated rotor laminations. In that event, the tooth and slot configuration of stator lamination 302 will be different than the tooth and slot configuration of stator lamination 402.

[0014] The rotor lamination 304 of Fig. 3 has six trapezoidal magnet slots 306. In contrast, the rotor lamination 404 of Fig. 4 has six arc-shaped magnet slots 406. The area of the arc-shaped magnet slots 406 in Fig. 4 is greater than the area of the trapezoidal magnet slots 306 in Fig. 3. Therefore, the arc-shaped magnet slots 406 can hold more magnet material than the trapezoidal magnet slots 306. Consequently, the rotor lamination 404 (and rotor 600) may be used with weaker magnets (e.g., ferrite magnets) than the rotor lamination 304 (and rotor 500), which may be used with stronger magnets, e.g., neodymium magnets.

[0015] The additional magnet material accommodated by the magnet slot configuration of rotor lamination 404 (as compared to rotor lamination 304) may completely offset the effect of using weaker magnets. In that event, the stack heights of the rotors 500, 600 may be the same, with the rotors 500, 600 producing the same level of magnetic flux. Alternatively, if the additional magnet material accommodated by the rotor lamination 404 does not completely offset the effect of using weaker magnets, the stack height of rotor 600 may be greater than the stack height of rotor 500, as shown in Figs. 5 and 6, so the rotors 500, 600 produce the same level of magnetic flux, and can be used in motors having the same or equivalent rated horsepower, despite using different magnet materials.

[0016] Alternatively, if the stack heights and magnetic flux of the rotors 500, 600 are the same, the rotors 500, 600 may be interchangeable with one another, and may be compatible with the same stators (i.e., formed from the

stator laminations 302 and/or 402 shown in Figs. 3 and 4) for use in motors having the same or equivalent rated horsepower. In that event, the choice between rotor 500 and rotor 600 for a given application may depend on the current price and/or availability of the magnet material(s) employed in rotor 500 and the magnet material(s) employed in rotor 600.

[0017] As apparent to those skilled in the art, the teachings of this disclosure are not limited to a particular number, spacing or orientation of rotor poles, stator slots or stator teeth, and may be applied to, for example, rotors having any even number of poles including four poles, six poles, twelve poles, etc. Similarly, the present teachings are not limited to any particular lamination configurations, pole/slot configurations, magnet slot configurations or magnet materials, and can be implemented using a wide variety of magnet shapes and materials, and combinations thereof (i.e., rotors employing multiple magnet slot shapes and/or multiple magnet materials).

[0018] Because the inner diameter and outer diameter of the stator laminations 302, 304 are the same, and the inner diameter and the outer diameter of the rotor laminations 304, 404 are the same, a variety of electric machine designs can be produced without changing all dies in the press. In the example shown in Fig. 2, the dies in only two stages of the progressive die (i.e., the second and third stages) may be changed to convert the press from producing rotor lamination 304 to rotor lamination 404, or vice versa. Further, if the rotor laminations 304, 404 have a different number of poles or pole spacings, only one additional die (i.e., in the fifth stage) may be changed so the stator

laminations 302, 402 are compatible with the rotor laminations 304, 404, respectively. In other embodiments, only one die may need to be changed (i.e., in only one stage of a progressive die, or in the only stage of a “single-out” die press) to convert the die press from one machine design to another.

[0019] Fig. 7 illustrates the performance (i.e., efficiency) of two electric motor designs relative to their stator’s inner diameter to outer diameter ratios. One of the motor designs uses the stator and rotor configurations shown in Fig. 3 with neodymium magnets, and the other motor design uses the stator and rotor configurations shown in Fig. 4 with ferrite magnets. As shown in Fig. 7, the efficiency of the neodymium motor decreases as its stator ID/OD ratio increases. Conversely, the efficiency of the ferrite motor increases as its stator ID/OD ratio increases.

[0020] Many machine applications demand efficiencies of ninety percent (90%) or greater. Accordingly, the ID/OD ratio of the various stators described herein is preferably at least sixty percent (60%) so a given stator can be used with, e.g., a rotor employing neodymium magnets or a rotor employing ferrite magnets and, in both cases, achieve a rated full-load efficiency of at least 92.5%. More preferably, the stator ID/OD is greater than or equal to about 62% and, most preferably, is greater than or equal to about 65%.

[0021] The teachings herein may be applied to a wide variety of dynamoelectric machines including brushless permanent magnet (BPM) motors having surface mounted and/or interior permanent magnets, and fixed or variable speed(s). One preferred application is to a hermetic motor. For example, Fig. 8

illustrates a refrigerant compressor 800 having an electric motor 802 including a stator 804 and a rotor 806. Any of the various motors, stators, and rotors described herein may be used as the electric motor 802, stator 804 or rotor 806 in the compressor 800 of Fig. 8.

[0022] The foregoing description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosure. Individual elements or features of a particular embodiment are generally not limited to that particular embodiment, but, where applicable, are interchangeable and can be used in a selected embodiment, even if not specifically shown or described. The same may also be varied in many ways. Such variations are not to be regarded as a departure from the disclosure, and all such modifications are intended to be included within the scope of the disclosure.

CLAIMS

1. A method of manufacturing electric machines, the method comprising:
producing a first plurality of stator and rotor laminations using a die press,
the first plurality of rotor laminations having a first magnet slot configuration;
producing a second plurality of stator and rotor laminations using the die press, the second plurality of stator laminations having the same inner diameter and the same outer diameter as the first plurality of stator laminations, the second plurality of rotor laminations having the same inner diameter and the same outer diameter as the first plurality of rotor laminations, the second plurality of rotor laminations having a second magnet slot configuration that is different than the first magnet slot configuration;
using the first plurality of rotor laminations to form a first rotor; and
using the second plurality of rotor laminations to form a second rotor.
2. The method of claim 1 wherein the first rotor and the second rotor have different stack heights.
3. The method of claim 1 or 2 further comprising changing only magnet slot forming die(s) in the die press between producing the first plurality of stator and rotor laminations and producing the second plurality of stator and rotor laminations.

4. The method of any preceding claim wherein the first magnet slot configuration defines the same number of poles and same pole spacing as the second magnet slot configuration, and wherein the first plurality of stator laminations have substantially the same configuration as the second plurality of stator laminations.

5. The method of any preceding claim wherein a ratio of the inner diameter of the stator laminations to the outer diameter of the stator laminations is greater than or equal to about sixty percent (60%).

6. The method of any preceding claim wherein the first rotor includes a permanent magnet comprising a first magnet material, and the second rotor includes a permanent magnet comprising a second magnet material that is different than the first magnet material.

7. The method of claim 6 wherein the first magnet material is neodymium and the second magnet material is ferrite.

8. A stator for an electric machine, the stator comprising:
a stator core;
the stator core having an inner bore defining an inner diameter of the stator core;

the stator core having an outer periphery defining an outer diameter of the stator core;

wherein a ratio of the inner diameter of the stator core to the outer diameter of the stator core is greater than or equal to about sixty percent (60%).

9. The stator of claim 8 wherein the ratio of the inner diameter of the stator core to the outer diameter of the stator core is greater than or equal to about sixty-two percent (62%).

10. The stator of claim 8 wherein the ratio of the inner diameter of the stator core to the outer diameter of the stator core is greater than or equal to about sixty-five percent (65%).

11. The stator of any preceding claim wherein the stator is operable with a neodymium magnet rotor to achieve a rated full-load efficiency greater than or equal to about 92.5%, and wherein the stator is operable with a ferrite magnet rotor to achieve a rated full-load efficiency greater than or equal to about 92.5%.

12. An electric machine comprising a rotor and the stator of any preceding claim, the rotor including one or more permanent magnets comprising ferrite.

13. An electric machine comprising a rotor and the stator of any preceding claim, the rotor including one or more permanent magnets comprising neodymium.

14. The electric machine of claim 12 or 13 wherein the rotor has at least four poles.

15. The electric machine of claim 12 or 13 wherein the rotor has at least six poles.

16. The electric machine of any of claims 12-15 wherein a rated full-load efficiency of the machine is greater than or equal to about 92.5%.

17. A compressor comprising the electric machine of any of claims 12-16.

18. A stator for an electric machine, the stator comprising:

a stator core;

the stator core having an inner bore defining an inner diameter of the stator core;

the stator core having an outer periphery defining an outer diameter of the stator core;

wherein a ratio of the inner diameter of the stator core to the outer diameter of the stator core permits the stator to be used with a rotor having a

permanent magnet comprising a first magnet material to achieve a first rated full-load efficiency greater than or equal to about 92.5%, and with a rotor having a permanent magnet comprising a second magnet material that is different than the first magnet material to achieve a second rated full-load efficiency greater than or equal to about 92.5%.

19. The stator of claim 18 wherein the first magnet material is ferrite and the second magnet material is neodymium.

20. The stator of claim 18 or 19 wherein the first rated full-load efficiency and the second rated full-load efficiency are substantially the same.

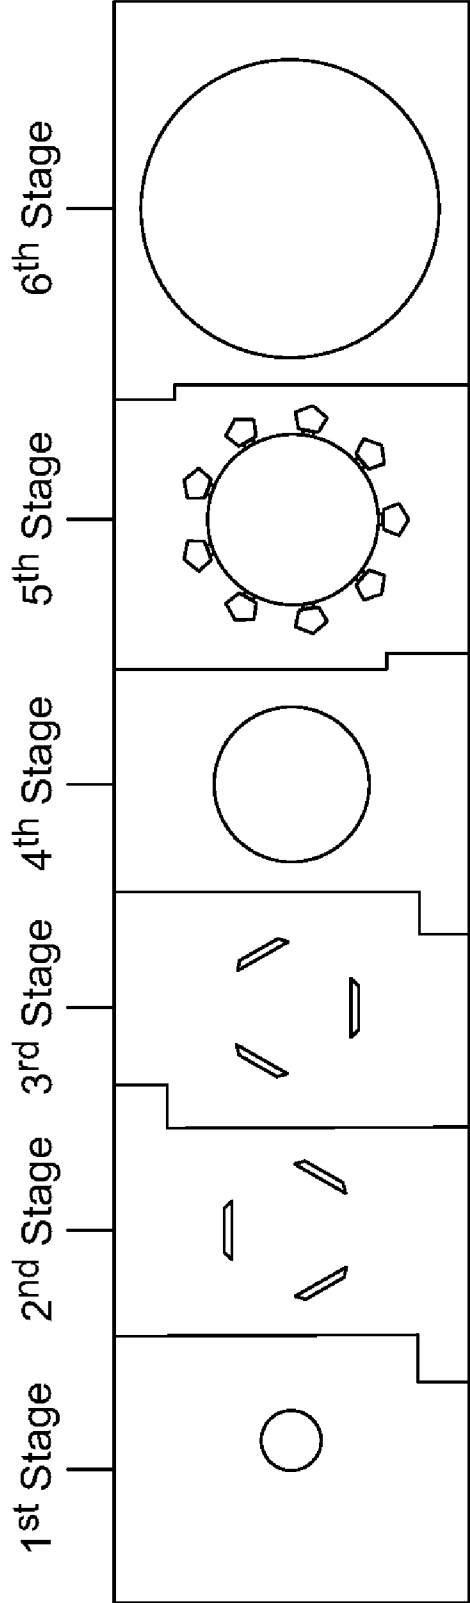


FIG. 1A

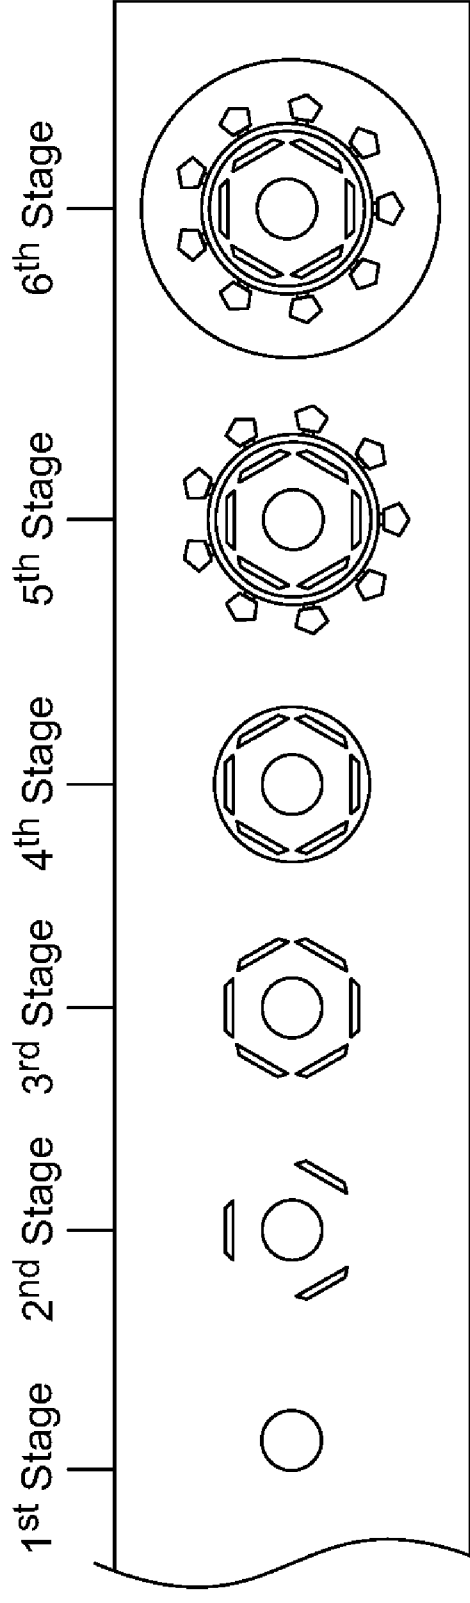
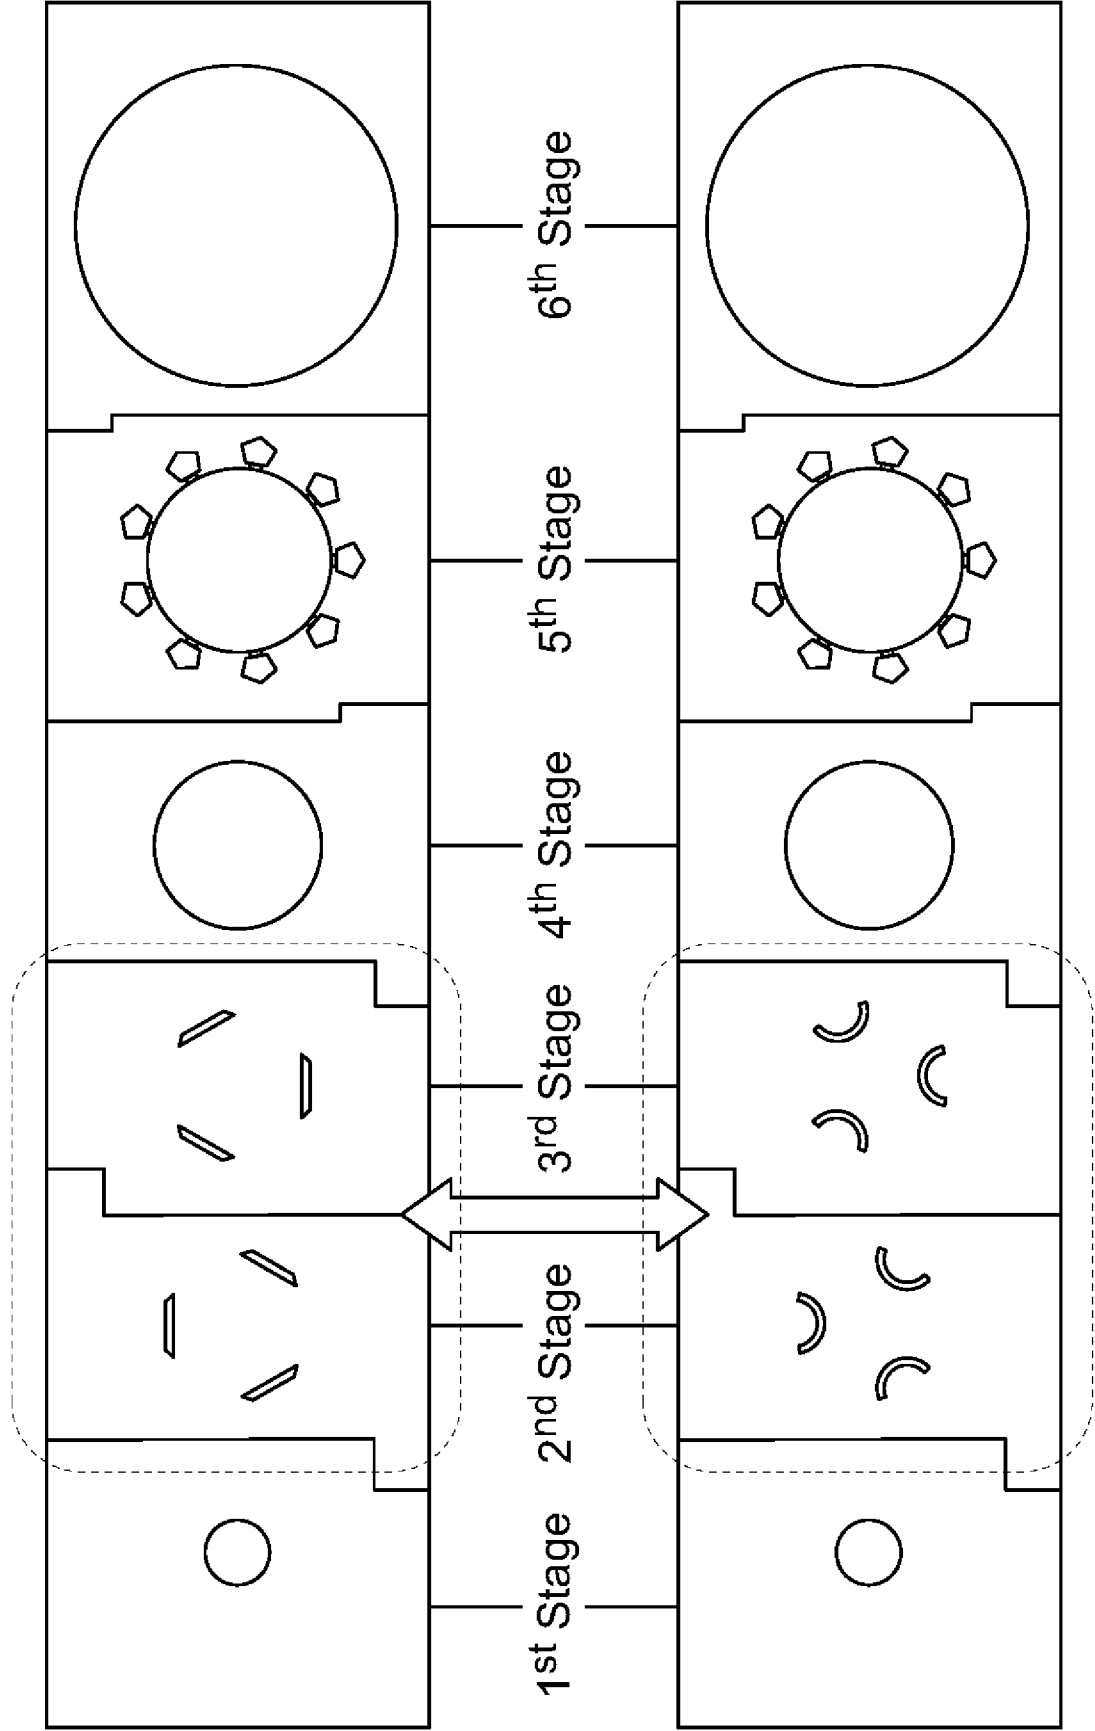


FIG. 1B



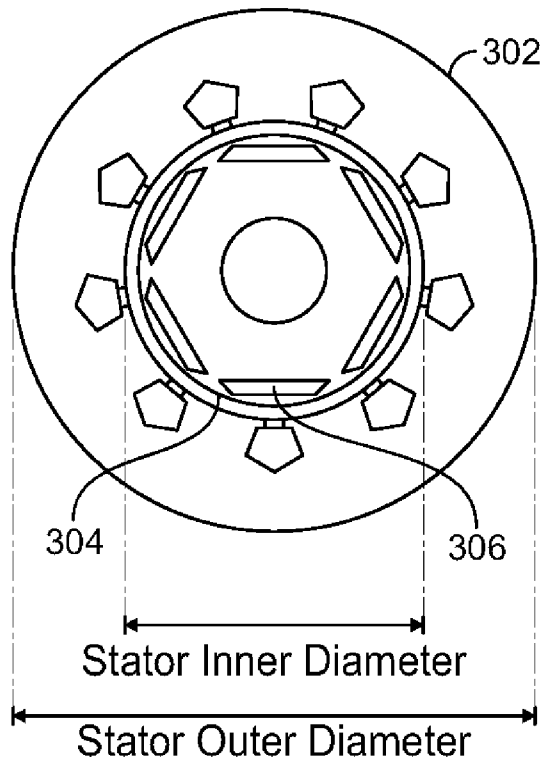


FIG. 3

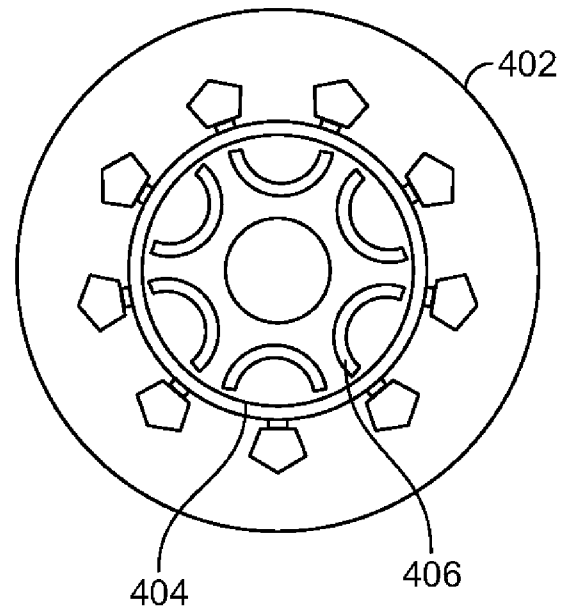


FIG. 4

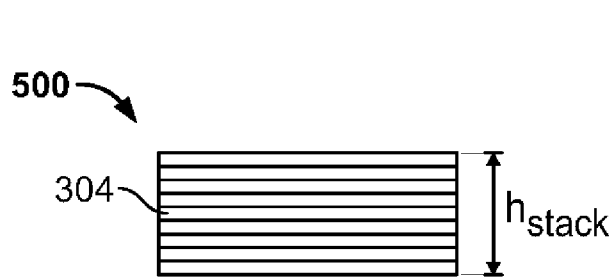


FIG. 5

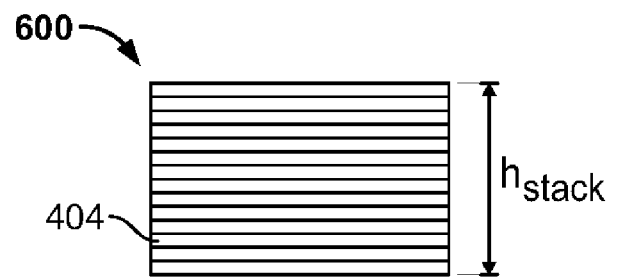


FIG. 6

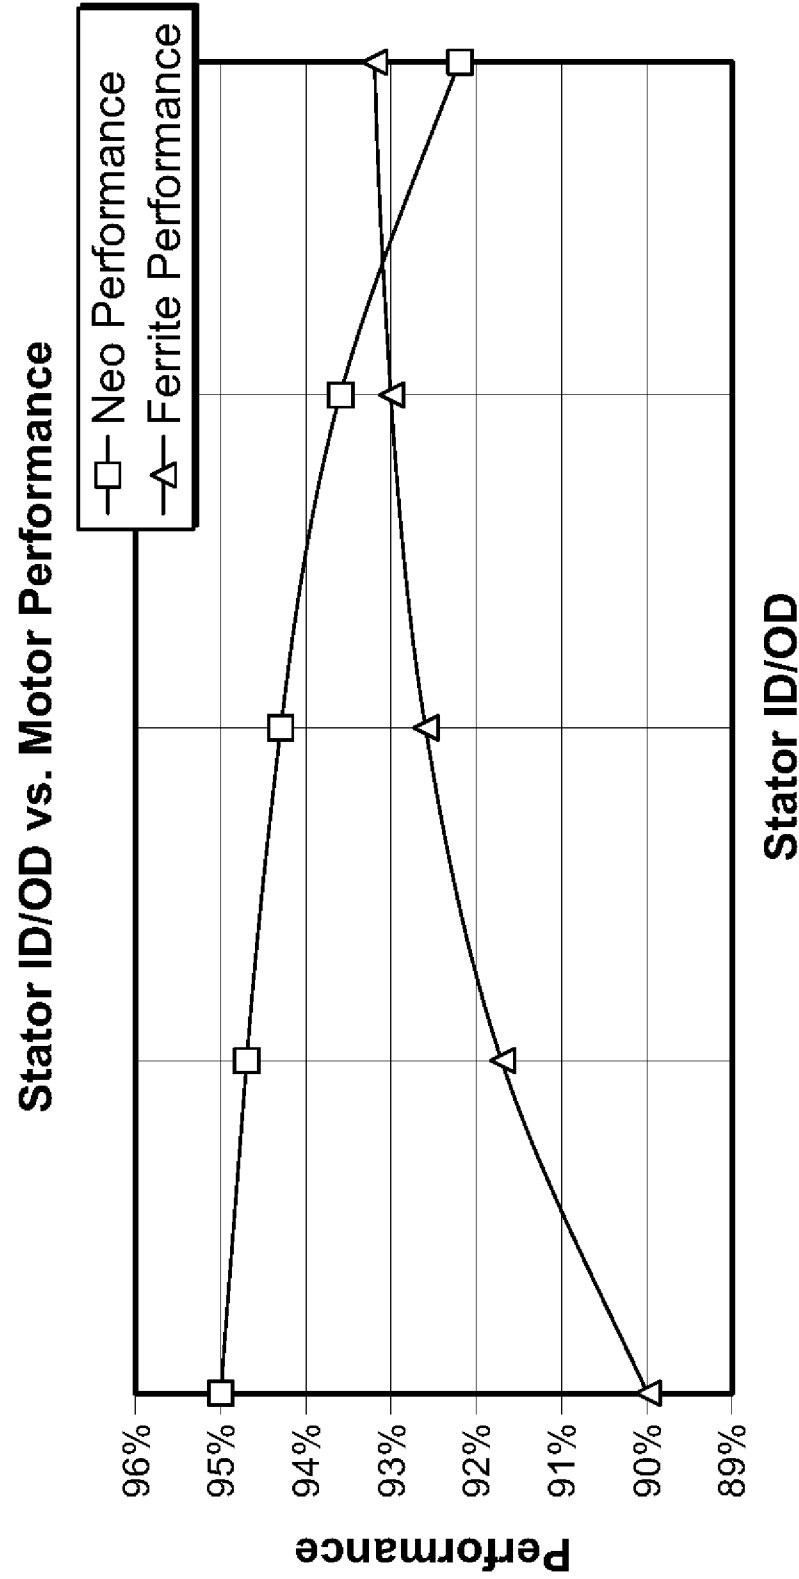


FIG. 7

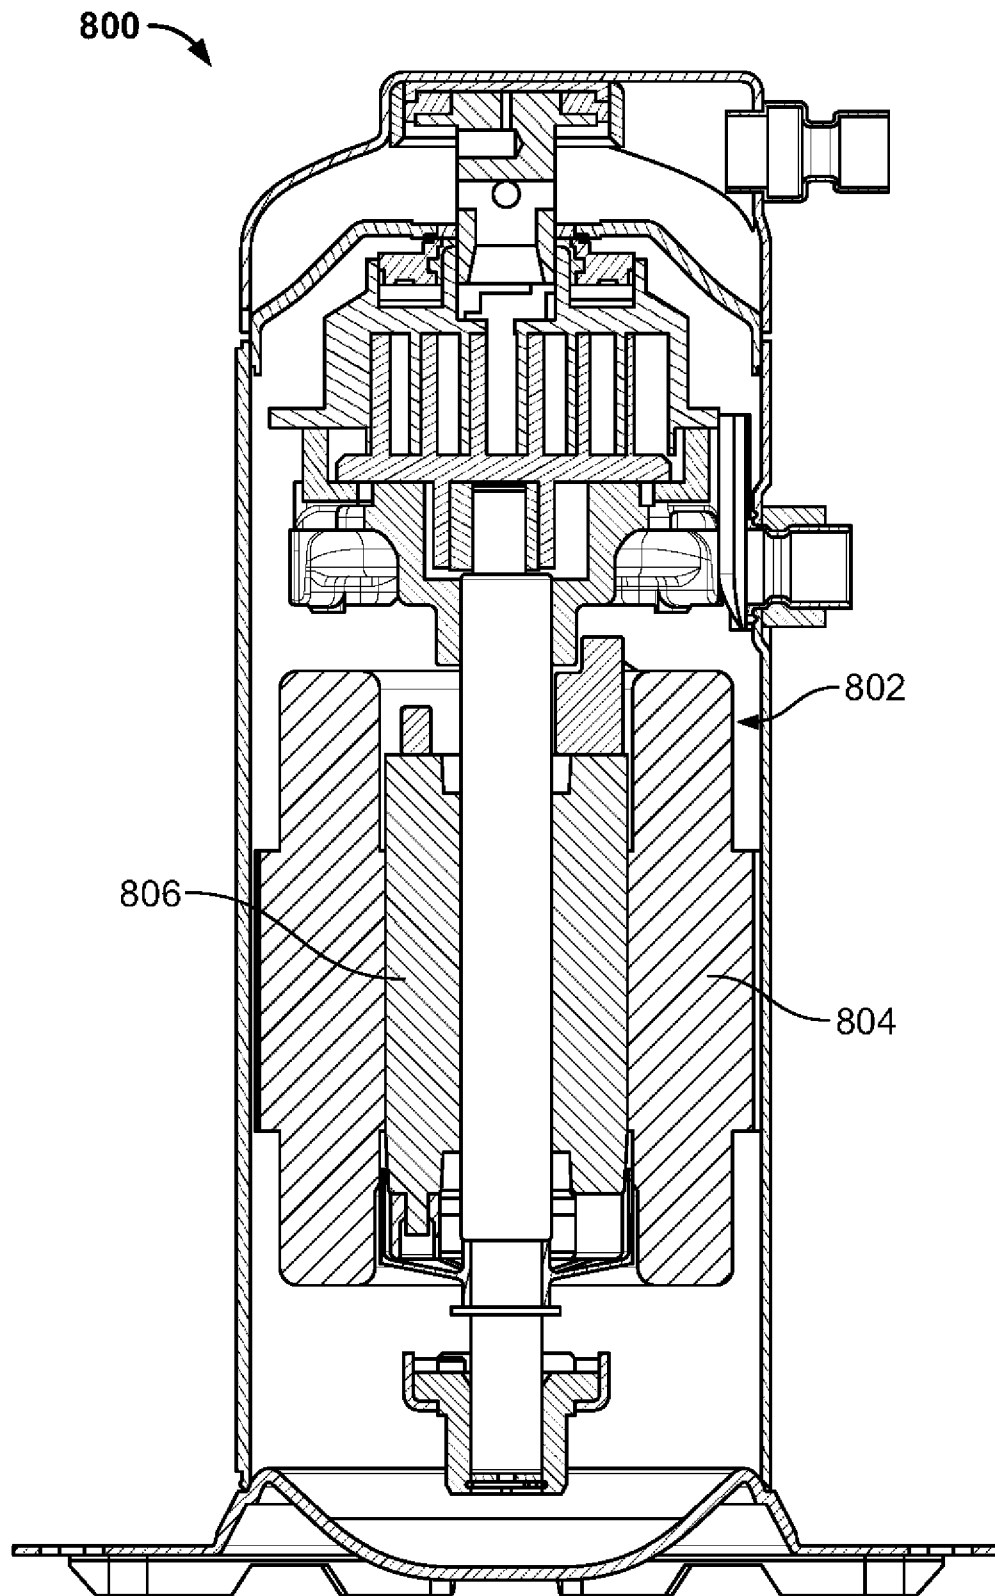


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/085044

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CNPAT, CNKI: stator, rotor, lamination?, magnet, slot, neodymium, ferrite, diameter, ratio, efficiency, second

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/106262 A1 (EMERSON ELECTRIC CO.) 4 September 2008 (04.09.2008), claim 1, paragraph [0023]	8-15,17-20
Y		16
Y	CN 2715415 Y (LIU,Hongyu, et al.) 03 August 2005(03.08.2005), page 4,line 4	16
A	CN 101192766 A (INDUSTRIAL TECHNOLOGY RESEARCH INSTITUTE) 4 June 2008 (04.06.2008), claims 1-5, figures 5A-6	1-7
A	CN 202424345 U (BEIJING MINGCHENG TECHNOLOGY DEV CO. LTD.) 05 September 2012(05.09.2012) , the abstract	18-20

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&”document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 13 August 2013 (13.08.2013)	Date of mailing of the international search report 29 Aug. 2013 (29.08.2013)
Name and mailing address of the ISA/CN The State Intellectual Property Office, the P.R.China 6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China 100088 Facsimile No. 86-10-62019451	Authorized officer LIU,Xiuyan Telephone No. (86-10)62414238

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/085044

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0119839 A1 (AMERICAN HOME PRODUCTS CORPORATION) 22 March 2001 (22.03.2001), the whole document	1-7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/085044

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Claim 1 and claims 8,18

Claim 1 relates to a method of manufacturing electric machines, claims 8 and 18 relate to a stator's structure. No same special technical features exist between claim 1 and claim 8,18. The said claims are lack of unity of invention.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2012/085044

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
WO 2008/106262 A1	04.09.2008	KR 20090115169 A	04.11.2009
		CN 101622390 A	06.01.2010
		US 7692350 B2	06.04.2010
		JP 2010520734 A	10.06.2010
		KR 110001033 B1	30.12.2011
		CN 101622390 B	29.08.2012
		US 2008203846 A1	28.08.2008
CN 2715415 Y	03.08.2005	None	
CN 101192766 A	04.06.2008	None	
CN 202424345 U	05.09.2012	None	
WO 0119839 A1	22.03.2001	AU 7128400 A	17.04.2001
		US 6380166 B1	30.04.2002
		EP 1212335 A1	12.06.2002
		BR 0013943 A	14.05.2002
		KR 20020027643 A	13.04.2002
		US 2002142971 A1	03.10.2002
		JP 2003509435 A	11.03.2003
		CN 1382151 A	27.11.2002
		HU 0202679 A2	28.01.2003
		US 6537971 B2	25.03.2003
		AU 764436 B	21.08.2003
		ZA 200201876 A	27.08.2003
		MX PA02002654 A	01.08.2002
		EP 1212335 B1	18.01.2006
		DE 60025630 E	06.04.2006
		MX 233923 B	24.01.2006
		ES 2254215 T3	16.06.2006
		DE 60025630 T2	10.08.2006
		NO 322250 B1	04.09.2006
		IL 148273 A	08.03.2007
		KR 100653570 B1	05.12.2006
		TW I287018 B	21.09.2007

International application No.
PCT/CN2012/085044

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
		CZ 20020881 A3	15.01.2003
		NZ 517645 A	26.09.2003
		PH 1200002499 B1	01.06.2006
		CZ 298862 B6	27.02.2008

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/085044

CLASSIFICATION OF SUBJECT MATTER

H02K15/02 (2006.01) i

H02K16/02 (2006.01) i