

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Journal bearing backing ring

(51)⁶ International Patent Classification(s)
F16C 35/063 20060101AFI2006030
(2006.01) 2BHAU **B60B**
B60B 35/00 (2006.01) 35/00
F16C 35/063 20060101ALI2006030
2BHAU

(21) Application No: 2006200715

(22) Application Date: 2006 .02 .21

(30) Priority Data

(31) Number	(32) Date	(33) Country
11/121469	2005 .05 .05	US

(43) Publication Date : 2006 .11 .23

(43) Publication Journal Date : 2006 .11 .23

(71) Applicant(s)
AMSTED Rail Company, Inc.

(72) Inventor(s)
Reed, Martin Earl

(74) Agent/Attorney
Spruson & Ferguson, Level 35 St Martins Tower 31 Market Street, Sydney, NSW, 2000

(56) Related Art
US 4915536
US 7219938


2006200715 21 Feb 2006

JOURNAL BEARING BACKING RING

Abstract of the disclosure

5 A bearing assembly (10) is provided having a roller bearing with an inner case (32) fitted around the journal portion (12) of an axle (14). An outer raceway (34, 36) combines with the inner raceway (38, 40) to receive roller elements (42, 44). A backing ring (66) is centered to the shaft fillet (16). An annular wear ring (60) is positioned between the inner case (32) and the backing ring (66). An annular sealant bead or a
10 sealant ring (75) form a seal between the shaft shoulder (14) and the backing ring (66).

FIG. 1

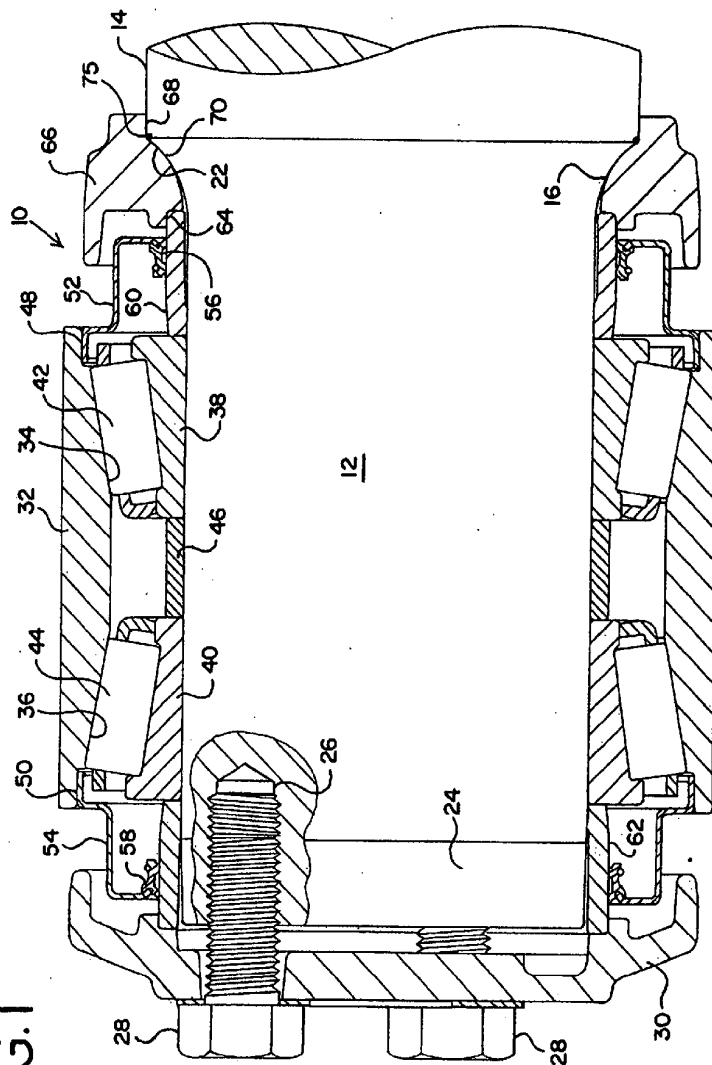

2006200715 21 Feb 2006

S&F Ref: 753420

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

Name and Address of Applicant :	Brenco, Incorporated, of Petersburg Industrial Park, Petersburg, Virginia, 23805, United States of America
Actual Inventor(s):	Martin Earl Reed
Address for Service:	Spruson & Ferguson St Martins Tower Level 35 31 Market Street Sydney NSW 2000 (CCN 3710000177)
Invention Title:	Journal bearing backing ring

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

5845c

JOURNAL BEARING BACKING RING**BACKGROUND OF THE INVENTION**

This invention relates to sealed shaft journal bearings and more particularly to an improved bearing assembly, providing a seal or a sealant bead between a shoulder of the shaft
5 and a backing ring.

Roller bearing assemblies incorporating two rows of tapered roller bearings preassembled into a self-contained, pre-lubricated package for assembly onto journals at the ends of axles or shafts are known. Such bearing assemblies are used as rail car bearings assembled onto journals at the ends of the car axles. Bearings of this type typically employ two rows of tapered roller
10 bearings fitted one into each end of a common bearing cup with their respective bearing cones having an inner diameter dimensioned to provide an interference fit with the shaft journal and with a cylindrical sleeve or spacer positioned between the cones providing accurate spacing on the journal. Seals mounted within each end of the bearing cup provide sealing contact with wear rings bearing against the outer ends of the respective bearing cones at each end of the assembly.

In a typical rail car installation, the axle journal is machined with a fillet at the inboard end, and a backing ring having a surface complementary to the contour of the fillet and an abutment surface for engaging the inboard end of the inner wear ring accurately positions the bearing assembly on the journal. An end cap mounted on the end of the axle by bolts threaded into bores in the end of the axle engages the outboard wear ring and clamps the entire assembly
15 on the end of the axle. The wear rings typically have an inner diameter dimensioned to provide an interference fit with the journal over at least a portion of their length so that the entire assembly is pressed as a unit onto the end of the journal shaft.
20

Summary of the Invention

The present invention provides an assembly comprising a shaft having a shoulder spaced from a free end, a journal of smaller diameter than the shaft between the shoulder and the free end, and a contoured fillet leading from the journal to the shoulder, a bearing assembly adapted to be fitted onto the journal and into another structure to permit relative rotation between the shaft and the other structure, the bearing assembly comprising:

a roller bearing including an inner race fitted around the journal and having an outwardly directed raceway thereon, an outer race having an inwardly directed raceway thereon, and roller elements located between and contacting the inner and outer raceways,

a backing ring having a contoured surface, complementary to and engaging said contoured surface of the fillet, the contoured surfaces cooperating to fix the backing ring against radial and axial movement on the shaft when the bearing is installed thereon,

an annular wear ring interposed between and engaging the inner race and the backing ring, the wear ring having a first end bearing against the inner race and a second end received in interference relation to radially and axially fix the second end on the journal,

a first sealant ring interposed between and engaging the shaft shoulder and the backing ring, and a second sealant ring interposed between and engaging the wear ring and the backing ring.

Preferably, the assembly further comprises a shoulder formed in the backing ring, and the second sealant ring interposed between and engaging a corner of the wear ring and the shoulder in the backing ring.

Preferably, both sealant rings are comprised of a nitrile rubber.

The present invention also provides an assembly comprising a shaft having a shoulder spaced from a free end and a journal of smaller diameter extending from the shoulder to the free end, a bearing assembly adapted to be fitted on the journal and retained thereon by an end cap mounted on the shaft free end to permit relative rotation between the shaft and an element supported by the bearing, the bearing assembly comprising:

an inboard bearing cone and an outboard bearing cone mounted on said journal, each said bearing cone defining an outwardly directed raceway and each having an inner diameter providing an interference fit on the journal, a bearing cup defining a pair of inwardly directed tapered outer raceways located in radially outwardly spaced relation to each of the inner raceways, and rolling elements located between the inner and outer raceways,

2a

a backing ring adapted to be mounted on the journal and engage the shoulder in a manner radially and axially fix the backing ring on the shaft, the backing ring having an outwardly directed counterbore formed therein defining an axial shoulder,

5 a first seal wear ring having a first end portion received in interference relation within said counterbore and abutting the axial shoulder and a second end portion abutting said inboard bearing cup, the first seal wear ring having its inner surface radially spaced from the journal along the full length of the seal wear ring, and a second seal wear ring mounted in contact with the outboard bearing cone and the end cap,

10 a first sealant ring interposed between and engaging the shaft shoulder and the backing ring, and a second sealant ring interposed between and engaging the wear ring and the backing ring.

Preferably, the assembly further comprises a shoulder formed in the backing ring, and the second sealant ring interposed between and engaging a corner of the wear ring and the shoulder in the backing ring.

15

Brief Description of the Drawings

A preferred embodiment of the present invention will now be described, by way of an example only, with reference to the accompanying drawings wherein:

Fig. 1 is a sectional view of a shaft journal having mounted thereon a tapered roller bearing assembly in accordance with the present invention;

Fig. 2 is a sectional view of a shaft journal having mounted thereon a tapered roller bearing assembly in accordance with a second embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Fig. 1 of the drawings, a bearing assembly indicated generally by the reference numeral 10 on Fig. 1 is shown mounted on a journal 12 on the free, cantilevered end of a shaft or axle 14, typically a rail car axle. Journal 12 is machined to very close tolerances and terminates at its inner end in a contoured fillet 22 leading to a cylindrical shoulder 18 of axle 14.

At the free end of the axle, journal portion 12 terminates in a slightly conical or tapered guide portion 24 dimensioned to facilitate installation of the bearing assembly onto the journal. A plurality of threaded bores 26 are formed in the end of axle 14 for receiving threaded cap screws, or bolts 28 for mounting a bearing retaining cap 30 on the end of the shaft to clamp the bearing in position as described more fully herein below.

The bearing assembly 10 is preassembled before being mounted and clamped on journal 12 by cap 30. The bearing assembly includes a unitary bearing cup or outer raceway 32 having a pair of raceways 34, 36 formed one adjacent each end thereof which cooperate with a pair of bearing cones 38, 40, respectively, to support the two rows of tapered rollers 42, 44, respectively, therebetween. A center spacer 46 is positioned between cones 38, 40 to maintain the cones in accurately spaced relation relative to one another.

The bearing cup 32 is provided with cylindrical counterbores 48, 50 at its opposite ends outboard of the raceways 34, 36, and a pair of seal assemblies 52, 54 are pressed one into each of the cylindrical counterbores 48, 50. The seals 52, 54 include resilient sealing elements 56, 58,

respectively, which rub upon and form a seal with a pair of seal wear ring sleeves 60, 62, respectively, having their inwardly directed ends in engagement with the outwardly directed ends of bearing cones 38, 40, respectively. The other end of wear ring sleeve 60 is received in a cylindrical counterbore 64 in the axially outwardly directed end of an annular backing ring 66 which, in turn, has a counterbore 68 at its other end which is dimensioned to be received in interference and non-interference relation on the cylindrical shoulder 18 of shaft 14. The counterbore 64 and the outer diameter of wear ring sleeve 60 are also dimensioned to provide an interference fit so that the wear ring is pressed into the backing ring 66 which is accurately machined to provide a contoured inner surface 70 complementary to and engaging the contour of fillet 116 when the bearing is mounted on the shaft. The outwardly directed end of sleeve 62 bears against the retaining cap 30.

Sealant bead 75 is seen to be located between backing ring 66 and the shoulder portion of fillet 22. Sealant bead 75 is most frequently a silicone sealant such as Dow Corning 737.

Sealant bead 75 can be formed by applying a sealant coating to the intersection of fillet 22 and counterbore 168 and then upon press fitting backing ring 66, a seal is formed. Sealant bead 75 forms a seal to water and abrasives that may enter sealed bearing 10 along the outer edge of axle 14.

Referring now to Figure 2 of the drawings, a bearing assembly indicated generally by the reference numeral 110 in Figure 2 is shown mounted on a journal 112 on the free, cantilevered end of a shaft or axle 114, typically a rail car axle. Journal 112 is machined to very close tolerances and terminates at its inner end in a contoured fillet 122 leading to a cylindrical shoulder of axle 114. At the free end of the axle, journal portion 112 terminates in a slightly conical or tapered guide portion 124 dimensioned to facilitate installation of the bearing

assembly onto the journal. A plurality of threaded bores 126 are formed in the end of axle 112 for receiving threaded cap screws, or bolts 128 for mounting a bearing retaining cap 130 on the end of the shaft to clamp the bearing in position as described more fully herein below.

The bearing assembly 110 is preassembled before being mounted and clamped on journal 112 by cap 130. The bearing assembly includes a unitary bearing cup or outer raceway 132 having a pair of raceways 134, 136, formed one adjacent each end thereof which cooperate with a pair of bearing cones 138, 140, respectively, to support the two rows of tapered rollers 142, 144, respectively, therebetween. A center spacer 146 is positioned between cones 138, 140 to maintain the cones in accurately spaced relation relative to one another.

The bearing cup 132 is provided with cylindrical counterbores 148, 150 at its opposite ends outboard of the raceways 134, 136, and a pair of seal assemblies 152, 154 are pressed into each of the cylindrical counterbores 148, 150. The seals 152, 154 include resilient sealing elements 156, 158, respectively, which rub upon and form a seal with a pair of seal wear ring sleeves 160, 162, respectively, having their inwardly directed ends in engagement with the outwardly directed ends of bearing cones 138, 140, respectively. The directed end of an annular backing ring 166 which, in turn, has a counterbore 168 at its other end which is dimensioned to be received in an interference or non-interference relation on the cylindrical shoulder 118 of shaft 114. The counterbore 164 and the outer diameter of wear ring sleeve 160 are also dimensioned to provide an interference fit so that the wear ring is pressed into the backing ring 166 which is accurately machined to provide a contoured inner surface 170 complementary to and engaging the contour of fillet 116 when the bearing is mounted on the shaft. The outwardly directed end of sleeve 162 bears against the retaining cap 30.

2006200715 21 Feb 2006

5

First sealant ring or gasket 175 is seen to be located between backing ring 166 and the shoulder portion of fillet 122. Second sealant ring or gasket 177 is seen to be located between such corner of wear ring 160 and shoulder 164 of backing ring 166.

First sealant ring 175 and second sealant ring 177 are usually comprised of a nitrile rubber or another suitable rubber or a synthetic. Sealant rings 175 and 177 form a seal to water and abrasives that may enter sealed bearing 110 along the outer edge of axle 114.

~ 6 ~

The claims defining the invention are as follows:

1. An assembly comprising a shaft having a shoulder spaced from a free end, a journal of smaller diameter than the shaft between the shoulder and the free end, and a contoured fillet leading from the journal to the shoulder, a bearing assembly adapted to be fitted onto the journal and into another structure to permit relative rotation between the shaft and the other structure, the bearing assembly comprising:
- 5 a roller bearing including an inner race fitted around the journal and having an outwardly directed raceway thereon, an outer race having an inwardly directed raceway thereon, and roller elements located between and contacting the inner and outer raceways,
- 10 a backing ring having a contoured surface, complementary to and engaging said contoured surface of the fillet, the contoured surfaces cooperating to fix the backing ring against radial and axial movement on the shaft when the bearing is installed thereon,
- 15 an annular wear ring interposed between and engaging the inner race and the backing ring, the wear ring having a first end bearing against the inner race and a second end received in interference relation to radially and axially fix the second end on the journal,
- 20 a first sealant ring interposed between and engaging the shaft shoulder and the backing ring, and a second sealant ring interposed between and engaging the wear ring and the backing ring.
2. The assembly of claim 1, further comprising a shoulder formed in the backing ring, and the second sealant ring interposed between and engaging a corner of the wear ring and the shoulder in the backing ring.
3. The assembly of claim 1, wherein both sealant rings are comprised of a
- 25 nitrile rubber.
4. An assembly comprising a shaft having a shoulder spaced from a free end and a journal of smaller diameter extending from the shoulder to the free end, a bearing assembly adapted to be fitted on the journal and retained thereon by an end cap mounted on the shaft free end to permit relative rotation between the shaft and an element
- 30 supported by the bearing, the bearing assembly comprising:
- an inboard bearing cone and an outboard bearing cone mounted on said journal, each said bearing cone defining an outwardly directed raceway and each having an inner diameter providing an interference fit on the journal, a bearing cup defining a pair of inwardly directed tapered outer raceways located in radially outwardly spaced relation to

2006200715 10 Dec 2010

each of the inner raceways, and rolling elements located between the inner and outer raceways,

5 a backing ring adapted to be mounted on the journal and engage the shoulder in a manner radially and axially fix the backing ring on the shaft, the backing ring having an outwardly directed counterbore formed therein defining an axial shoulder,

10 a first seal wear ring having a first end portion received in interference relation within said counterbore and abutting the axial shoulder and a second end portion abutting said inboard bearing cup, the first seal wear ring having its inner surface radially spaced from the journal along the full length of the seal wear ring, and a second seal wear ring mounted in contact with the outboard bearing cone and the end cap,

a first sealant ring interposed between and engaging the shaft shoulder and the backing ring, and a second sealant ring interposed between and engaging the wear ring and the backing ring.

15 5. The assembly of claim 4, further comprising a shoulder formed in the backing ring, and the second sealant ring interposed between and engaging a corner of the wear ring and the shoulder in the backing ring.

6. The assembly of claim 4, wherein both sealant rings are comprised of a nitrile rubber.

20 7. An assembly substantially as hereinbefore described with reference to any one of the embodiments as that embodiment is shown in the accompanying drawings.

Dated 9 December 2010
AMSTED Rail Company, Inc.

Patent Attorneys for the Applicant/Nominated Person
SPRUSON & FERGUSON

25

FIG. 1

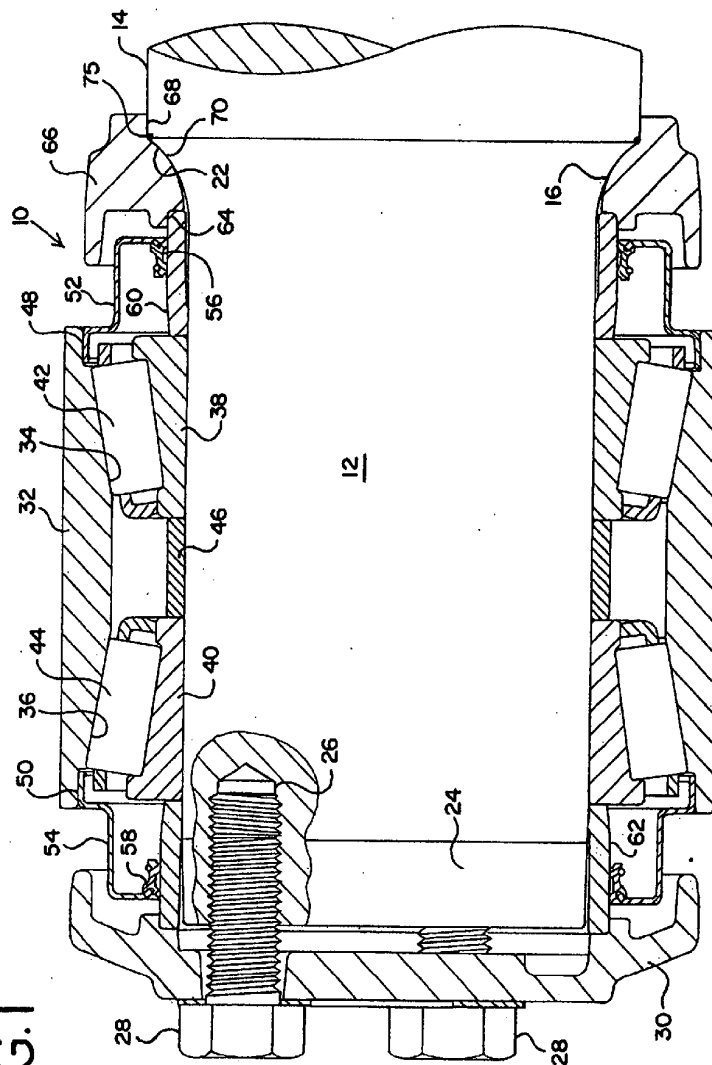


FIG. 2

