

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D01F 1/07, 1/10, B32B 5/26, 27/02, D04H 1/56, 3/16	A1	(11) International Publication Number: WO 99/54530 (43) International Publication Date: 28 October 1999 (28.10.99)
(21) International Application Number: PCT/US99/08580 (22) International Filing Date: 19 April 1999 (19.04.99) (30) Priority Data: 60/082,367 20 April 1998 (20.04.98) US (71) Applicant: BBA NONWOVENS SIMPSONVILLE, INC. [US/US]; 840 Southeast Main Street, Simpsonville, SC 29681 (US). (72) Inventor: SRINIVASAN, Ramesh; 5460 Yonge Street #1208, North York, Ontario M2N 6K7 (CA). (74) Agent: ONOFRIO, Dara, L.; Ostrager, Chong, Flaherty, & Onofrio, 300 Park Avenue, New York, NY 10022-7402 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: NONWOVEN FABRIC HAVING BOTH UV STABILITY AND FLAME RETARDANCY AND RELATED METHOD FOR ITS MANUFACTURE (57) Abstract A nonwoven fabric with UV stability and flame retardancy having at least one fabric layer. The fabric layer is made of a base resin, preferably polyolefinic, and a non-halogenated melt processable compound that is selected from the group consisting of N-alkyoxo amines and are combined into a homogeneous blend which is then either spunbonded or meltblown to form the fabric layer. A melt processable fluorochemical additive may also be combined into the homogeneous blend to provide liquid barrier properties to the fabric layer.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

**NONWOVEN FABRIC HAVING BOTH UV STABILITY AND FLAME
RETARDANCY AND RELATED METHOD FOR ITS MANUFACTURE**

Related Application

This application claims the benefit of U.S.
5 Provisional Application No. 60/082,367, filed on April
20, 1998.

Field of the Invention

The invention relates to flame-retardant, UV stable
nonwoven fabrics suitable for medical and industrial
10 uses. In particular, the invention relates to nonwoven
fabrics made using a non-halogenated melt processable
compound that is both flame retardant and UV stable
selected from the group consisting of N-alkoxy amines.
Thermally stable fluorochemical derivatives can also be
15 incorporated into the nonwoven fabrics to further impart
liquid barrier properties to the fabric.

Background of the Invention

Flame retardant nonwoven composites are needed in
a variety of applications like medical garments, drapes
20 and fire fighting suits. Research indicates that 80 to
100 operating room fires alone occur each year, and 10
to 20 of those result in serious injury. The
introduction of lasers, and other advanced electrical
equipments in surgery today have also greatly increased
25 the potential for fires in the operating rooms.

Existing flame retardant chemicals to manufacture
such fibers/fabrics via melt spinning are not
environmentally friendly and are also toxic. They also
weaken the final fabric properties and have an adverse
30 effect on machinery by initiating metal corrosion.
Examples of such flame retardant chemicals that are
widely used include phosphorous compounds, metal
hydrates and halogenated (brominated) compounds in

-2-

synergistic combination with antimony oxides.

Nonwovens and nonwoven composites possessing both liquid barrier and flame retardancy are desired in many medical applications like surgical drapes (particularly in opthamology) and operating room accessories. Such materials have to provide a barrier to low surface tension liquids such as isopropyl alcohol while offering flame retardancy simultaneously. Prior to the invention, the combination of flame retardancy and liquid barrier property incorporated in the same nonwoven was hitherto not achievable in a single step process.

Nonwoven fabrics possessing light stability (particularly ultraviolet) are used as substrates to manufacture outdoor covers. Outdoor covers include marine, automobile, bike and recreational vehicle covers. Such covers include protecting the vehicle from wear and tear caused by wind, rain and sunlight.

Nonwovens and nonwoven composites to manufacture substrates for such covers are available in the market. However, it was not possible hitherto to incorporate UV stability and flame retardancy in one step using internal melt additives to produce a nonwoven or nonwoven composite.

To overcome these problems the invention provides a combination of light stability and flame retardancy incorporated into a nonwoven using a non-halogenated melt processable compound. Preferably the compound is a N-alkoxy hindered amine light stabilizer (NOR-HALS).

In general use of alkoxyamine functional hindered amine light stabilizers (NOR-HALS) to improve the flame retardant properties of polyolefins, including polyolefins used in fabrics, is known. For example, published European patent application EP 0792911 A2 to Tennesen discloses a phosphate based flame retardant combined with alkoxyamine functional hindered amine

-3-

light stabilizer to achieve flame retardant properties that are better than those with phosphates alone. There is no disclosure or suggestion in Tennesen that the light stabilizer alone be used as the only flame
5 retardant.

U.S. Patent No. 5,393,812 to Haley describes fibers and fabrics, as used clothing, upholstery and carpeting which contain about 0.01 to 3% (preferably 0.2 to 1.0%) by weight of the composition, of a light stabilizer.
10 This patent discloses a polyolefin, a NOR HALS (alkoxy amine functional hindered amine light stabilizers) and a phosphorous flame retardant (col. 2 line 33-40; col. 4 line 62-64). Regular HALS (hindered amine light stabilizers) may be employed additionally or in place
15 of NOR HALS.

U.S. Patent No. 5,096,950 to Galbo discloses numerous N-OR1 alkoxy hindered amine light stabilizers. This patent also notes that the N-OR1 class of HALS can function in the presence of organohalogenated flame
20 retardants and thiosynergists, unlike prior art hindered amine compounds.

Thus it is a broad object of the invention to provide a nonwoven fabric with both UV stability and flame retardancy having at least one fabric layer. The
25 fabric layer is made of a resin, preferably polyolefinic resin, combined with a non-halogenated melt processable compound that is both flame retardant and UV stable. The compound is preferably a N-alkoxy hindered amine and is combined with a base polyolefinic resin into a
30 homogeneous blend which is then either spunbonded or meltblown to form the fabric layer.

Another object of the invention is to provide a nonwoven fabric of that is alcohol repellant in addition to being flame retardant and UV stable. A melt
35 processable fluorochemical additive is added to the homogeneous blend to impart liquid barrier properties

-4-

to the fabric layer.

A specific object of the invention is to provide a nonwoven UV stable, flame retardant structure that is environmentally friendly and non-toxic.

5 Another specific object of the invention is to provide a liquid barrier nonwoven fabric or composite that has flame retardant properties suitable for medical use.

10 A further object of the invention is to provide an outdoor cover substrate having UV stability and flame retardancy in a single step process.

A further specific object of the invention is to provide a method for making the nonwoven fabric of the invention utilizing melt processable additives without
15 initiating metal corrosion.

Summary of the Invention

The present invention provides a nonwoven fabric suitable for medical and industrial uses made using a non-halogenated melt processable compound that is both
20 flame retardant and UV stable selected from the group consisting of N-alkoxy amines. Preferably the compound is a N-alkoxy hindered amine light stabilizer (NOR-HALS), known as CGL 116, available from Ciba Specialty Canada (Mississauga, Ontario, Canada).

25 Improved product properties are obtained by compounding the non-halogenated melt processable compound with a carrier resin. The carrier resin is preferably a polyolefinic resin, which includes the melt processable compound, and is combined with a base
30 polyolefinic resin to form a homogeneous blend. This blend is then either spunbonded or meltblown to form the fabric layer or layers of the invention. The final add-on quantity of the melt processable compound to the fabric layer is 0.3% - 1.5 wt.% with a particularly
35 preferred range of 0.3% - 0.6 wt.% for medical garments,

-5-

drapes and fire fighting suit applications; and 0.75% - 1.5 wt.% for outdoor cover applications.

The nonwoven fabric of the invention may comprise multiple fabric layers. Fabric structures encompassed by the invention include spunbond (SB), meltblown (MB), spunbond-spunbond (SS), spunbond-meltblown-spunbond (SMS), spunbond-spunbond-spunbond (SSS), spunbond-meltblown-meltblown-spunbond (SMMS) nonwoven fabrics, as well as other combinations and variations of the foregoing.

There are three preferred applications for the flame-retardant, UV stable nonwoven fabrics of the invention. One is a substrate used in making composite fabrics for outdoor covers include marine craft, automobiles, bicycles and recreation vehicles. The nonwoven material can also be used as flame-retardant, environmental friendly medical drapes and fire fighting suits. This material is environmentally friendly because it is non-halogenated. Finally, fluid resistant agents such as thermally stable fluorochemical derivative can be incorporated into the nonwoven which can then serve as a liquid barrier, particularly to low surface tension liquids such as isopropyl alcohol.

Other objects, features and advantages of the present invention will be apparent when the detailed description of the preferred embodiments of the invention are considered with reference to the drawings, which should be construed in an illustrative and not limiting sense as follows:

Brief Description of the Drawings

FIG. 1 is a schematic diagram showing the basic components of a system for producing the nonwoven fabric in accordance with the process of the invention.

-6-

Detailed Description of the Preferred Embodiments

As used herein, the term "nonwoven web" or "nonwoven fabric" are interchangeable and refer to a web/fabric that has a structure of individual fibers or filaments which are interlaid, but not in an identifiable repeating pattern.

As used herein, the term "spunbonded fibers" refers to fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinnerette. Cooling air is fed to a quenching chamber wherein the filaments are cooled. The cooling air is then sucked through a nozzle, which accelerates the flow of air. The friction between the flowing air and the filaments creates a force which draws the filaments, i.e., attenuates the filaments to a smaller diameter. The drawn filaments are then passed through a diffusor and deposited on a conveyor belt to form a nonwoven web. A conventional spinbonding technique is disclosed in U.S. Patent No. 4,340,563 to Appel.

As used herein, the term "meltblown fibers" refers to fibers which are formed by extruding molten thermoplastic material as threads or filaments through a plurality of fine, usually circular capillaries of a die. A high-velocity, usually heated gas (e.g., air) stream attenuates the filaments of molten thermoplastic material to reduce their diameter. Thereafter the meltblown fibers are carried by the high-velocity heated gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. A conventional meltblowing technique is disclosed in U.S. Patent No. 4,707,398 to Boggs.

Meltblown fibers differ from spunbonded fibers in that the extruded polymer strands have much finer diameters. These fine diameter filaments are easily dispersed by the forced hot air stream before being

-7-

deposited on the collecting surface. In addition, the meltblown fibers are substantially cooled by the air so that they do not significantly bond together. Bonding of the web to retain integrity and strength occurs as
5 a separate downstream operation.

In general, the invention provides a nonwoven fabric with UV stability and flame retardancy having at least one fabric layer. The fabric layer comprises a resin, preferably a polyolefinic resin, and a non-
10 halogenated melt processable compound that is both flame retardant and UV stable selected from the group consisting of N-alkoxy amines. The resin and said compound are combined into a homogeneous blend which is either spunbonded or meltblown to form the fabric layer.

15 "Non-halogenated" flame retardants are the general class of melt processable additives that are suitable to manufacture the nonwoven of the invention. Non-halogenated flame retardants are those that do not contain halogenated compounds like bromine. Under such
20 non-halogenated class of additives, the preferred class of chemicals are based on N-alkoxy amine chemistry.

A most preferred system is the N-alkoxy hindered amine light stabilizer known as CGL 116 available from Ciba Specialty Canada (Mississauga, Ontario, Canada).
25 The technical brochure of CGL 116 is incorporated herein by reference. CGL 116 is a non-halogenated N-alkoxy (N-OR₂) HALS with flame retardant and UV stability properties and refers to 1,3-Propanediamine, N, N''-1,2-ethanediybis-, reaction products with cyclohexane and
30 peroxidized N-butyl-2,2,6,6-tetramethyl-4-piperidinamine-2,4,6-trichlor-1,3,5-triazine reaction products. N-alkoxy hindered amines are in a more active oxidation state than conventional hindered amine light stabilizers (HALS).

35 The preferred range of N-alkoxy hindered amine in the final fabric layer is between 0.3 and 1.5 wt.% (or

-8-

3000 to 15,000 ppm). A more preferred amount of the N-alkoxy hindered amine is 0.3-0.6 wt.%. Typically, concentrations of the N-alkoxy hindered amine of more than 1.5 wt.% on the fabric was found to lead to a decrease in the flame retardant characteristics of the polyolefinic fabrics.

The base resins and carrier resins used in making the nonwoven fabric are selected from the group consisting of polypropylene, polyethylene, polyester and polyamide, or mixtures thereof. Polyolefinic resins are preferred and a most preferred resin is polypropylene.

The homogeneous blend may further include TiO_2 as a synergist to increase the flame retardancy of the N-alkoxy hindered amine. The TiO_2 used in the present invention is either rutile or anatase, which are different morphological/crystalline structures of TiO_2 . The amount of TiO_2 in the final fabric layer is between 0.2 to 2 wt.% (2000 and 20,000 ppm).

If liquid barrier properties are desired in the final fabric a melt processable fluorochemical additive may be added to the homogeneous blend. The fluorochemical class of additives that are useful in the invention are thermally stable and facilitate the attachment of active fluorine to the polyolefinic backbone rendering it resistant to certain fluids, particularly low surface tension fluids like alcohols. In a preferred application, the fluorochemical additive provides alcohol repellenancy to the fabric layer.

Examples of fluorochemical additives that can be used in the invention are the fluorochemical urethane derivatives, such as S215125E117 commercially available by Techmer PM, Tennessee; and FX1801 or L41990 commercially available from 3M, Toronto, Ontario, Canada.

Typically, the melt processable fluorochemical additives are present in the final fabric layer between

-9-

0.1 to 2 wt% (5000 to 20,000 ppm), more preferred between 0.5 to 2 wt.%. Concentrations of the fluorochemical of more than 1.0 wt.% on the fabric was found to lead to excessive static generation during melt spinning thereby affecting filament laydown and final fabric uniformity. To overcome this problem, antistatic chemicals in the range of 0.1 to 1 wt.%, preferably 0.3-0.6 wt.%, can be added.

The homogeneous blend is either spunbonded or meltblown to form a fabric layer. The nonwoven fabric can be a single fabric layer but may comprise multiple fabric layers. Fabric structures encompassed by the invention include spunbond (SB), meltblown (MB), spunbond-spunbond (SS), spunbond-meltblown-spunbond (SMS), spunbond-spunbond-spunbond (SSS), spunbond-meltblown-meltblown-spunbond (SMMS) spunbond-spunbond-spunbond (SS-SS), spunbond-meltblown or viceversa (SM or MS), spunbond-meltblown-spunbond-spunbond-meltblown-spunbond (SMS-SMS), spunbond-meltblown-meltblown-spunbond-spunbond-meltblown-meltblown-spunbond (SMMS-SMMS) and nonwoven fabrics, as well as other combinations and variations of the foregoing.

The invention also provides a method of making a nonwoven fabric with UV stability and flame retardancy having at least one fabric layer comprising the steps of combining a base resin with a carrier resin to form a homogeneous blend.

The carrier resin comprises an additional resin, that is preferably polyolefinic, and a non-halogenated melt processable compound that is both flame retardant and UV stable selected from the group consisting of N-alkoxy amines. The homogeneous blend is either spunbond or meltblown to form the nonwoven fabric layer.

As previously mentioned the base resin and said additional resin are preferably polyolefinic and in

-10-

particular either polypropylene or polyethylene.

In making a preferred spunbond fabric layer of the invention, the base polyolefinic resin is a polypropylene resin having a MFR between 20 to 70 and
5 the additional polyolefinic resin is a polypropylene resin having a MFR between 4 to 60.

In making a preferred meltblown fabric layer of the invention the base polyolefinic resin and said additional polyolefinic resin are polypropylene resins
10 having a MFR between 300 to 1400.

In an alternate embodiment the additional polyolefinic resin in the carrier resin may be a combination of polypropylene and polyethylene resins.

In a preferred embodiment the carrier resin
15 comprises 75-90 wt.% polypropylene and 10-25 wt.% of a N-alkoxy hindered amine.

In another embodiment the carrier resin may further include TiO_2 . Preferably the carrier resin comprises 12-22 wt.% of a N-alkoxy hindered amine; 39-49 wt.%
20 TiO_2 ; and 33-43 wt.% of said additional polyolefinic resin.

In another embodiment the carrier resin may further include a melt processable fluorochemical additive which imparts liquid barrier properties to said fabric layer.
25 Preferably the carrier resin comprises: 10-20 wt.% of a N-alkoxy hindered amine; 10-20 wt.% of said melt processable fluorochemical additive; and 70-90 wt.% of said additional polyolefinic resin.

In general the fabric layers of the invention are
30 either spunbond or meltblown. The nonwoven fabric has at least one fabric layer, but structures with multiple fabric layers are included in the invention.

In an embodiment of the invention, a nonwoven fabric having at least two of the fabric layers is
35 formed by spinbonding the homogeneous blend to form a first and second nonwoven fabric layers followed by

-11-

thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least two of the fabric layers is formed by spinbonding the homogeneous blend to form a first nonwoven fabric layer and meltblowing the homogeneous blend to form a second nonwoven fabric layer followed by thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least three of the fabric layers is formed by spinbonding the homogeneous blend to form a first, second and third nonwoven fabric layer followed by thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least three of the fabric layers is formed by spinbonding the homogeneous blend to form first and third nonwoven fabric layers and meltblowing the homogeneous blend to form a second nonwoven fabric layer. The meltblown second layer is sandwiched between the first and third layers followed by thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least four of the fabric layers is formed by spinbonding the homogeneous blend to form first and fourth nonwoven fabric layers and meltblowing the homogeneous blend to form second and third nonwoven fabric layers. Sandwiching the second and third layers between the first and fourth layers and thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least five of the fabric layers is formed by spinbonding the homogeneous blend to form first and second nonwoven fabric layers. Meltblowing the homogeneous blend to form third and fourth nonwoven fabric layers on top of the first and second fabric layers and spinbonding the homogeneous blend to form a fifth nonwoven fabric layer, which is on top of the

-12-

fourth fabric layer followed by thermally bonding the layers together.

In another embodiment of the invention, a nonwoven fabric having at least two of the fabric layers is formed by spinbonding or meltblowing said homogeneous blend to form a first and second nonwoven fabric layer and sandwiching a film material between the first and second fabric layers followed by ultrasonically bonding said layers together.

FIGURE 1 is a schematic diagram showing the basic components of a system for producing the nonwoven fabric in accordance with the process of the invention.

As previously described the nonwoven fabric of the invention has at least one fabric layer. The fabric layer preferably comprises a polyolefinic resin and a carrier resin which includes the non-halogenated melt processable compound and, in some embodiments, the melt processable fluorochemical additive. These components are combined into a homogeneous blend which is either spunbonded or meltblown to form the fabric layer.

The meltblown fabric layer can be prepared by extruding the homogeneous blend in molten form through a plurality of fine, usually circular capillaries of a die. A high-velocity, usually heated gas (e.g., air) stream attenuates the filaments of molten thermoplastic material to reduce their diameter. Thereafter the meltblown fibers, which include any melt processable additives that were present in the blend, are carried by the high-velocity heated gas stream and are deposited on a collecting surface to form a nonwoven web of randomly dispersed meltblown fibers. In accordance with the preferred embodiment, the base polyolefinic resin of the meltblown fabric layer is polypropylene. Polymers other than polypropylene, such as nylon, polyethylene, polyester, and copolymers and blends thereof, may also be used as the base resin.

-13-

The spunbonded fabric layer may be produced by continuously extruding the homogeneous blend through a plurality of fine, usually circular capillaries of a spinnerette. Pressurized cooling air is fed to a quenching chamber wherein the filaments are cooled. The cooling air is then accelerated through a nozzle by a positive air pressure. The friction between the flowing air and the filaments creates a force which draws the filaments, i.e., attenuates the filaments to a smaller diameter. The filaments are drawn to achieve molecular orientation and tenacity. The continuous filaments are then deposited in a substantially random manner to form a web of substantially continuous and randomly arranged, molecularly oriented filaments. The preferred base polyolefinic resin used to make spunbonded fabric layers is polypropylene, although nylon, polyethylene, polyester, and copolymers and blends thereof can be used.

The nonwoven fabric of the invention has a least one layer. Multiple fabric layers are encompassed by the invention, with numerous variations of spunbonded and meltblown fabric layers possible. Multiple fabric layers are then bonded together by the application of heat and pressure to form the desired fabric composite. Spunbonded fabric layers may be prebonded by heated press rolls providing structural integrity to the fabric.

For illustrative purposes, the production of a spunbond-meltblown-spunbond (SMS) fabric structure of the invention is described. The production line illustrated in FIGURE 1 can be operated at a speed in the range of 250 to 600 m/min, preferably about 375 m/min. The equipment of production line 10 consists of an endless foraminous forming belt 12 wrapped around rollers 14 and 16. The belt 12 is driven in the direction shown by the arrows. The production line 10

-14-

includes a forming machine which has three stations: spunbond station 18, meltblown station 20 and spunbond station 22. In other embodiments, depending on the desired fabric structure, not all these stations may be
5 operating.

For the SMS structure, first, the spunbond station 18 lays down a web 8 of spunbonded fibers 28 onto the carrier belt 12. Then the meltblown station 20 lays down a web 4 of meltblown fibers 26 onto the spunbonded
10 web 8. Lastly, the spunbond station 22 lays down a web 6 of spunbonded fibers 30 onto the meltblown web 4. Alternatively, each of the component fabric layers may be formed separately, rolled, and later converted to the SMS fabric laminate offline.

15 The spunbond stations 18 and 22 are conventional extruders with spinnerettes which form continuous filaments of a polymer/melt additive and deposit those filaments onto the forming belt 12 in a random interlaced fashion. Each spunbond station may include
20 one or more spinnerette heads depending on the speed of the process and the particular polymer being used. Forming spunbonded material is a conventional process well known in the art.

The meltblown station 20 consists of a die 24 which
25 is used to form microfibers 26. As the homogeneous blend exits the die 24, the polymer threads are attenuated and spread by high-pressure fluid, usually air, to form microfibers 26. The microfibers 26 are randomly deposited on top of the spunbond layer 8 and form a
30 meltblown layer 4. The construction and operation of the meltblown station 20 for forming microfibers 26 are well known in the art.

In accordance with the SMS embodiment of the invention, the meltblown fabric layer has a basis weight
35 of approximately 1.5 gsy, while the total basis weight of the spunbonded fabric layers is 10 gsy. However, in

-15-

accordance with the broad concept of the invention, the basis weight of the meltblown fabric layer can be in the range of 0.5 to 6.0 gsy, while the total basis weight of the spunbonded fabric layers can be in the range of 6.0 to 20.0 gsy. Further, in accordance with the invention, the meltblown fibers have an average diameter of 1-10 μm , preferably 3-5 μm , while the spunbonded fibers have an average diameter of 10-30 μm , preferably 12-20 μm . In this embodiment the SMS fabric laminate has a mean pore size in the range of 15-50 μm , preferably about 30-40 μm . The molten polypropylene used to make the meltblown fibers has a molecular weight distribution in the range of about 1.8-5.0, preferably 3.6, and a melt flow rate in the range of about 400-3000 grams/10 minutes, preferably about 1200 grams/10 minutes, whereas the molten polypropylene used to make the spunbonded fibers has a molecular weight distribution in the range of about 1.8-5.0, preferably 2.5-2.7, and a melt flow rate in the range of about 10-100 grams/10 minutes, preferably about 35 grams/10 minutes.

Out of the forming machine, the SMS fabric laminate web 2 is then fed through bonding rolls 32 and 34. The surfaces of the bonding rolls 32 and 34 are provided with a pattern of raised lands which apply heat and pressure to thermally spot bond the three layers together. The bonding rolls are heated to a temperature which causes the meltblown polymer to soften. As the meltblown web 4 passes between the heated bonding rolls 32 and 34, the composite material is compressed and heated by the bonding rolls in accordance with the pattern on the rolls to create a pattern of discrete bonding areas. Such discrete area or spot bonding is well known in the art and can be carried out by means of heated rolls or by ultrasonic bonding. The bond pattern is selected to provide desired fabric strength

-16-

characteristics. The pattern bonding area is not limited in accordance with the present invention, although pattern bonding areas in the range of 5-25%, preferably 14-19%, of the total fabric area are feasible. In the alternative, the laminate can be ultrasonically spot bonded or bonded by hot melt/glue adhesive lamination.

As a further illustration of the process of the invention and in accordance with another embodiment, a spunbonded/spunbonded (SS) fabric laminate is formed by operating only spunbond stations 18 and 22, i.e., meltblown station 20 is turned off. In this case, the bonding rolls 32 and 34 must be heated to a temperature which causes the spunbonded polymer to soften. The SS fabric laminate will have the same tensile strength and elongation as an SMS fabric laminate having the same spunbonded layers since the meltblown layer does not contribute to these physical properties.

Other fabric structures encompassed by the invention are formed as described by the process above and as illustrated in FIGURE 1 with the number of spunbond stations, 18, 22 or meltblown stations 20 depending on the type of layers in the desired end fabric.

The following examples are for purposes of illustration only and this invention should not be considered to be limited by any recitation used therein.

EXAMPLE 1

NONWOVEN WITH IMPROVED FLAME RETARDANT CHARACTERISTICS

In this example nonwoven flame retardant and UV stable fabrics suitable for medical and industrial end uses were made using a new and a non-halogenated melt processable additive known as CGL 116 available from Ciba Specialty Canada of Mississauga, Ontario, Canada. The technical brochure of CGL 116 is incorporated herein

-17-

by reference. CGL 116 is environmentally friendly, and does not have the adverse properties exhibited by the older/existing generation of flame retardant chemicals.

The structures included at least one layer of spunbond or meltblown web, to which the non-halogenated melt processable additive was added before melt spinning (i.e. as an internal melt additive). The nonwoven fabrics made in this example meet the following key functional attributes:

(a) The structures passed the NFPA 701-1989/1996, NFPA 702-1980 flammability tests.

(b) The structures possess acceptable physical properties as measured by grab/strip tensile tests and trapezoidal tear tests.

(c) The fabrics were acceptable for medical industry usage, i.e. non-toxic in nature.

TABLE I below describes two nonwoven fabrics of the invention. Both sample 1 and 2 were made by spunbonding. The weight %'s indicate the amount of material in the final fabric layer. Other examples of flame retardant nonwoven structures not illustrated include meltblown (MB), SS (spunbond-spunbond), SMS (spunbond-meltblown-spunbond) and SMMS (spunbond-meltblown-meltblown-spunbond) nonwovens.

TABLE I

MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 1 33.9 gsm (28.4 gsy)	SAMPLE 2 33.9 gsm (28.4 gsy)
TECHNOLOGY	SPUNBOND	SPUNBOND
POLYOLEFINIC RESIN	Polypropylene resin with MFR of 35-40; Weight % = 99.7	Polypropylene resin with MFR of 35-40; Weight % = 99.4
MELT PROCESSABLE COMPOUND	CGL 116 Weight % = 0.3	CGL 116 Weight % = 0.6

-18-

Samples 1 and 2 are nonwoven spunbond fabrics and were made according to the process of the invention as described herein and illustrated in FIGURE 1. The particular process conditions for samples 1 and 2 are detailed in TABLE II below.

The melt processable additive CGL 116 was combined with a carrier resin comprised of a 12 MFR polypropylene resin and blended with a base polypropylene resin. This was let-down at a ratio of 3% and 6% respectively during melt spinning to obtain a final fabric add-on of 0.3% and 0.6% respectively in samples 1 and 2.

TABLE II
PROCESS CONDITIONS

	MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 1	SAMPLE 2
15	BASIS WEIGHT, gsy	28.40	28.40
	gm/hole/min.	0.31	0.31
20	DIE MELT temperature, °C	232.00	232.50
	SUCTION AIR, rpm	1,978.00	1,978.00
25	COOLING AIR, rpm	2,405.00	2,407.00
	SPIN-BELT, m/min.	32.90	33.00
	CALENDAR nip pressure, pli	355.00	354.00
30	SURFACE TEMPERATURE Engraved/Smooth °F	275/273	275/273

Flammability testing of the samples revealed that the disclosed materials have a tendency to extinguish the flame upon igniting. The results of the NFPA 701-1989 test are given in TABLE III below.

TABLE III
FLAMMABILITY TEST RESULTS

MATERIAL	CHAR length, in	AFTER FLAME, sec	DRIPS continue to burn, YES/NO
CONTROL WITH NO FR	5.25	2.00	YES
SAMPLE 1	6.00	0.00	NO
SAMPLE 2	5.25	0.00	NO

Several variations of the nonwoven fabric made in this example in accordance with the invention process are possible. Although the flame retardant structure is described in this example as a single layer of SB or MB a composite structure is possible. Examples include SS, SMS, SMMS, or other combinations. Such a composite is made in a one-step process wherein all the layers are eventually thermally bonded together.

Alternatively, the composite structure can also be made in multiple steps by separately manufacturing the SB/MB layers and then combining them using ultrasonic lamination, adhesive lamination and other methods known to individual skilled in this art.

An advantage of this invention over prior practice in this area is in the provision of environmentally friendly and non-toxic nonwoven fabrics.

EXAMPLE 2

LIQUID BARRIER NONWOVEN WITH FLAME RETARDANT PROPERTIES

In this example a nonwoven/composite structure possessing both liquid barrier properties, flame retardancy and UV stability is produced which meet the following key requirements:

- (a) The fabric achieved an alcohol repellency rating of '8' or lower when measured using the INDA

-20-

standard test method IST 80.9 - 74 (R82).

(b) The fabric passed the NFPA 701-1989/1996 and NFPA 702-1980 flammability tests.

(c) The fabric possess acceptable physical
5 properties as measured by grab/strip tensile tests and trapezoidal tear tests.

(d) The fabric is acceptable for medical industry usage, i.e. non-toxic in nature.

The fabric structures include at least one layer
10 of spunbond or meltblown web, to which suitable melt processable additives were incorporated before melt spinning (i.e. as an internal melt additive).

TABLE IV below describes a nonwoven fabric of the invention having alcohol repellancy, UV stability and
15 flame retardancy. Sample 3 was made by spunbonding. The weight %'s indicate the amount of material in the final fabric layer. Other examples of liquid barrier flame retardant nonwoven structures not illustrated include MB (meltblown), SS (spunbond- spunbond), SMS
20 (spunbond-meltblown-spunbond) and SMMS (spunbond-meltblown-meltblown-spunbond), SSS (spunbond-spunbond-spunbond), SS-SS (spunbond-spunbond -spunbond-spunbond) SM or MS (spunbond-meltblown or viceversa), SMS-SMS (spunbond-meltblown-spunbond - spunbond-meltblown-
25 spunbond) SMMS-SMMS (spunbond-meltblown-meltblown-spunbond-spunbond-meltblown-meltblown-spunbond) and SSMMMS (spunbond-spunbond-meltblown-meltblown-spunbond) nonwoven composites.

TABLE IV

MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 3 33.9 gsm (28.4 gsy)
TECHNOLOGY	SPUNBOND
POLYOLEFINIC RESIN	Polypropylene resin with MFR of 35-40; Weight % = 98.4
MELT PROCESSABLE COMPOUND	CGL 116 Weight % = 0.6
	FLUORCHEMICAL Weight % = 1.0

Sample 3 is a nonwoven spunbond fabrics and was made according to the process of the invention as described herein and illustrated in FIGURE 1. The particular process conditions for sample 3 is detailed in TABLE V below. The liquid barrier, UV stable, flame retardant additives were added during melt spinning to the base polypropylene resin.

The liquid barrier fluorochemical was obtained from Techmer PPM, Clinton, Tennessee designated as S215125E117 consisting of a sky-blue color pigment, 20% of a fluorochemical and a carrier resin, 12 MFR polypropylene. As in Example 1, the melt processable additive CGL 116 (20%) was combined with a carrier resin comprised of a 12 MFR polypropylene (80%).

The liquid barrier additive S215125E117 was let-down at a ratio of 5% and the CGL 116 was let-down at a ratio of 3% respectively during melt spinning to obtain a final fabric add-on of 1.6% of active chemicals. TABLE V below shows the process conditions and the material composition.

-22-

TABLE V
PROCESS CONDITIONS

	MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 3
5	BASIS WEIGHT, gsy	35.00
	gm/hole/min.	0.35
	DIE MELT temperature, °C	236.20
	SUCTION AIR, rpm	2,371.00
	COOLING AIR, rpm	2,685.00
10	SPIN-BELT, m/min.	28.30
	CALENDAR nip pressure, pli	400.00
15	SURFACE TEMPERATURE Engraved/Smooth °F	275/273

Fabric evaluations of Sample 3 revealed that the disclosed material is resistant to water-isopropyl alcohol solutions achieving a rating of '8' in the INDA standard test and also have a tendency to extinguish flame upon ignition. The results of the NFPA 701-1989 test are given in TABLE VI below.

TABLE VI
FABRIC EVALUATIONS

	MATERIAL	CHAR length, in	AFTER FLAME, sec	DRIPS continue to burn, YES/NO
25	CONTROL WITH NO FR	5.25	2.00	YES
	SAMPLE 3	6.00	0.00	NO

Several variations of the nonwoven fabric made in this example in accordance with the invention process are possible. Although a liquid barrier, flame retardant structure is described in this example as a

-23-

single layer of SB or MB a composite structure is possible. Examples include SS, SMS, SMMS, or other combinations. Such a composite is made in a one-step process wherein all the layers are eventually thermally
5 bonded together.

Alternatively, the composite structure can also be made in multiple steps by separately manufacturing the SB/MB layers and then combining them using ultrasonic lamination, adhesive lamination and other methods known
10 to individual skilled in this art. An example of such a fabric is an SS-SS ultrasonic composite.

A liquid barrier nonwoven or composite possessing flame retardant properties suitable for medical use has hitherto not been possible before in a one-step process.
15 Nonwovens possessing either liquid barrier or flame retardant properties have been made before but separately. An advantage of this invention over prior practice in this area is in the provision of environmentally friendly and non-toxic nonwoven fabrics.

20

EXAMPLE 3**OUTDOOR COVER SUBSTRATE WITH ENHANCED UV STABILITY**

In this example a nonwoven/composite structure possessing both UV stability and flame retardancy was made meeting the following key requirements:

25 (a) The fabric structure had a useful service life of from six (6) months to sixty (60) months as measured by accelerated indoor tests such as QUV-B / Xenon arc and outdoor tests such as exposed panels.

(b) The fabric structures pass the NFPA
30 701-1989/1996 and NFPA 702-1980 flammability tests.

(c) The fabric structures possess acceptable initial physical properties as measured by grab/strip tensile tests and trapezoidal tear tests.

(d) The fabric structure does not suffer a loss of

-24-

more than 50% of its initial MD, CD tensiles and initial MD, CD trapezoidal tear values.

(d) Color shift is maintained within tolerances over the entire service life.

5 The fabric structures include at least one layer of spunbond or meltblown web, to which suitable melt processable additives were incorporated before melt spinning (i.e. as an internal melt additive).

TABLE VII below describes two nonwoven fabrics of
 10 the invention having UV stability and flame retardancy. Samples 4 and 5 were made by spunbonding. The weight %'s indicate the amount of material in the final fabric layer. Other examples of the UV, flame retardant nonwoven structures not illustrated include MB
 15 (meltblown), SS (spunbond- spunbond), SMS (spunbond-meltblown-spunbond) and SMMS (spunbond-meltblown-meltblown-spunbond), SSS (spunbond-spunbond-spunbond), SS-SS (spunbond-spunbond -spunbond-spunbond) SM or MS (spunbond-meltblown or viceversa), SMS-SMS (spunbond-
 20 meltblown-spunbond - spunbond-meltblown-spunbond) SMMS-SMMS (spunbond-meltblown-meltblown-spunbond-spunbond-meltblown-meltblown-spunbond) and SSMMS (spunbond-spunbond-meltblown-meltblown-spunbond) nonwoven composites.

25

TABLE VII

30

MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 4 33.9 gsm (28.4 gsy)	SAMPLE 5 67.7 gsm (56.7 gsy)
TECHNOLOGY	SPUNBOND	SPUNBOND
POLYOLEFINIC RESIN	Polypropylene resin with MFR of 35-40; Weight % = 99.0	Polypropylene resin with MFR of 35-40; Weight % = 99.0
MELT PROCESSABLE COMPOUND	CGL 116 Weight % = 1.0	CGL 116 Weight % = 1.0

-25-

Samples 3 and 4 are nonwoven spunbond fabrics and were made according to the process of the invention as described herein and illustrated in FIGURE 1. The particular process conditions for samples 4 and 5 are detailed in TABLE VIII below. The UV stable, flame retardant additive, was added during melt spinning to the base polypropylene resin.

The melt processable additive CGL 116 (20%) was combined with a carrier resin comprised of a 12 MFR polypropylene resin (80%). This was let-down at a ratio of 5% during melt spinning to obtain a final fabric add-on of 1% of active chemicals.

TABLE VIII
PROCESS CONDITIONS

	MATERIAL COMPOSITION AND PROPERTIES	SAMPLE 4	SAMPLE 5
15	BASIS WEIGHT, gsy	28.40	56.70
20	gm/hole/min.	0.31	0.31
	DIE MELT temperature, °C	232.60	231.70
	SUCTION AIR, rpm	1,979.00	1,980.00
25	COOLING AIR, rpm	2,405.00	2,406.00
	SPIN-BELT, m/min.	33.10	15.80
30	CALENDAR nip pressure, pli	356.00	551.00
	SURFACE TEMPERATURE Engraved/Smooth °F	275/273	279/277

35 Several variations of the nonwoven fabric made in this example in accordance with the invention process are possible. Although a UV, flame retardant structure

-26-

is described in this example as a single layer of SB or MB a composite structure is possible. Examples include SS, SMS, SMMS, or other combinations. Such a composite is made in a one-step process wherein all the layers are
5 eventually thermally bonded together.

Alternatively, the composite structure can also be made in multiple steps by separately manufacturing the SB/MB layers and then combining them using ultrasonic lamination, adhesive lamination, adhesive lamination and
10 other methods known to individual skilled in this art.

An outdoor cover substrate possessing UV stability and flame retardant properties has hitherto not been possible before in a step process. Nonwovens possessing either UV stability or flame retardant properties have
15 been made before but separately. An advantage of this invention over prior practice in this area is in the provision of environmentally friendly and non-toxic nonwoven fabrics.

The preferred embodiments of the invention have
20 been disclosed for the purpose of illustration. Variations and modifications of the disclosed preferred embodiments which fall within the concept of this invention have been described and will also be readily apparent to persons skilled in the art. All such
25 variations and modifications are intended to be encompassed by the claims set forth hereinafter.

-27-

Claims

1. A nonwoven fabric with UV stability and flame retardancy having at least one fabric layer, the fabric layer comprising:

a resin selected from the group consisting of polypropylene, polyethylene, polyester and polyamide; and

a non-halogenated melt processable compound that is both flame retardant and UV stable selected from the group consisting of N-alkoxy amines;

wherein said resin and said compound are combined into a homogeneous blend which is either spunbonded or meltblown to form the fabric layer.

2. The nonwoven fabric as defined in Claim 1 wherein said compound is a N-alkoxy hindered amine and is present in said fabric layer in an amount between 0.3 and 1.5 wt.%.

3. The nonwoven fabric as defined in Claim 1, wherein said homogeneous blend further comprises TiO_2 present in said fabric layer in an amount between 0.2 to 2 wt.%.

4. The nonwoven fabric as defined in Claim 1, wherein said resin is polyolefinic and is either polypropylene or polyethylene.

5. The nonwoven fabric as defined in Claim 1, wherein said homogeneous blend further comprises a melt processable fluorochemical additive which provides liquid barrier properties to the fabric layer and is present in an amount between 0.5 to 2 wt%.

6. The nonwoven fabric as defined in Claim 5, wherein said fabric layer is alcohol repellent.

-28-

7. The nonwoven fabric as defined in Claim 1 having of at least two of said fabric layers, wherein both fabric layers are spunbonded.

8. The nonwoven fabric as defined in Claim 1 having of at least two of said fabric layers, wherein one fabric layer is spunbonded and the other layer is meltblown.

9. The nonwoven fabric as defined in Claim 1 having of at least three of said fabric layers, wherein all three of said fabric layers are spunbonded.

10. The nonwoven fabric as defined in Claim 1 having of at least three of said fabric layers, wherein one fabric layer is meltblown sandwiched between two fabric layers that are spunbonded.

11. The nonwoven fabric as defined in Claim 1 having of at least four of said fabric layers, wherein two fabric layers are meltblown and are sandwiched between two fabric layers that are spunbonded.

12. The nonwoven fabric as defined in Claim 1 having of at least five of said fabric layers, wherein first and second fabric layers are spunbonded; third and fourth fabric layers are meltblown and are on top of said first and second fabric layers; and a fifth fabric layer is spunbonded and is on top of said fourth layer.

13. The nonwoven fabric as defined in Claim 1 having of at least two of said fabric layers, wherein a film material is sandwiched between said fabric layers.

-29-

14. A method of making a nonwoven fabric with UV stability and flame retardancy having at least one fabric layer comprising the steps of :

combining a base resin with a carrier resin to form a homogeneous blend;

wherein said carrier resin comprises an additional resin and a non-halogenated melt processable compound that is both flame retardant and UV stable selected from the group consisting of N-alkoxy amines;

wherein said base resin and said additional resin are selected from the group consisting of polypropylene, polyethylene, polyester and polyamide; and

spinbonding or meltblowing said homogeneous blend to form the nonwoven fabric layer.

15. The method according to Claim 14, wherein said base resin and said additional resin are polyolefinic and are either polypropylene or polyethylene.

16. The method according to Claim 14, wherein said base resin is a polypropylene resin having a MFR between 20 to 70 and said additional resin is a polypropylene resin having a MFR between 4 to 60; and

spinbonding said homogeneous blend into said fabric layer.

17. The method according to Claim 14, wherein said base resin and said additional resin are polypropylene resins having a MFR between 300 to 1400; and

meltblowing said homogeneous blend into said fabric layer.

18. The method according to Claim 14, wherein said additional resin is a combination of polypropylene and polyethylene resins.

-30-

19. The method according to Claim 14, wherein said carrier resin comprises 75-90 wt.% polypropylene and 10-25 wt.% of a N-alkoxy hindered amine.

20. The method according to Claim 14, wherein said carrier resin further comprises TiO_2 .

21. The method according to Claim 20, wherein said carrier resin comprises:

- 12-22 wt.% of a N-alkoxy hindered amine;
- 39-49 wt.% TiO_2 ; and
- 33-43 wt.% of said additional resin.

22. The method according to Claim 14, wherein said carrier resin further comprises a melt processable fluorochemical additive which imparts liquid barrier properties to said fabric layer.

23. The method according to Claim 22, wherein said carrier resin comprises:

- 10-20 wt.% of a N-alkoxy hindered amine;
- 10-20 wt.% of said melt processable fluorochemical additive; and
- 70-90 wt.% of said additional resin.

24. The method according to Claim 14, wherein the nonwoven fabric has at least two of said fabric layers comprising the steps of:

- spinbonding said homogeneous blend to form a first and second nonwoven fabric layers; and
- thermally bonding said first and second layers together.

25. The method according to Claim 14, wherein the nonwoven fabric has at least two of said fabric layers comprising the steps of:

-31-

spinbonding said homogeneous blend to form a first nonwoven fabric layer;

meltblowing said homogeneous blend to form a second nonwoven fabric layer; and

thermally bonding said first and second layers together.

26. The method according to Claim 14, wherein the nonwoven fabric has at least three of said fabric layers comprising the steps of:

spinbonding said homogeneous blend to form a first, second and third nonwoven fabric layer; and

thermally bonding the layers together.

27. The method according to Claim 14, wherein the nonwoven fabric has at least three of said fabric layers comprising the steps of:

spinbonding said homogeneous blend to form first and third nonwoven fabric layers;

meltblowing said homogeneous blend to form a second nonwoven fabric layer;

sandwiching said second layer between said first and third layers and thermally bonding the layers together.

28. The method according to Claim 14, wherein the nonwoven fabric has at least four of said fabric layers comprising the steps of:

spinbonding said homogeneous blend to form first and fourth nonwoven fabric layers;

meltblowing said homogeneous blend to form second and third nonwoven fabric layers;

sandwiching said second and third layers between said first and fourth layers and thermally bonding the layers together.

-32-

29. The method according to Claim 14, wherein the nonwoven fabric has at least five of said fabric layers comprising the steps of:

spinbonding said homogeneous blend to form first and second nonwoven fabric layers;

meltblowing said homogeneous blend to form third and fourth nonwoven fabric layers and are on top of said first and second fabric layers;

spinbonding said homogeneous blend to form a fifth nonwoven fabric layer, which is on top of said fourth fabric layer;

thermally bonding the layers together.

30. The method according to Claim 14, wherein the nonwoven fabric has at least two of said fabric layers comprising the steps of:

spinbonding or meltblowing said homogeneous blend to form a first and second nonwoven fabric layer;

sandwiching a film material between said first and second fabric layers; and

ultrasonically bonding said layers together.

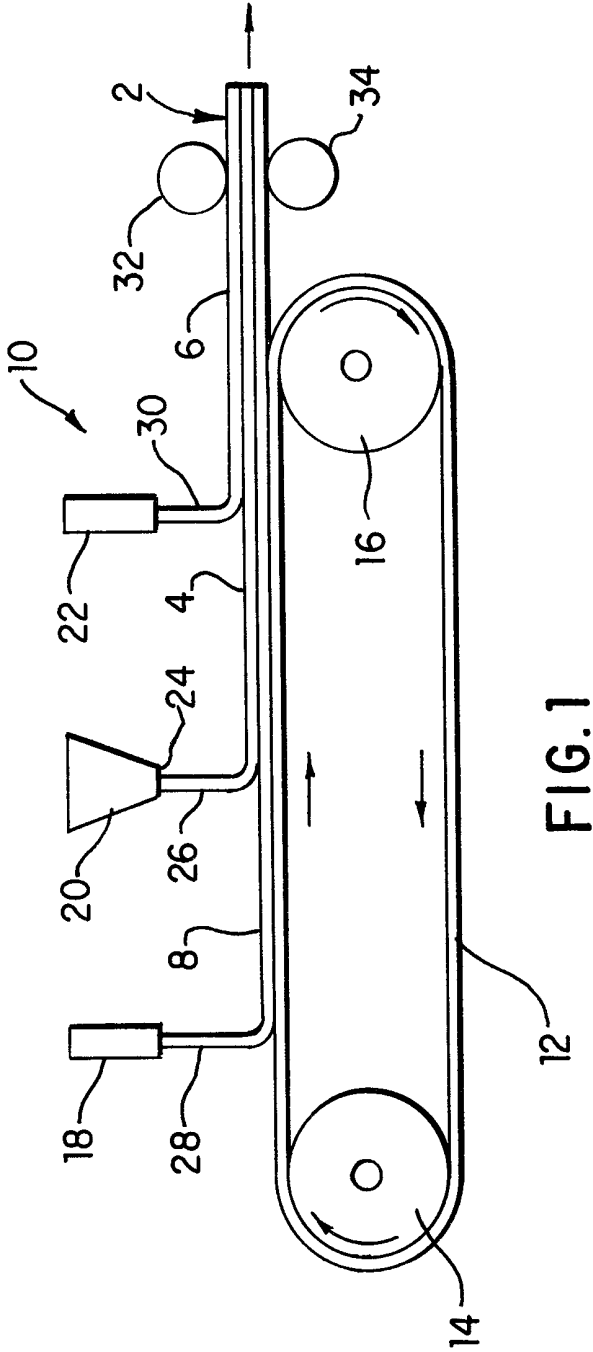


FIG.1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/08580

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : D01F 1/07, 1/10; B32B 5/26, 27/02; D04H 1/56, 3/16.

US CL : 442/ 382, 392, 400, 401, 414; 264/211

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 442/ 382, 392, 400, 401, 414; 264/211

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
APS, DERWENT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,393,812 A (HALEY et al) 28 February 1995, see abstract; col. 1, line 59-col.2, line 2; col. 4, lines 28-36 and 43-52; col. 12, lines 26-44 and 47-50; col. 15, lines 34-54; and col. 16, lines 64-66.	1-4, 14, 15, 18, and 20.
Y	US 5,096,950 A (GALBO et al) 17 March 1992, see abstract; col. 1, lines 31-47; col. 2, line 22-col. 4, line 55; col. 15, line 62-col. 16, line 42; and col. 24, lines 31-46.	1, 2, 4, 14, 15, 18,
Y	US 4,374,888 A (BORNSLAEGGER) 22 February 1983, see abstract; col. 4, line 23-col. 5, line 7.	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*g* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 JULY 1999

Date of mailing of the international search report

02 AUG 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CHERYL JUSKA

Telephone No. (703) 308-0661