

600283

FORM 1 APPLICATION ACCEPTED AND AMENDMENTS
ALLOWED 28.5.90

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

N.V. Bekaert S.A., of Naamloze Vennootschap, Bekaertstraat 2, Zwevegem,
8550, BELGIUM, hereby apply for the grant of a standard patent for an
invention entitled:

Brass-Coated Steel Elements Having Improved Rubber Adhesion
Properties

which is described in the accompanying complete specification.

Details of basic application(s):-

<u>Basic Applic. No:</u>	<u>Country:</u>	<u>Application Date:</u>
86.15746	UNITED KINGDOM	27 June 1986

The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia

LODGED AT SUB-OFFICE
26 JUN 1987
Sydney

DATED this TWENTY SIXTH day of JUNE 1987

N.V. Bekaert S.A.
[Signature]


By:

Registered Patent Attorney

FEE STAMP TO VALUE OF
\$ 345 ATTACHED
MAIL OFFICER *[Signature]*

TO: THE COMMISSIONER OF PATENTS
OUR REF: 28309
S&F CODE: 51310

5845/2

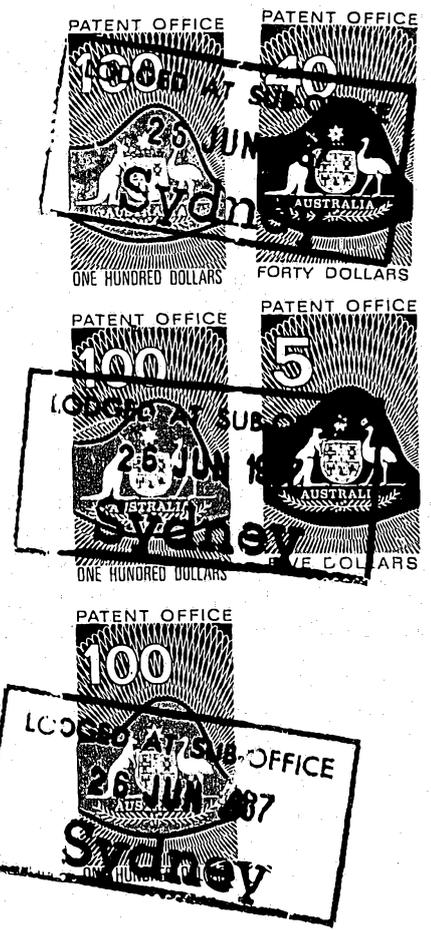

DECLARATION IN SUPPORT OF A CONVENTION
APPLICATION FOR A PATENT OR PATENT OF ADDITION

In support of the Convention Application made for a

patent
~~patent of addition~~ for an invention entitled

"BRASS-COATED STEEL ELEMENTS HAVING IMPROVED RUBBER ADHESION
PROPERTIES"

Full name and ad-
dress of Declarant.

I, Willy VANDEVELDE

of Schoolstraat 8, B- 8590 ZWEEGEM - HEBSTERE, Belgium

do solemnly and sincerely declare as follows:-

1. ~~I am the applicant for the~~ ^{patent}
~~patent of addition.~~
(or, in the case of an application by a body corporate)
I am authorised by N.V. BEKAERT S.A.

the applicant for the ^{patent}
~~patent of addition~~ to make this declaration on its behalf.

Insert country and
date of basic appli-
cation and name of
foreign applicant.

2. The basic application as defined by Section 141 of the Act was made in
Great Britain on the
27th day of June 1986 by N.V. BEKAERT S.A.

3. ~~I am the actual inventor of the invention referred to in the basic application.~~
(or where a person other than the inventor is the applicant)

Full name and ad-
dress of Inventor(s)

3. Wilfried COPPENS, C. Verschaevestraat 7, B- 8510 KORRIJKE
(MARKE)
BELGIUM

✕ Daniël CHAMBAERE, Felix Vervennestraat 13,
B- 8610 WEVELGEM
BELGIUM and

Hugo LIEVENS, Coupure 403, B- 9000 GENT, BELGIUM

are
is the actual inventor of the invention and the facts upon which the applicant
is/are entitled to make the application are as follows: contract of employment
of 1.05.1970 (W. Coppens), 1.02.1985 (D. Chambaere), 1.04.1983 (H. Lievens) as
employees with N.V. Bekaert S.A. as an employer, as persons who would be entitled
to have the patent assigned to it if a patent were granted upon an application
made by the inventors.

4. The basic application referred to in paragraph 2 of this Declaration
was the first application made in a Convention country in respect
of the invention the subject of the application.

Declared at Zwevegem this 26th day of May 19 87.

Ir. Willy VANDEVELDE - Proxy Holder
Signature of Declarant

To:
The Commissioner of Patents,

600283

S & F Ref: 28309

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

This document contains the amendments made under section 49 and is correct for printing.

Priority:

Related Art:

Name and Address
of Applicant:

N.V. Bekaert S.A.
Naamloze Vennootschap
Bekaertstraat 2
Zwevegem 8550
BELGIUM

Address for Service:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

Brass-Coated Steel Elements Having Improved Rubber Adhesion
Properties

The following statement is a full description of this invention, including the best method of performing it known to me/us

ABSTRACT

A brass alloy coating is disclosed which is of use in the manufacture of steel reinforced rubber articles, particularly tires. The alloy contains small amounts of phosphorus, particularly phosphates, and the adhesion between the rubber and brass is thereby improved, especially under high humidity and/or high temperature conditions.

BRASS-COATED STEEL ELEMENTS HAVING IMPROVED RUBBER ADHESION PROPERTIES

The present invention relates to brass coated steel elements for use in the reinforcement of vulcanized rubber articles and in particular to brass-coated steel wire and cord elements having improved, durable adhesion properties for use in high-performance rubber applications such as steel-belt reinforced pneumatic vehicle tires.

10 Brass-coated steel reinforcements for use in vulcanized rubber articles include single filaments, steel cords, strands of twisted or parallel wires and other wire products (e.g. wire fabrics), strips, flattened or otherwise shaped wires, etc. The term "element" is intended to include all possible forms of such reinforcements. The steels used are generally carbon and high-carbon steels, i.e. alloys which owe their properties chiefly to the presence of carbon. The carbon content may vary from about 0.1 % to up to more than 1 %, a usual range for tire cord application being 0.6 to 0.8 %. The term "brass" includes rubber adherable Cu-Zn alloy
20 compositions which contain at least 55% of copper, more usually alpha-brass ranging from about 60 to 75 % Cu, the remainder being essentially zinc (and optionally minor amounts of other alloying elements, such as Co, Ni, etc.).

The present invention is particularly concerned with the problem of ensuring adequate adhesion retention, over extended periods of use, between brass-coated steel elements and the vulcanized rubber in which such reinforcing elements are incorporated, more especially between brass-coated steel tire cord and tire rubber wherein the embedded cord is frequently
30 subjected to severe ageing under high humidity and/or high temperature conditions.

The problem of adhesion degradation during tire operation is known to arise frequently and to a variable extent when steelbelted vehicle tires are exposed to more or less severe driving conditions, involving humidity and/or heat ageing effects stemming from the presence of moisture in the rubber (e.g. due to water penetration or permeation) and high operating temperatures. As a consequence, initial or originally cured adhesive bond strength between brass-coated steel cord and tire rubber will decrease with time, sometimes very rapidly (accelerated ageing) due to high heat and humidity ageing (often in combination with chemical degradation and corrosion effects). This deterioration in adhesion weakens the structural integrity of the cord/rubber composite, and ultimately the tire may tend to come apart by cord/rubber debonding.

Consequently, it is important to maintain a high level of adhesion throughout the service life of the vulcanized rubber product.

Many ways of protecting brass coated tire cord and of improving adhesion properties have been investigated and numerous methods have been proposed in the recent past. Various improvements are directed to increased surface protection of the steel substrate and of the brass coating, mainly through treatment of the wire and/or brass surface with anticorrosive agents or by applying a protective top layer or undercoating layer on to the brass. Other proposals involve alloy modifications of the brass composition and yet others the adaptation of the rubber compound with specific adhesion promoters and the like. Proposals thus include dipping the cord in specified mineral oil solutions, vapour treatment of the cord surface, precoating the brass cords with rubber or with

certain ingredients of the rubber wire and numerous similar treatments with various chemical compositions (e.g. benzo-triazole, carboxylic acids and salts thereof, borates, etc.).

Although the afore-mentioned proposals may result in an increased stability of the adhesive bond against corrosive attack, it has been acknowledged that they have not solved entirely the persistent problem of substantial adhesion loss in steel cord reinforced tires under conditions of high humidity and heat ageing. Moreover, many of the above proposals
10 appear to be less practical from a technical and economical point of view.

Accordingly, it is an object of the present invention to overcome the difficulties and drawbacks referred to above and to provide improved brass coated steel elements which can be readily produced, which have satisfactory adhesion properties when incorporated into vulcanized rubber products and which in particular provide a means of achieving adequate adhesion retention when used in demanding conditions.

Another object is to provide a novel brass composition for
20 use as a rubber adherent coating on steel elements to be incorporated in rubber articles such as vehicle tires, ensuring a more durable brass-rubber adhesive bond during the lifetime of the steel/rubber composite.

A further object is to provide a method of increasing the resistance of the brass-rubber bond in brass-coated steel/rubber vulcanizates to rapid degradation caused by heat and the presence of moisture.

A still further object is to provide brass-coated steel elements for use as tire reinforcements which retain a high adhesion level during tire operation when subjected to severe heat and humidity conditions such as simulated by steam ageing and overcure heat ageing.

A yet still further object is to provide high-durable rubber products, in particular vehicle tires, containing improved steel element reinforcements.

These and other objects and advantages of the present invention will become more apparent to those skilled in the art from the detailed description, figures and working examples hereinafter.

The present invention is based on the surprising finding that the normal relatively steep fall in rubber adhesion strength of conventional brass-coated steel reinforcing elements under severe humidity and heat ageing conditions (exemplified by steam ageing) can be retarded to a considerable degree when such reinforcing elements are coated with a rubber-adherent brass composition containing phosphorus, in particular when phosphorus is present as a phosphate in the brass coating.

According to a first embodiment of this invention there is provided a rubber adherable steel reinforcement element having a brass alloy coating with a copper content of at least 55%, a substantially homogeneous Cu-Zn composition with an essentially alpha brass structure, the coating having incorporated therein phosphorus in the form of phosphate ions in an amount of from 5 to 50 milligrams of phosphate ions per square metre of coating surface, wherein the phosphorus in the brass alloy coating serves to provide an enhanced adhesion to vulcanized rubber products upon heat and/or humidity ageing.

The steel elements according to the invention are advantageously in the form of steel wire (which preferably have a diameter of not more than 0.5 mm, a tensile strength of at least 2500 N/mm² and a brass alloy coating having a thickness of from 0.10 to 0.40 micrometer) and steel cords for use as tire reinforcing elements comprising a plurality of such steel wires, preferably having a diameter of between 0.1 and 0.4 mm and a tensile strength of at least 2700 N/m².



KK:5740W

According to a second embodiment of this invention there is provided a method of producing steel reinforcement elements in the form of steel wire which comprises applying a brass alloy coating with a copper content of at least 55% to the surface of a steel wire wherein phosphorus is incorporated into the brass alloy coating by contacting the surface of the brass alloy coating with a phosphatizing composition and drawing the wire whereby phosphorus is distributed in the brass alloy coating in an amount of more than 4 milligrams of phosphate ions per square metre of coating surface.

According to a still further feature of the present invention, there is provided vulcanized rubber articles containing as reinforcement steel elements according to the invention as hereinbefore defined or steel elements as produced by a method according to the invention as hereinbefore defined. Rubber tires containing steel cords as hereinbefore defined constitute a particularly important embodiment of the present invention.

According to a yet still further feature of the present invention, there is provided a method of producing vulcanized rubber articles containing steel reinforcing elements in which unvulcanized rubber is vulcanized in contact with steel

KK:5740W



reinforcing elements whereby bonding between the vulcanized rubber and the steel reinforcing elements is effected, characterized in that the steel reinforcing elements used are in accordance with the invention as hereinbefore defined or are as produced by a method of the invention as hereinbefore defined.

From investigations on numerous test coatings applied to different wires or cords and bonded to various rubbers, it has been possible to specify a minimum phosphate content of
10 4 mg per square meter of brassed surface as measured by the Standard Test hereinafter described, below which minimum the improvement in aged adhesion retention is generally poor or less consistent. For example, between 3 and 4 mg phosphate per m² there may be a certain improvement, but this is less controllable and frequently affected by minor surface contaminants (including even incidental P-containing substances, stemming from wire and cord processing aids). Above this minimum amount of 4 mg phosphate per m² of brass coating one in general obtains a substantial increase in adhesion strength under high humidity/heat ageing conditions.
20 This improvement is observed in a broad range of P-containing brasses and increasingly so with rising phosphate content which may attain a level of up to more than 40 mg/m². (For convenience, all concentrations in this specification are expressed in mg/m² as measured by the Standard Test).

Above, an upper phosphate limit of about 50 mg/mm², it has however been found that difficulties may sometimes arise. For example it may become harder to fulfil a requirement of sufficient initial adhesion with certain rubber compounds
30 (owing to a too large reduction in adhesion build up rate in normal vulcanization conditions) and also the wet drawing

operation frequently requires greater care. Thus it is preferred that the phosphate content be less than 50 mg/m^2 .

The advantages and the improved aged adhesion properties obtainable by the present invention are illustrated by the drawings of Figures 1 and 2.

Referring to Fig. 1, there is shown the evolution of cord/rubber adhesion strength with steam ageing time t , respectively for conventionally produced cords : solid line (1) and for two different cords according to the invention :
10 broken lines (2) and (3). The adhesion strength in ordinate is expressed in terms of forces (N) necessary to pull out cords embedded in rubber blocks with a predetermined embedment length (ASTM test 2630). Steam ageing time t in hours is shown in abscis.

Fig. 2 compares adhesion build up with curing time t (min.) and the effect of overcure on adhesion loss for the same conventional cords : solid line (1) and for the respective cords as in figure 1 and according to the invention : broken lines (2) and (3).

20 It is apparent from Fig. 1 that very significant increases in aged adhesion retention are obtainable with cords according to the invention which are coated with a brass layer of the usual Cu-Zn composition (here about 63-65 % Cu) except that the brass has a phosphate content of about 9 to 12 mg/m^2 .

From Fig. 2 it is clear that cords according to the invention are similar to conventional brassed cords in adhesion build up, but are clearly superior in overcure resistance (prolonged heat ageing at 155°C).

Accordingly, the objects of the present invention are accomplished by providing a steel element (usually wire filaments and cords) for use in the reinforcement of vulcanized rubber products such as tires, hoses, straps, belts and the like, which element is covered with a phosphorized brass alloy coating having a copper content of at least 55 % by weight (more usually 60 to 75 % Cu), the said brass coating having generally a substantially homogeneous Cu-Zn alloy base composition and structure comprising an average phosphorus content of at least 4 milligrams per square meter of coating surface, the P-content being expressed as an amount by weight of phosphate ion (PO_4^{3-}) as measured by the Standard Test hereinafter described.

The phosphorus content of the improved brass coating will preferably be not less than 5 mg/per m^2 and not more than 50 mg/m^2 , and preferably be comprised in the range of from 6 to 40 mg/m^2 still more preferably from 8 to 30 mg/m^2 and most preferably from 10 to 25 mg PO_4^{3-} per m^2 . The phosphorus is preferably, but not necessarily, evenly distributed in the brass layer. It may be more concentrated in the upper part of the coating thickness, provided the average P-amount is not less than a specified lower limit as mentioned above. According to a particularly advantageous embodiment of the present invention, the P-amount in the brass coating is essentially present in the form of phosphate ions (PO_4^{3-}), conveniently but not necessarily of the constituent metals (i.e. copper and zinc) of the brass alloy base. Other suitable phosphates include for example pyrophosphates. In addition, phosphates of iron (stemming from the steel substrate or otherwise introduced to the brass alloy) and phosphates of optional brass alloying elements (e.g. Mn or Co or Ni)

are not excluded. Further, P-alloyed brass coatings wherein phosphorus is present as a solute, or as a suitable non-phosphate phosphorus compound are envisaged. Such P-containing rubber adherent brass coatings, applied on steel filaments and tire cords, are all included within the scope of the present invention, provided their average P-content, expressed as PO_4 -ion amount, is not lower than 4 mg per m^2 of brassed surface.

It is believed that the unexpected significant improvement
10 in aged adhesion retention achievable in cord/rubber composites by applying a specified P-containing brass deposit on steel elements according to this invention (in particular when the phosphorus is present as a phosphate, intimately distributed in the brass coating) is associated with a substantial reduction in overcure and/or postvulcanization reaction rate between the brass coating and the rubber, more especially in the presence of heat and humidity. It is generally known that a gradual adhesion degradation normally occurring in tire service is accelerated by heat and humidity,
20 dity, frequently to such an excessive extent that premature cord/rubber debonding precludes further tire usage. This is commonly thought to arise from abnormal growth of a cuprous sulphide phase in the interface layer (rendering the adhesion layer friable and more prone to debonding) or from the formation of other undesirable reaction products (hydro-oxides, sulphides of copper and zinc, corrosion products etc.) between the rubber and the brass. Up to now these phenomena were less understood and hardly controllable when using conventional brass-coated wires and cords in demanding rubber
30 applications. Hence, considerable and unpredictable shortening of the running life of steel cord reinforced tires has been a serious drawback when such tires are exposed to severe

humidity and heat ageing effects during operation. As distinguished from specific prior art proposals for either improving adhesion properties or brass protection against corrosion (which measures appeared to be less successful in increasing the aged adhesion retention to a satisfactory level, presumably because of the inability to slow down overcure/ageing reactions to a sufficient extent), the fundamental merit of the present invention consists both in the identification of the nature of the complex brass/
10 rubber ageing problem and in the provision of an efficient and practical means for preventing otherwise excessive deterioration of adhesion strength under severe heat and/or humidity ageing circumstances.

The precise mechanism of the unexpectedly favorable phosphorus factor in this respect is not yet completely understood. We presume, that there may occur a direct beneficial effect of phosphorus, in particular of phosphate, for regulating/maintaining optimum brass reactivity in broadly varying ageing conditions, although this hypothesis should in no
20 way be taken to limit the invention. Certain indirect factors related to brass phosphatization concern copper availability and mobility in the brass surface region (adjacent to the interface adhesion layer). As a result of phosphatization, copper migration from the coating interior to the reaction zone may be affected in such a way that excessive brass sulfidation and copper penetration in the rubber phase-structure is prevented. Minor changes in brass surface properties and composition (possibly as a result of interaction between phosphate, brass structure and high surface strain and shear
30 forces experienced during wire drawing) may exert an additional favourable influence.

The present invention is applicable to a large variety of reinforcing steel elements covered by any suitable rubber adherable brass coating. However, the steel elements according to the invention are advantageously in the form of wires or cords for use in the reinforcement of tires and the following description is directed for the most part to brass-alloy coated steel wires and steel cords for this purpose, although not necessarily restricted thereto.

10 The invention is generally, but not exclusively, applicable to the commonly used combinations of steel wire materials and brass (i.e. Cu-Zn) alloy surface coatings employed for strengthening vulcanized rubber composites. Such wire materials conveniently have a diameter of less than 2 mm and are produced from carbon steels (most often high-carbon steel containing between 0.6 and 1.0 % C, although alloyed versions thereof with higher than normal Si and Mn-contents and/or containing Cr, Ni, Mo, V, Co, Nb, etc, are not to be excluded). The wire surface will be covered with a thin brass alloy coating containing at least 55 % Cu (most often a
20 binary Cu-Zn alpha-brass alloy with 60 to 75% Cu). The P-containing brass coatings according to this invention optionally may also comprise other elements, e.g one or more additional alloying elements (such as Co, Ni, Fe, Mn, Sn, Sb, Mo, etc.) added in varying minor amounts to the P-brass composition.

Particularly preferred embodiments of the present invention are concerned with brass alloy coated wires and cords for use in vehicle tires. Such wire materials are commonly made from brass-coated near-eutectoid steel up to about 1.0 % C (more often 0.7 - 0.85 % C), which following patenting, is
30 brass plated and wet drawn to a final diameter of below 0.50 mm, commonly between 0.10 and 0.40 mm. In general, such hard

drawn pearlitic wires have a tensile strength of about 2500 - 2800 N/mm², sometimes increased to up to more than 3000 N/mm². The wire surface is covered by a thin brass alloy coating containing from 58 to 75 % Cu, preferably from 60 to 72 % Cu. Coating thickness is generally less than 0.50 μm and is preferably between 0.10 and 0.35 μm. The brass alloy coating may be formed by alloy plating (e.g. from a cyanidic electrolytic Cu-Zn solution) or by sequential plating (in any order) from separate copper and zinc baths to form distinct Cu and Zn-layers in appropriate proportions followed by a thermodiffusion treatment so as to achieve a homogeneous (usually α-brass) alloy layer composition.

In principle, any appropriate process (including chemical/electrochemical deposition and even physical alloying methods) can be used to achieve the desired P-containing brass composition of this invention and this can be realized at any suitable stage of the wire and cord manufacturing process. Thus, the alloying treatment with phosphorus, and in particular the provision of a required phosphate amount in the brass composition, may be realized in different ways. It can thus be carried out prior or together with the deposition of the brass coating on the wire surface (alloy plating or sequential Cu and Zn plating), or between sequential plating and thermodiffusion, or following thermodiffusion and prior to wire drawing, or also during the wire drawing process. It could also be done on finished wire filaments (either before or after twisting the wires into a tire cord). The manner or order in which these P-containing or phosphatized brass surface coatings are realized into wires and cords is not important to the performance per se of the present invention, but only to the degree of performance and ease of manufacturing.

According to a particularly preferred feature of the practice of the present invention, there is provided a method of producing a brass coated steel wire or steel cord covered by a desired phosphatized brass composition, which method comprises dipping a previously brass-coated steel wire in an appropriate phosphatizing solution so as to deposit a required amount of phosphate on the brassed wire surface, which phosphate upon subsequent wire drawing is evenly distributed into the brass layer by the combined effect of extreme thermo-
10 plastic surface straining, mechanical mixing and deformation enhanced migration or diffusion.

In a most preferred embodiment thereof a previously patented steel wire is first brass coated (either alloy plated or, more preferably sequentially plated with Cu + Zn and thermodiffused) and next treated in a phosphatizing H_3PO_4 -solution of desired composition so as to fix a required phosphate-amount on the brass surface prior to drawing and finally subjected to a large deformation by drawing the same to a required final filament diameter.

20 The phosphoric acid solution may also contain zinc phosphates, one suitable phosphoric acid/zinc phosphate solution being that sold under the commercial name *Bonderite*⁹ (supplied by Barker Chemicals, USA). *(Bonderite is a registered trademark)* The brassed wire is conveniently phosphatized by running through a bath of the desired solution and it is preferred to dry the wire between dipping and drawing, for instance by hot air drying or other convenient methods.

In the case of thermodiffused brass coatings, the phosphatizing treatment of the Cu-Zn deposit can also be carried out



before thermodiffusion (i.e. on the upper Zn-layer of the Cu + Zn plating) with subsequent thermodiffusion so as to form a phosphate-containing brass alloy. Most preferred however is the process whereby a previously thermodiffused Cu-Zn coated wire is subjected to a phosphatizing treatment followed by wet drawing said wire to its final diameter with a large drawing reduction of up to 96 % and more.

According to another possible embodiment of the method of this invention, the improved wire with P-alloyed brass coating is obtained by submerged drawing of a brass-coated wire in a wet lubricant solution of a composition effective to phosphatize the brass layer to a sufficient degree during the multiple die wire diameter reduction operation. This process effects phosphatization of the brass surface and may also provide penetration of part of the phosphate deeper into the brass layer by the action of heavy surface deformation under high die pressure while leaving most of the phosphate in the upper layer of the brass coating.

The main advantages of the above identified preferred processes for producing steel filaments covered with a brass coating composition in accordance with this invention include simplicity of operation and favourable production economics.

In order to demonstrate the broad applicability of the present invention and the superior adhesion properties of wires and cords provided with a novel brass coating in accordance with the invention, and to appreciate the marked gain in adhesion retention over current brassed wires and cord used in comparable rubber and high humidity/heat ageing conditions, we have carried out an extensive test program with a multiplicity of cord/rubber combinations involving

various brass alloy coatings, different wire processing methods and several tire rubber compounds. In these investigations we used brass coated steel wires drawn to a filament diameter of 0.20 to 0.30 mm (made from 0.70 to 0.85 % C-steel). Cords of 1x5, 1x4, 2+2, 3 + 9, 2 + 7 and 12 x 1 (compact cord) construction were twisted from said filaments (of normal strength and increased strength of up to more than 3000 N/mm²) covered in most cases with a Cu-Zn alloy thermodiffusion coating having a copper content in range of 10 60 to about 72% and further containing a preset amount of phosphate which was varied from a very small level (nil to less than 3 mg/m²) to increased levels of up to more than 30 mg/m².

Actual adhesion testing was carried out on vulcanized rubber samples wherein either brass-coated wires or cords were embedded. Static adhesion was then determined in the well-known standard manner by measuring the force (in Newton) required to pull a test wire or cord through and out of a rubber block (with standard depth of wire/ cord embedment of 20 1 to 2,5 cm) by using standard Instron testing machine.

For humidity/heat ageing the vulcanized rubber samples containing the embedded wires or cords were placed in a closed chamber containing a humid steam atmosphere at a temperature of 120°C. The samples were aged therein for a period of 12 to 24 hours. After this period of time, the samples were removed from the steam ageing chamber. Adhesion measurements for the unaged and steam aged samples were conducted at room temperature by using the above-described pull-out test.

The rubbers to which the treated and untreated wire or cord is to be bonded are preferably standard tire rubbers based on natural rubber and/or polyisoprene, suitably compounded with carbon black, sulphur, zinc oxide, accelerators, antioxidants, stearic acid, etc. In most cases we used proprietary and/or commercially available tire rubber compounds. However, blends thereof with other rubbery polymers (like butadiene-styrene copolymers, polybutadiene, etc.) can also be used and for products other than tires there can be used
10 nitrile rubber, polychloroprene and similar mixtures.

The superior adhesion retention properties following steam ageing and the production of improved brass-coated wire and cord according to the invention is illustrated in the examples given below which explain the object and technical advantages of the present invention.

Example 1

This example illustrates the capacity of the phosphatizing-drawing method for producing steel filaments with a specified P-containing brass coating according to the invention.

20 Steel wires were produced from patented and brass-coated halfproduct material of diameter 1,24 mm (0,72% C steel) by wet drawing the same to a diameter of 0,27 mm, the ultimate tensile strength of the wire attaining about 2700 - 2850 N/mm². The thermodiffused brass layer on the wire surface had a Cu-Zn alloy composition with 63 to 71 % Cu and a coating weight of about 3,5 - 4,5 g of brass per kg of wire. To investigate the filament adhesion response to the presence of phosphorus in the brass-alloy composition, the currently used wet lubricant solution was adapted with the aim of providing a desired degree of phosphatizing power varying from
30

very poor (reference lubricant) to moderate and up to high. For this purpose the phosphate concentration in the lubricant was raised stepwise from a normal level (low total phosphate amount of less than 0,5 g/l) to a medium level of 1,2 - 2 g/l and was further increased to a high level ranging from 2 to 3 g/l. For more effective phosphatizing, the concentration of soluble phosphates was set at a value of at least 0,5 g/l and adjusted in a range of about 0,6 to 1 g/l for moderate phosphatizing, respectively from about 1 to 1,8 g/l for enhanced phosphatizing in combination with a control of pH (appropriate addition of H_3PO_4) and of the fatty acid (lubricating) compounds in the lubricant solution to compensate consumption of chemicals during operation.

The results obtained with brassed filaments drawn in varying phosphatizing-lubrication conditions were as follows :

Table 1 : Coating characterization versus lubricant conditions.

Phosphate content of lubricant g/l	Phosphating power of lubricant	Phosphorus content of coating(**)	
		IR-reflection (Absorbance Units) x 10 ³	Chemical analysis by DCP (mg/m ²)
< 0,5 to 1	I. nil to low	0.1 - 2	< 3
1 - 2	II. moderate	2 - 4	3 - 5
> 2	III. moderate to high	4 - 6.5	5 - 8
> 2 with predip	IV. high (*)	≥ 6 up to 7.5 - 9	≥ 7 up to 9 - 10

(*) Highest P-concentrations (level IV) in the brass surface coating of the wet drawn wire were obtainable by passing the wire through a phosphoric acid predip bath (e.g. 3% H_3PO_4) placed at the entrance of the drawing machine with a drying stage between the predip bath and the drawing machine.

Maximum PO_4 -concentrations in the brass coating attainable by applying the method of phosphatizing in the drawing lubricant were about 8 to 10 mg/m^2 .

10 (**) Phosphorus characterization of the coating is carried out by the infra-red reflection technique (IR) and by fine chemical analysis of the brass layer using the DCP (Atomic Emission Spectroscopy by Direct Current Plasma) method. The IR-technique mainly gives information on the P-content of the upper brass surface (IR-reflection peak at PO_4 -wavelength of measured IR-spectrum). The amount of phosphate is expressed as absorbance units (A.U.) or relative reflection intensity

$$(\Delta R = \frac{I_0 - I}{I_0})$$

20 The DCP-chemical analysis, by contrast, gives information on total phosphate content of the brass coating since the sample preparation method ensures in-depth leaching of phosphates present in the brass layer. This method was therefore adopted as the standard method of analysis and is referred to herein as the "Standard Test". The exact procedure is performed as follows :
Standard preparation procedure for DCP-analysis in the case involves treatment of 5 gram cord or filament or other element, cut into bits, in a 1.2 N HCl solution
30 (10 ml) for 60 seconds at ambient temperature in an ultrasonic bath (Telsonic type TUC-150, frequency 35 kHz) to speed up in-depth brass layer attack. The

obtained solute is then transferred to a well-known DCP-instrument for analytical determination of PO_4 -amount (Beckman Spectraspan VI; wavelength of DCP-spectrum : $\lambda = 213.618$ nm). This measured amount is then converted to give a value expressed as weight in milligram related to the brassed surface of the element in square metres ($mg PO_4/m^2$ of wire). The DCP-method has been found to be very reliable and reproducible and to afford precise data even when PO_4 -content is very low. Therefore the method has been adopted as the Standard Test referred to herein.

10

The drawn wires with different P-contents of their brass surface coating, relating to the phosphatizing lubricative conditions I to IV of table I, were then incorporated into rubber blocks for comparative adhesion testing. Wire embedment length was 1 centimeter and vulcanization was carried out at $155^\circ C$ for a cure time of 35 minutes. The vulcanized rubber/cord samples were then subjected to steam ageing ($120^\circ C - 24$ hours) for adhesion comparison with unaged samples. Static adhesion tests were conducted (as described hereinabove) by pulling the filaments through and out the rubber blocks by means of an Instron testing machine and by measuring the pull-out force in Newton. The test data are summarized in table 2.

20

CC
CC

CC
CC
CC
CC

Table 2 : Adhesion of wire filaments
(force in Newton)

Phosphatizing-drawing conditions of wire	Unaged	Steam aged
I	≥ 130	38 - 52 (poor)
II	(mostly greater	51 - 65
III	than breaking	76 - 89
IV	force of filaments)	83 - 94

10 As demonstrated by the results given in Tables 1 and 2, adhesion retention of brassed filaments after steam ageing is markedly improved by providing the steel wire with a brass coating containing a sufficiently high phosphate amount (level III and IV) according to phosphatizing-drawing conditions. The phosphatizing-drawing method, however, has some limitations with regard to the maximum attainable phosphate amount of brass coating and requires great care to maintain a constant phosphatizing level in production conditions (ageing of lubricant solution).

20 In a second series of tests adhesion response on phosphatization was evaluated for commercial tire cords (construction type 2 + 2 x 0.25 mm) twisted from 0.25 mm diameter wires (tensile strength of about 2800 - 3000 N/mm²) provided with a brass surface layer containing about 63-64 % Cu with a coating weight of about 3.4 g/kg of wire. Phosphorus content of the brass coating was set at either a high level (at least 4×10^{-3} A.U. by IR-analysis), or alternatively at a normal

low level ($0,1 \times 10^{-3}$ A.U.) by adapting the phosphatizing capacity of the wet drawing lubricant.

Adhesion results of rubberised cord samples after vulcanization or steam ageing are given in Table 3 below.

Table 3 : Adhesion of (2+2 x 0.25)-cords
in commercial tire rubber compound

Phosphatizing level	Initial adhesion (Newton)	Steam-aged adhesion (Newton) with ageing time	
		12 hrs	24 hrs
low (conventional wires)	370 - 427	230 - 257	167 - 187
high (wires of the invention)	375 - 430	280 - 300	218 - 227

It can be seen that brass-coated cords of this invention are less sensitive to adhesion degradation by steam ageing. Adhesion retention after 24 hours is improved by 20-25 % over conventional cords. However, as will be demonstrated in the following examples, the reliability of the method and the level of improvement in aged adhesion retention can be increased to a still more significant extent by optimization of the practice of this invention in accordance with the underlying inventive concept.

Example 2

Brass-plated cords (2+2 x 0.25 mm) having an average brass coating thickness ranging between 0.12 and 0.30 μm with a copper content from about 60 % up to 70 % were twisted from

0.25 mm diameter wire. The wire had been drawn from brassed semiproduct (0.68 to 0.86 %C; diameter 1.20 to 1.40 mm) which was thermodiffused to produce a homogeneous α -brass structure as desired for adequate wet drawing and rubber adhesion purposes.

In a first series (I) said plated wires were conventionally processed to a final diameter 0.25 mm without any special previous treatment of the brass coating.

In a second series (II) the thermodiffused brassed semiproducts, prior to drawing, were first subjected to a controlled phosphatizing treatment by immersion in a phosphoric acid solution (0.5 to 10% H_3PO_4) followed by careful heating/drying so as to obtain a sufficiently phosphatized brass coating. Wet drawing to 0.25 mm was carried out in the same lubricant as used for current production of conventional wires (cfr. series I).

Cord samples randomly taken from the two wire series were evaluated with respect to steam aged adhesion retention.

20 Phosphorus content (expressed as PO_4^{3-}) of cord filaments has been determined by DCP-analysis (the Standard Test).

Table 4 gives the results of coating characterization and adhesion behaviour in two unidentified standard tire compounds supplied to us by well known tire manufactures.

Table 4 : Initial and steam aged adhesion (Newton) of 2+2 x 0.25 mm cords with brass coatings of different P-content (expressed as phosphate)

Wire type	Compound A		Brass coating		P-content mg/m ²	Compound B		Brass coating P-content mg/m ²
	Adhesion (N) Init.	Steam-ageing 24 H - 120° C	% Cu	Weight g/kg		Adhesion (N) Init.	Steam ageing 24 H 120° C	
10 I current to low P-level	433	210	69.5	4.15	1.6	476	182	1.9
	477	243	66.7	3.45	3.1	474	220	2.8
	466	248	64.9	3.38	2.9	450	232	2.9
	475	252	60.8	4.30	2.7	465	201	3.2
II invention (phos- phatized)	450	308	68.8	3.80	15.2	480	277	10.1
	477	317	66.3	3.21	7.4	460	270	10.4
	495	372	63.5	3.03	11.1	445	288	8.5
	483	313	65.2	3.24	7.8	400	290	9.3
	471	298	61.6	3.52	4.6	428	261	5.7
20 III current mass production	457	172	63.9	3.9	2.1			
	446	187	62.5	4.3	2.7			
	450	153	66.1	5.4	1.9			
	442	139	69.2	4.9	1.7			

As demonstrated by the tabulated results, a substantial improvement in adhesion retention is obtainable in a reproducible way by assembling cords from filaments having a brass composition with an specified P-content, which according to the invention is at least 4 mg PO₄ per m² of brassed wire surface.

Most remarkable is also the finding of an unexpected, considerable improvement (70 up to 90 %) over current production levels of steam aged cord adhesion.

On filament, specified phosphate levels are preferably at least 5 mg/m^2 and more preferably in a range of from 7 up to more than 25 mg/m^2 .

10 It can be seen that by applying the teachings of the present invention in optimum practice conditions, a high retained adhesion target value of 280 N after 24 hours of steam-ageing is achievable in different rubbers. Even in rubber batches showing 20 to 30% lower initial adhesion ratings than the most appropriate rubber compounds for steam ageing purposes, we observed a substantial increase in adhesion retention. Of course, the degree of improvement is affected by rubber composition and further depends on degree of coating perfection, wire processing and drawing care.

20 A schematic representation of the improvement in adhesion retention after steam ageing is shown in Fig. 1, comparing actual levels of current tire cords with the results achieved by applying the cords and production method according to this invention.

Example 3

In this example we investigated the steam aged adhesion response of 0.25 mm filaments and cords $(2 + 2) \times 0.25 \text{ mm}$ with different settings of phosphate amount in their brass plate. Phosphate content was determined by chemical DCP-analysis (the Standard Test). Copper content of the thermodiffused brass coating was between 60.5 and 66 % and coating weight varied from about 2,8 g up to 5 g per kg of wire filament.

In a first set-up phosphatization of the brassed semi-product was carried out by a predip bath (20 to 50 g/l of phosphoric acid) with rapid drying prior to and in line with the entering section of the wire drawing machine. In a second better controlled and adjustable process the semi-product brass coating line was extended with an appropriate phosphatizing and phosphate fixing cell wherein the brass coated wire was treated in appropriate conditions (H_3PO_4 -concentration from 5 to up to more than 250g/l, preferably from 25 to 125 g/l ; zinc orthophosphate concentration from zero up to the solubility limit; different immersion times) with the aim of systematically increasing the phosphate content of the brassed wire (firmly attached to brass layer by proper drying/heating).

Steam aged adhesion retention (120°C - 24 hrs) of wire and cord samples was evaluated in 2 distinct batches of a given tire rubber compound stemming from the same supplier. The results are summarized in Table 5.

Table 5 : Adhesion force (Newton) versus PO_4 -content of wire and cord specimens following steam ageing.

Specimen type	PO_4 -content mg/m ²	Adhesion (N)			
		batch 1		batch 2	
		filament	cord	filament	cord
normal production	1.2 - 2.9	19-34	144-167	31-37	153-187
phosphatizing predip	3.1 - 3.9	39-52	192-223	46-58	230-262
	4.0 - 5.0	50-58	238-265	57-65	250-302
phosphatized on brass coating line	5.2 - 8.1	60-72	273-308	66-75	287-324
	9.2 - 12.8	71-86	293-328	85-92	330-342
	14 - 20	90-99	366-391	91-106	370-398
	23 - 28	86-94	345-369	89-96	355-370
	32 - 41	81-89	309-351	83-91	317-360

The tabulated results demonstrate the considerable improvement in adhesion retention after steam ageing obtainable by covering the wires or cords with a phosphatized brass coating comprising a specified minimum PO_4 -amount of 4 mg/m² according to the invention. It can be seen that beyond an optimum PO_4 -range (above about 25 - 30 mg/m²) there is a slight tendency to somewhat lower than maximum adhesion values. In this respect, however, processing care, drawing conditions (lubricant type and temperature ; number of dies and die series) and rubber compound factors will also affect actual adhesion response ; said factors may shift the optimum PO_4 -range to smaller or larger levels, or broaden or narrow it from case to case.

It can be seen that the improvement in aged adhesion retention obtainable by the invention is still significant at elevated PO_4 -levels of up to more than 40 mg/m^2 , although less pronounced and showing more variation as compared to the optimum PO_4 -range. Thus, excessive increase of a PO_4 -amount (about $40\text{-}50 \text{ mg/m}^2$ and more) is generally unnecessary for the purpose of adequate adhesion properties and often less desirable in practice owing to certain problems in wire production associated with drawability variations, increased drawing losses and the like.

Example 4

Experiments were made similar to those in example 3 with brassed cords $(2 + 2) \times 0.25 \text{ mm}$ but the rubber compound used for cord embedment was changed to check the comparative (steam) age adhesion response of different rubbers to the presence of phosphate in the brass coating.

In Table 6 a comparison is given between three unidentified standard industrial tire rubbers (as made available by well-known suppliers B, C and D) which were reinforced with conventional cords or alternatively cords according to the invention comprising on average between 10 and 15 mg/m^2 of PO_4 in their brass surface coating.

Table 6 : Adhesion property of cords according to the invention versus conventional cords in different rubbers

Rubber	Cord Adhesion Strength in Newton			
	Conventional Cords		Cords acc. to invention	
	Initial	Steam Aged	Initial	Steam Aged
B	492	271	493	357
C	423	243	446	349
D	438	201	450	360

10

In the following Table 7 the tests are repeated for rubbers B and C, but comprising brassed cords with varying phosphate amount in an usual brass composition of about 65 Cu - 35 Zn.

Table 7 : Effect of increasing PO₄-content of brass coating on cord adhesion in rubber C and D (steam ageing : 120° C - 24 hours)

	Compound C		Compound D			
	PO ₄ -content of brass (mg/m ²)	Adhesion strength Initial (N)	Adhesion strength Steam aged 24hrs-120°C (N)	PO ₄ -content of brass	Adhesion strength Initial (N)	Adhesion strength Steam aged (N)
10	≤ 3.0	403	243	≤ 3.0	-	185 - 204
	4.0 - 4.8	420	310	3.9 - 4.5	-	229 - 244
	7.1	437	322	6.1	-	260 - 293
	10.4	457	342	10.8	-	320
	15.2	445	360	14.6	-	379
	16.9	468	375	17.5	-	391
	21.6	485	413	19	-	366
	31	416	302	27.4	-	335

20 The test results (Table 7) demonstrate that a phosphate-containing brass coating of this invention is very effective in different commercial rubbers to considerably enhance adhesion retention of normal cords in steam ageing conditions. As expected, the attainable degree of improvement and the optimum PO₄-range depend on the rubber compound.

In a further series of tests we investigated the peculiar adhesion effect of certain special rubber ingredients (known as adhesion promoters and often optionally added to a given standard rubber mix) in combination with the phosphate factor.

We started with a standard compound S having the following base composition (main ingredients expressed as relative weight units):

Natural rubber : 100
Carbon : 60
Zinc oxide : 8
Sulfur : 4
Stearic Acid : 0.5

Other proprietary additives:

Santoflex* 13 (Monsanto) : 2
Dutrex* 729 : 6
Santocure MOR (Monsanto) : 0.8
Flectol* : 1

Compound S was modified by replacement of part of the carbon black with the well known HRH or RFS system, and additionally small quantities of three well known adhesion promoters were added, to give modified compositions as follows:

Ingredients	S ₁	S ₂	S ₃	S ₄
Carbon black	45	45	45	45
(Ultrasil*VN 13	12.5	12.5	12.5	12.5
RFS (Cofill*II	5	5	5	5
(Hexa K	-	-	1.5	1.5
Cyrez* resin 963	4	4	-	-
Manobond C16	1.5	-	-	1.5
Addivex Co 23%	-	1	1	-

Suppliers: Manobond C-16: Mancham Ltd. Manchester
Addivex Co 23%: Ets. Vasset, Ezamville, France
Cyrez resin: American Cynamid, New Jersey, USA

* "Santoflex", "Dutrex", "Flectol", "Ultrasil", "Cofill" and "Cyrex" are registered trademarks.

KK:5740W



Conventional brassed cords and cords according to the invention with a brass surface comprising from 8 to 20 mg PO_4 per m^2 were incorporated in said rubbers for adhesion testing after vulcanization (initial adhesion) and steam ageing (120°C - 24 hrs).

Table 8 : Cord Adhesion in modified rubbers

Adhesion strength in Newton

Rubber Compound	Conventional Cords		Cords acc. to invention	
	Initial	Steam Aged	Initial	Steam Aged
10 S	495	157	490	279
S ₁	481	304	489	436
S ₂	491	336	485	438
S ₃	492	140	493	303
S ₄	488	168	492	376

From the tabulated adhesion ratings it is clear that cords according to the invention systematically retain a significantly higher cord-to-rubber bond level than conventional tire cords under similar steam ageing conditions, and this for all the tested rubber modifications.

20 Comparing the different additives, it can be seen that the Cyrez adhesion promotor is apparently more effective for steam ageing than a HRH-type. However, this in no way diminishes the general conclusion that a phosphate-containing brass coating according to the invention affords a very substantial improvement of cord/rubber adhesion in severe heat/humidity ageing conditions irrespective of the applied tire rubber compound.

Example 5

Similar to example 4 the same cord construction (2+2) x 0.25 mm comprised of respectively conventionally produced filaments with normal brass coating and of filaments made according to the invention (drawn from prephosphatized brassed wire) were incorporated in various rubbers to investigate the adhesion properties under (overcure) heat ageing conditions. Adhesion response upon heat ageing was determined by subjecting cord/rubber samples to prolonged vulcanization cure cycles at 155° C and then measuring the adhesion strength (cord pull-out force in Newton).

Table 9 summarizes the results obtained in commercial rubber C of example 4.

Table 9 : Adhesion strength vs. cure time

Cure time (minutes)	PO ₄ -content of brass coating, mg/m ²				
	Current Cords	Interme- diate cords	Cords according to invention		
	< 3	3 - 4	7,6	14	18,2
15	333	417	350	390	410
25	448	482	472	492	440
35	475	465	463	475	495
60	403	422	447	462	462
180	345	360	407	415	447
200					

Similar tests were carried out on modified rubbers S₁, S₂, S₃ and S₄ of Example 4 reinforced with normal cords and cords according to the invention. Here the

cord/rubber blocks were heat aged for 200 minutes at 155° C. The results are set out in Table 10 as follows :

Table 10 : Overcure adhesion retention (Newton)

Rubber Compound	Improved Cords	Conventional Cords
S ₁	417	305
S ₂	450	422
S ₃	473	418
S ₄	452	373

10 From the results it follows that improved cords with a phosphate-containing brass coating according to the invention are consistently superior to normal cord in their resistance to adhesion degradation as a result heat ageing (overcure). The improvement is systematically observed in a variety of rubbers although the degree of performance will depend on rubber type and on optimization of a PO₄-containing brass composition.

Some typical results are illustrated in Fig. 2 described hereinabove.

Example 6

20 To evaluate other important advantages of the present invention (and also to distinguish between the humidity and heat factors in the humidity/heat ageing problem) we carried out additional tests in cured humidity ageing conditions. For this purpose vulcanized cord/rubber blocks were prepared from the same conventional cords and cords according to the invention of Example 5 and exposed in a humidity chamber for 8 days to a temperature of 80 - 85° C and an atmosphere of 95 % relative humidity.

Table 11 gives a comparison of initial and cured humidity adhesion for both cord types embedded in rubbers S₁ to S₄.

Table 11 : Effect of humidity ageing on cord adhesion
(Adhesion strength in Newton)

Rubber Compound	Current Cords		Cords acc. to invention	
	Initial	Cured Humidity	Initial	Cured Humidity
S ₁	481	363	489	465
S ₂	491	382	485	471
S ₃	492	140	493	314
S ₄	488	175	492	324

The tabulated results clearly demonstrate the remarkable capacity of cords according to the invention to retard adhesion loss by humidity ageing.

Finally, a complementary test was carried out to separate the heat and humidity effects in steam ageing conditions. In this case we compared the adhesion response of cord/rubber samples upon ageing for 24 hours at 120° C in a closed chamber comprising an atmosphere of respectively wet steam and dry nitrogen.

The results are summarized below for conventional cords and cords according to the invention incorporated in rubber compound S.

Table 12 : Adhesion strength (Newton) after heat ageing
(24 hours - 120° C)

Cord Type	Initial Adhesion	Heat Aged	
		Steam	Nitrogen
Conventional	462	127	238
Invention	483	283	352

16

It can be seen that both the heat and humidity ageing part of the adhesion loss are considerably smaller when using cords according to the invention which proves the outstanding capacity of the invention to improve adhesion retention in different ageing conditions involving varying relative heat and humidity effects.

20

In summary, as seen from the examples and the results shown in the tables above, steel filaments and cords treated according to the invention and provided with a specified phosphate-containing brass surface coating for bonding to rubber ensure durable adhesion with rubber in service. In particular, adhesion retention in widely varying heat and/or humidity ageing conditions are markedly improved in different tire rubber compounds.

It has to be understood that the invention and the underlying inventive concept are not restricted to the generally known combination of steel elements and brass surface coatings used for reinforcing rubber with adequate bond strength. With respect to the selection of a reinforcing material, any alloyed steel, including non-ferrous metals and alloys, may be combined with rubber in any suitable form (such as filaments, cords, flat wire and other shaped elements and fabrics

thereof) and provide improved adhesion properties if said elements are covered with a phosphate-containing brass layer.

In addition to the exemplified phosphatizing methods and the preferred embodiments of (Zn, Cu) phosphate-containing brass surface coatings for improving rubber to steel (cord) vulcanization bond properties, the invention may be extended to modified phosphatizing methods and other phosphorus compounds (pyrophosphates, phosphides) and possibly other P-alloying means to realize a desired P-containing brass coating. Modified phosphatizing methods may for example include depositing a metallic film (selected from Zn, Fe, Mn or a combination thereof) onto the brass surface and chemically converting said surface film into phosphate by treating the same in a phosphating bath.

To form a desired phosphated film on brassed wire prior to drawing a final filament, a chemical conversion treatment in a phosphoric acid solution containing metallic zinc ions, or optionally manganese or iron or iron and calcium ions to modify the metal composition of the phosphate film, may if desired be made. Nickel and/or cobalt phosphates may similarly be incorporated into the brass coating if desired. Also electrochemical aids and the use of electrolytic deposition are not excluded.

The claims defining the invention are as follows:

1. A rubber adherable steel reinforcement element having a brass alloy coating with a copper content of at least 55%, a substantially homogeneous Cu-Zn composition with an essentially alpha brass structure, said coating having incorporated therein phosphorus in the form of phosphate ions in an amount of from 5 to 50 milligrams of phosphate ions per square metre of coating surface, wherein said phosphorus in said brass alloy coating serves to provide an enhanced adhesion to vulcanized rubber products upon heat and/or humidity ageing.

2. A steel element as claimed in claim 1 in the form of a steel wire.

3. A steel element as claimed in claim 1 or claim 2 in the form of a steel wire having a diameter of not more than 0.5 mm, a tensile strength of at least 2500 N/mm^2 and a brass alloy coating having a thickness of from 0.10 to 0.40 micrometer.

4. A steel element as claimed in any one of claims 1 to 3 wherein the brass alloy coating is one which has been applied by alloy plating.

5. A steel element as claimed in any one of claims 1 to 3 wherein the brass alloy coating is one which has been applied by sequential plating of copper and zinc on to the steel element followed by thermodiffusion to form a substantially homogeneous coating of the brass alloy.

6. A steel element as claimed in any one of claims 1 to 5 wherein the brass alloy coating has a copper content of from 58 to 75%.

7. A steel element as claimed in any one of claims 1 to 6 wherein the brass alloy coating has a copper content of from 60 to 72%.

8. A steel element as claimed in any one of claims 1 to 7 wherein the brass alloy coating contains phosphorus in an amount of from 6 to 40 mg PO_4 per m^2 expressed as a weight content of phosphate ions.

KK:5740W



9. A steel element as claimed in any one of claims 1 to 8 wherein the brass alloy coating contains phosphorus in an amount of from 8 to 30 mg/m² expressed as a weight content of phosphate ions.

10. A steel element as claimed in any one of claims 1 to 9 wherein the brass alloy coating contains phosphorus in an amount of from 10 to 25 mg/m² expressed as a weight content of phosphate ions.

11. A method of producing steel reinforcement elements in the form of steel wire which comprises applying a brass alloy coating with a copper content of at least 55% to the surface of a steel wire wherein phosphorus is incorporated into the brass alloy coating by contacting the surface of the brass alloy coating with a phosphatizing composition and drawing the wire whereby phosphorus is distributed in the brass alloy coating in an amount of more than 4 milligrams of phosphate ions per square metre of coating surface.

12. A method as claimed in claim 11 wherein the phosphatizing composition contains H₃PO₄ in a concentration of from 5 to 250 g/l and optionally zinc phosphate in a concentration up to the solubility limit.

13. A method as claimed in claim 11 or claim 12 wherein the wire is dried between the steps of contacting with the phosphatizing composition and drawing.

14. A steel cord for use as a tire reinforcing element which comprises a plurality of steel wires as claimed in claim 2.

15. A steel cord as claimed in claim 14 wherein the steel wires have a diameter of between 0.1 and 0.4 mm and a tensile strength of at least 2700 N/mm².

16. Vulcanized rubber articles containing as reinforcements steel elements as claimed in any one of claims 1 to 10.

17. Rubber tires containing steel cords as claimed in claim 14 or claim 15 as reinforcements.

KK:5740W



18. A method of producing vulcanized rubber articles containing steel reinforcement elements in which unvulcanized rubber is vulcanized in contact with steel reinforcement elements whereby bonding between the vulcanized rubber and the steel reinforcement elements is effected, characterized in that the steel reinforcement elements used are as claimed in any one of claims 1 to 10 or are as produced by a method as claimed in any one of claims 11 to 13.

19. A rubber adherable steel reinforcement element as defined in claim 1 and substantially as herein described with reference to any one of Examples 1 to 6, but excluding any comparative examples therein.

20. A method for producing a rubber adherable steel reinforcement element as defined in claim 1 which method is substantially as herein described with reference to any one of Examples 1 to 5, but excluding any comparative examples therein.

DATED this TWENTY-EIGHTH day of FEBRUARY 1990

N V BEKAERT S A

Patent Attorneys for the Applicant
SPRUSON & FERGUSON

KK:5740W



FIG.1

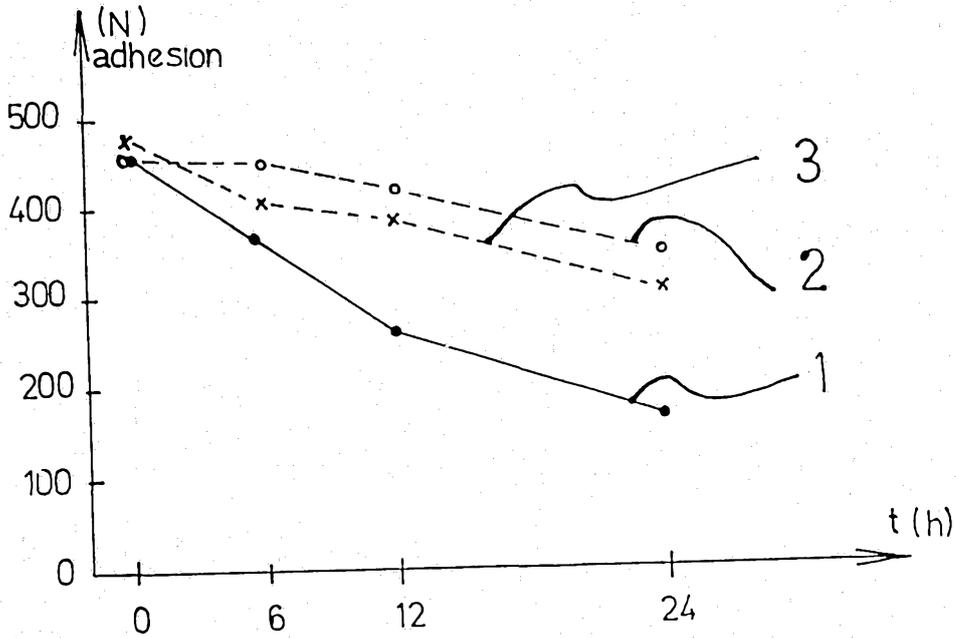


FIG.2

