

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2010317776 B2

(54) Title
Adsorption of contaminants from liquid and electrochemical regeneration of adsorbent

(51) International Patent Classification(s)
C02F 1/467 (2006.01) **C02F 1/28** (2006.01)

(21) Application No: **2010317776** (22) Date of Filing: **2010.11.03**

(87) WIPO No: **WO11/058298**

(30) Priority Data

(31) Number **0919413.5** (32) Date **2009.11.05** (33) Country **GB**

(43) Publication Date: **2011.05.19**
(44) Accepted Journal Date: **2014.01.30**

(71) Applicant(s)
ARVIA TECHNOLOGY LIMITED

(72) Inventor(s)
Roberts, Edward P. L.;Brown, Nigel Willis;Hussain, Syed Nadir

(74) Agent / Attorney
Marks & Clerk Australia, Level 5 412 Collins Street, MELBOURNE, VIC, 3000

(56) Related Art
BROWN N. W. et al., "Electrochemical regeneration of a carbon-based adsorbent loaded with crystal violet dye"
ZHOU M. H. et al., "Electrochemical regeneration of activated carbon loaded with p-nirophenol in a fluidized electrochemical reactor"
US 2008/0245739 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 May 2011 (19.05.2011)

(10) International Publication Number
WO 2011/058298 A1

(51) International Patent Classification:
C02F 1/467 (2006.01) *C02F 1/28* (2006.01)

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/GB2010/002027

(22) International Filing Date:
3 November 2010 (03.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0919413.5 5 November 2009 (05.11.2009) GB

(71) Applicant (for all designated States except US): **ARVIA TECHNOLOGY LIMITED** [—/GB]; Energy Innovation Centre, Capenhurst Technology Park, Capenhurst, Chester CH1 6ES (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROBERTS, Edward P. L.** [GB/GB]; 8 Chichester Street, Chester CH1 4AD (GB). **BROWN, Nigel Willis** [GB/GB]; 25 Talke Road, Alsager, Stoke-on-Trent ST7 2PW (GB).

(74) Agent: **DAUNCEY, Mark**; Mark & Clerk LLP, Sussex House, 83-85 Mosley Street, Manchester M2 3LG (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))



WO 2011/058298 A1

(54) Title: ADSORPTION OF CONTAMINANTS FROM LIQUID AND ELECTROCHEMICAL REGENERATION OF ADSORBENT

(57) Abstract: A method for the treatment of a liquid. The method comprises contacting the liquid within a treatment zone with an adsorbent material, which is then electrochemically regenerated within a regeneration zone following contact with said liquid. A disinfectant precursor species is provided within the regeneration zone and then electrochemically converted to a disinfectant species which can then contact adsorbent material and/or liquid within the regeneration zone effecting in-situ disinfection and resulting in the presence of residual disinfectant species in the treated liquid. There is further provided apparatus for carrying out such a method.

TREATMENT OF LIQUIDS

The present invention relates to a method for the treatment of liquids. The invention has particular, but not exclusive application in the treatment of contaminated liquids to remove organic pollutants and kill bacteria, fungus, mold, spores or other micro-organisms present in the liquid.

Chlorine is widely used as a disinfectant in various waters, including drinking, process and swimming pool waters. Its major advantage over alternative disinfection technologies (e.g. ozone, UV) is that it provides residual disinfection capability as it remains dissolved in the water and thereby continues to provide protection against bacteria, fungus, mold, spores and other micro-organisms over a longer period. In addition to its disinfectant properties, chlorine is also a strong oxidising agent and can therefore oxidise any organic pollutants present in contaminated water. These properties have resulted in chlorine being the most widely used disinfectant for aqueous applications.

Traditional dosing regimes to disinfect liquids typically employ chlorine, hypochlorite solutions, chloramine solutions, chlorine dioxide or hydrogen peroxide. Unfortunately, however, many of the traditional disinfectants, in particular chlorine, are very hazardous substances. As an alternative, systems have been developed for producing chlorine or hypochlorite from brine using electrochlorination. In spite of the perceived benefits of such systems, their commercial application to date has been hindered by significantly increased capital cost compared to traditional chlorine dosing regimes.

An object of the present invention is to obviate or mitigate problems associated with current methods for disinfecting contaminated liquids.

A first aspect of the present invention provides a method for the treatment of a liquid comprising contacting the liquid within a treatment zone with an adsorbent material, passing the adsorbent material to a regeneration zone within the treatment zone after contact with said liquid and electrochemically regenerating the adsorbent material within the regeneration zone, disinfectant precursor species being provided in the regeneration zone, subjected to electrochemical conversion to generate a disinfectant species within the regeneration zone and adsorbent material and/or liquid within the regeneration zone contacted by said disinfectant species, wherein regeneration of the adsorbent material is effected simultaneously with oxidation of the disinfectant precursor species.

By employing electrochemical treatment within a regeneration zone to regenerate used adsorbent material and to produce disinfectant species in-situ, the present invention provides a simple, convenient and environmentally acceptable method to treat contaminated and infected liquids which avoids many of the disadvantages associated with existing systems. The present invention thus provides a combined method for the decontamination and disinfection of liquids in need of such treatment. While the method according to the first aspect of the present invention is eminently suitable for the combined treatment of contaminated and infected liquids, it will be appreciated that the method can be employed for disinfection alone or decontamination alone, depending upon the level of infectious agents and contaminants present in the liquid to be treated.

Prior to the development of the present invention methods of disinfecting liquids typically required the addition to the liquid of a disinfectant, such as chlorine or a chlorinated oxidising agent, which are generally hazardous to handle and store. By generating the disinfectant species in-situ the need to handle and store these hazardous chemicals is avoided. By way of example, the method according to the present invention facilitates the production of a sufficient quantity of oxidised chloride species to be added to a supply of water to ensure that the water remains potable and in doing so reduces or eliminates the need for conventional chemical biocides.

The term 'oxidised chloride species' is intended to encompass a range of oxidised chloride species including, but not limited to, dissolved chlorine, hypochlorite and hypochlorous acid. It will be appreciated that the particular concentration of such species employed in a particular application will depend upon a range of factors, such as solution temperature and pH, as well as parameters of the process used to generate the species and/or parameters of the subsequent processes in which the species are intended to be used.

Preferably the disinfectant species is generated within the regeneration zone at a first higher concentration and then passed to the treatment zone where it disperses in the liquid to be treated so as to be present in said liquid at a second lower concentration. Generation of disinfectant species within the regeneration zone enables high levels of disinfection to be achieved within the regeneration zone where the disinfectant concentration is highest. Disinfection may be effected by contacting microorganisms,

such as bacteria, within liquid present within the regeneration zone and/or microorganisms that have been adsorbed by the adsorbent material and which are not killed as a result of the electrochemical regeneration of the adsorbent material. Further disinfection may also be achieved within the treatment zone by residual disinfectant species which have passed from the regeneration zone to the treatment zone. This leads to another significant advantage of the present invention since it facilitates residual disinfection of liquid after it has left the treatment zone.

A second aspect of the present invention provides apparatus for the treatment of a liquid comprising a treatment reservoir for liquid to be contacted by an adsorbent material; and a regeneration chamber defined between two electrodes which are controllable to simultaneously electrochemically regenerate said adsorbent material following contact with said liquid and electrochemically convert a disinfectant precursor species to generate said disinfectant species within the regeneration zone which can then contact adsorbent material and/or liquid within the regeneration zone, wherein the regeneration chamber is within the treatment reservoir.

In the first and/or second aspects of the present invention, electrochemical conversion of the disinfectant precursor preferably comprises electrochemical oxidation. In preferred embodiments of the present invention the disinfectant precursor species comprises chloride ions, more preferably the disinfectant precursor species is a chloride salt and preferably the disinfectant precursor species is sodium chloride, which may be provided in the form of dry salt or as a brine and most preferably the sodium chloride is in the form of a brine. Salt water as the disinfectant precursor may be particularly desirable in coastal areas where salt water is plentiful and could be electrochemically oxidised using the method/apparatus of the present invention to generate any required amount of oxidised chloride species. Electrochemical treatment of such precursor species liberates oxidised chloride species, which represent preferred disinfectant species. The electrochemical production of oxidised chloride species using direct electric current provides a number of benefits over traditional methods, including no-longer requiring on-site storage and handling of hazardous chlorine-based products, since the present invention enables oxidised chloride species to be generated in-situ on demand and in precisely the correct amount, which can, if desired, take into account existing concentrations of oxidised chloride species within the liquid being treated. The method of the present invention thus preferably involves monitoring the concentration of disinfectant species available to contact liquid to be treated and generating further

disinfectant in response to said monitoring detecting that the concentration of available disinfectant species is below a threshold level. Given the advantages associated with generation of disinfectant in-situ on demand it will be appreciated that it is preferred that the further disinfectant species is generated by providing further disinfectant precursor species in the regeneration zone and subjecting said further precursor species to electrochemical oxidation.

Moreover, it will be appreciated that the handling and storage of preferred disinfectant precursors, such as brine, is safe, simple and relatively cheap, which provide the method of the present invention with significant commercial advantages over existing disinfectant methods.

Adsorbent materials suitable for use in the method of the present invention are electrically conducting solid materials capable of convenient separation from the liquid phase. Suitable materials are discussed in more detail below, but preferred adsorbent materials comprise a particulate electrically conductive adsorbent material, such as unexpanded graphite intercalation compounds (GICs) and/or activated carbon. Typical individual GIC particles suitable for use in the present invention have electrical conductivities in excess of $10,000 \Omega^{-1} \text{ cm}^{-1}$. It will be appreciated however that in a bed of particles this will be significantly lower as there will be resistance at the particle/particle boundary. Hence it is desirable to use as large a particle as possible to keep the resistance as low as possible. It will be appreciated however that a large number of different GIC materials have been manufactured and that different materials, having different adsorptive properties, can be selected to suit a particular application of the method of the present invention.

In the preferred embodiment which employs brine or salt water as the disinfectant precursor species, electro-chlorination is a suitable process because the presence of the brine in the liquid being treated increases the conductivity of the liquid so that the adsorbent regeneration and oxidised chloride species generation processes can be operated at relatively low voltages. Yet further commercial advantages arise from the use of preferred adsorbent materials with relatively high conductivities, which results in the regeneration of the adsorbent and electro-oxidation of the disinfectant precursor being relatively low power processes and enables the amount of precursor used to be determined almost exclusively upon the amount of disinfectant needed, rather than having to add an amount of precursor to produce conductivity within the regeneration zone. Moreover, using high conductivity adsorbents allows the method

of the present invention to be used to treat water of any conductivity, including low conductivity water.

Another significant advantage associated with the present invention is that the possible generation of chlorinated by-products by the electrochemical oxidation of organic contaminants within the liquid should not represent a potential hazard if the chlorinated compounds have preferential adsorption onto the particulate adsorbent material and higher adsorptive capacities on the adsorbent material. Hence the method of the present invention will help to prevent the release of chlorinated by-products from the decontaminated and disinfected liquid, which is important from both an environmental and economic standpoint.

The decontamination/disinfection treatment process, the adsorbent material regeneration process and the disinfectant generation process can each be carried out continuously, semi-continuously or on a batch basis. Thus, liquid in need of treatment can be continuously passed through the treatment zone, such as a reservoir, containing appropriate levels of adsorbent and disinfectant, or individual volumes of liquid to be treated can be decontaminated and disinfected as a batch, with the adsorbent material being regenerated and the disinfectant species being generated during treatment of the respective batch or between batch treatments as appropriate. Suitable apparatus for carrying out the process in a continuous, semi-continuous or batch-wise manner is described in International patent publication no.s WO2007/125334 and WO2009/050485.

In a first preferred embodiment of the present invention, contacting of the liquid with the adsorbent material and any residual disinfection occurs during passage of the liquid through the treatment zone containing the adsorbent material and any residual disinfectant species. Used adsorbent material that has already contacted contaminated/infected liquid can be recycled through the regeneration zone, for example in the form of a chamber, which is advantageously located within the treatment reservoir, prior to contacting further liquid in need of treatment. A direct electric current is preferably passed through the adsorbent material as the adsorbent material passes through the regeneration zone to regenerate the adsorbent material. A current of around 0.05 to 1 A may be employed. More preferably a current of around 0.25 to 0.75 A may be employed, and most preferably a current of around 0.5 A may be employed. A current density of around 1 to 20 mA/cm² may be employed.

Alternatively, it may be advantageous to use a current density of around 5 to 15 mA/cm², or a current density of around 10 mA/cm².

Electrochemical oxidation of the disinfectant precursor species to generate the disinfectant species is also preferably affected by passage of a direct electric current through a quantity of disinfectant precursor species introduced separately into the regeneration zone. A current of around 0.05 to 1 A, or more preferably a current of around 0.25 to 0.75 A, may be employed. Most preferably a current of around 0.5 A may be employed. A current density of around 1 to 20 mA/cm² may be used. Alternatively, it may be advantageous to use a current density of around 5 to 15 mA/cm², or a current density of around 10 mA/cm².

In a preferred embodiment the current employed to effect regeneration of the adsorbent material has substantially the same magnitude as the current used to oxidise the disinfectant precursor species. It is particularly preferred that regeneration of the adsorbent material is effected simultaneously with oxidation of the disinfectant precursor species.

Continuous injection of the disinfectant precursor species into the regeneration zone can occur throughout the treatment process.

It will be appreciated that the quantity of disinfectant precursor species required for a particular application may be admitted to the regeneration zone in a single batch, a plurality of discrete batches over a period of time or continuously over a suitable time period. The total quantity needed will depend upon the level of disinfection required and so may, in some cases, be calculable before treatment has begun or may need to be periodically or continually recalculated throughout the period of time that the liquid is being treated. It may therefore be advantageous to control the rate at which the disinfectant precursor species is admitted to the regeneration zone for electrochemical oxidation so as to generate the disinfectant species at a desired rate to suit a particular application.

It is necessary, when deciding the quantity of disinfectant precursor species required, to also consider the quantity of the oxidised chloride species that react with organic contaminants present in the liquid to be treated. The reacted oxidised chloride species thus no longer provide the required disinfectant effect due to the production of unwanted chlorinated organic species. An additional benefit of the present method

over previously patented methods is that said chlorinated organic species are removed by the adsorption process and do not remain in the treated liquid as unwanted contaminants.

The regeneration zone or chamber may be defined between two electrodes for coupling to a source of electrical power. In use, a voltage can be applied between the electrodes, either continuously or intermittently, to pass current through the adsorbent material and regenerate it in the manner described in "*Electrochemical regeneration of a carbon-based adsorbent loaded with crystal violet dye*"; N W Brown, E P L Roberts, A A Garforth and R A W Dryfe; *Electrachemica Acta* 49 (2004) 3269-3281 and "*Atrazine removal using adsorption and electrochemical regeneration*"; N W Brown, E P L Roberts, A Chasiotis, T Cherdron and N Sanghrajka; *Water Research* 39 (2004) 3067-3074. Contaminated/infected liquids may also be treated within an undivided cell, provided there is no continuous electrical connection between the cathode and anode through the solid conducting adsorbent material. In a continuous or semi-continuous process the flow rate of the adsorbent through the regeneration zone can be determined and controlled to ensure a sufficient dwell time in contact with the recycling adsorbent, while the concentration of the disinfectant species available to contact liquid in need of treatment in the regeneration zone and/or treatment zone can also be monitored and controlled to ensure that sufficient disinfectant is available to liquid flowing through the treatment zone.

Apparatus suitable to carryout the method of the present invention can employ a single regeneration zone, or a plurality of regeneration zones in more substantial equipment as described in detail in International patent publication no.s WO2007/125334 and WO2009/050485.

To aid in the recycling of the adsorbent material it is desirable to provide some means to assist movement of the adsorbent material through the treatment zone to the regeneration zone. It is also preferred that the adsorbent material is physically agitated within the treatment zone to assist distribution of the adsorbent material in the liquid and, in doing so, aid adsorption of contaminants, including microorganisms, such as bacteria, from the liquid. This physical agitation also assists dispersion of the disinfectant species throughout the liquid thereby aiding residual disinfection of the liquid during and/or after contact with the adsorbent. Conveniently, physical agitation of the adsorbent material can be achieved by delivery to the treatment zone of a

pressurised fluid, such as air, and/or liquid in need of decontamination and/or disinfection.

In a second preferred embodiment of the present invention, a batch-wise process is carried out such that liquid to be treated within the treatment zone is essentially stationary, save for agitation to aid distribution of the adsorbent material throughout the liquid. Conveniently, the adsorbent material can be removed from the treatment zone for recycling and regeneration, or more preferably, used adsorbent material that has already contacted liquid is regenerated within a regeneration zone within the treatment zone by passing an electric current through the adsorbent material to release from the adsorbent material gaseous products derived from contaminants formerly present in the liquid. Generation of the disinfectant species by electrochemical oxidation of the disinfectant precursor species is also preferably effected within the regeneration zone by passage of an electric current through a quantity of the disinfectant precursor species within the regeneration zone. Electrochemical oxidation of the precursor may be carried out once at the start of the treatment process if it is known in advance precisely how much disinfectant species will be required for the volume of liquid being treated, or the oxidation process may be carried out a plurality of times during treatment of the liquid to ensure there is always sufficient disinfectant species present to safely and effectively disinfect the liquid. In a preferred embodiment, electrochemical oxidation of the disinfectant precursor species to generate the disinfectant species and electrochemical regeneration of the adsorbent material occur effectively simultaneously within the regeneration zone such that disinfection is achieved at similar overall cost as compared to the adsorbent regeneration process carried out in WO2007/125334 and WO2009/050485. The cost of the combined electrochemical oxidation / regeneration process according to the present invention may in fact be lower than the regeneration process described in WO2007/125334 and WO2009/050485 in embodiments of the present invention where the disinfectant precursor species increases the conductivity of the medium within which the electrochemical processes are being carried out.

As mentioned above, the level of available, i.e. unused, disinfectant species within the regeneration and/or treatment zones can be continually or periodically monitored during treatment of the liquid, and if the concentration falls below a predetermined minimum level, further disinfectant species can be added to the regeneration and/or treatment zones. This further disinfectant can be any desirable type of disinfectant species and does not necessarily have to be generated in-situ, but it is preferred that

any further disinfectant is generated in-situ in this way in view of the commercial and environmental advantages of this method.

As mentioned above, it is preferred that the regeneration zone or chamber is defined between an anode and a cathode for coupling to a source of electrical power. The adsorbent material may be continuously or intermittently regenerated while it passes through the regeneration chamber by the application of an electrical voltage between the electrodes. The cathode is preferably housed in a separate compartment defined by a conductive membrane which enables a catholyte to be pumped through the compartment, whilst protecting the cathode from direct contact with the adsorbent material. If a chloride ion-containing solution (e.g. a dilute salt solution) was used as the catholyte (or as a component of the catholyte) and a conductive membrane is selected which allows chloride ions to pass therethrough then this would represent a relatively simple, cheap and convenient means of both supporting regeneration of the adsorbent material and generation of the disinfectant species. The rate of disinfectant generation could then be controlled at least in part by appropriate adjustment of the pressure within the cathode compartment and/or changing the salt concentration within the compartment.

When a batch-wise process is carried out such that the liquid to be treated is essentially stationary rather than flowing through the treatment zone or reservoir it may be desirable to physically agitate the adsorbent material within the treatment zone to assist distribution of the adsorbent material in the liquid and adsorption of contaminants from the liquid. The physical agitation may be provided in any convenient manner, but is conveniently provided by delivery to the treatment zone of pressurised fluid, e.g. air and/or a quantity of liquid in need of decontamination and/or disinfection.

Adsorbent materials suitable for use in the method of the present invention are electrically conducting solid materials capable of convenient separation from the liquid phase. The material may be used in powder, flake or granular form. Whilst the particle size may not be critical, the optimum size is likely to depend on the adsorbent properties. Generally, the material used and particularly the particle size is a compromise between surface area, electrical conductivity and ease of separation.

Preferred adsorbent materials comprise a particulate electrically conductive adsorbent material, such as unexpanded intercalated graphite and/or activated

carbon. A single form of electrically conductive material may be used or multiple component materials comprising a combination of two or more different types of material may be used in which at least one component is electrically conductive. Particularly preferred materials include graphite intercalation compounds (GICs). Preferred GICs include a bi-sulphate intercalated product, which can be formed by chemically or electrochemically treating graphite flakes in oxidising conditions in the presence of sulphuric acid. A preferred GIC is in flake form, and typically has a composition of at least 95% carbon, and a density of around 2.225 g cm^{-3} . Flake carbons can be used as the starting materials for producing GICs with significantly lower carbon contents (80% or less). These compounds can also be used, but are likely to result in slightly higher voltages across the electrochemical regeneration zone. Other elements may also be present within the GIC, depending on the initial composition of the flake graphite and the chemicals used to convert the flakes into intercalated form.

In single component adsorbent materials a typical particle size is around 0.25 - 0.75 mm. Significantly larger particle sizes can be employed, such as up to around 5 mm, when multiple component adsorbent materials are employed. Very fine particles (< 50 microns) can be used as the adsorbent material since these can be separated from the liquid phase easily if an organic polymer is used as a flocculent. This organic flocculent can then be destroyed by regeneration. The use of other materials of lower electrical conductivity and density would benefit from larger particles. Typical individual GIC particles suitable for use in the present invention have electrical conductivities in excess of $10,000 \Omega^{-1} \text{ cm}^{-1}$. It will be appreciated however that in a bed of particles this will be significantly lower as there will be resistance at the particle/particle boundary. Hence it is desirable to use as large a particle as possible to keep the resistance as low as possible. However it should also be noted that the surface area is inversely proportional to the particle size and there is a trade off between adsorptive capacity and electrical resistance.

It will be appreciated that a large number of different GIC materials have been manufactured and that different materials, having different adsorptive properties, can be selected to suit a particular application of the method of the present invention.

Three separate mechanisms of disinfection occur during the regeneration stage of the process which, in combination, provide strong disinfection conditions within the electrochemical regeneration chamber. The first is due to the direct electrical

disruption of bacteria by the passage of electrical current through the adsorbent when contaminant and bacteria are adsorbed on its surface; the second is the direct chlorination of bacteria by the oxidised chloride species generated from the precursor species; the third is a pH affect caused by an increase in hydrogen ions during the oxidation of adsorbed organics and water. Dilution of the oxidised chloride species into the treatment zone occurs during agitation of the adsorbent species such that a residual quantity of said oxidised chloride species remains in the treated fluid post-treatment, providing a residual disinfection effect.

The present invention will now be exemplified with reference to the following figure in relation to the treatment of swimming pool water.

Figure 1 is a graph illustrating the increase in free chlorine and decrease in pH over time of a sample of deionised water subjected to electrochemical oxidation in line with a step in the method of the present invention.

Apparatus suitable to remove contaminants, such as organic pollutants, from swimming pool water using a continuous, semi-continuous or batch process is described in International patent publication no.s WO2007/125334 and WO2009/050485. For the present exemplary embodiment, apparatus similar to that described in WO2007/125334 and WO2009/050485 is employed in which the water to be treated is passed through a treatment zone in the form of a reservoir, within which is provided a regeneration zone in the form of a chamber. The apparatus described in the aforementioned patent applications requires modification to facilitate in-situ generation of oxidised chloride species and disinfection of the swimming pool water as well as decontamination to remove organics, microorganisms and the like. The apparatus requires means by which the disinfectant precursor species, e.g. brine can be added to the regeneration chamber in a sufficient quantity, continuously or as often as necessary, to generate the required amount of disinfectant species, e.g. chlorine/hypochlorite, to provide the desired disinfection level within the regeneration chamber and residual disinfection within the treatment reservoir. The apparatus also requires means to control the current applied to the brine to ensure it is electrochemically converted to oxidised chloride species in the most appropriate manner.

When the apparatus is ready for use, an adsorbent material is loaded into the regeneration chamber in the required amount. Swimming pool water to be treated is

then delivered to the treatment reservoir through one or more inlets and filled to a level just below that of one or more discharge outlets from which it can then be returned, after treatment, to the swimming pool or to a separate storage unit. The regeneration chamber and the treatment reservoir are in fluid communication and so upon delivering swimming pool water to be treated into the treatment reservoir, a volume of the water enters the regeneration chamber. An appropriate amount of dry salt or brine is then introduced into the regeneration chamber and a current passed through the brine to generate chlorine gas within the water in the chamber.

Air under pressure is then delivered through openings in the base of the treatment reservoir to generate bubbles in the swimming pool water. This draws particulate adsorbent material and oxidised chloride species generated within the regeneration chamber from below an opening at the bottom of the regeneration chamber, and carries them upward through the treatment reservoir.

As the adsorbent material is carried upwards through the liquid, it adsorbs pollutants, such as organic compounds and bacteria, in the liquid and then passes into the regeneration chamber where a direct electric current is applied to the absorbed organic species to regenerate the adsorbent by anodic oxidation of the adsorbent and electrochemical destruction of some of the adsorbed bacteria. The direct electric current also causes oxidation of the brine within the regeneration chamber to generate oxidised chloride species which can then kill bacteria in water within the regeneration chamber as well as bacteria adsorbed on to the adsorbent material.

As the oxidised chloride species disperse throughout the liquid within the regeneration chamber it passes through to the treatment reservoir, typically as a more dilute solution, where it can provide the dual benefit of killing bacteria present within the treatment zone and providing some initial oxidation of any organic contaminants present within the liquid since oxidised chloride species are strong oxidising agents. By controlling the rate of salt addition and the electric current applied to the salt it is possible, if desired, to ensure that sufficient oxidised chloride species remain within the treated liquid to afford a continuing level of disinfection after treatment.

While a generally upward flow of liquid to be treated is preferred, the opposite arrangement can also be used. The direction of flow of liquid through the treatment reservoir will be selected on the basis of the system requirements, but there may be

2010317776 24 May 2012

benefit in having the flow of liquid generally opposite to the flow of adsorbent material in the treatment reservoir. That could be case if the general direction of flow of liquid in the reservoir was downwards rather than upwards and the adsorbent material was circulated as described above.

As noted above in a second embodiment, the method may be used for the separate treatment of individual volumes of liquid. In this variant, the treatment reservoir is filled with liquid for treatment to the required level, and then a sufficient quantity of the adsorbent material and oxidised chloride species provided to the treatment reservoir to complete the treatment. The liquid is then removed and a fresh charge of liquid delivered to the reservoir. The adsorbent material will normally be regenerated and recycled during the treatment process, with oxidised chloride species being produced in-situ on demand.

EXAMPLE

Deionised water (500 ml) was added to an adsorbent material (intercalated graphite material; 120 g) in a simple tank with an electrochemical cell at the base of the tank. The cathode and anode in this cell were divided by a semi-permeable membrane. The adsorbent material was provided on the anode side of the membrane. Sodium chloride was provided as the electrolyte on the cathode side of the membrane.

Air was injected at the base of the electrochemical cell to effect mixing of the adsorbent material with the deionised water.

After mixing a current (0.5 A) was applied to the water / adsorbent mixture and samples of the water then taken at regular intervals.

The applied potential resulted in the transfer of chloride ions across the membrane from the cathode side of the membrane into the anode compartment where they were oxidised to chlorine (Cl_2). Figure 1 illustrates the increase in free chlorine and consequential decrease in pH over time.

In this specification, the term 'comprises' and its variants are not intended to exclude the presence of other integers, components or steps.

In this specification, references to prior art are not intended to acknowledge or suggest that such prior art is part of the common general knowledge in Australia or that a person skilled in the relevant art could be reasonably expected to have ascertained, understood and regarded it as relevant.

2010317776 24 May 2012

CLAIMS

1. A method for the treatment of a liquid comprising contacting the liquid within a treatment zone with an adsorbent material, passing the adsorbent material to a regeneration zone within the treatment zone after contact with said liquid and electrochemically regenerating the adsorbent material within the regeneration zone, disinfectant precursor species being provided in the regeneration zone, subjected to electrochemical conversion to generate a disinfectant species within the regeneration zone and adsorbent material and/or liquid within the regeneration zone contacted by said disinfectant species, wherein regeneration of the adsorbent material is effected simultaneously with oxidation of the disinfectant precursor species.
2. A method according to claim 1, wherein liquid within the treatment zone is contacted by disinfectant species.
3. A method according to claim 1 or claim 2, wherein the disinfectant species is generated within the regeneration zone at a first higher concentration and then passed to the treatment zone where it disperses in the liquid to be treated so as to be present in said liquid at a second lower concentration.
4. A method according to any one of claims 1 to 3, wherein said electrochemical conversion comprises electrochemical oxidation of said disinfectant precursor species.
5. A method according to any one of claims 1 to 4, wherein the disinfectant precursor species comprises chloride ions.
6. A method according to any one of claims 1 to 4, wherein the disinfectant precursor species is a chloride salt.
7. A method according to any one of claims 1 to 4, wherein the disinfectant precursor species is sodium chloride.
8. A method according to any one of the preceding claims, wherein the disinfectant species is chlorine or other oxidised chloride species including hypochlorite and hypochlorous acid.

9. A method according to any one of the preceding claims, wherein the concentration of disinfectant species available to contact liquid is monitored and further disinfectant generated in response to said monitoring detecting that the concentration of available disinfectant species is below a threshold level.
10. A method according to claim 9, wherein the further disinfectant is generated by providing further disinfectant precursor species in the regeneration zone and subjecting said further precursor species to electrochemical oxidation.
11. A method according to any one of the preceding claims, wherein contacting of the liquid with the adsorbent material and disinfectant species occurs during passage of the liquid through the treatment zone.
12. A method according to any one of the preceding claims, wherein adsorbent material that has already contacted liquid is recycled through the regeneration zone prior to contacting further liquid; an electric current being passed through the adsorbent material as the adsorbent material passes through the regeneration zone to regenerate the adsorbent material.
13. A method according to claim 12, wherein a current of 0.05 to 1 A is employed.
14. A method according to claim 12, wherein a current of 0.25 to 0.75 A is employed.
15. A method according to claim 12, wherein a current of around 0.5 A is employed.
16. A method according to any one of the preceding claims, wherein electrochemical oxidation of the disinfectant precursor species is effected by passage of an electric current through a quantity of disinfectant precursor species within the regeneration zone.
17. A method according to claim 16, wherein a current of 0.05 to 1 A is employed.
18. A method according to claim 16, wherein a current of 0.25 to 0.75 A is employed.
19. A method according to claim 16, wherein a current of around 0.5 A is employed.

20. A method according to any one of claims 16 to 19, wherein the current employed to effect regeneration of the adsorbent material has substantially the same magnitude as the current used to oxidise the disinfectant precursor species.
21. A method according to claim any one of claims 16 to 20, wherein said quantity of disinfectant precursor species is admitted to the regeneration zone for electrochemical oxidation at a rate that is controllable to generate the disinfectant species at a desired rate.
22. A method according to any one of the preceding claims, wherein the adsorbent material is physically agitated within the treatment zone to assist distribution of the adsorbent material in the liquid and dispersion of disinfectant species throughout the liquid.
23. A method according to claim 22, wherein the physical agitation is provided by delivery to the treatment zone of a pressurised fluid and/or liquid in need of decontamination and/or disinfection.
24. A method according to any one of the preceding claims, wherein the adsorbent material comprises a particulate electrically conductive adsorbent material.
25. A method according to any one of the preceding claims, wherein the adsorbent material comprises unexpanded intercalated graphite.
26. A method according to any one of the preceding claims, wherein the adsorbent material comprises activated carbon.
27. Apparatus for the treatment of a liquid comprising a treatment reservoir for liquid to be contacted by an adsorbent material; and a regeneration chamber defined between two electrodes which are controllable to simultaneously electrochemically regenerate said adsorbent material following contact with said liquid and electrochemically convert a disinfectant precursor species to generate a disinfectant species within the regeneration zone which can then contact adsorbent material and/or liquid within the regeneration zone, wherein said regeneration chamber is within said treatment reservoir.

28. A method for the combined decontamination and disinfection of a liquid substantially as hereinbefore described.
29. Apparatus for the combined decontamination and disinfection of a liquid substantially as hereinbefore described.

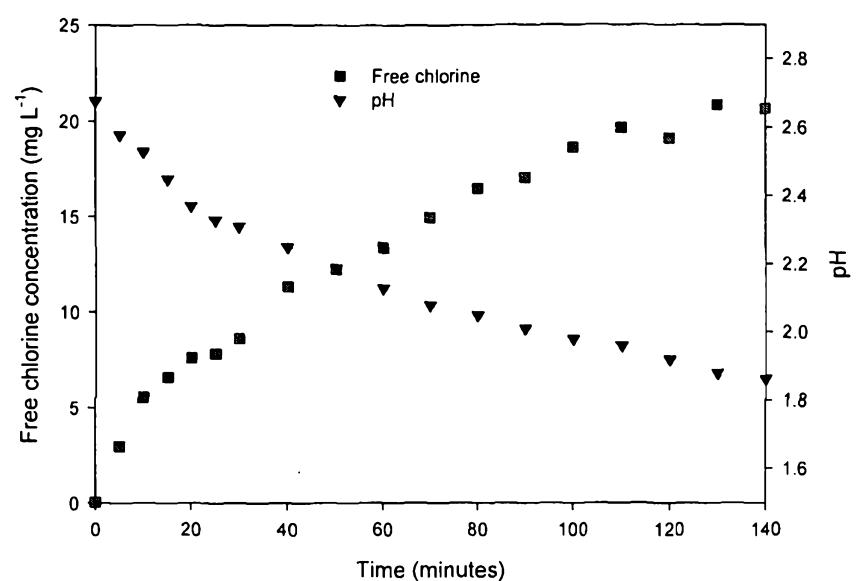


Figure 1