




(86) Date de dépôt PCT/PCT Filing Date: 1999/09/23
 (87) Date publication PCT/PCT Publication Date: 2000/11/16
 (45) Date de délivrance/Issue Date: 2009/06/30
 (85) Entrée phase nationale/National Entry: 2001/10/23
 (86) N° demande PCT/PCT Application No.: US 1999/021258
 (87) N° publication PCT/PCT Publication No.: 2000/068955
 (30) Priorité/Priority: 1999/05/05 (US09/305,726)

(51) Cl.Int./Int.Cl. *G21K 5/10* (2006.01)
 (72) Inventeurs/Inventors:
 WILLIAMS, COLIN BRIAN, US;
 ALLEN, JOHN THOMAS, US;
 SULLIVAN, GEORGE MICHAEL JR., US
 (73) Propriétaire/Owner:
 THE TITAN CORPORATION, US
 (74) Agent: SMART & BIGGAR

(54) Titre : SYSTEME D'IRRADIATION D'ARTICLES COMPRENANT UNE PAROI INTERMEDIAIRE REALISEE DANS UN MATERIAU FORMANT UN ECRAN DE PROTECTION CONTRE LES RAYONNEMENTS PLACE DANS UNE BOUCLE D'UN SYSTEME D'ACHEMINEMENT QUI TRANSPORTE LES ARTICLES
 (54) Title: ARTICLE IRRADIATION SYSTEM HAVING INTERMEDIATE WALL OF RADIATION SHIELDING MATERIAL WITHIN LOOP OF A CONVEYOR SYSTEM THAT TRANSPORTS THE ARTICLES

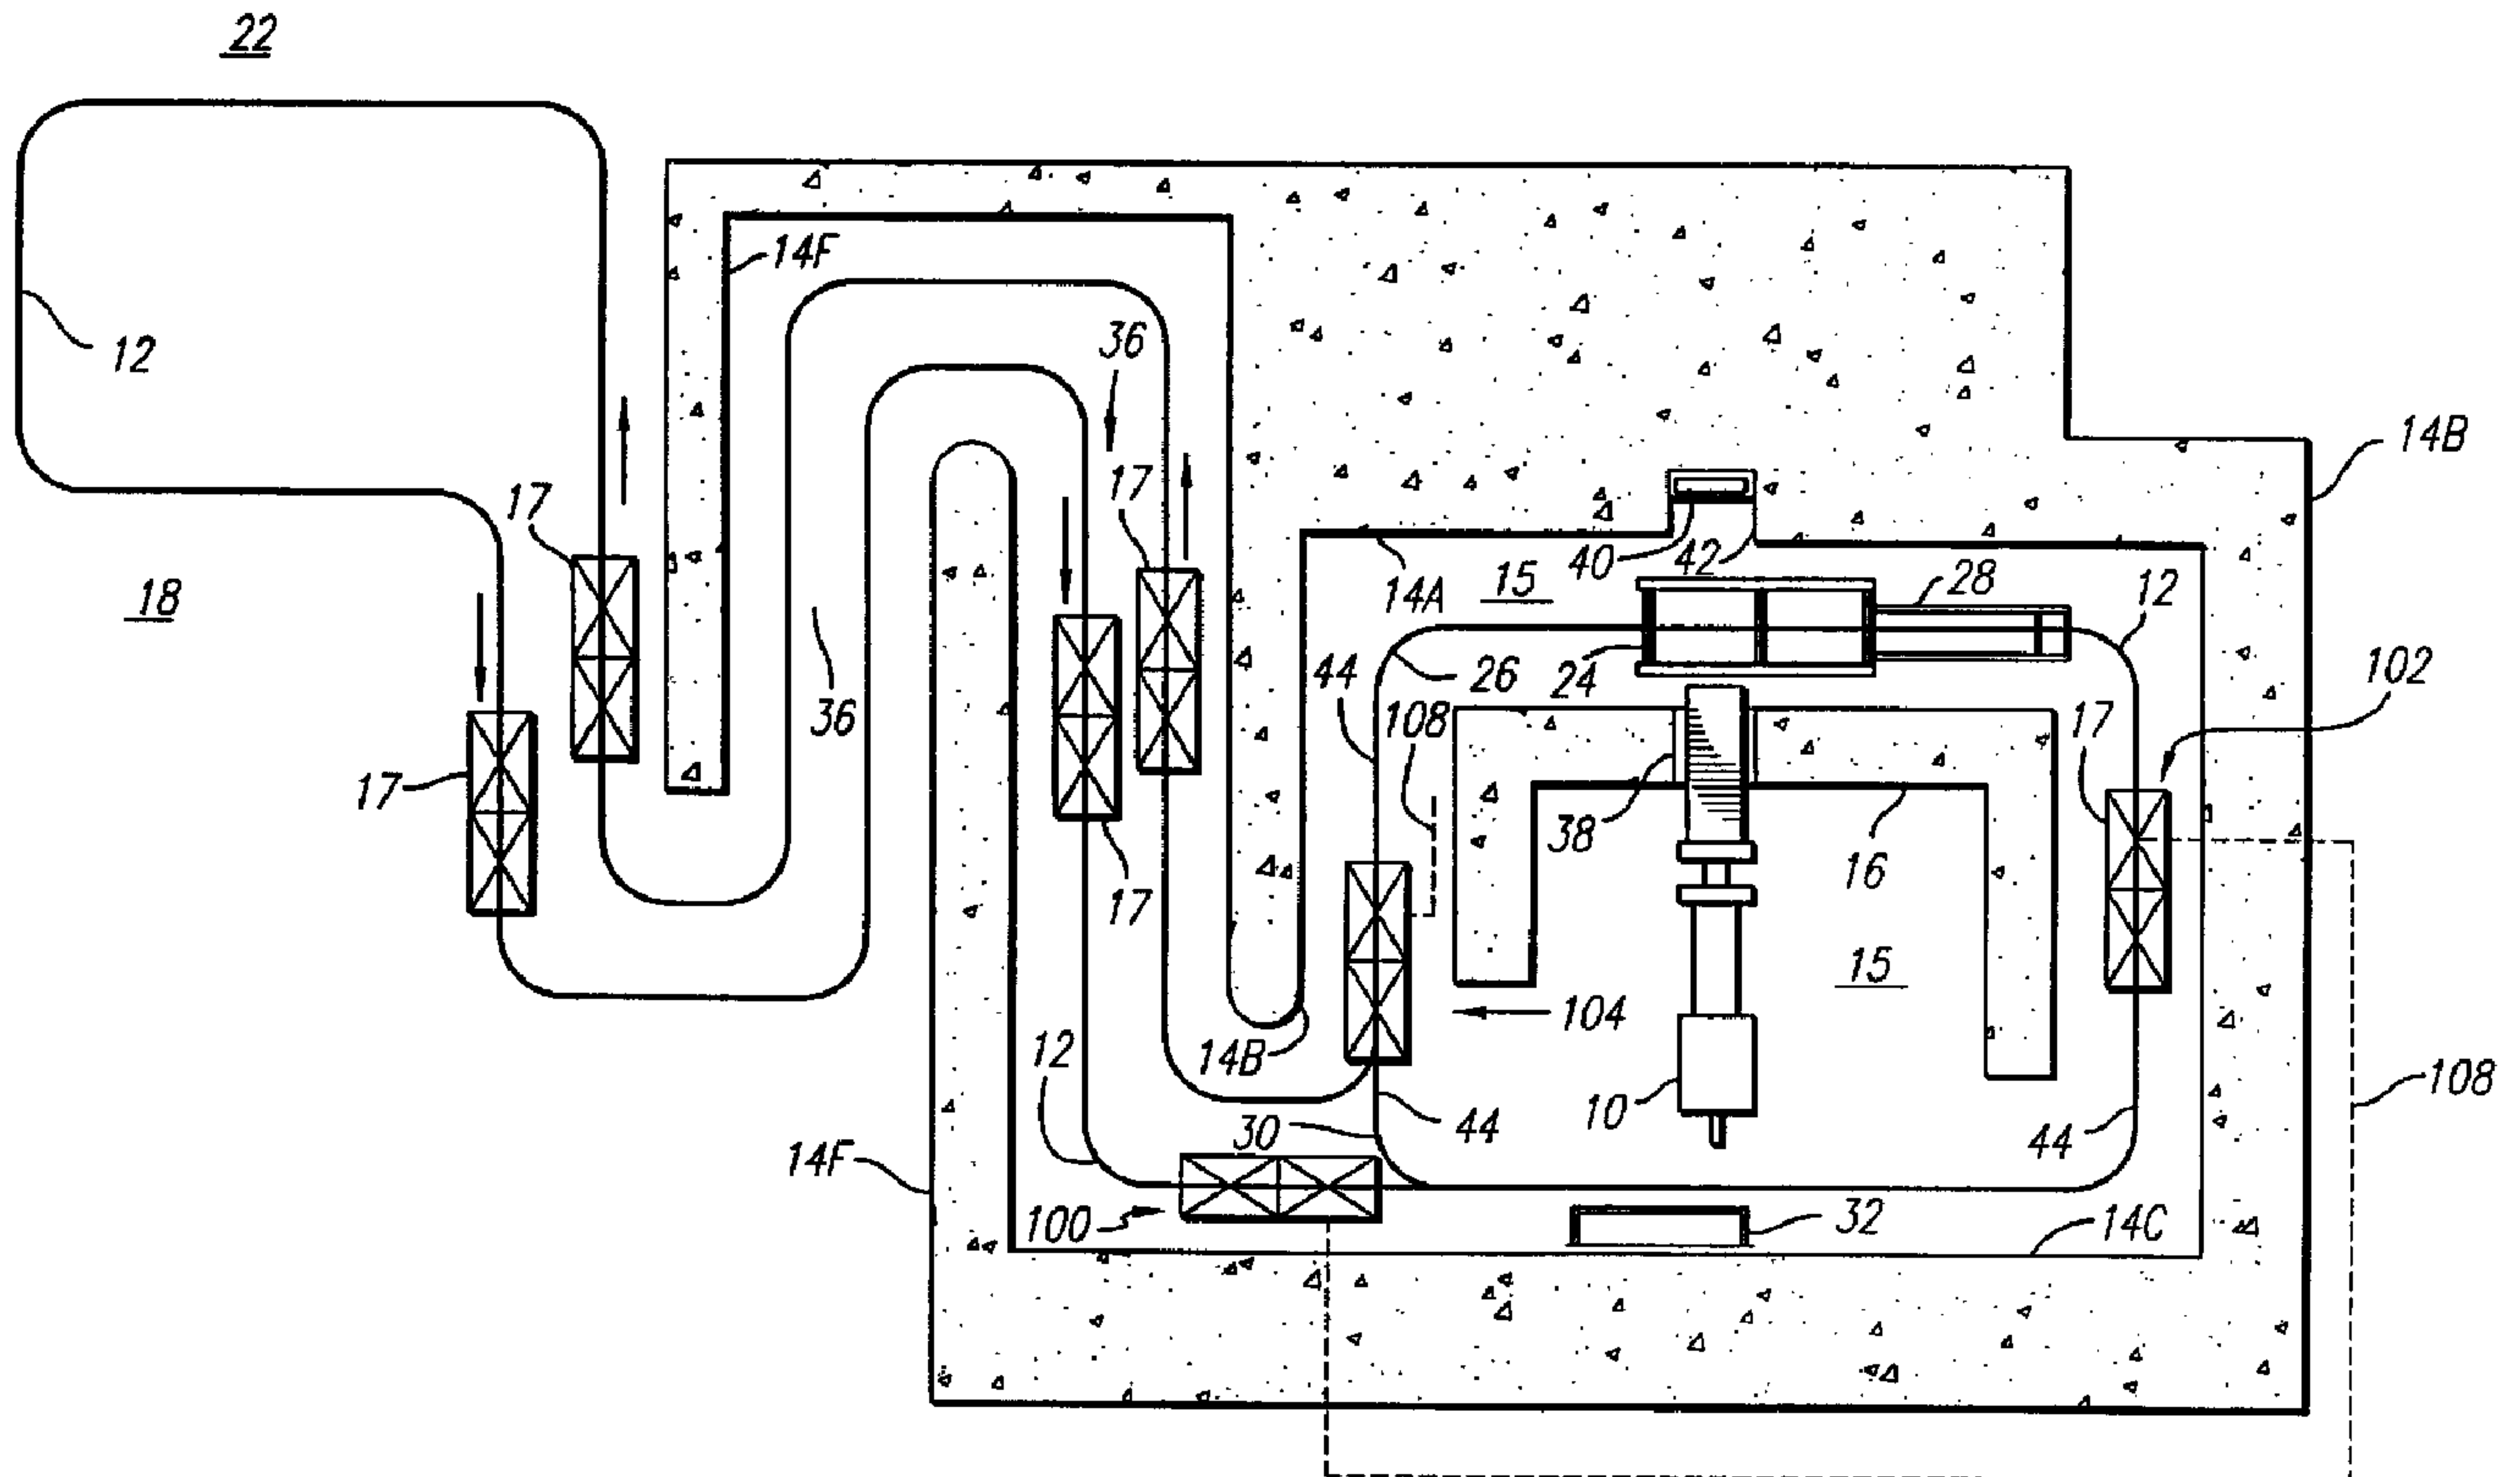

(57) Abrégé/Abstract:

An article irradiation system includes (1) a radiation source for scanning a target region with radiation, (2) a conveyor system including a process conveyor positioned for transporting articles in a given direction through the target region, and (3) radiation

(57) **Abrégé(suite)/Abstract(continued):**

shielding material defining the walls of a chamber containing the radiation source, the target region and a position of the conveyor system. The radiation source is disposed inside a loop defined by a portion of the conveyor system and is adapted to scan the articles in the chamber in a plane transverse to the given direction of the transport by the process conveyor. A shield (e.g., an intermediate wall) of radiation shielding material positioned within the loop supports a radiation shielding ceiling of the chamber, inhibits photons emitted from a beam stop in one of the chamber walls from impinging on the outer walls of the chamber and restricts flow in the chamber of ozone derived in the target region from the radiation source. A first queue is disposed outside of the chamber for transferring into the chamber articles from a loading area; a second queue is disposed in the chamber for moving the articles past the radiation source for irradiation by the source; and a third queue is disposed in the chamber for transferring articles from the chamber, after irradiation, for movement to an unloading area. The operations of the first, second and third queues are synchronized. The shield inhibits radiation from the source from reaching the queues.



PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G21K 5/10	A1	(11) International Publication Number: WO 00/68955 (43) International Publication Date: 16 November 2000 (16.11.00)
---	-----------	---

<p>(21) International Application Number: PCT/US99/21258</p> <p>(22) International Filing Date: 23 September 1999 (23.09.99)</p> <p>(30) Priority Data: 09/305,726 5 May 1999 (05.05.99) US</p> <p>(71) Applicant: THE TITAN CORPORATION [US/US]; 3033 Science Park Road, San Diego, CA 92121 (US).</p> <p>(72) Inventors: WILLIAMS, Colin, Brian; 6559 Avenida Manana, La Jolla, CA 92037 (US). ALLEN, John, Thomas; 4626 Black Pine Place, San Diego, CA 92130 (US). SULLIVAN, George, Michael, Jr.; 8778 Elford Court, San Diego, CA 92129 (US).</p> <p>(74) Agents: PARKHURST, David, G. et al.; Fulwider Patton Lee & Utecht, LLP, Howard Hughes Center, Tenth Floor, 6060 Center Drive, Los Angeles, CA 90045 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
---	--

(54) Title: ARTICLE IRRADIATION SYSTEM HAVING INTERMEDIATE WALL OF RADIATION SHIELDING MATERIAL WITHIN LOOP OF A CONVEYOR SYSTEM THAT TRANSPORTS THE ARTICLES

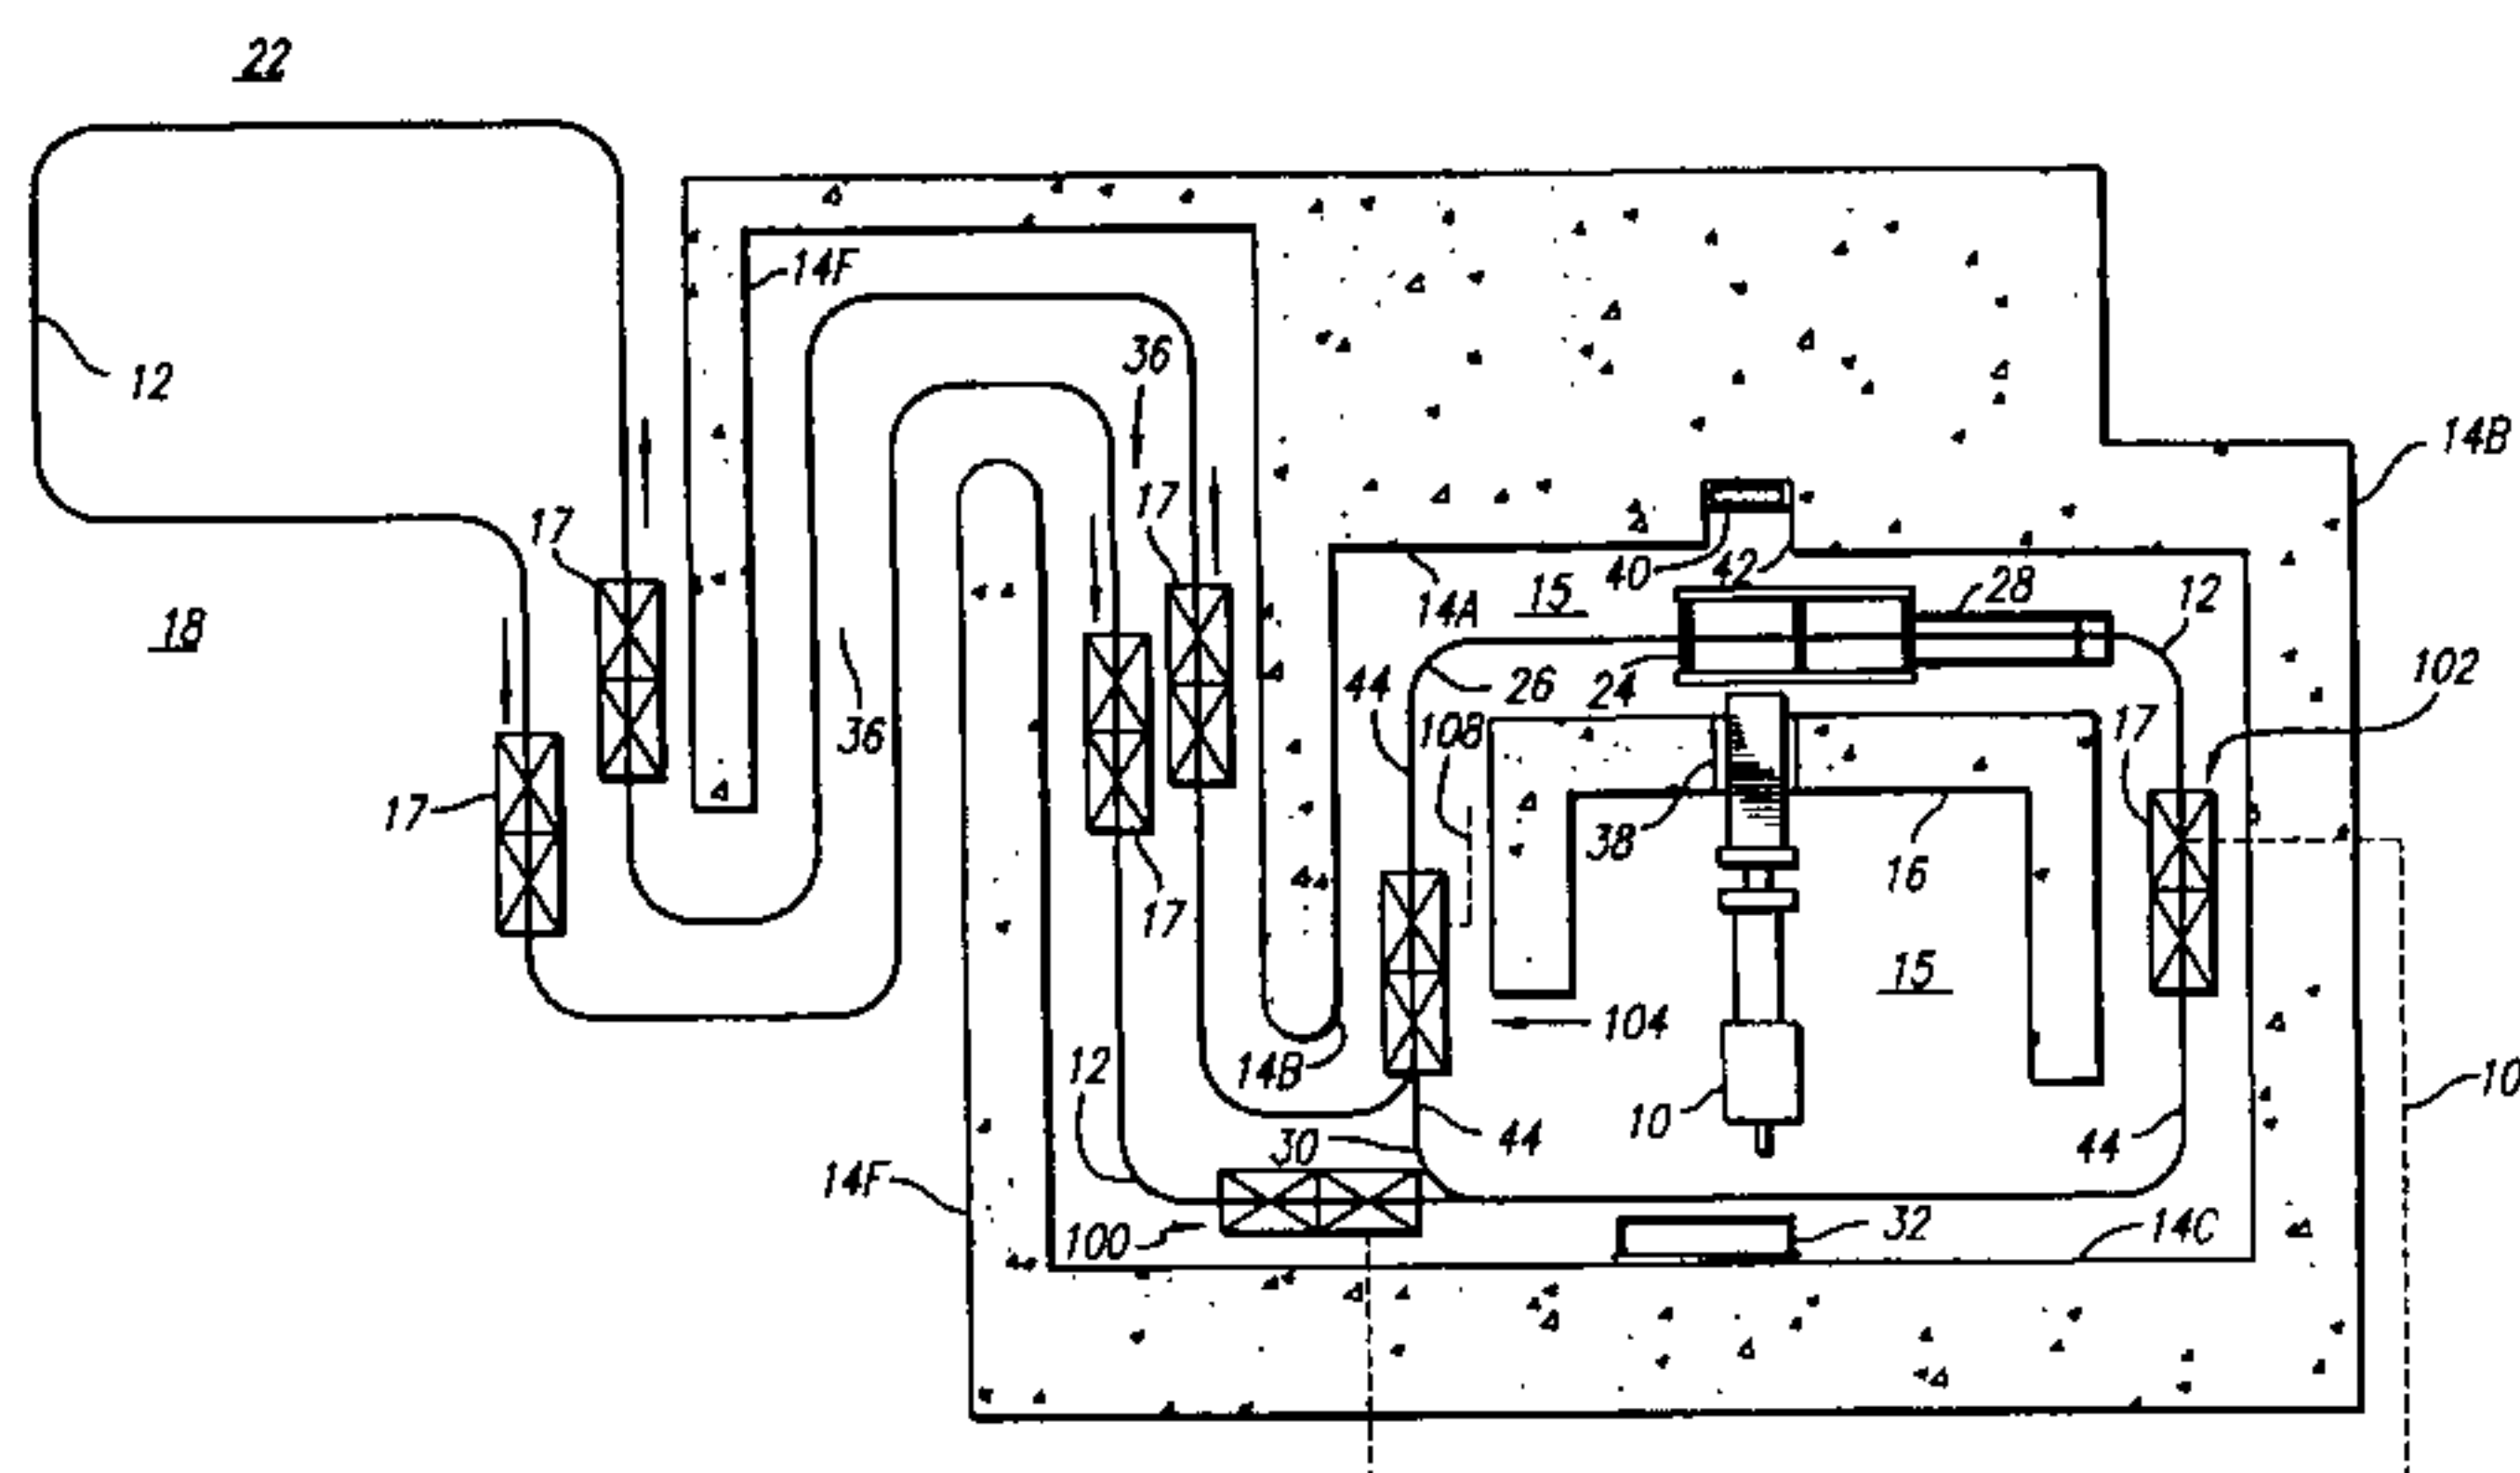

(57) Abstract

An article irradiation system includes (1) a radiation source for scanning a target region with radiation, (2) a conveyor system including a process conveyor positioned for transporting articles in a given direction through the target region, and (3) radiation shielding material defining the walls of a chamber containing the radiation source, the target region and a position of the conveyor system. The radiation source is disposed inside a loop defined by a portion of the conveyor system and is adapted to scan the articles in the chamber in a plane transverse to the given direction of the transport by the process conveyor. A shield (e.g., an intermediate wall) of radiation shielding material positioned within the loop supports a radiation shielding ceiling of the chamber, inhibits photons emitted from a beam stop in one of the chamber walls from impinging on the outer walls of the chamber and restricts flow in the chamber of ozone derived in the target region from the radiation source. A first queue is disposed outside of the chamber for transferring into the chamber articles from a loading area; a second queue is disposed in the chamber for moving the articles past the radiation source for irradiation by the source; and a third queue is disposed in the chamber for transferring articles from the chamber, after irradiation, for movement to an unloading area. The operations of the first, second and third queues are synchronized. The shield inhibits radiation from the source from reaching the queues.

**ARTICLE IRRADIATION SYSTEM HAVING INTERMEDIATE WALL OF
RADIATION SHIELDING MATERIAL WITHIN LOOP OF A CONVEYOR
SYSTEM THAT TRANSPORTS THE ARTICLES**

5

BACKGROUND OF THE INVENTION

This invention relates to irradiation systems which utilize a conveyor system for transporting articles in a chamber through a target region scanned by radiation from a radiation source. The invention is particularly related (1) to a system for synchronizing the movements of queues providing for the movements of the articles into the chamber, past the radiation source for irradiation of the articles and then from the chamber after the irradiation of the articles and (2) to the disposition of a shield in the chamber for inhibiting radiation from reaching the queues and the walls of the invention.

United States Patent No. 6,127,687, which issued on October 3, 2000 to Williams, *et al.*, discloses and claims an article irradiation system which includes (1) a radiation source for scanning a target region with radiation, (2) a conveyor system including a process conveyor positioned for transporting articles in a given direction through the target region and (3) radiation shielding material defining the walls of a chamber containing the radiation source, the target region and a portion of the conveyor system. The radiation source is disposed inside a loop defined by a portion of the conveyor system and is adapted to scan the articles in the chamber in a plane transverse to the given direction of transport by the process conveyor. A shield (e.g., an intermediate wall) of radiation shielding materials positioned within the loop supports a radiation shielding ceiling of the chamber, inhibits photons emitted from a beam stop in one of the chamber walls from impinging on other walls of the chamber and restricts flow in the chamber of ozone derived in the target region from the radiation source.

BRIEF DESCRIPTION OF THE INVENTION

In one embodiment of the invention, an article irradiation system includes (1) a radiation source for scanning a target region with radiation, (2) a conveyor system including a process conveyor positioned for transporting articles in a given direction through the target region, and (3) radiation shielding material defining the walls of a chamber containing the radiation source, the target region and a position of the conveyor system. The radiation source is disposed inside a loop defined by a portion of the conveyor system and is adapted to scan the articles in the chamber in a plane transverse to the given direction of the transport by the process conveyor. A shield (e. g., an intermediate wall) of radiation shielding material positioned within the loop supports a radiation shielding ceiling of the chamber, inhibits photons emitted from a beam stop in one of the chamber walls from impinging on the outer walls of the chamber and restricts flow in the chamber of ozone derived in the target region from the radiation source.

In this illustrative embodiment, a first queue is disposed outside of the chamber for transferring into the chamber articles from a loading area; a second queue is disposed in the chamber for moving the articles past the radiation source for irradiation by the source; and a third queue is disposed in the chamber for transferring articles from the chamber, after irradiation, for movement to an unloading area. The operations of the first, second and third queues are synchronized. The shield inhibits radiation from the source from reaching the queues.

In accordance with another illustrative embodiment, there is provided an irradiation system for irradiating articles. The system includes a chamber defined by walls, a radiation source disposed in the chamber and constructed to provide radiation in the chamber, and a conveyor system constructed to carry the articles through the chamber for the irradiation of the articles by the radiation source. The system further includes a first queue for introducing the articles into the chamber, a second queue for moving the articles in the chamber past the radiation source, a third queue for passing the articles from the chamber after the irradiation of the articles by the radiation source, and a synchronizer for synchronizing the operation of the first, second and third queues. The system further includes a shield disposed in the chamber for shielding the first, second and third queues from irradiation by the radiation source.

In accordance with another illustrative embodiment, there is provided an irradiation system for irradiating articles. The system includes a loading area, an unloading area, a chamber displaced from the loading area and the unloading area, and a radiation source
5 disposed in the chamber for irradiating articles in the chamber. The system further includes a first queue for transferring the articles from the loading area to the chamber, a second queue for transferring the articles from the chamber to the unloading area in synchronized relationship with the transfer by the first queue of the articles from the loading area to the chamber, and a third queue operative in synchronized relationship with the first and second
10 queues for transferring the articles in the chamber to a position for irradiation of the articles by the radiation source in the chamber. The system further includes a shield disposed in the chamber for shielding the first, second and third queues from the radiation in the chamber.

In accordance with another illustrative embodiment, there is provided an irradiating system for irradiating articles. The system includes a chamber defined by walls, a radiation
15 source constructed to provide radiation in the chamber, and a conveyor system constructed to carry the articles through the chamber for the irradiation of the articles in the chamber by the radiation source. The system further includes a first queue disposed in the chamber for introducing the articles to the conveyor system, and a second queue disposed in the chamber for operation in synchronism with the operation of the first queue. The second queue is
20 operative to pass the articles from the chamber after the irradiation of the articles by the radiation source. The system further includes a shield disposed in the chamber for shielding the first and second queues and the walls of the chamber.

In accordance with another illustrative embodiment, there is provided an irradiating system for irradiating articles. The system includes a chamber defined by walls, a radiation
25 source constructed to provide radiation in the chamber, a conveyor system constructed to carry the articles through the chamber for the irradiation of the articles in the chamber by the radiation source, and a loading area displaced from the chamber. The system further includes a first queue disposed outside of the chamber for introducing the articles into the chamber, a second queue disposed in the chamber and operative in synchronism with the operation of the
30 first queue for introducing the articles in the chamber to the conveyor system, and a third queue disposed in the chamber and operative in synchronism with the operation of the first and second queues for passing the articles from the chamber after the irradiation of the articles by the radiation source. The system further includes a shield disposed in the chamber

relative to the first, second and third queues for shielding the first, second and third queues from radiation from the radiation source.

In accordance with another illustrative embodiment, there is provided an irradiating system for irradiating articles. The system includes a chamber defined by walls, a radiation source constructed to carry the articles through the chamber for the irradiation of the articles in the chamber by the radiation source, and a conveyor system for passing the articles through the chamber for irradiation by the source. The system further includes a first queue disposed outside the chamber for introducing the articles to the conveyor system, a second queue disposed in the chamber for co-operating with the conveyor system in moving the articles in the chamber past the radiation source for an irradiation of the articles, and a shield disposed in the chamber for shielding the first and second queues and the walls of the chambers.

Other aspects and features of illustrative embodiments will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

15

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic top plan view of a preferred embodiment of an irradiation system according to an illustrative embodiment of the invention; and

FIG. 2 is a schematic sectional view of a portion of the irradiation system of FIG 1 as taken along line 2-2 and further showing article carries in positions other than as shown in FIG. 1.

20

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figures 1 and 2, a preferred embodiment of an irradiation system according to the present invention includes a radiation source 10, a conveyor system 12, radiation shielding material 14 defining a chamber 15 and an intermediate wall 16 of

25

radiation shielding material. Articles carried by article carriers 17 are transported by the convey system 12 in a direction indicated by the arrows from a loading area 18 through a target region 20 to an unloading area 22. The conveyor system 12 includes a process conveyor 24 for transporting articles carried by the article carriers 17 in a given direction
5 through the target region 20.

The radiation source 10 preferably is a 10-million-electron-volt linear accelerator having an electron accelerating wave guide that provides an electron beam for irradiating articles transported through the target region 20 by the conveyor system 12. The radiation source 10 is disposed along an approximately horizontal axis 25 inside a loop 26 defined
10 by a portion of the conveyor system 12 and is adapted for scanning the articles being transported through the target region 20 with an electron beam at a given rate in a plane perpendicular to the given direction of transport by the conveyor system 12. The scanning height and the current of the electron beam are adjusted in accordance with the height and radiation absorption characteristics of the articles being scanned. The scanning of the
15 articles by the electron beam is further controlled as described in the above-referenced U.S. Patent No. 5,396,074. The accelerator is located inside a removable shield and protected from ionizing radiation and ozone by interior walls. In alternative embodiments, the radiation source scans the articles with a type of radiation other than an electron beam, such as X-rays.

The conveyor system 12 includes a power-and-free conveyor throughout and, in addition to the process conveyor 24, further includes a load conveyor 28, all three of which are independently powered. The power-and-free-conveyor functions as a transport conveyor for transporting the article carriers 17 at a first given speed from the process conveyor 24 through the unloading area 22 and the loading area 18 to the load conveyor
25 28. The process conveyor 24 transports the articles carriers 17 through the target region 20 at a second given speed that is different than the first given speed at which the article carriers 17 are transported by the transport conveyor. The load conveyor 28 transports the article carriers 17 from the transport conveyor to the process conveyor 24 at a speed that is varied during such transport in such a manner that when the article carriers 17 are
30 positioned on the process conveyor 24 there is a predetermined separation distance between adjacent positioned articles carriers 17. When an article carriers 17 is positioned on the process conveyor 24, the load conveyor 28 is transporting the article carriers 17 at

the speed of the processor conveyor 24. Such a conveyor system 12 and the operation thereof is described in detail in the above-referenced U.S. Patent No. 5,396,074.

In order to reorient articles for retransportation through the target region 20 so that such articles can be irradiated from opposite sides, upon it being detected that an article carrier 17 carrying such articles is so oriented as to have been transported through the target region 20 only once, such article carrier 17 is diverted onto a reroute conveyor section 30 and then transported by the transport conveyor past a mechanism 32 that reorients the so-oriented article carrier 17 by 180 degrees for said retransportation through the target region 20. Such a reorienting mechanism 32 and means for detecting the orientation of an article carrier 17 are also described in U.S. Patent No. 5,396,074 to Peck et al.

The radiation shielding material 14 includes walls 14A, 14B, 14C, a floor 14D and a ceiling 14E defining the chamber 15 that contains the radiation source 10, the target region 20 and at least the portion of the conveyor system 12 that includes the process conveyor 24, the load conveyor 28 and the adjacent portions of the transport conveyor. Additional walls 14F of radiation shielding material define an angled passageway 36 into the chamber 15 for the conveyor system 12 and shield the loading area 18 and the unloading area 22, which are located outside of the chamber 15, from radiation derived from the radiation source 10.

The intermediate wall 16 is positioned within the loop 26 and transverse to the approximately horizontal axis 25 of the radiation source 10. The intermediate wall 16 has an aperture 38 through which the radiation source 10 is disposed.

The ceiling section 14E of the radiation shielding material is supported in part by the intermediate wall 16; whereby the underlying chamber 15 may be of a greater area and/or the ceiling section 14E may be of a greater span and/or of a greater weight than would be permitted in the absence of such support.

Preferably, the radiation shielding material 14A, 14B, 14C, 14D, 14E, 14F (collectively referred to as 14), 16 is primarily concrete because of cost considerations. However, other types of radiation shielding material may be used when space is limited or in view of other requirements, such as steel. In alternative embodiments, some of the radiation shielding material may be concrete and some not. For example, in one alternative embodiment shielding material other than concrete, such as steel, selected in accordance with limited space requirements, while the remainder of the radiation shielding

material 14 is concrete.

A beam stop 40 is disposed in a recess 42 in the wall 14A of radiation shielding material that is on the opposite side of the target region 20 from the electron beam radiation source 10. The beam stop 40 is made of a material, such as aluminum, that
5 absorbs electrons and converts the energy of the absorbed electrons into photons that are emitted from the beam stop 40. The beam stop 40 is so disposed in the recess 42 that some of the photons emitted from the beam stop 40 toward the radiation source 10 but obliquely thereto are inhibited from entering the chamber 15 by the portion of the radiation shielding material in the wall 14A that defines the recess 42. The recessing of the beam stop 40
10 reduces the intensity of back scattered photons, thereby decreasing the thickness required for the side walls 14B, the back wall 14C and the ceiling section 14E. This reduces construction costs and shortens the construction schedule.

Sections 44 of the transport conveyor portion of the conveyor system 13 are positioned for transporting the article carries 17 in directions that are transverse to the
15 given direction of transport by the process conveyor 24. The lateral walls 14B of the chamber-defining radiation shielding material are disposed outside the loop 26 adjacent these transversely positioned sections 44 of the conveyor system 12 and portions of the intermediate wall 16 are positioned adjacent these transversely positioned sections 44 of the conveyor system 12 and across from substantial portions of the lateral walls 14A.

20 The intermediate wall 16 is thereby positioned between the beam stop 40 and the lateral walls 14B so that photons emitted into the chamber 15 from the beam stop 40 are inhibited from impinging upon the lateral walls 14B. The intermediate wall 16 is also positioned between the beam stop 40 and the wall 14C on the opposite side of the chamber
25 15 from the wall 14A in which the beam stop 40 is recessed so that photon emitted from the chamber 15 from the beam stop are inhibited from impinging upon the opposite wall 14C. As a result, the lateral walls 14B and the opposite wall 14C may be of a lesser thickness of radiation shielding material than would be required in the absence of the intermediate wall 16.

The intermediate wall 16 also is positioned for restricting flow throughout the
30 chamber 15 of ozone derived in the target region 20 from the radiation source 10. Accordingly, most of such ozone can be removed from the chamber 15 by exhaust ducts 46 in the chamber 15 disposed above the target region 20.

The dimensions of the various components of the radiation shielding material 14 and of the intermediate wall of radiation shielding material 16 are determined by computer-aided modeling in accordance with a technique described in a manual entitled "MCNP - A General Monte Carlo Code for Neutron and Photo Transport" published by the Radiation
5 Shielding Information Center, P.O. Box 2008, Oak Ridge, Tennessee 37831.

A plurality of queues respectively indicated generally at 100, 102 and 104 are included in the embodiment shown in Figure 1. Each of the queues may be defined by a plurality of the article carriers 17. The queue 100 is disposed at a position preferably just outside the loop 26 for a transfer into the loop of the articles in the queue. The queue 102
10 is disposed within the loop at a position for each of the article carriers 17 to be released from the queue and to be moved past the radiation source 10 for an irradiation of the article in the article carrier. The queue 104 is disposed within the loop 26 at a position just inside the loop for a transfer of each of the article carriers 17 out of the loop.

The operations of the queues 100, 102 and 104 are synchronized. In this way, the
15 first one of the article carriers 17 in the queue 100 is transferred into the loop 26 at the same time that the first one of the article carriers in the queue 102 is moved past the radiation source 10. In like manner, the first one of the article carriers 17 in the queue 100 is transferred into the loop 26 at the same time that the first one of the article carriers in the queue 104 is transferred out of the loop. A synchronizer for providing this function is
20 indicated by broken lines 108 extending between the queues 100, 102 and 104.

The intermediate wall 16 is disposed relative to each of the queues 100, 102 and 104 so that it shields the article carriers in the queue from radiation from the source 10. In this way, the articles in the article carriers 17 are not exposed to radiation from the source 10 during the time that the article carriers are disposed in the queues 100, 102 and 104.
25

In an alternative embodiment, the loop within which the intermediate wall 14B is positioned is not a closed loop, such as shown in FIG. 1, but instead is an open loop, such as would be formed by elimination of the reroute conveyor section 30.

An article irradiation system in accordance with the present invention provides the advantages of: (a) reducing the volume of concrete required in the ceiling section 14E,
30 thereby reducing the cost and complexity of the structure; (b) reducing radiation levels incident on sensitive electrical and mechanical equipment, such as the radiation source 10 and the reorienting mechanism 32, thereby prolonging the life of such equipment; and (c)

constraining ozone production to the vicinity of the process conveyor 24, thereby reducing the quantity of ozone produced and its dispersal throughout the chamber 15 so to prolong the life of the equipment and reduce the environmental impact of ozone vented to the atmosphere.

5 The advantages specifically stated herein do not necessarily apply to every conceivable embodiment of the present invention. Further, such stated advantages of the present invention are only examples and should not be construed as the only advantages of the present invention.

10 While the above description contains many specificities, these should not be construed as limitations on the scope of the present invention, but rather as examples of the preferred embodiments described herein. Other variations are possible and the scope of the present invention should be determined not by the embodiments described herein but rather by the claims and their legal equivalents.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An irradiation system for irradiating articles, including,
5 a chamber defined by walls,
a radiation source disposed in the chamber and constructed to provide radiation in the chamber,
a conveyor system constructed to carry the articles through the chamber for the irradiation of the articles by the radiation source,
10 a first queue for introducing the articles into the chamber,
a second queue for moving the articles in the chamber past the radiation source,
a third queue for passing the articles from the chamber after the irradiation of the articles by the radiation source,
a synchronizer for synchronizing the operation of the first, second and third queues,
15 and
a shield disposed in the chamber for shielding the first, second and third queues from irradiation by the radiation source.
2. An irradiation system as set forth in claim 1 including,
20 a photon converter in the chamber for converting the radiation from the source to photons, and
the shield being operative to shield the walls of the chamber and the first, second and third queues from the photons from the photon converter.
- 25 3. An irradiation system as set forth in claim 1 wherein
the radiation source extends through the shield and wherein
the chamber includes a ceiling and wherein
the shield supports the ceiling.

4. An irradiation system as set forth in claim 1 wherein
the shield includes an intermediate wall made from a radiation shielding material and
wherein
the radiation shielding material is separated from the walls of the chamber.
- 5
5. An irradiation system as set forth in claim 2 wherein
the radiation source extends through the shield and wherein
the chamber includes a ceiling and wherein
the shield supports the ceiling and wherein
10 the shield includes an intermediate wall made from a radiation shielding material and
wherein
the radiation shielding material is separated from the walls of the chamber.
6. An irradiation system for irradiating articles, including,
15 a loading area, an unloading area,
a chamber displaced from the loading area and the unloading area,
a radiation source disposed in the chamber for irradiating articles in the chamber,
a first queue for transferring the articles from the loading area to the chamber,
a second queue for transferring the articles from the chamber to the unloading area in
20 synchronized relationship with the transfer by the first queue of the articles from the loading
area to the chamber,
a third queue operative in synchronized relationship with the first and second queues
for transferring the articles in the chamber to a position for irradiation of the articles by the
radiation source in the chamber, and
25 a shield disposed in the chamber for shielding the first, second and third queues from
the radiation in the chamber.
7. An irradiation system as set forth in claim 6, including;
the chamber being defined by a plurality of walls and the shield being disposed in the
30 chamber relative to the walls to shield the walls from the radiation from the source.

8. An irradiation system as set forth in claim 7,
the shield constituting an intermediate wall disposed in the chamber in spaced
relationship to the walls defining the chamber.
- 5 9. An irradiation system as set forth in claim 7 wherein
the chamber includes a ceiling and wherein
the shield is disposed in the chamber to support the ceiling.
10. An irradiation system as set forth in claim 7, including
10 the shield constituting an intermediate wall disposed in the chamber in spaced
relationship to the walls defining the chamber,
the chamber including a ceiling,
the shield being disposed in the chamber to support the ceiling, and
the shield and the walls and the ceiling of the chamber being made from a radiation
15 shielding material.
11. An irradiating system for irradiating articles, including,
a chamber defined by walls,
a radiation source constructed to provide radiation in the chamber,
20 a conveyor system constructed to carry the articles through the chamber for the
irradiation of the articles in the chamber by the radiation source,
a first queue disposed in the chamber for introducing the articles to the conveyor
system, and
a second queue disposed in the chamber for operation in synchronism with the
25 operation of the first queue, the second queue being operative to pass the articles from the
chamber after the irradiation of the articles by the radiation source, and
a shield disposed in the chamber for shielding the first and second queues and the
walls of the chamber.
- 30 12. An irradiating system as set forth in claim 11 wherein
the walls of the chamber and the shield are made from a radiation shielding material.

13. An irradiating system as set forth in claim 12 wherein
the shield includes an intermediate wall disposed in the chamber in spaced
relationship to the walls defining the chamber.
- 5 14. An irradiating system as set forth in claim 11, including,
a loading area for holding the articles to be irradiated,
means for passing the articles from the loading area into the chamber for obtaining the
irradiation of the articles by the radiation source,
an unloading area for receiving the articles after the articles have been irradiated, and
10 means for passing the articles to the unloading area after the articles have been
irradiated and passed from the chamber.
15. An irradiating system as set forth in claim 14 wherein
the walls of the chamber and the shield are made from a radiation shielding material
15 and wherein
the shield includes an intermediate wall disposed in the chamber in spaced
relationship to the walls defining the chamber and in position relative to the first and second
queues and the walls of the chamber to shield the first and second queues and the walls of the
chamber.
- 20 16. An irradiating system for irradiating articles, including,
a chamber defined by walls,
a radiation source constructed to provide radiation in the chamber,
a conveyor system constructed to carry the articles through the chamber for the
25 irradiation of the articles in the chamber by the radiation source,
a loading area displaced from the chamber,
a first queue disposed outside of the chamber for introducing the articles into the
chamber,
a second queue disposed in the chamber and operative in synchronism with the
30 operation of the first queue for introducing the articles in the chamber to the conveyor
system,

a third queue disposed in the chamber and operative in synchronism with the operation of the first and second queues for passing the articles from the chamber after the irradiation of the articles by the radiation source, and

5 a shield disposed in the chamber relative to the first, second and third queues for shielding the first, second and third queues from radiation from the radiation source.

17. An irradiating system as set forth in claim 16, including,
ozone being derived in the chamber from the radiation source, and
the shield being disposed in the chamber to restrict the flow of ozone through the
10 chamber.

18. An irradiating system as set forth in claim 16, including;
means for converting radiation in the chamber to photons,
the shield being disposed in the chamber to inhibit the photons from impinging on the
15 walls defining the chamber, thereby providing for a reduction in the thickness of the walls defining the chamber.

19. An irradiating system as set forth in claim 16 wherein
the radiation source extends through the shield.
20

20. An irradiating source as set forth in claim 18, including,
ozone being derived in the chamber from the radiation source, and
the shield being disposed in the chamber to restrict the flow of ozone through the
chamber, and
25 the radiation source extending through the shield.

21. An irradiating system for irradiating articles, including,
a chamber defined by walls,
a radiation source constructed to carry the articles through the chamber for the
30 irradiation of the articles in the chamber by the radiation source,
a conveyor system for passing the articles through the chamber for irradiation by the
source,

a first queue disposed outside the chamber for introducing the articles to the conveyor system,

a second queue disposed in the chamber for co-operating with the conveyor system in moving the articles in the chamber past the radiation source for an irradiation of the articles,

5 and

a shield disposed in the chamber for shielding the first and second queues and the walls of the chambers.

22. An irradiating system as set forth in claim 21 wherein
10 the walls of the chamber and the shield are made from a radiation shielding material.

23. An irradiating system as set forth in claim 21 wherein
the shield includes an intermediate wall disposed in the chamber in spaced
relationship to the wall defining the chamber.

15

24. An irradiating system as set forth in claim 21, including,
a loading area for holding the articles to be irradiated,
means for passing the articles from the loading area into the chamber for the
irradiation of the articles by the radiation source,
20 an unloading area for receiving the articles after the articles have been irradiated, and
means for passing the articles to the unloading area after the articles have been
irradiated and passed from the chamber.

25. An irradiating system as set forth in claim 24 wherein
25 the walls of the chamber and the shield are made from a radiation shielding material,
the shield includes an intermediate wall disposed in the chamber in spaced
relationship to the wall defining the chamber.

30

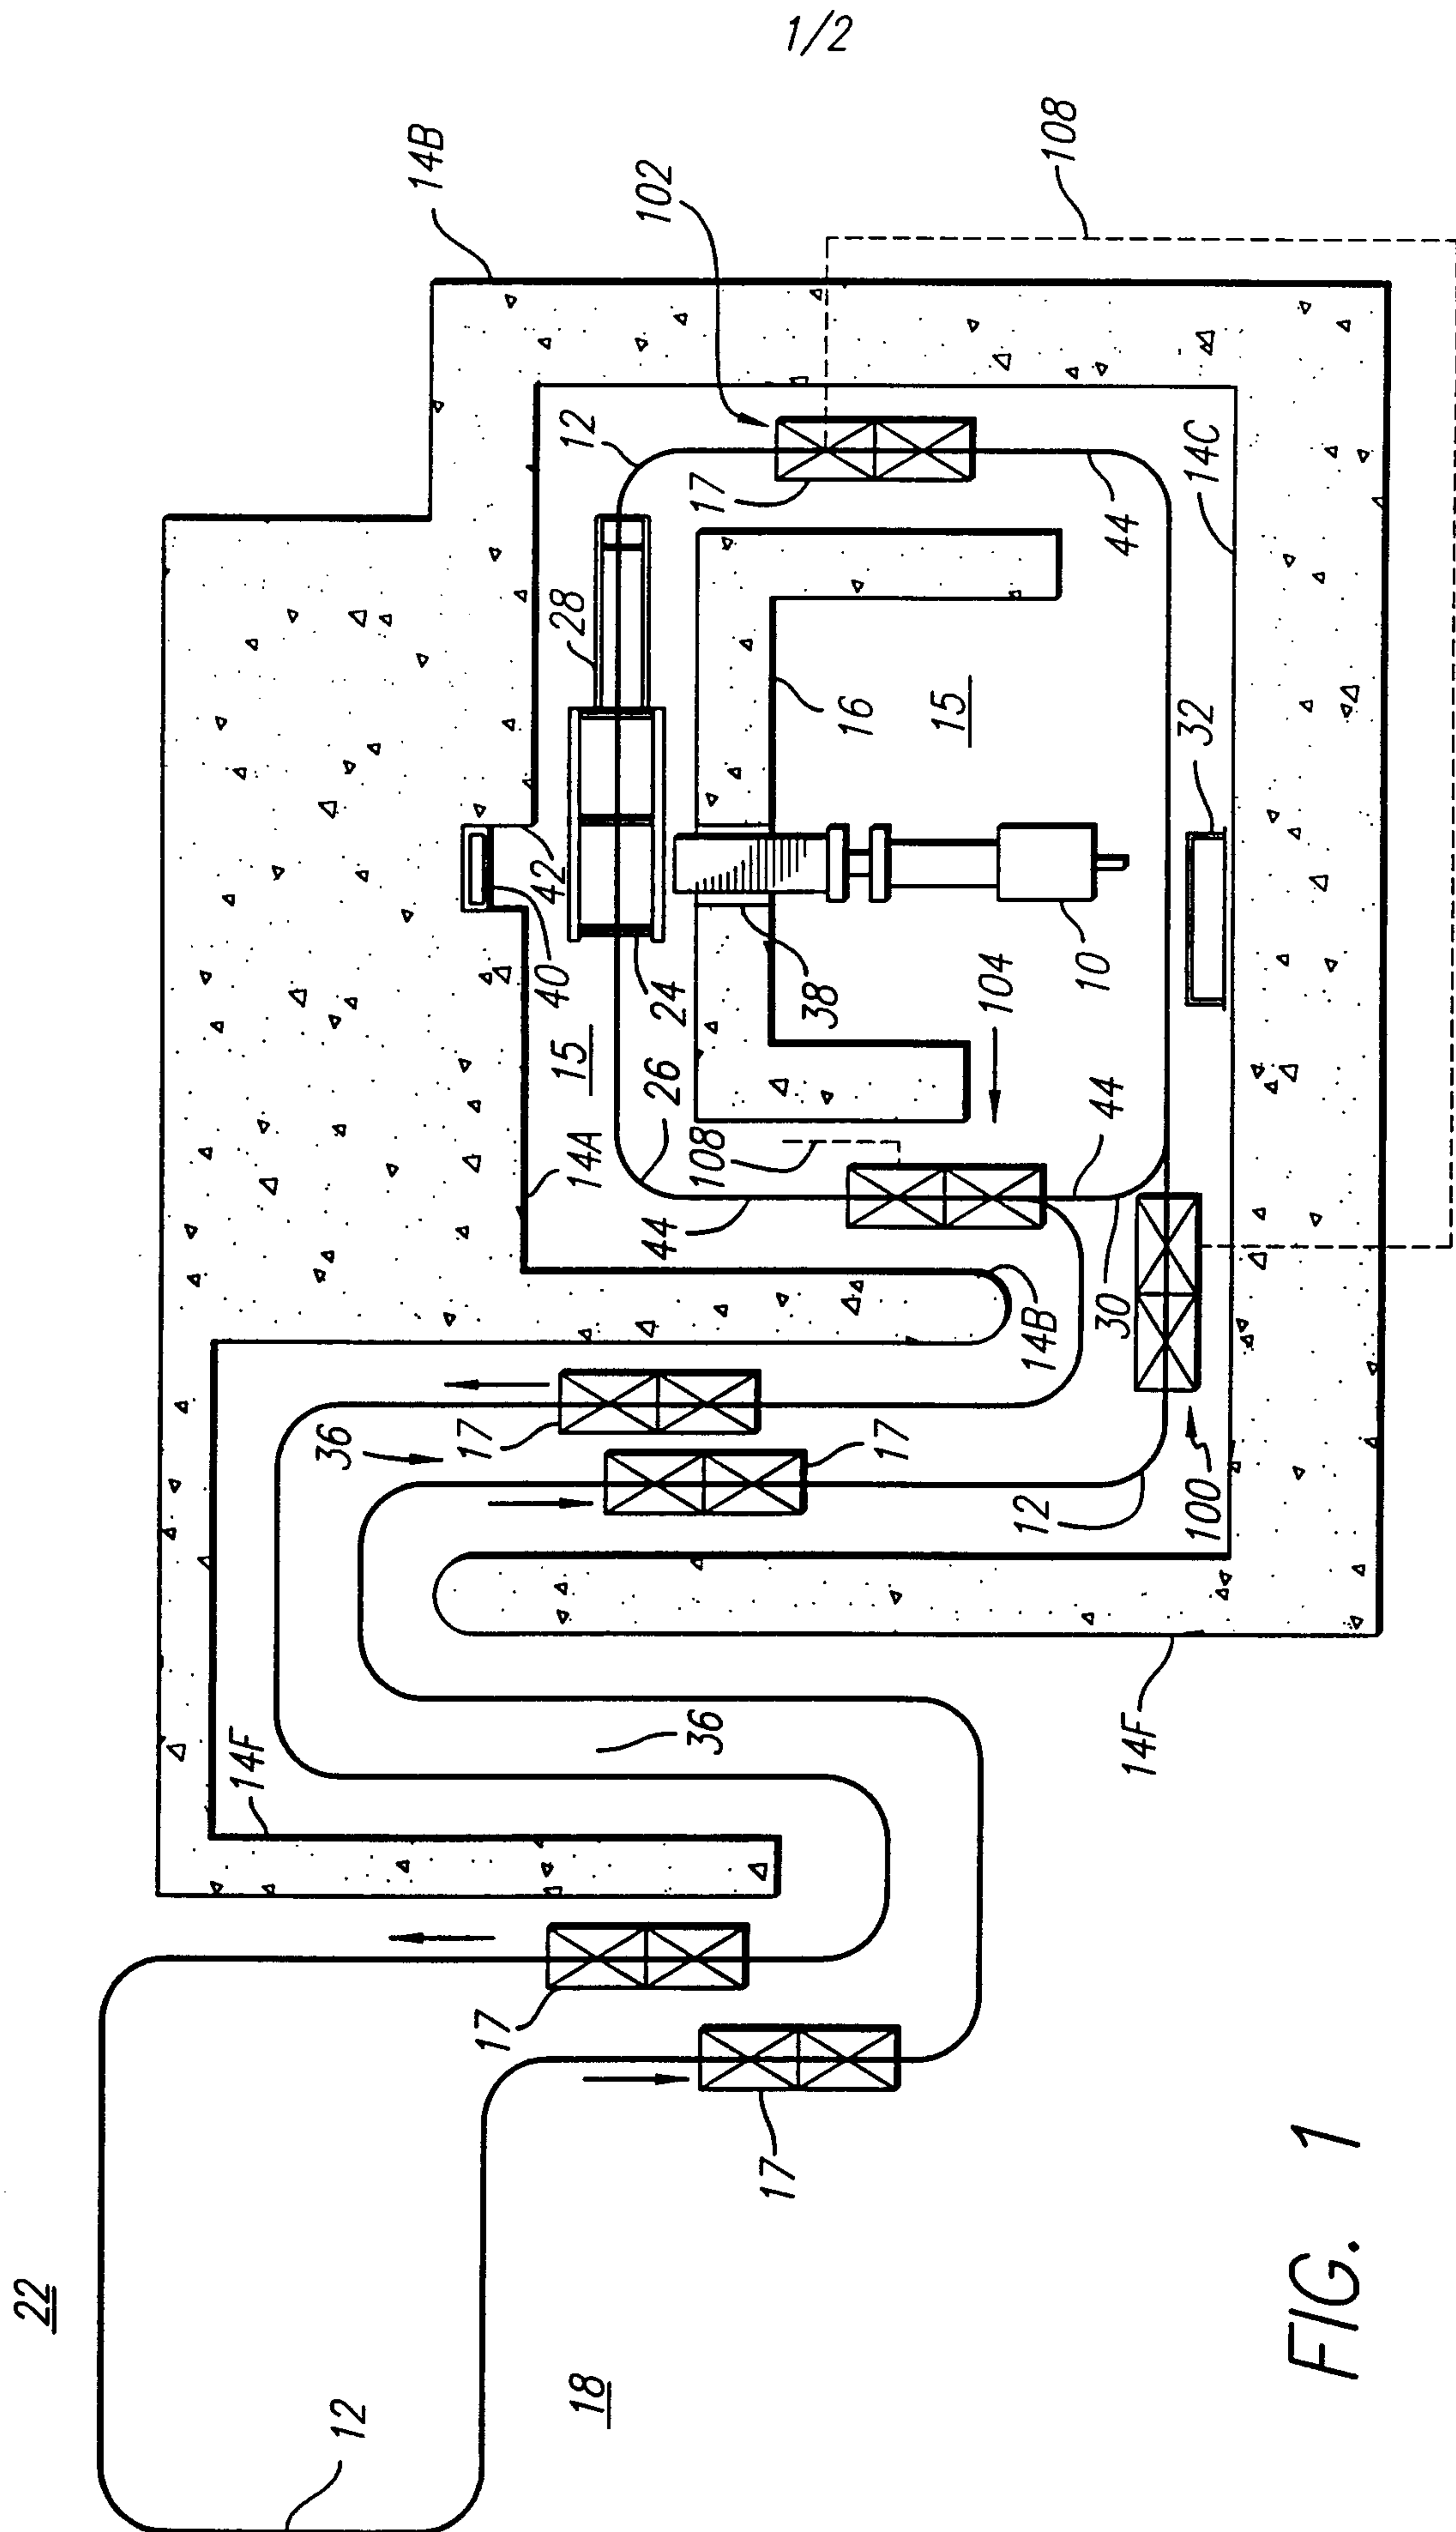


FIG. 1

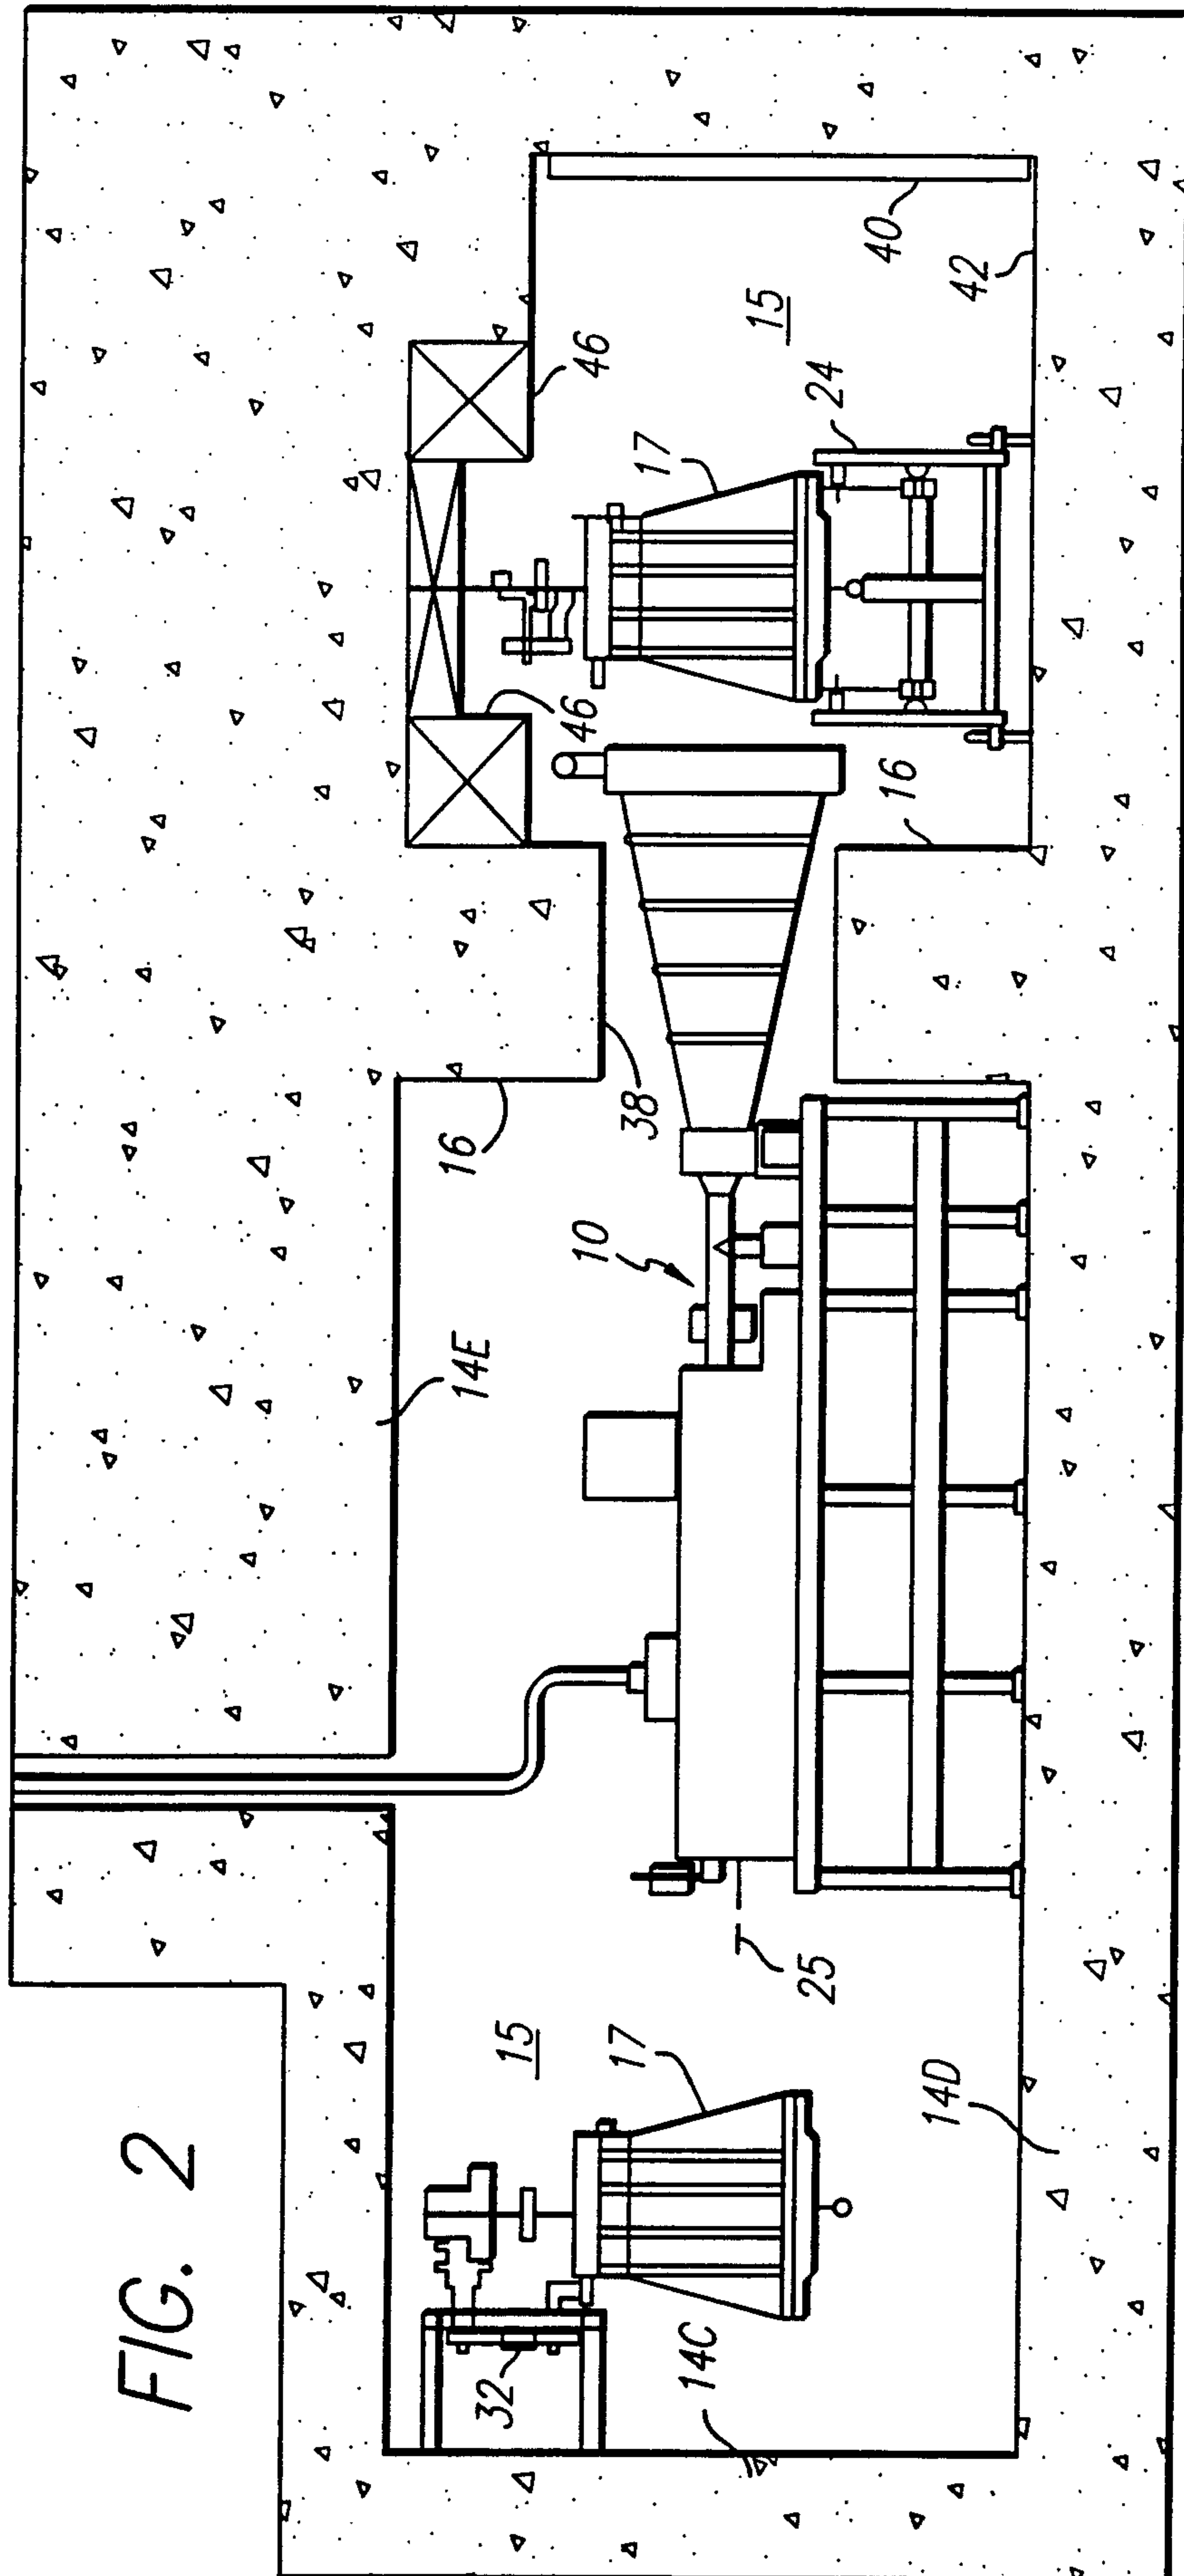


FIG. 2

