

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 549 215 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.03.1996 Bulletin 1996/13

(51) Int Cl.⁶: **E04F 13/08**, E04F 13/12

(21) Application number: **92311349.2**

(22) Date of filing: **11.12.1992**

(54) **Curtain wall cladding system**

Verkleidungssystem für Vorhangsfassade

Système de revêtement pour mur-rideau

(84) Designated Contracting States:
BE CH DE DK ES FR GB IT LI NL SE

(30) Priority: **24.12.1991 GB 9127334**
06.05.1992 GB 9209701

(43) Date of publication of application:
30.06.1993 Bulletin 1993/26

(73) Proprietor: **HUNTER DOUGLAS INDUSTRIES**
B.V.
NL-3071 EL Rotterdam (NL)

(72) Inventor: **Landheer, Hugo Arie Johan**
NL-3205 RH Spijkenisse (NL)

(74) Representative: **Allen, William Guy Fairfax et al**
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)

(56) References cited:
EP-A- 0 361 727 **DE-A- 3 442 189**
DE-U- 9 208 035 **FR-A- 2 650 612**
FR-A- 2 652 843 **GB-A- 929 981**
US-A- 4 441 301

EP 0 549 215 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention relates to a polygonal building panel and to a building assembly including such a panel

There are many forms of building panel which essentially consist of first and second sheet metal pans each having a central portion defining a polygonal periphery and intumed marginal flanges, the flanges of one of the pans fitting within the flanges of the other pan, an insulating core being fitted within the pan which are secured to the core usually by adhesive or by having the core moulded directly therein. Profiles are engaged with the intumed flange portions and provide side edges to the panels enabling the panels to be secured to one another and to a support structure.

EP-A-0361727 discloses a polygonal panel for a wall or ceiling cladding of the type in which certain longitudinal edges of the panels rest on supporting devices or are wedged in by the latter. The panel has a metal front plate, a metal rear plate and a core joined thereto, e.g. by adhesive, composed preferably of lightweight, e.g. fibre, material having non-flammable or fire-retarding and/or sound-absorbing properties. The front plate is formed with at least two longitudinal side flanges which are bent over or turned over towards the rear of the panel, at least partly to enclose the core at at least two longitudinal sides. The flanges are provided with adjoining free edge parts bent over or turned over outwards at an angle. The free edge portions are completely overlapped by edge parts of the rear plate which extend beyond the core, the thickness of the core and the form and the shape of the longitudinal edges and the edge portions being matched to each other in a manner such that no direct contact exists between rear plate and front plate.

While known panels have been generally satisfactory for internal use, when they are used externally they are subjected to far higher forces, especially forces attributable to the weather, in particular to the wind and known structures have not proved entirely satisfactory for this purpose.

It is now proposed, according to the present invention to provide a polygonal building panel comprising a first sheet metal pan having a first central portion defining a polygonal periphery and first intumed marginal flanges on each side of the polygonal periphery; a second sheet metal pan having a second central portion similar in shape to that of the first pan, but covering a smaller surface area and second intumed marginal flanges on each side of the polygonal periphery and dimensioned to fit closely alongside said first intumed flanges of the first pan; a structural core substantially filling an interior defined by said first and second central portions and said second intumed flanges, some of the first intumed flanges having an edge portion which projects in a direction transversely of the associated flange, and generally parallel to the central portion of that pan, and peripheral intermediate profiles engaging and positioning said first and second intumed marginal flanges with respect to

one another, wherein said intermediate profiles include a laterally projecting abutment engaging said edge portion on the side thereof to hold the first pan and intermediate profile in position with respect to each other.

By providing the marginal flange with such an abutment which engages the edge portion, the edge portion can be prevented from being pulled outwardly by the wind. Preferably it is the edge portion of the flange associated with the exterior pan which is provided with such a transversely projecting edge portion.

The complementary intumed flange advantageously is engaged both internally and externally by a portion of the intermediate profile.

In a preferred construction, the intermediate profile has a portion engageable by a fastener which is used to fasten the panel against a support structure. Desirably this portion is disposed so as to urge the edge profile, when the fastener is tightened, in a direction to push the abutment against the transversely extending edge portion. In this way, the fastener can be used to hold the two pans tightly against the support structure thereby squeezing slightly the core sandwiched therebetween.

The fastener may, for example, be a screw fastener having associated therewith a washer-like rotatable member which preferably is formed with at least one groove to engage an out-turned bead formed on said portion of the profile.

The fastener will often be associated with the profiles of two adjacent panels, the profiles being positioned in mirror image with respect to one another. The rotatable member may be part circular with a portion of the periphery omitted so that the rotatable member may be rotated to a position readily allowing a second panel to be positioned adjacent an already fixed panel whereafter the rotatable member is rotated, for example through 90°, so that the rotatable member engages the portion of the second panel.

In an alternative arrangement the fastener is in the form of a body having a profiled head engageable with said portion of the intermediate profile.

Indeed according to another aspect of the invention there is provided a panelling system comprising a support structure, a plurality of panels each comprising a first sheet metal pan having a central portion defining a polygonal periphery and first intumed marginal flanges on at least one side of the polygonal periphery; a second sheet metal panel having a second central portion similar in shape to that of the first panel, and second intumed marginal flanges on at least one side of the polygonal periphery; a structural core substantially filling an interior defined by said second intumed flanges, peripheral intermediate profiles engaging and positioning the first and second intumed marginal flanges with respect to one another, said intermediate profile including a channel shaped portion having intumed rims, and a plurality of fasteners each including a fastener body and a head portion engaged in said channel, said channel being slidable with respect to said head portion, the fastener body hav-

ing means mounted on the support structure, and locking means to lock the fastener with respect to said channel.

With such fasteners, the head portion has a bore therein into which is engaged a threaded locking member which can be tightened to engage against the portion of the intermediate profile and lock the intermediate profile relative to the fastener.

The body portion preferably includes a notch engageable with a support member of a support structure.

Advantageously there is located between each pair of adjacent panels a filler strip. This may be of channel shape sheet metal construction and may have associated therewith a gasket on each side of the flange of the channel shaped filler member so that when the filler member is pressed forcibly into the space between two adjacent panels, the gasket firstly provides a weather proof seal between the facing intumed flanges and secondly has an engagement portion engaging behind complementary rims formed on the two associated intermediate profiles.

While it would normally be the case that the edge portion of the first and second intumed flanges are bent outwardly away from the associated core, it is contemplated that this may be the situation, say, with the first intumed flanges, but the second intumed flanges may have inwardly directed transversely extending edge portions.

In a preferred structure, the edge portions are formed on alternate flanges and not on the intermediate flanges. For example, most commonly the panels will be rectangular and in those circumstances two opposite first flanges will have the edge portions and the other two edge flanges will not. If that be the case in one particular embodiment the complementary second flanges to said alternate flanges will not have any edge portions, but the other flanges will have intumed edge portions. It is also contemplated that the polygonal shape can have a different number of sides, for example, the polygonal building panel may be hexagonal and here again preferably alternate first flanges are provided with out-turned edge portions and the other three are not.

In order that the present invention may more readily be understood, the following description is given, merely by way of example, reference being made to the accompanying drawings in which:-

Figure 1 is a schematic perspective view of one embodiment of building panel assembly according to the invention from the exterior;

Figure 2 is a similar view from the interior;

Figure 3 is a detail showing the rotatable element associated with a screw fastener more clearly;

Figure 4 is an enlarged cross-sectional view through two adjacent building panels according to the invention with a filler strip therebetween;

Figure 5a and 5b are similar views, but with the filler strip omitted, and showing the rotatable member associated with the fastener in two different posi-

tions;

Figure 5c is an enlarged view of the filler strip;

Figure 6 is a view similar to Figure 4 but showing the two other sides associated panels with the filler strip inserted;

Figure 7 is an exploded view of the panel of Figures 1 to 6;

Figure 8 is a view illustrating two intermediate profiles abutting at a corner;

Figure 9a and 9b are schematic perspective views showing portions of two of the intermediate profiles of the invention;

Figure 10 is an exploded view similar to Figure 7 showing a hexagonal panel;

Figure 11 is an exploded view showing a modified structure of rectangular panel;

Figure 12 is a view similar to Figure 4 of a further modified panel;

Figure 13 is an enlarged section taken on the line XIII-XIII of Figure 12;

Figure 14 is a perspective view of a further embodiment of building panel assembly according to the invention;

Figure 15 is a fragmentary top plan view of the panel of Figure 14;

Figure 16 is a perspective view of a pair of fastening members of the assembly of Figures 14 and 15; and Figure 17 is a section taken along the line XVII-XVII of Figure 14.

Figures 1 and 2 show a front and back view of a fragmentary portion of a curtain wall cladding system according to the invention. More in particular a portion is shown at the location of a junction between horizontal and vertical filler elements.

A load bearing building frame or structure 10 having a frontal flange or web 12 is used as an attachment for a plurality of individually removable and interchangeable panels 14. The load bearing frame can comprise any number of parallel spaced elongate profiles of L-shaped, U-shaped or H-shaped cross-section having one flange or web exposed in a frontal plane for mounting of the panels. Each panel 14 is mounted by a rotatable member 16 and a screw fastener 18 engaging upper and lower horizontal flanges 20 rigidifying profiles forming edges of the panels.

The panels themselves consist of a first outer sheet metal pan 22, a second inner sheet metal pan 24, a lightweight structural core member 26 and horizontal and vertical intermediate rigidifying profiles 28 and 30. The horizontal flanges 20 are integral with the horizontal profiles 28. Also integral with each of the profiles 28 and 30 are outwardly opening outer channels 32 into which filler element profiles generally indicated with a numeral 34 can engage. The filler element profiles 34 consist of a resilient gasket 36 and a rigid sheet metal channel shaped outer strip or body 38.

Mounting of the panels 14 onto the load carrying

structure 10 is effected by member 16 and fastener 18, whereby as more clearly shown in Figures 2 to 5b, the rotatable member 16 on its back face is provided with two parallel grooves 40 which are adapted to engage over ridges 42 on the flanges 20.

The arrangement is such that the lateral cross sectional dimensions of the grooves 40 exceed the cross sectional width of the ridges 42 so as to allow for certain dimensional tolerances and differences in heat expansion and contraction. The generally circular rotatable members 16 have a flattened side 44 which can be rotated to be in register with one flange 20, to allow passage of the profile while retaining another profile during installation. This feature is particularly shown in Figures 5a and 5b in which the screw fastener and load bearing structure have been omitted for clarity.

Figure 4 shows a details cross section through a horizontal filler element, with the panels 14 and filler element profiles 34 properly installed. The screw fastener 18 as shown in the illustrated embodiment is of the type having a drilling end 46 and self-tapping screw thread 48 so as to perform several steps in a single operation. It should be clear that any kind of screw fastener can be employed provided that there is a sufficient length of screw thread 48 to allow loosening and rotation of the member 16 over the ridge 42 while retaining it on the load bearing structure.

Also shown in Figure 4 is how the filler element profile 34 engages in the outwardly exposed channels of the intermediate profiles 28. For a further explanation of this structure reference is made to Figure 6, which shows a cross section through a vertical filler element and Figure 5c which shows the filler element profile itself. A comparison of Figure 6 and Figure 4 makes it directly apparent that there is no attachment of the panels in the vertical filler elements.

The filler element profile 34 is pressed in from the outer side of the structure, and both the gasket 36 and the rigid body 38 are sufficiently resilient to accommodate slight building tolerances resulting in a somewhat variable distance between the channels 32 of adjacent panels. The gasket 36 as shown in Figure 5c having outwardly biased lateral wings 50 which provide a weather-tight seal against first intumed marginal flanges 52 of the outer pans. The gasket profile is also provided with inwardly directed lips 54 which grip behind ribs 56 on the outwardly opening channels 32, so as to retain the filler element profiles 34 in position.

Figure 5c shows the filler element profile in its relaxed form. Figure 6 shows a cross section through a vertical filler element, whereas Figure 4 shows a cross section through a horizontal filler element. It can also be seen from Figures 4 and 6 that the horizontal and vertical panel edges are different from one another. It is seen that the sheet metal outer pans 22 at the horizontal panel edges as shown in Figure 4 have intumed marginal flanges 52 which have laterally projecting edge portions 58.

The horizontal intermediate profiles 28 are provided with an inwardly facing abutment in the form of a ridge 60 in the outwardly opening channels 32, which ridge can be engaged over and retain the laterally projecting edge portions 58 of the outer pans. This enables the curtain wall structure to withstand even excessive wind suction forces as the outer pans are positively retained by the load carrying structure. Thus the connection of the outer pans to the load carrying structure is not subject to chemical deterioration as would be the case if the outer sheet were merely adhesively kept in place.

The intumed marginal flanges 52 of the vertical panel edges as shown in Figure 6 are formed without any laterally projecting edges.

Figure 7 shows the panel in a somewhat simplified and in an exploded arrangement. The core member 26 which covers and adheringly interconnects substantially the entire interior main surfaces of the inner and outer pans is not shown in Figure 7 but will be part of the assembled structure.

The rigidity of the assembled panel as well as the flatness of the relatively thin walled outer surface, however, are in particular dependent on a homogeneous connection with and on the structural rigidity of the core. The purpose of Figure 7 is to explain the assembly of the inner and outer pans and the horizontal and vertical rigidifying intermediate profiles.

The horizontal and vertical intermediate profiles 28 and 30 are substantially identical in cross section, but differ in length and in the shape of their ends.

As shown in Figure 7, each of the intermediate profiles has an outer main surface 62 which upon assembly engages the inner surface of the intumed flanges 52 of the outer pan 22. The intermediate profiles are also provided with an inner main surface 64 which upon assembly engages an outer surface of a second, intumed marginal flange 66 of the inner pan 24. The inner sheet metal pan 24 has a central portion 25 which is similar in peripheral shape to the central portion 23 of the outer sheet metal pan 22, but covers a somewhat smaller surface area so that the intumed flanges 66 of the inner pan will fit inwardly of the intumed flanges 52 of the outer pan while allowing room for the intermediate profiles 28, 30.

The intermediate profiles 28,30 are each also provided with an inner channel 68 opening towards the intumed flanges 66 of the inner pan. While the free ends of the intumed flanges of both the inner and outer pans are each engaged in a channel such as 68 or 32, loads and forces exerted on the inner and outer pans can be transmitted onto the intermediate profiles and thereby onto the load bearing structure.

From a safety point of view, especially in structures that should be relatively maintenance free such as a curtain wall for a building, it is clear that one should preferably not rely solely on adhesive material for structural connections as such connection can be easily affected by chemical deterioration. The building panel according to the present invention in particular achieves a positive

mechanical locking of all its components once it is attached to a load bearing structure in the manner described above.

Of particular importance in this respect is the sequential assembly of the panels, which is as follows: Each of the horizontal intermediate profiles 28 is first assembled with the relevant horizontal flanges 52 of the outer pan 22. This is done by manoeuvring the lateral edge portion 58 behind the ridge 60 of the channel 32, by rotating the horizontal profile 28 about its longitudinal axis.

As can be seen in Figure 7, the inner channels 68 on the horizontal profile 28 have been cut shorter than the remainder of the profile over a portion 70. The recessed portion 70 allows accommodation of the confronting end of the inner channel 68 of the adjacent vertical profile 30.

After inserting the vertical profiles 30 between opposed horizontal profiles 28, the latter can no longer be moved out of engagement with the edges 58. After the horizontal and vertical intermediate profiles 28,30 are positioned on the outer pan, preparations can be completed for mounting a structural core, which is preferably lightweight, into the interior of the outer pan 22 as defined by the intermediate members. This structural core while not illustrated in Figure 7 can be of any suitable form, such as a preformed block or slab of polystyrene foam, polyurethane foam, mineral wool or other suitable material as well as prefabricated cores of cellular configuration such as structural honeycombs or the like.

To complete the 'sandwich', the inner pan is inserted with the free ends of its marginal flanges 66 facing the free ends of the marginal flanges 52 of the outer pan and into the inner channels 68 of the intermediate profiles. The central surface 25 of the inner pan is adhesively connected to the core and thereby to the main surface 23 of the outer pan and so holds the entire assembly together. Such a sandwich structure is very advantageous as it allows large surface area panels, without having to resort to heavy gauge metal plates.

Large surface area panels are usually critical with respect to flatness, which if defective would directly destroy the visual aspect of the wall cladding. The sandwiched panels of the present invention ensure flatness while being lightweight which enhances installation and reduces costs for the support structure.

A corner detail of the position taken by a vertical and a horizontal intermediate profile is additionally shown in Figure 8. The different ends of the horizontal intermediate profile 28 and the vertical intermediate profile 30 as they would appear on the particular (more elaborate) profiles of the preferred embodiment of Figures 1 to 6 are additionally illustrated in Figures 9a and 9b respectively.

Figure 10 shows a variation of the panel which is not rectangular and in this example is hexagonal. The assembly arrangement of the panel is similar to the embodiment of Figure 7, but here three profiles of the 'horizon-

tal' type and three profiles of the 'vertical' type alternate along the six peripheral flanges of the panel.

Another alternative arrangement is shown in Figure 11, which assembly differs from that of Figure 7 in that two opposed intumed marginal flanges 66 of the inner pan each have an inwardly directed edge portion 72 which can be preassembled with an inner channel 74 on the intermediate profile 30 somewhat similar in shape to the outer channel 32.

Obviously this latter modification requires a slight adjustment in the assembly procedure, in that the 'vertical' type of profile 30 will now be assembled together with the inner pan 24.

Figures 12 and 13 show a further embodiment in which the mounting structure differs from that of Figures 1 to 4. Figures 12 and 13 illustrate a horizontal and a vertical cross section through a vertical filler element. The arrangement of this further embodiment is such that the vertical load bearing structure 110 coincides with the vertical filler elements and the panels are attached at their vertical filler elements instead of the horizontal filler elements as in the first described embodiments.

Apart from having different intermediate profiles 120 the inner and outer pans of the panels have also been re-orientated through 90°, making the horizontal edges the vertical edges and vice versa.

Figure 12 shows that the lateral edge portions 58 and the ridges 160 are now positioned in the vertical filler element.

Figure 13, which is a cross section according to the line XIII - XIII in Figure 12 shows that the panels 114 are lowered in attachment onto bolts 115. The bolts 115 are engaged by hook like members 117 which are connected to the panels 114 by enlarged head sections 119 fitting in undercut grooves 121 in the intermediate profiles 120.

The hook like members 117 can be retained in the undercut grooves 121 by a fastener 123 as shown in Figure 13.

To obtain a rattle-free and close fitting connection the bolt 115 can be additionally provided with a resilient member 125, which may have additional means 127 to snap-fit over the bolt 115 and additionally also engage behind a detent 129 on the hook like member 117.

Preferably the structural support 110 is of top-hat configuration and has lateral surfaces 112 to support the back face of the panels.

Resilient padding in the form of strips 113 may be provided between the surfaces 112 and the inner panel faces.

The embodiment of Figures 12 and 13 would be generally preferred for installations where rectangular panels are positioned with their length in a vertical orientation, whereas the embodiment of Figures 1 through 4 would be preferred for rectangular panels in a horizontal orientation.

Figures 14-17 illustrate a further embodiment of the invention which shows intermediate profiles generally similar to those of Figures 1-4 and a mounting arrange-

ment generally similar to those of Figures 12 and 13, but with modifications.

In detail the support structure 210 is very similar to that of Figure 12 and includes a cross-bolt 215. Two panels 214 having a first pan 222, a second pan 224, and a core 226 are shown mounted adjacent one another (Figure 15) and are retained thereagainst by fasteners 216 each including a body portion 217, an elongate head portion 218 and a downwardly extending notch 219 (Figure 16), this being engageable over the bolt 215.

It will be seen from Figure 15 that the head portion 218 is engaged in a recessed portion 227 of the associated intermediate profile 228, this recess portion including intumed rims 229 to engage under the head 218.

The head portion 218 is provided with at least one threaded bore 250 into which is threaded a locking member 252 so that when the locking member 252 is screwed inwardly, it will engage the intermediate profile 228 to lock against relative movement between the intermediate profile and the fastener 216. As can be seen from Figure 16, the threaded bores 250 of the two fasteners are offset longitudinally of the head portion with respect to one another. This facilitates the operation of a spanner on the locking member. In this way the actual height and location of each panel 214 can be adjusted to suit a particular requirement. Other aspects of the design are similar to that shown in Figure 4 and it will be seen that the assembly is again provided with a filler element profile 234 and a gasket 236. These can be removed to enable the locking element 252 to be tightened up and loosened by means of a suitable spanner.

It will be appreciated that this form of fastening can be employed not only in the type of structure illustrated herein, but is equally adaptable to other panels provided they have some form of edge profile into which the head of the fastener can be engaged and locked.

Claims

1. A polygonal building panel comprising a first sheet metal pan (22,222) having a first central portion (23) defining a polygonal periphery and first intumed marginal flanges (52) on each side of the polygonal periphery; a second sheet metal pan (24,224) having a second central portion (25) similar in shape to that of the first pan, but covering a smaller surface area and second intumed marginal flanges (66) on each side of the polygonal periphery and dimensioned to fit closely alongside said first intumed flanges (52) of the first pan; a structural core (26,226) substantially filling an interior defined by said first and second central portions (23,25) and said second intumed flanges (66), some of the first intumed flanges having an edge portion (58) which projects in a direction transversely of the associated flange (52), and generally parallel to the central portion of that pan, and peripheral intermediate profiles (28,30,120,228) engaging and positioning said first and second intumed marginal flanges (52,66) with respect to one another, wherein said intermediate profiles include a laterally projecting abutment (60,160) engaging said edge portion (58) on the side thereof to hold the first pan (22,222) and intermediate profile (28,30,120,228) in position with respect to each other.
2. A panel according to claim 1, wherein the first and second intumed flange (66,52) are each engaged both internally and externally by a portion of the intermediate profile (28,30,120,228).
3. A panel according to claim 1 or 2, wherein the intermediate profile (28,30,120,228) has a portion (42,229) engageable by a fastener (16,117,21) which is adapted to be used to fasten the panel against a support structure (10,110,210).
4. A panel according to claim 3, wherein the said portion (42,229) is disposed so as to urge the intermediate profiled bar (28,30,120,228), when the fastener is tightened, in a direction to push the abutment (60,160) against the transversely extending edge portion (58).
5. A panel according to any preceding claim, wherein the edge portion (58) is formed on alternate ones of the intumed flanges (52) of the first pan (22,222) only.
6. A panelling system comprising a support structure (10,110,210), a plurality of panels (14,114,214) each comprising a first sheet metal pan (22,222) having a central portion (23) defining a polygonal periphery and first intumed marginal flanges (52) on at least one side of the polygonal periphery; a second sheet metal panel (24) having a second central portion (25) similar in shape to that of the first panel, and second intumed marginal flanges (66) on at least one side of the polygonal periphery; a structural core (26) substantially filling an interior defined by said second intumed flanges, peripheral intermediate profiles (28,30,120,228) engaging and positioning the first and second intumed marginal flanges (52,66) with respect to one another, said intermediate profile (28,30,120,228) including an integral flange (20,121,227) having intumed rims (42,229), and a plurality of fasteners (16,117,217) each including a fastener body and a head portion (40,119,218) engaged over said flange, said flange being slidable with respect to said head portion, the fastener having means mounted on the support structure (10,110,210), and locking means (18,123,252) to lock the fastener with respect to said flange.
7. A panelling system according to claim 6, and further

comprising a locking means in the form of a screw fastener (18) having associated therewith a washer-like rotatable member (16).

8. A panelling system according to claim 7, wherein the washer-like rotatable member (16) is formed with at least one groove (40) to engage an out-turned bead (42,229) formed on said portion of the profile intermediate (28,30,120,228) and wherein the rotatable member is part-circular with a flattened portion (44) on a part of its periphery so that the rotatable member may be rotated to a position readily allowing a second panel to be positioned adjacent an already fixed panel whereafter the rotatable member is rotated, for example through 90°, so that the rotatable member engages the portion of the second panel. 5 10 15
9. A panelling system according to claim 6, and further comprising a fastener which can be mounted on said support structure (110,210), said fastener having a body (117,217) which is provided with a profiled head (119,218) engageable in a groove (121,227) of the intermediate profile (28,30,121,228). 20 25
10. A panelling system according to claim 9, wherein said head portion (218) has a bore (250) therein into which is engaged a threaded locking member (252) which can be tightened to engage against the portion (227) of the intermediate profile (228) and lock the intermediate profile relative to the fastener. 30 35
11. A panelling system according to claim 8 or 9, wherein the threaded bores (250) of two fasteners are off-set longitudinally of the head portion with respect to one another, to facilitate the operation of a spanner on the locking member whereby the height and location of each panel (214) can be adjusted to suite a particular requirement. 40 45
12. A panelling system according to any one of claims 6 to 11, and further comprising a filler strip (34,234) adapted to be located between each pair of adjacent panels and wherein the filler strip is of channel shape sheet metal construction having associated therewith a gasket (36,236) extending to each side of the channel shaped filler member, so that, when the filler member is pressed forcibly into the space between two adjacent panels, the gasket firstly provides a weather proof seal between the facing intumed flanges (52) and secondly has engagement portions engaging behind ribs (56) formed on the two intermediate profiles associated with said facing intumed flanges. 50 55

Patentansprüche

1. Mehreckige Gebäudeverbleidungstafel, ausgestattet mit
 - einer ersten Blechwanne (22,222) mit einem ersten Mittelteil (23), das einen mehreckigen Umfang und an jeder Seite dieses mehreckigen Umfangs erste einwärts gerichtete Kantenflansche (52) aufweist,
 - einer zweiten Blechwanne (24,224) mit einem zweiten Mittelteil (25), das eine der ersten Wanne ähnliche Form, dabei jedoch eine geringere Fläche aufweist, und an jeder Seite seines mehreckigen Umfangs über zweite einwärts gerichtete Kantenflansche (66) verfügt, die so bemessen sind, daß sie entlang den ersten nach innen gerichteten Flanschen (52) der ersten Wanne mit diesen eine enge Passung eingehen, sowie
 - einem Strukturkern (26,226), der im wesentlichen einen von den genannten ersten und zweiten Mittelteilen (23,25) und deren einwärts gerichteten Kantenflanschen (66) gebildeten Hohlraum ausfüllt, wobei einige der ersten einwärts gerichteten Flansche über ein Kantenteil (58) verfügen, das quer zu dem zugehörigen Flansch (52) und im wesentlichen parallel zum Mittelteil dieser Wanne absteht, und die genannten ersten und zweiten nach innen gerichteten Kantenflansche (52, 66) durch umlaufende Zwischenprofile (28,30,120,228) fixiert und relativ zueinander positioniert werden, und wobei an diesen Zwischenprofilen wiederum ein seitlich vorstehender Anschlagkörper (60, 160) angeordnet ist, der das genannte Kantenteil (58) seitlich so übergreift, daß die erste Wanne (22,222) und das Zwischenprofil (28,30,120,228) relativ zueinander in der gewünschten Stellung gehalten werden.
2. Tafel gemäß Anspruch 1, wobei die ersten und zweiten einwärts gerichteten Flansche (66,52) sowohl innen als auch außen von einem Teil des Zwischenprofils (28,30,120,228) hintergriffen werden.
3. Tafel gemäß Anspruch 1 oder 2, wobei das Zwischenprofil (28,30,120,228) einen Teil (42,229) aufweist, an dem ein Befestigungselement (16,117,21) zur Befestigung der Tafel an einem Tragwerk (10,110,210) angreift.
4. Tafel gemäß Anspruch 3, wobei der genannte Teil (42, 229) so ausgebildet ist, daß er beim Anziehen des Befestigungselementes so auf das Zwischen-

profil (28,30,120,228) drückt, daß der Anschlagkörper (60,160) gegen das quer abstehende Kantenteil (58) gepreßt wird.

5. Tafel gemäß einem der vorstehenden Ansprüche, wobei das Kantenteil (58) nur auf abwechselnden nach innen gerichteten Flanschen (52) der ersten Wanne (22,222) ausgebildet ist. 5
6. Verkleidungstafelsystem, das 10
 - ein Tragwerk (10,110,210),
 - mehrere Verkleidungstafeln (14,114,214), jeweils bestehend aus 15
 - * einer erste Blechwanne (22,222) mit einem Mittelteil (23), das einen mehreckigen Umfang und an mindestens einer Seite dieses mehreckigen Umfangs erste, nach innen gerichtete Kantenflansche (52) aufweist, 20
 - * einer zweite Blechtafel (24) mit einem zweiten Mittelteil (25), das eine der ersten Tafel ähnliche Form aufweist, und die an mindestens einer Seite ihres mehreckigen Umfangs über zweite nach innen gerichtete Kantenflansche (66) verfügt, und 25
 - * einem Struktorkern (26), der im wesentlichen einen von den genannten zweiten einwärts gerichteten Flanschen gebildeten Hohlraum ausfüllt, 30
 - umlaufende Zwischenprofile (28,30,120,228), die die ersten und zweiten einwärts gerichteten Kantenflansche (52,66) hintergreifen und diese relativ zueinander positionieren, wobei dieses Zwischenprofil (28,30,120,228) einen angeformten Flansch (20,121,227) mit einwärts gerichteten Kanten (42, 229) aufweist, sowie 35
 - mehrere Befestigungselemente (16,117,217) umfaßt, die jeweils einen Befestigungskörper sowie ein den genannten Flansch hintergreifendes Kopfteil (40,119, 218) aufweisen, wobei dieser Flansch relativ zu diesem Kopfteil verschieblich ist und das Befestigungselement über am Tragwerk (10,110,210) angebrachte Mittel sowie ferner über Fixierungsmittel (18,123,252) zur Arretierung des Befestigungselementes relativ zu diesem Flansch verfügt. 40
7. Verkleidungstafelsystem gemäß Anspruch 6, zusätzlich ausgestattet mit einem Fixierungsmittel in Form eines Schraubbefestigungselementes (18), dem ein drehbarer Körper (16) ähnlich einer Unter- 45

legscheibe zugeordnet ist.

8. Verkleidungstafelsystem gemäß Anspruch 7, wobei der ähnlich einer Unterlegscheibe ausgebildete drehbare Körper (16) mindestens eine Nut (40) aufweist, in die ein nach außen gerichteter Randwulst (42,229) eingreift, der an dem genannten Teil des Zwischenprofils (28,30,120,228) ausgebildet ist, und der drehbare Körper insbesondere an seinem Umfang einen abgeflachten Teil (44) aufweist, so daß sich der drehbare Körper in eine Stellung drehen läßt, in der er die problemlose Anfügung einer zweiten Tafel neben einer bereits befestigten Tafel erlaubt, wonach er dann (z. B. um 90°) gedreht wird, um auch das betreffende Teil dieser zweiten Tafel zu hintergreifen.
9. Verkleidungstafelsystem gemäß Anspruch 6, zusätzlich ausgestattet mit einem Befestigungselement, das sich an dem Tragwerk (110,210) befestigen läßt und einen Körper (117,217) aufweist, der über einen profilierten Kopf (119,218) zum Eingriff in einer Nut (121, 227) des Zwischenprofils (28,30,121,228) verfügt.
10. Verkleidungstafelsystem gemäß Anspruch 9, wobei das genannte Kopfteil (218) eine Bohrung (250) aufweist, in das ein Fixierungsmittel (252) mit einem Gewinde eingesetzt wird, daß sich so festziehen läßt, daß es gegen das genannte Teil (227) des Zwischenprofils (228) drückt und damit das Zwischenprofil relativ zu dem Befestigungselement arretiert.
11. Verkleidungstafelsystem gemäß Anspruch 8 oder 9, wobei die Gewindebohrungen (250) von zwei Befestigungselementen in Längsrichtung des Kopfes zueinander versetzt angeordnet sind, um das Ansetzen eines Schraubenschlüssels an dem Fixierungsmittel zu erleichtern, so daß sich die Höhe und Lage jeder Tafel (214) an bestimmte Erfordernisse anpassen läßt.
12. Verkleidungstafelsystem gemäß einem der Ansprüche 6 bis 11, weiterhin ausgestattet mit einer Fülleiste (34,234), die sich zwischen zwei nebeneinanderliegenden Tafeln einsetzen läßt und als U-förmiges Blechprofil mit einer auf jeder Seite dieser U-förmigen Fülleiste verlaufenden Dichtung (36,236) ausgeführt ist, die beim Einpressen der Fülleiste in den Zwischenraum zwischen zwei nebeneinanderliegenden Tafeln erstens einen witterungsbeständige Verschuß zwischen den gegenüberliegenden einwärts gerichteten Flanschen (52) herstellt und zweitens Eingriffteile aufweist, die hinter entsprechende Ränder (56) an den beiden Zwischenprofilen eingreifen, welche diesen gegenüberliegenden einwärts gerichteten Flanschen zugeordnet sind.

Revendications

1. Panneau modulaire polygonal comprenant un premier pan de tôle (22, 222) comportant une première partie centrale (23) définissant une périphérie polygonale et des premiers rebords latéraux rentrés (52) sur chaque côté de la périphérie polygonale, un second pan de tôle (24, 224) comportant une seconde partie centrale (25) de forme similaire à celle du premier pan, mais couvrant une surface plus petite, et des seconds rebords latéraux rentrés (66) sur chaque côté de la périphérie polygonale et dimensionnés pour s'ajuster étroitement le long desdits premiers rebords rentrés (52) du premier pan, une âme structurelle (26, 226) remplissant sensiblement un intérieur défini par lesdites première et seconde parties centrales (23, 25) et lesdits seconds rebords rentrés (66), certains des premiers rebords rentrés comportant une partie de bord (58) qui fait saillie dans une direction transversale au rebord associé (52), et généralement parallèle à la partie centrale de ce pan, et des profilés intermédiaires périphériques (28, 30, 120, 228) saisissant et positionnant lesdits premiers et seconds rebords latéraux rentrés (52, 66) les uns par rapport aux autres, dans lequel lesdits profilés intermédiaires comprennent une butée faisant saillie latéralement (60, 160) saisissant ladite partie de bord (58) sur son côté afin de maintenir le premier pan (22, 222) et le profilé intermédiaire (28, 30, 120, 228) en position l'un par rapport à l'autre.
2. Panneau selon la revendication 1, dans lequel les premiers et seconds rebords rentrés (66, 52) sont chacun saisis à la fois intérieurement et extérieurement par une partie du profilé intermédiaire (28, 30, 120, 228).
3. Panneau selon la revendication 1 ou 2, dans lequel le profilé intermédiaire (28, 30, 120, 228) comporte une partie (42, 229) pouvant être saisie par un dispositif de fixation (16, 117, 21) qui est conçu pour être utilisé pour fixer le panneau contre une structure de support (10, 110, 210).
4. Panneau selon la revendication 3, dans lequel ladite partie (42, 229) est disposée de façon à pousser la barre profilée intermédiaire (28, 30, 120, 228), lorsque le dispositif de fixation est serré, dans une direction qui pousse la butée (60, 160) contre la partie de bord s'étendant transversalement (58).
5. Panneau selon l'une quelconque des revendications précédentes, dans lequel la partie de bord (58) est formée sur des rebords alternés des rebords rentrés (52) du premier pan (22, 222) seulement.
6. Système de montage de panneaux comprenant une structure de support (10, 110, 210), une multitude de panneaux (14, 114, 214) comprenant chacun un premier pan de tôle (22, 222) comportant une partie centrale (23) définissant une périphérie polygonale, et des premiers rebords latéraux rentrés (52) sur au moins un côté de la périphérie polygonale, un second panneau de tôle (24) comportant une seconde partie centrale (25) de forme similaire à celle du premier panneau, et des seconds rebords latéraux rentrés (66) sur au moins un côté de la périphérie polygonale, une âme structurelle (26) remplissant sensiblement un intérieur défini par lesdits seconds rebords rentrés, des profilés intermédiaires périphériques (28, 30, 120, 228) saisissant et positionnant les premiers et seconds rebords latéraux rentrés (52, 66) les uns par rapport aux autres, lesdits profilés intermédiaires (28, 30, 120, 228) comprenant un rebord intégral (20, 121, 227) comportant des bords rentrés (42, 229), et une multitude de dispositifs de fixation (16, 117, 217) comprenant chacun un corps de dispositif de fixation et une partie de tête (40, 119, 218) engagés sur ledit rebord, ledit rebord pouvant coulisser par rapport à ladite partie de tête, le dispositif de fixation comportant des moyens montés sur la structure de support (10, 110, 210), et des moyens de verrouillage (18, 123, 252) pour verrouiller le dispositif de fixation par rapport audit rebord.
7. Système de montage de panneaux selon la revendication 6, et comprenant en outre un moyen de verrouillage sous forme d'un dispositif de fixation par vis (18) auquel est associé un élément pouvant tourner semblable à une rondelle (16).
8. Système de montage de panneaux selon la revendication 7, dans lequel l'élément pouvant tourner semblable à une rondelle (16) est formé avec au moins une rainure (40) afin de saisir un talon tourné vers l'extérieur (42, 229) formé sur ladite partie du profilé intermédiaire (28, 30, 120, 228) et dans lequel l'élément pouvant tourner est en partie circulaire avec une partie aplatie (44) sur une partie de sa périphérie de façon à ce que l'élément pouvant tourner puisse être tourné à une position permettant facilement de positionner un second panneau à côté d'un panneau déjà fixé, après quoi l'on fait tourner l'élément pouvant tourner, par exemple de 90°, de façon à ce que l'élément pouvant tourner saisisse la partie du second panneau.
9. Système de montage de panneaux selon la revendication 6, et comprenant en outre un dispositif de fixation qui peut être monté sur ladite structure de support (10, 210), ledit dispositif de fixation comportant un corps (117, 217) qui comporte une tête profilée (119, 218) pouvant s'engager dans une rainure (121, 227) du profilé intermédiaire (28, 30, 121,

228).

10. Système de montage de panneaux selon la revendication 9, dans lequel ladite partie de tête (218) comporte un alésage (250) dans celle-ci dans lequel est engagé un élément de verrouillage fileté (252) que l'on peut visser afin de le serrer contre la partie (227) du profilé intermédiaire (228) et de verrouiller le profilé intermédiaire par rapport au dispositif de fixation.

5
10
11. Système de montage de panneaux selon la revendication 8 ou 9, dans lequel les alésages filetés (250) de deux dispositifs de fixation sont décalés l'un par rapport à l'autre dans le sens longitudinal de la partie de tête, afin de faciliter la mise en oeuvre d'une clé sur l'élément de verrouillage, d'où il résulte que l'on peut ajuster la hauteur et l'emplacement de chaque panneau (214) afin de satisfaire une exigence particulière.

15
20
12. Système de montage de panneaux selon l'une quelconque des revendications 6 à 11, et comprenant en outre une baguette de remplissage (34, 234) conçue pour être placée entre chaque paire de panneaux adjacents et dans lequel la baguette de remplissage est d'une construction en tôle en forme de canal à laquelle est associé un joint (36, 236) s'étendant jusqu'à chaque côté de l'élément de remplissage en forme de canal, de sorte que, lorsque l'élément de remplissage est enfoncé de force dans l'espace entre deux panneaux adjacents, le joint procure tout d'abord un joint étanche aux intempéries entre les rebords rentrés se faisant face (52) et comporte en second lieu des parties d'engagement s'engageant derrière des nervures (56) formées sur les deux profilés intermédiaires associés auxdits rebords rentrés se faisant face.

25
30
35
40
45
50
55

Fig.1.

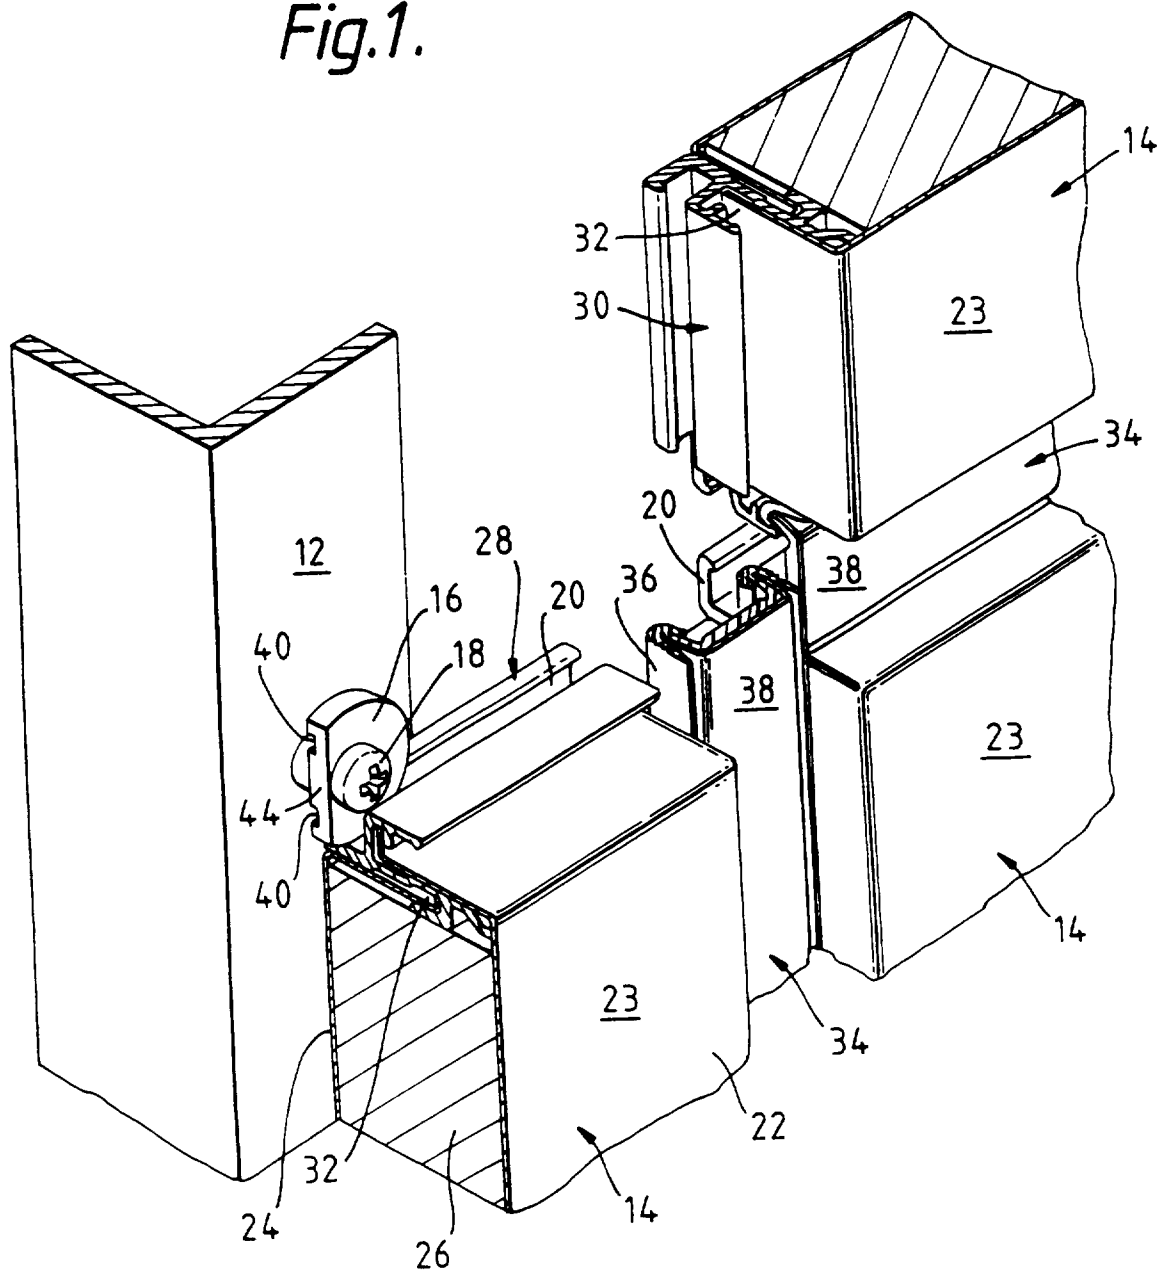


Fig.2.

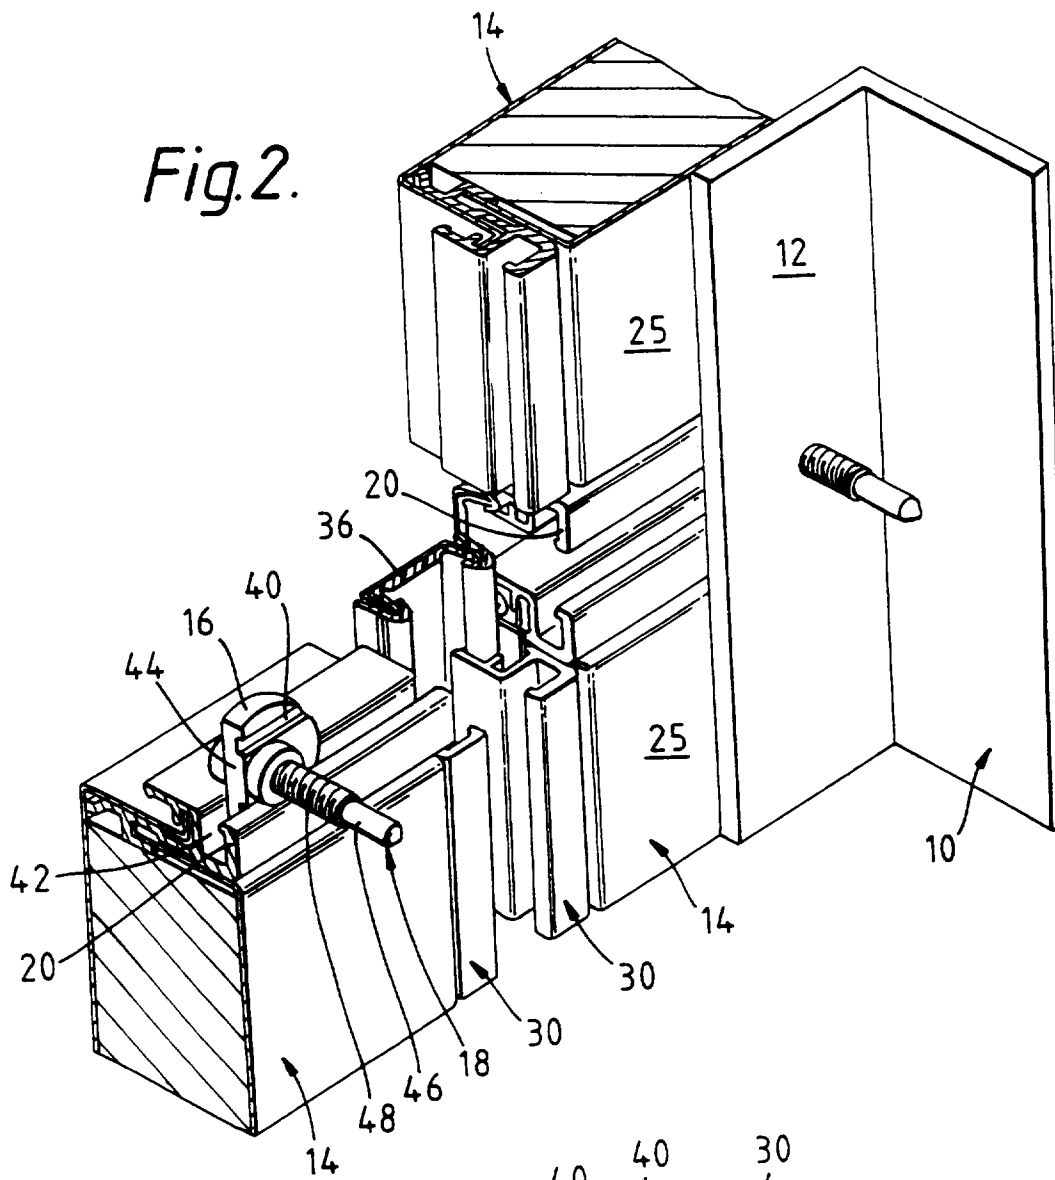


Fig.3.

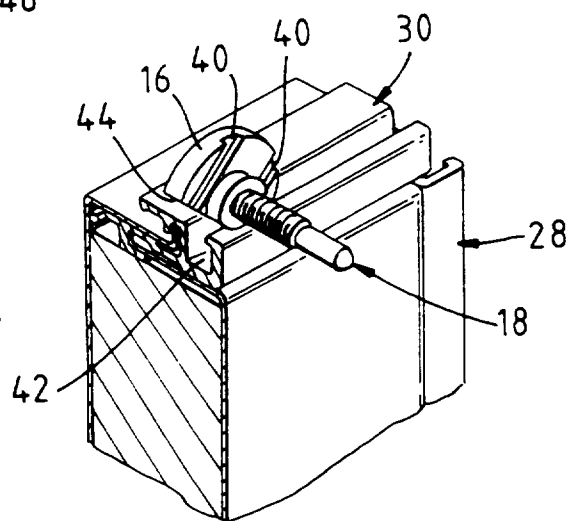


Fig. 4.

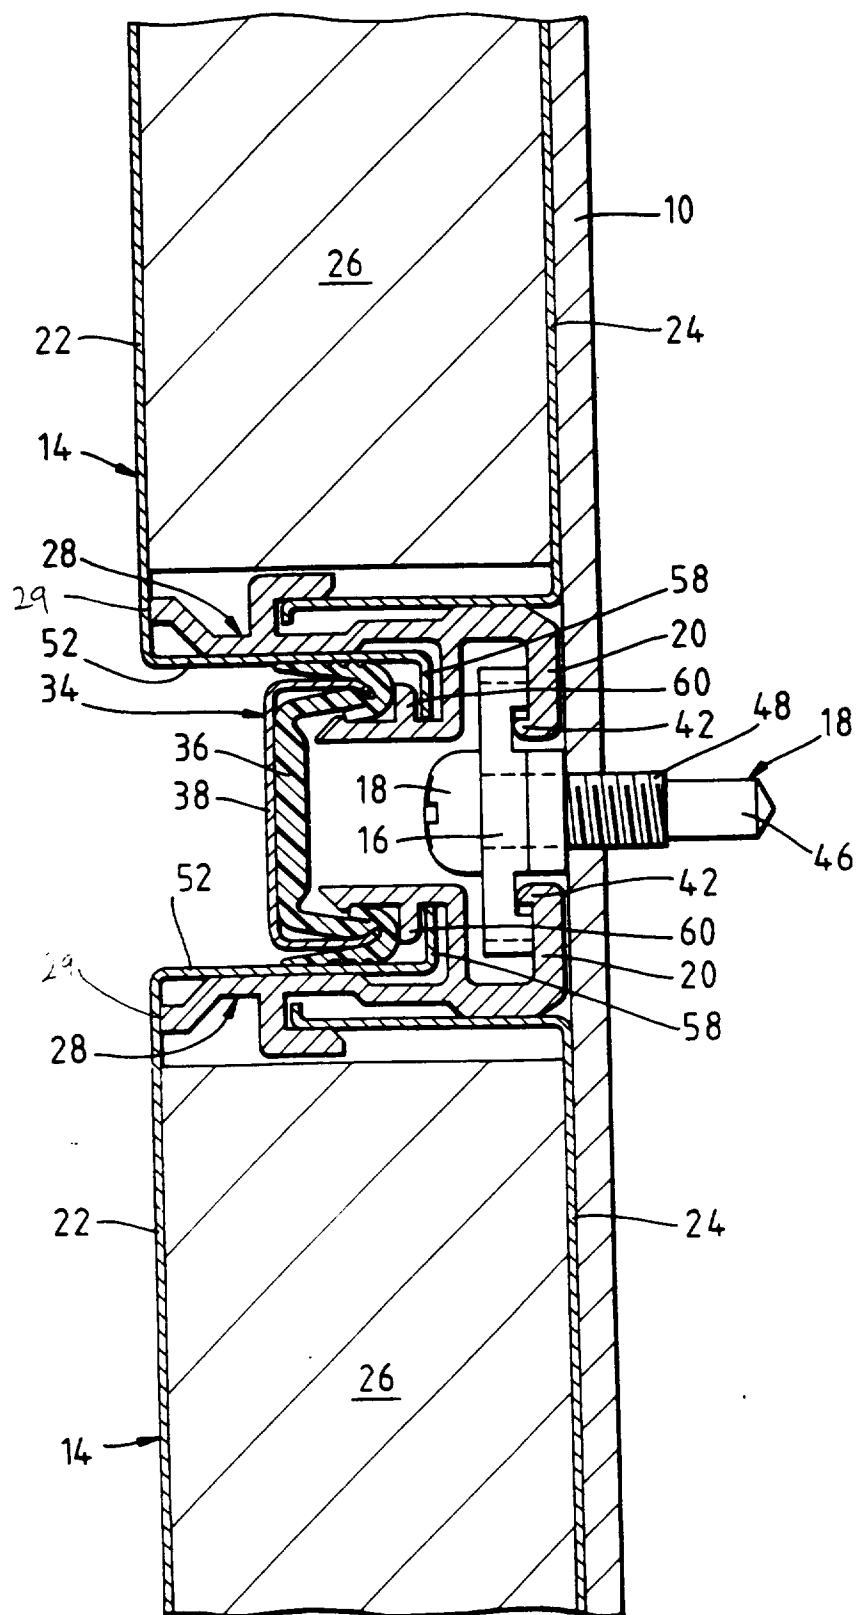


Fig. 5A.

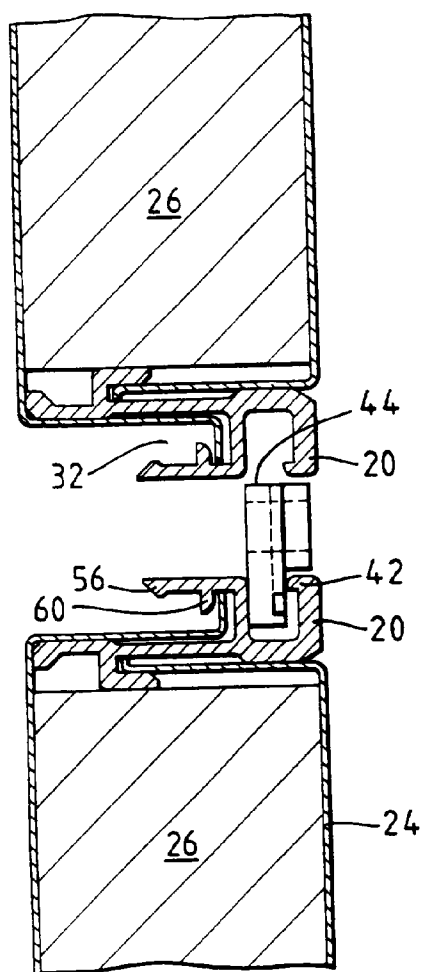


Fig. 5B.

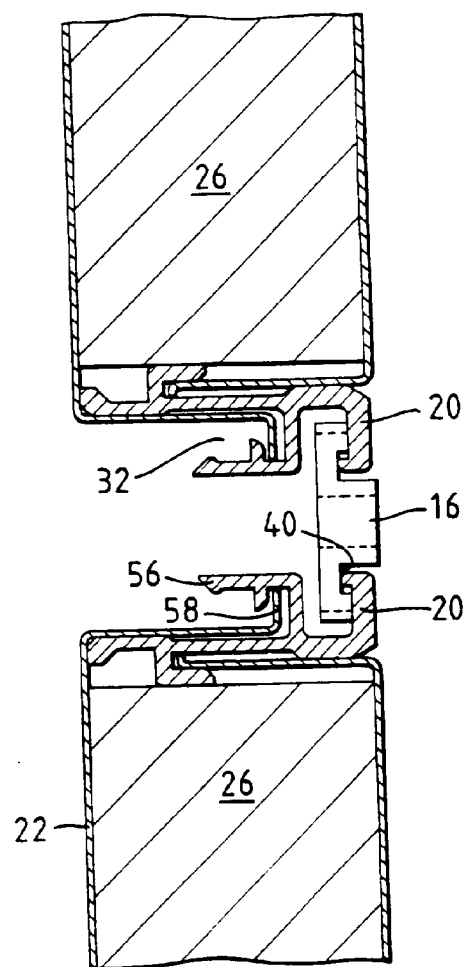


Fig. 5C.

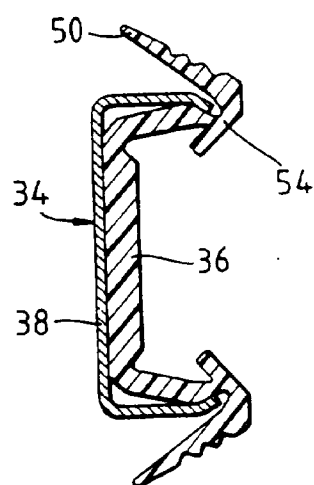


Fig. 6.

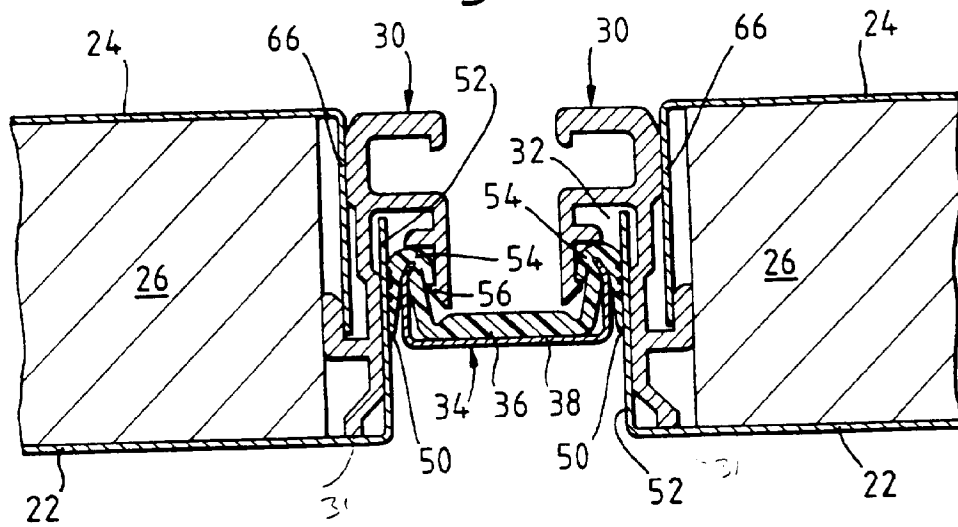


Fig. 7.

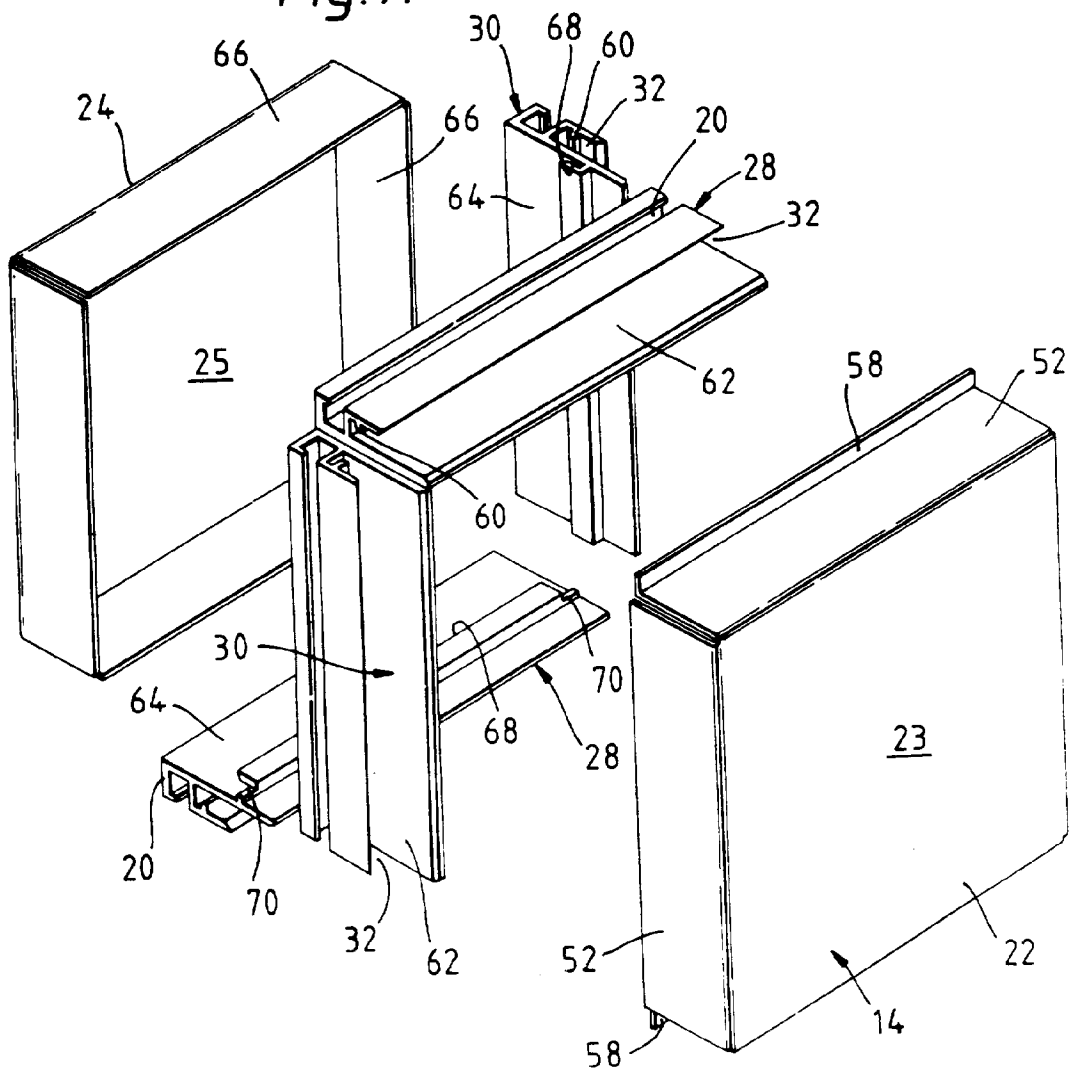


Fig.8.

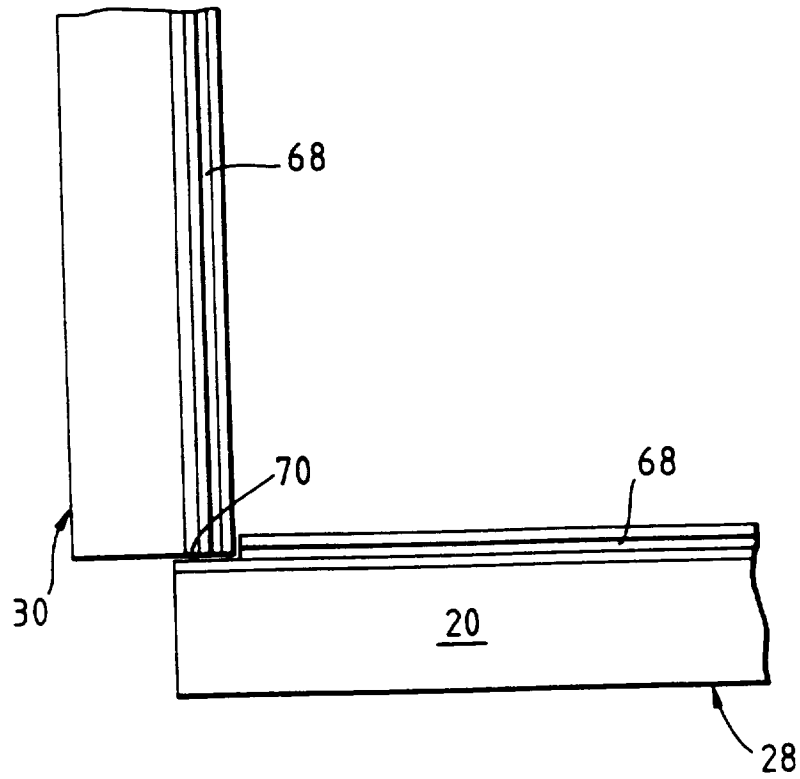


Fig.9A.

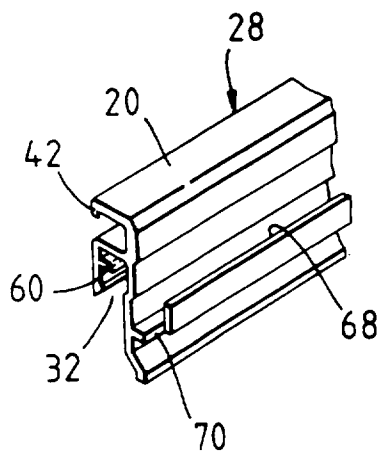


Fig.9B.

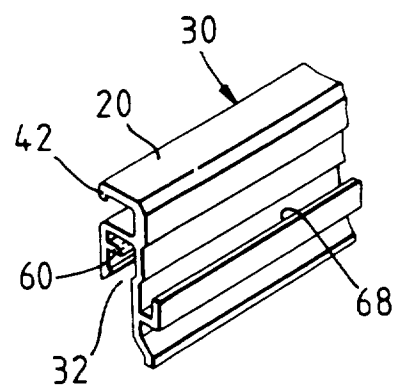
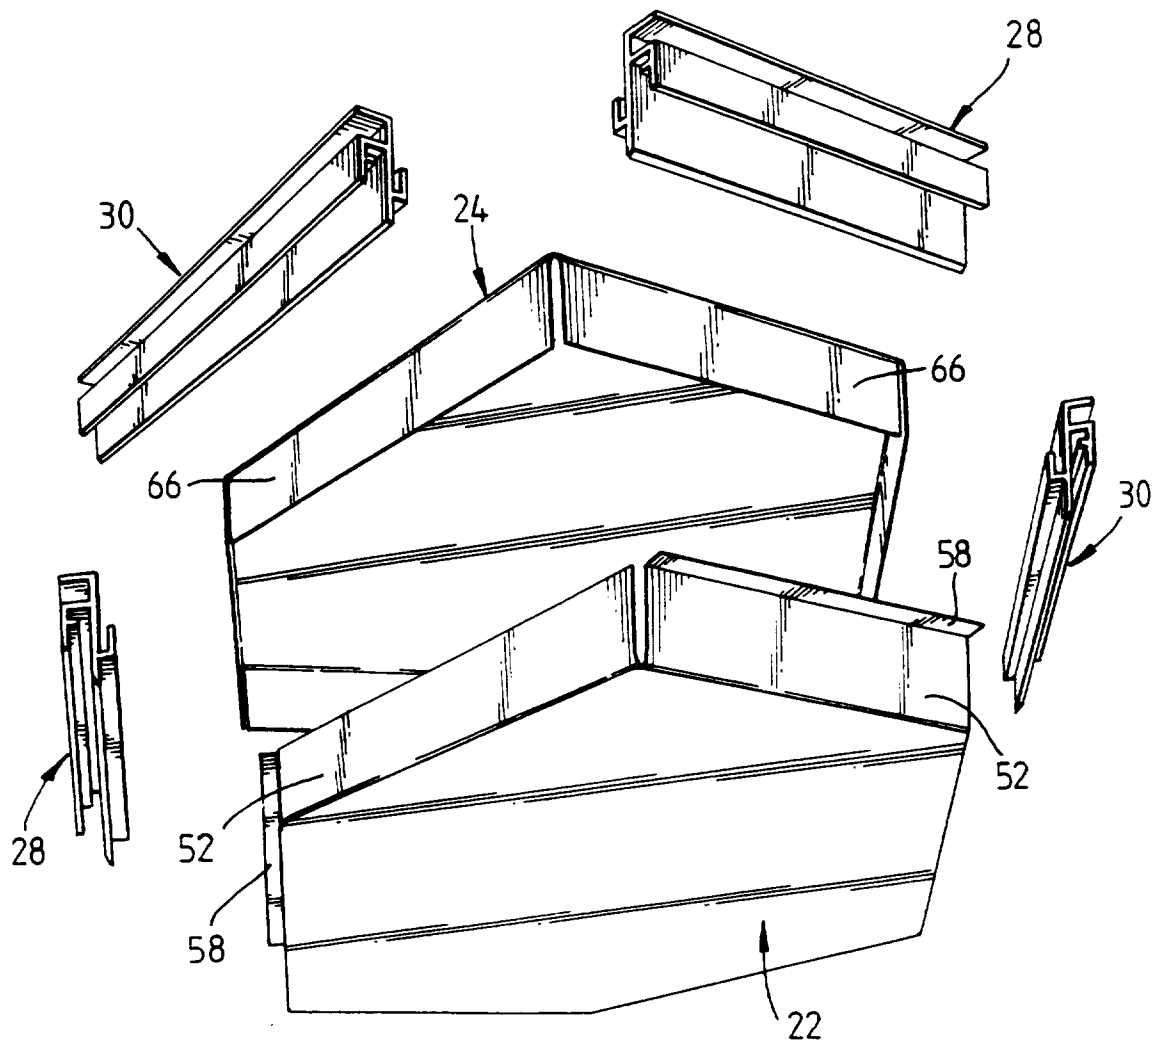


Fig. 10.



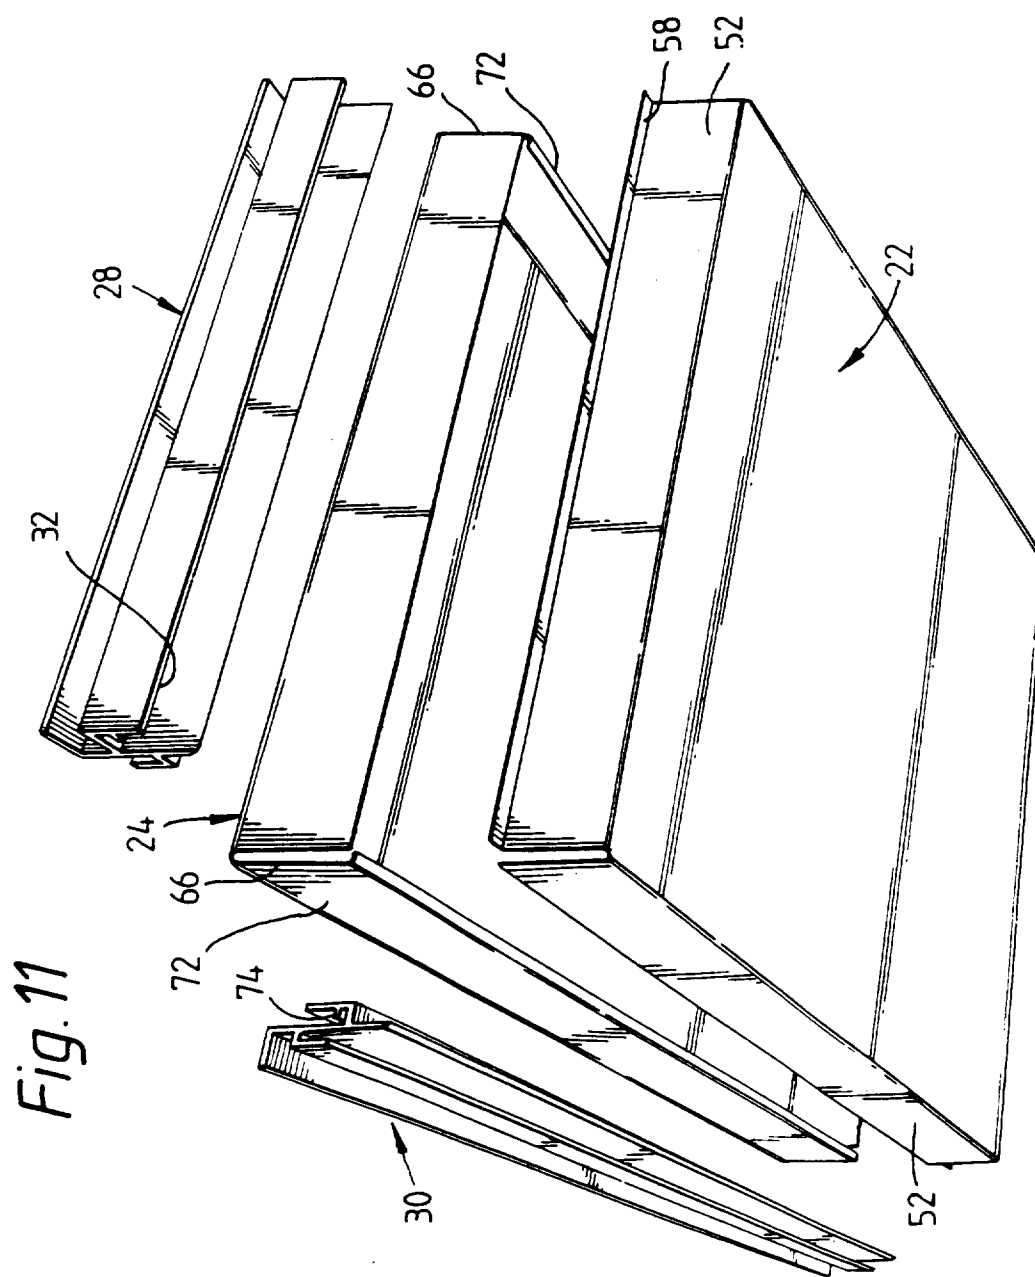


Fig. 11

Fig. 12.

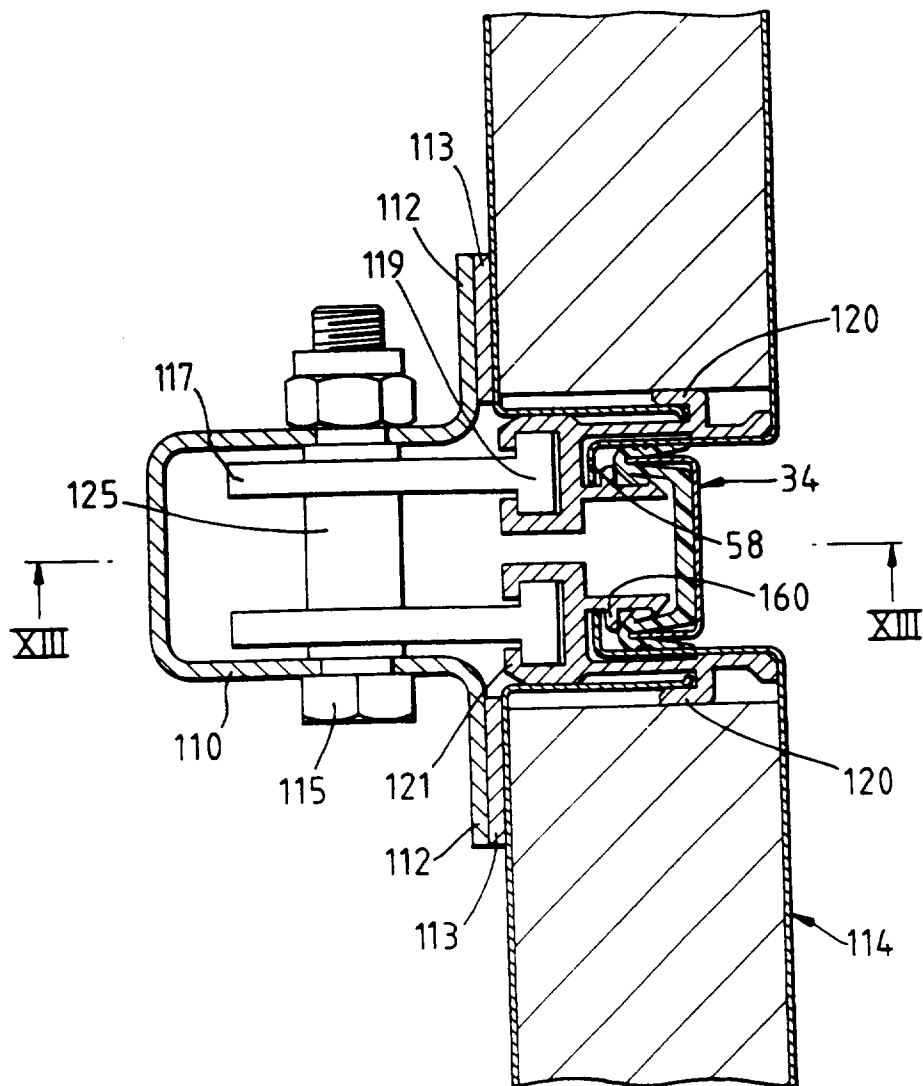


Fig. 13.

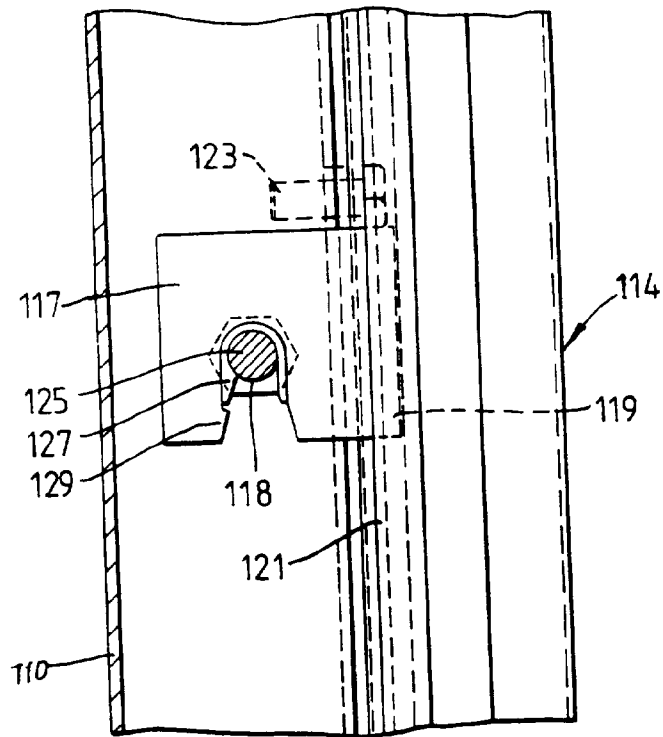


Fig. 15.

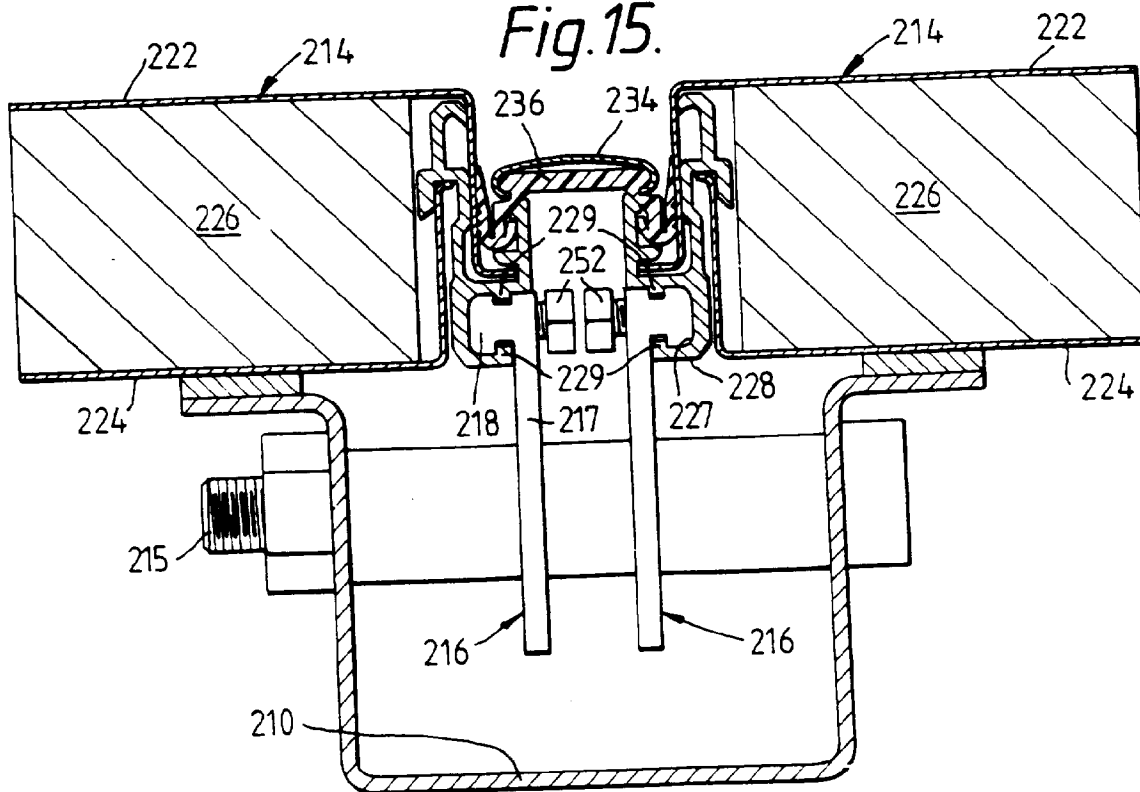


Fig. 14.

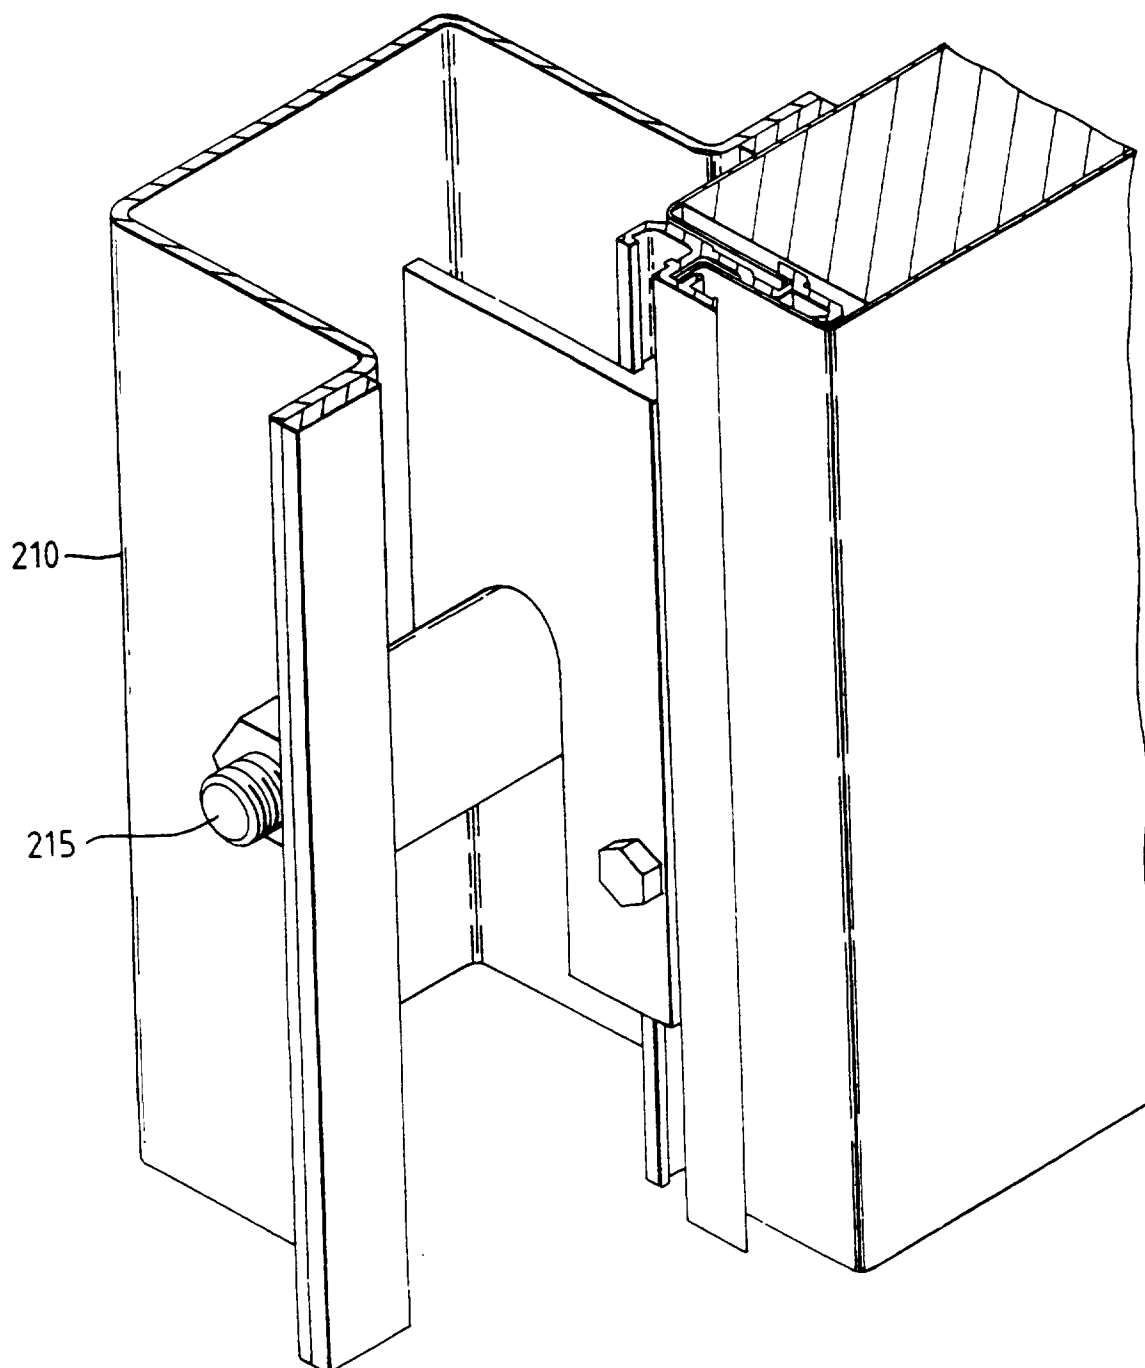


Fig.16.

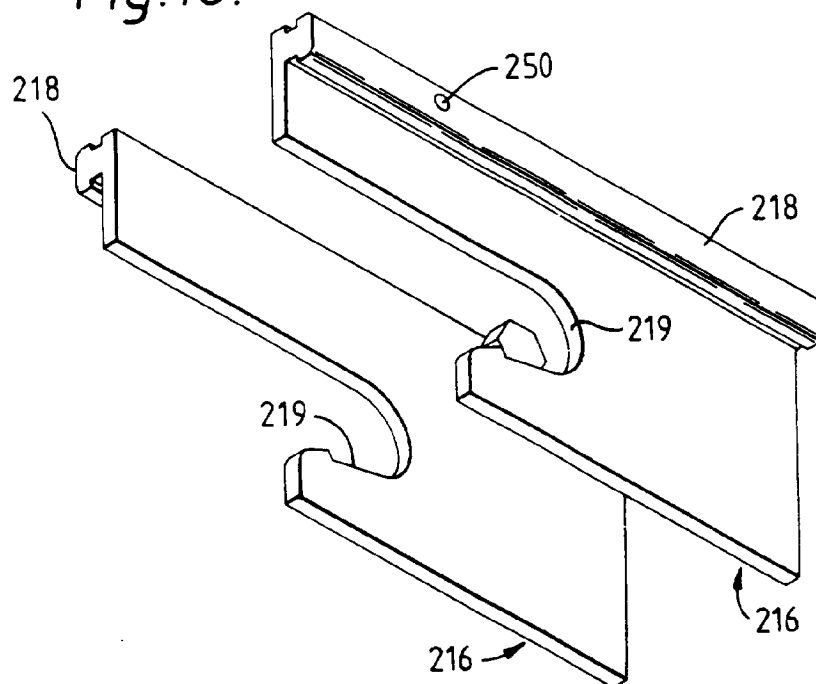


Fig.17.

