



US 20060218744A1

(19) **United States**(12) **Patent Application Publication****Hayashi et al.**(10) **Pub. No.: US 2006/0218744 A1**(43) **Pub. Date: Oct. 5, 2006**(54) **ELECTRIC VACUUM CLEANER****Related U.S. Application Data**

(62) Division of application No. 10/372,087, filed on Feb. 25, 2003.

(30) **Foreign Application Priority Data**

Jun. 11, 2002 (JP) 2002-169405

Oct. 21, 2002 (JP) 2002-305265

Publication Classification(51) **Int. Cl.**
A47L 9/16 (2006.01)(52) **U.S. Cl.** **15/347; 15/353**(76) Inventors: **Shoji Hayashi**, Ushiku (JP); **Yukiji Iwase**, Ushiku (JP); **Yasuyuki Hiruta**, Hitachi (JP); **Kyouichi Kanno**, Hitachi (JP); **Susumu Sato**, Takahagi (JP); **Naofumi Kitagawa**, Hitachi (JP); **Naruhiko Suzuki**, Hitachi (JP); **Yasunori Kotaka**, Hitachi (JP); **Hirofumi Tanaka**, Shiroyama (JP); **Koichi Umezawa**, Tokyo (JP)

Correspondence Address:

ANTONELLI, TERRY, STOUT & KRAUS, LLP
1300 NORTH SEVENTEENTH STREET
SUITE 1800
ARLINGTON, VA 22209-3873 (US)(21) Appl. No.: **11/443,021**(22) Filed: **May 31, 2006**(57) **ABSTRACT**

The electric vacuum cleaner is disclosed which includes a main body within which an electric blower and cyclonic separation cylinder are provided. A dust collecting case is provided in communication with the cyclonic separation cylinder to receive dust that has been separated from the inlet tube. The dust collecting case also includes a filter arranged therein. Air received from the inlet tube is separated such that a portion is passed through the dust collecting case and a communicating passage. The air is subsequently merged and discharge through the electric blower.

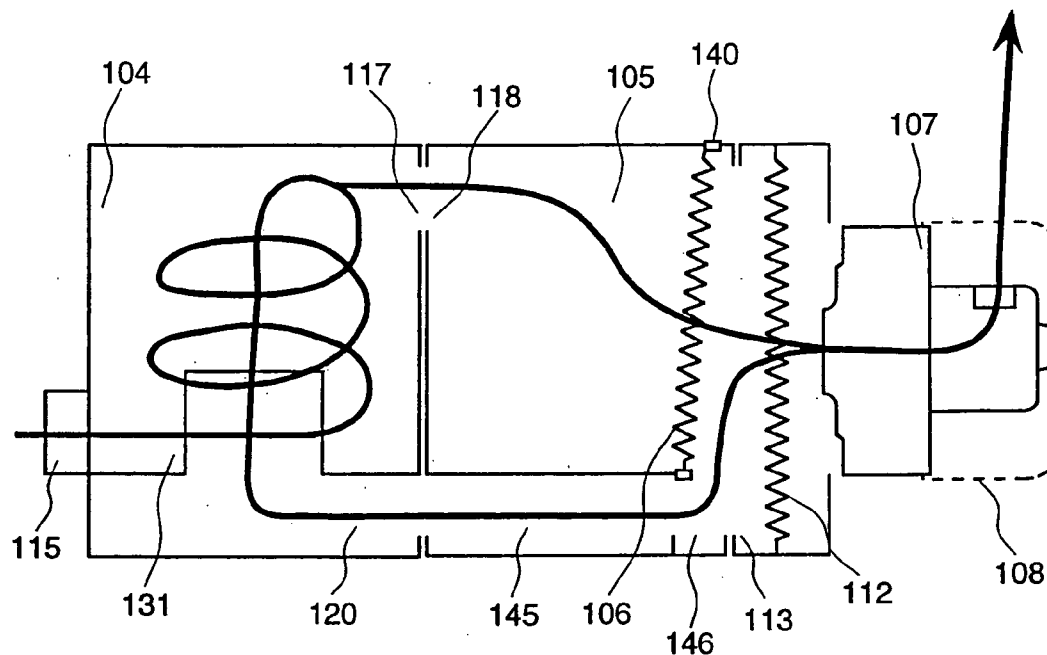


FIG. 1

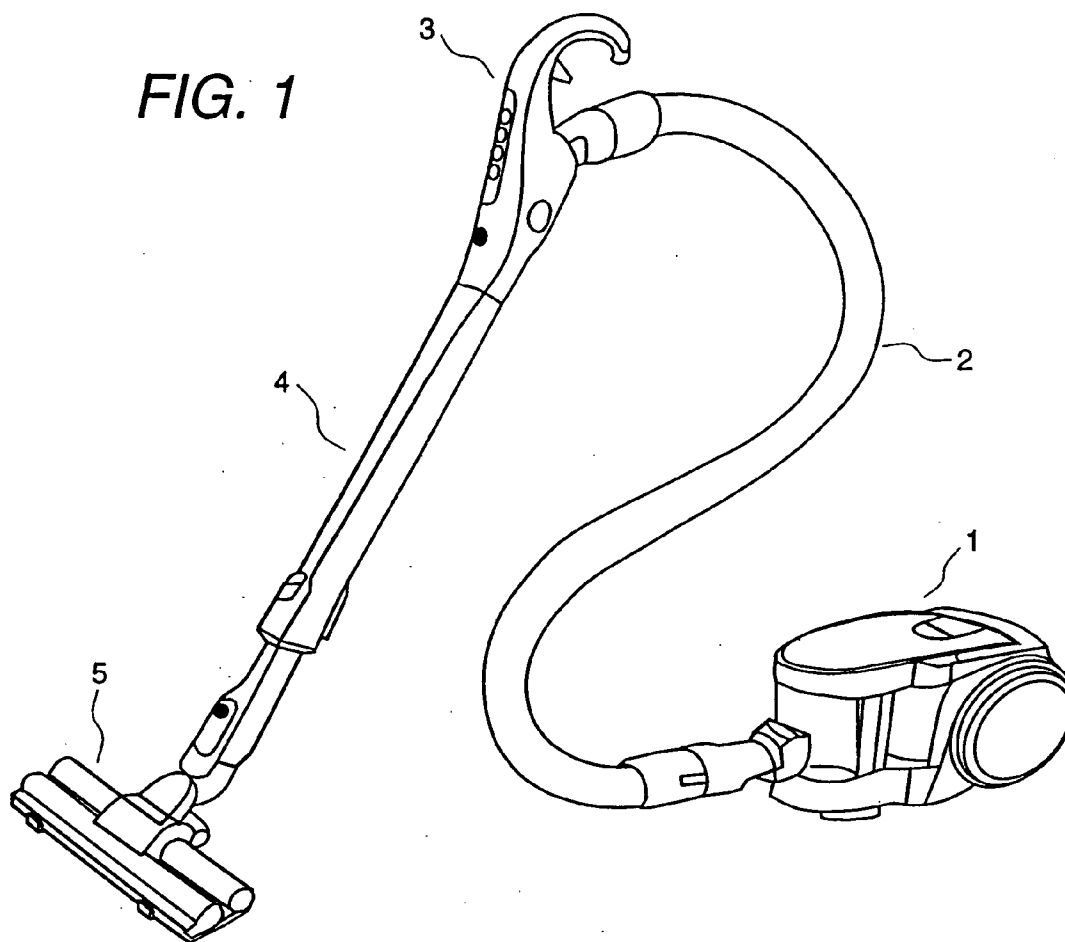


FIG. 2

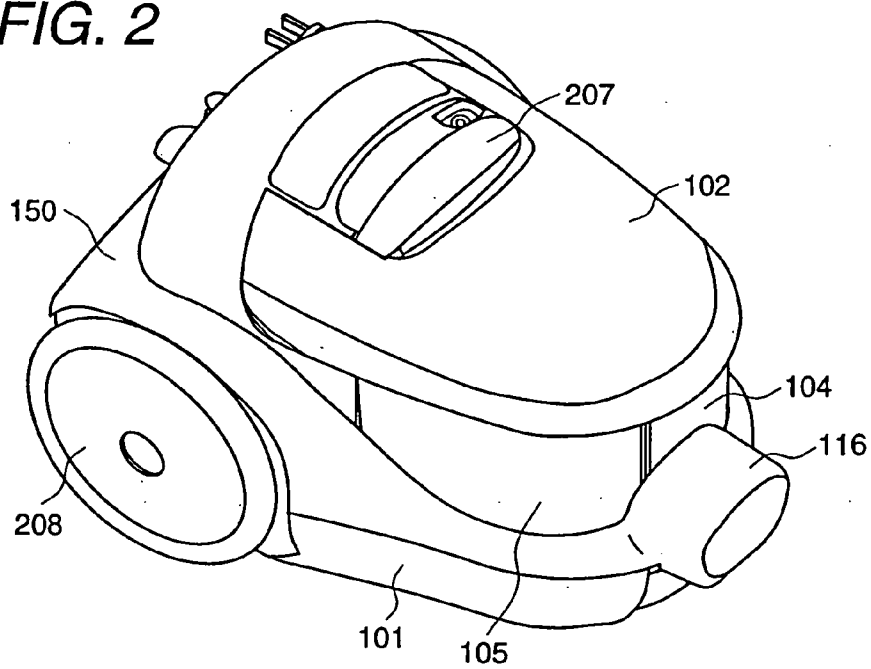


FIG. 3

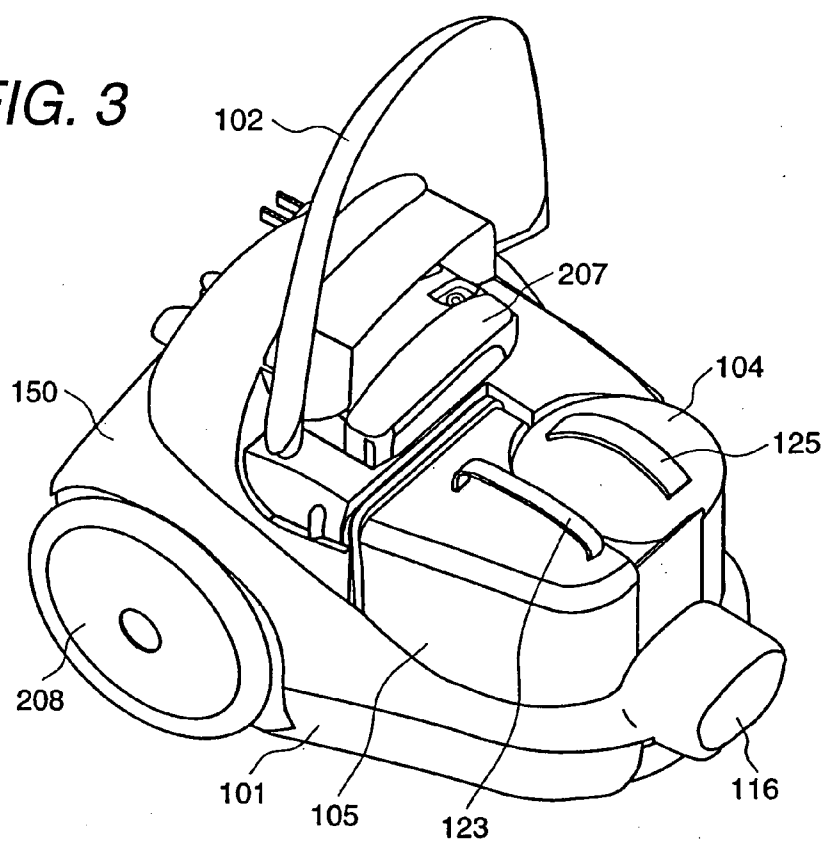


FIG. 4

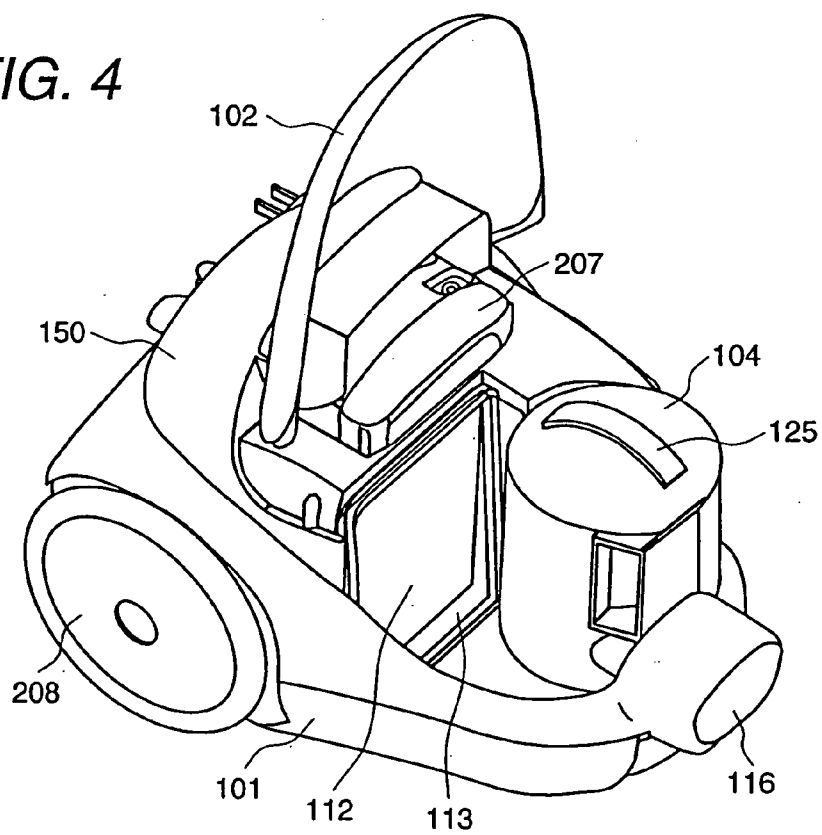


FIG. 5

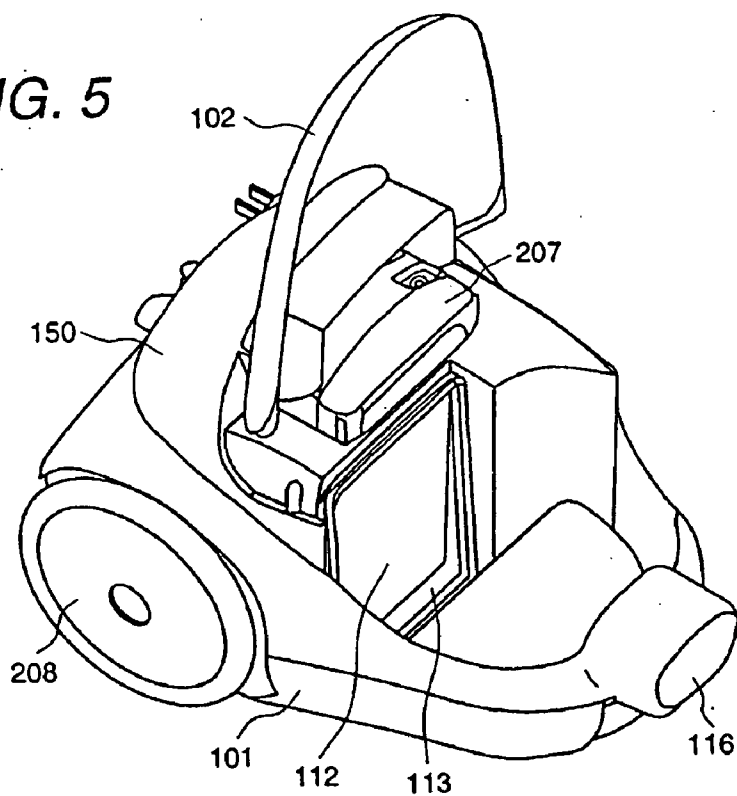


FIG. 6

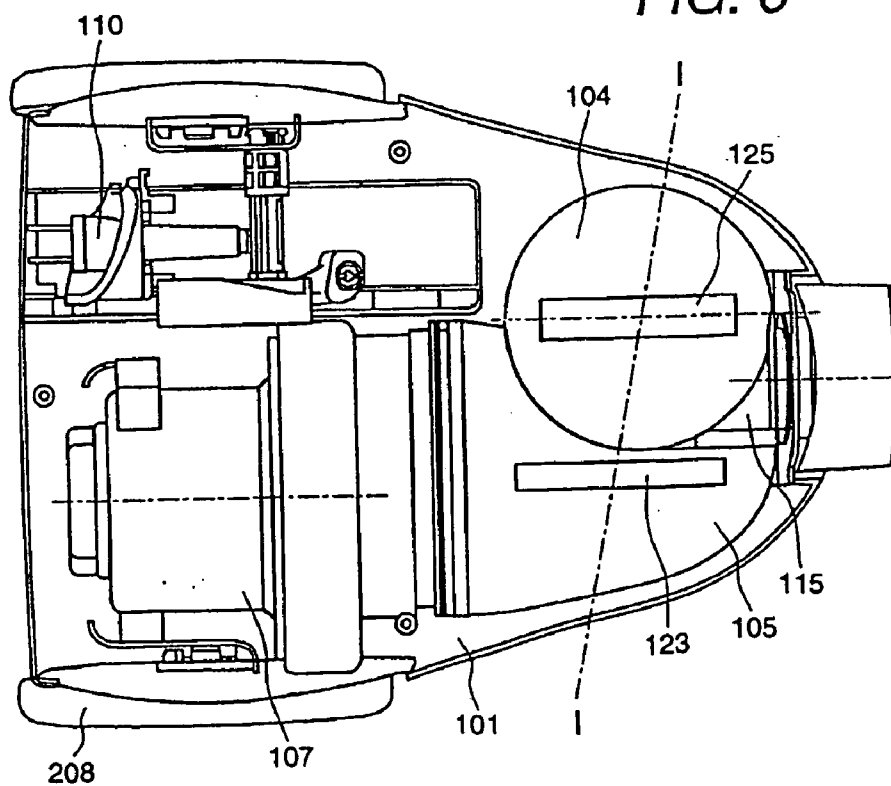


FIG. 7(a)

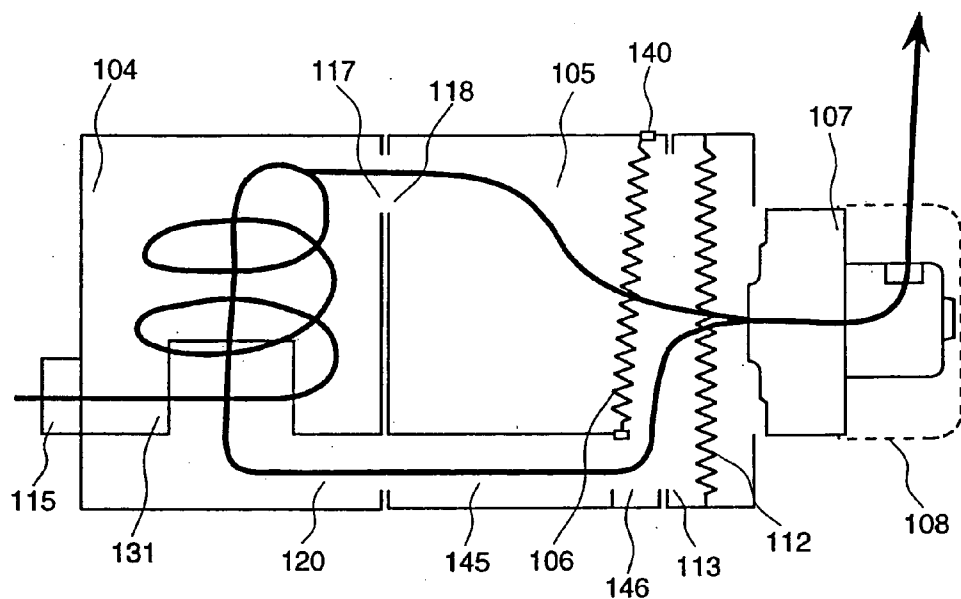


FIG. 7(b)

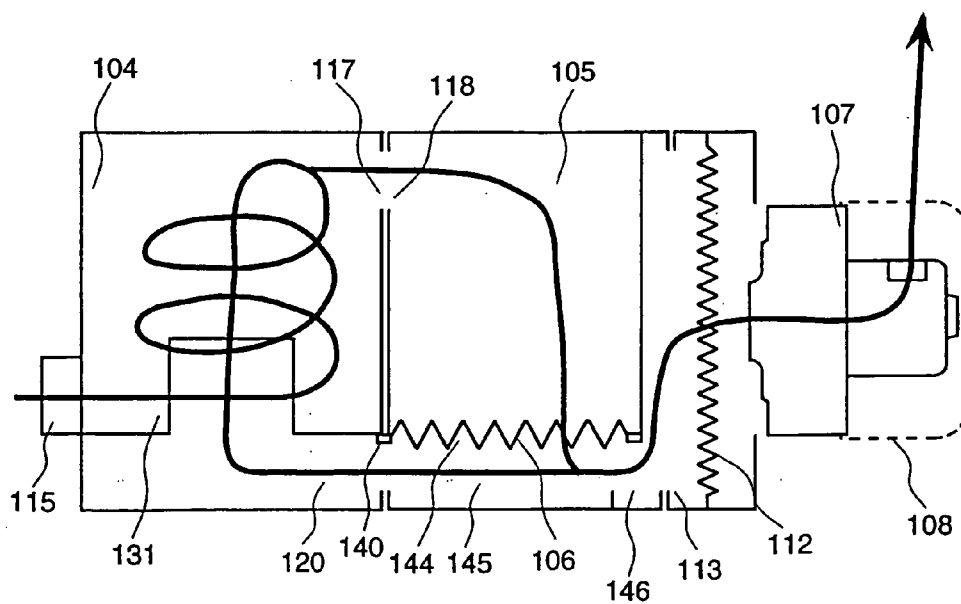


FIG. 8

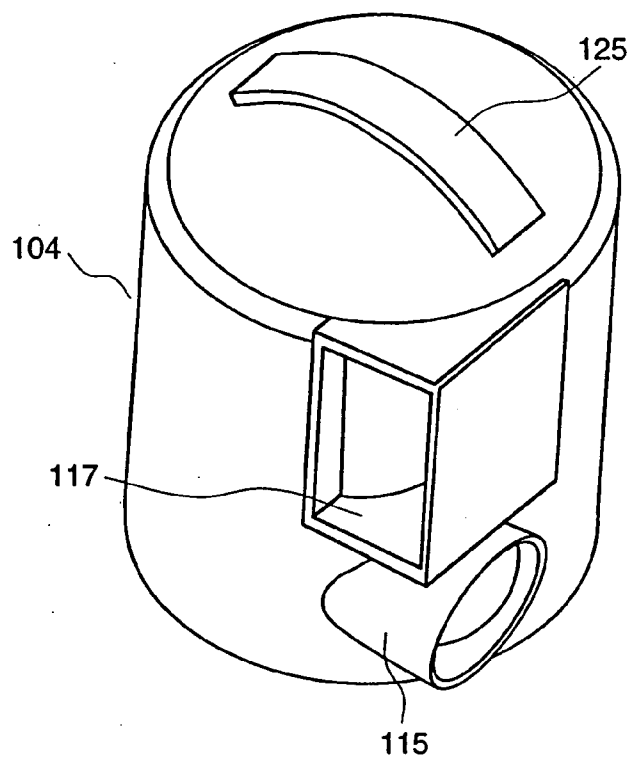


FIG. 9

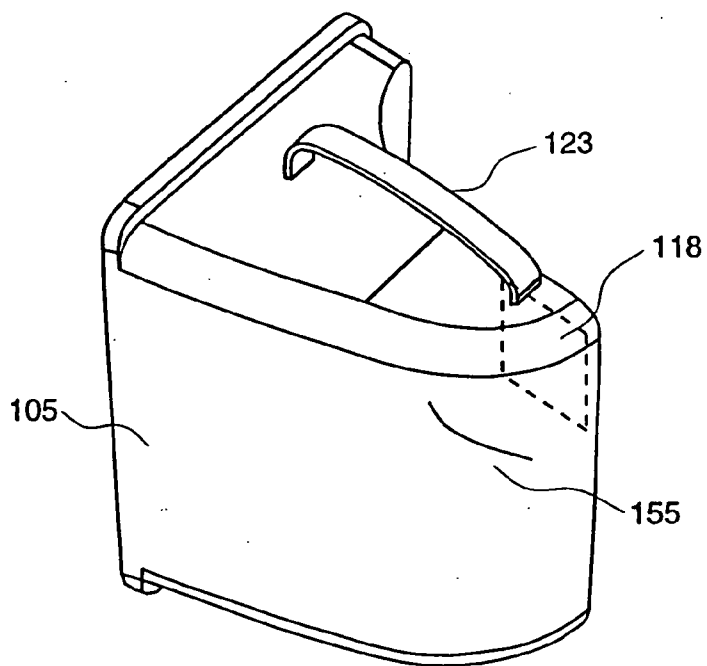


FIG. 10(a)

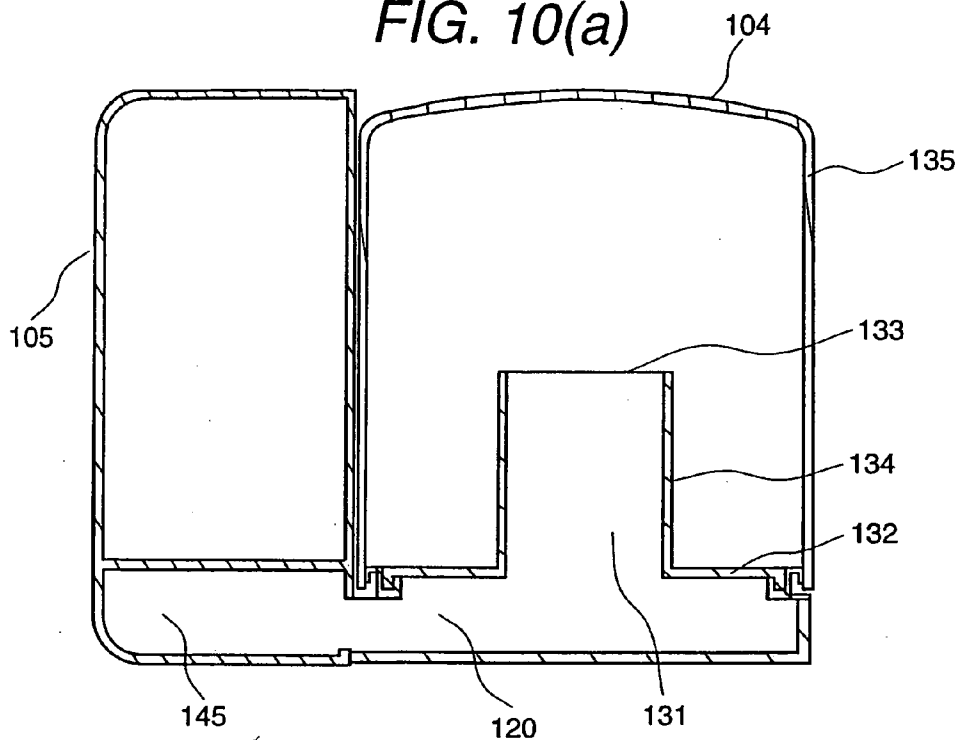


FIG. 10(b)

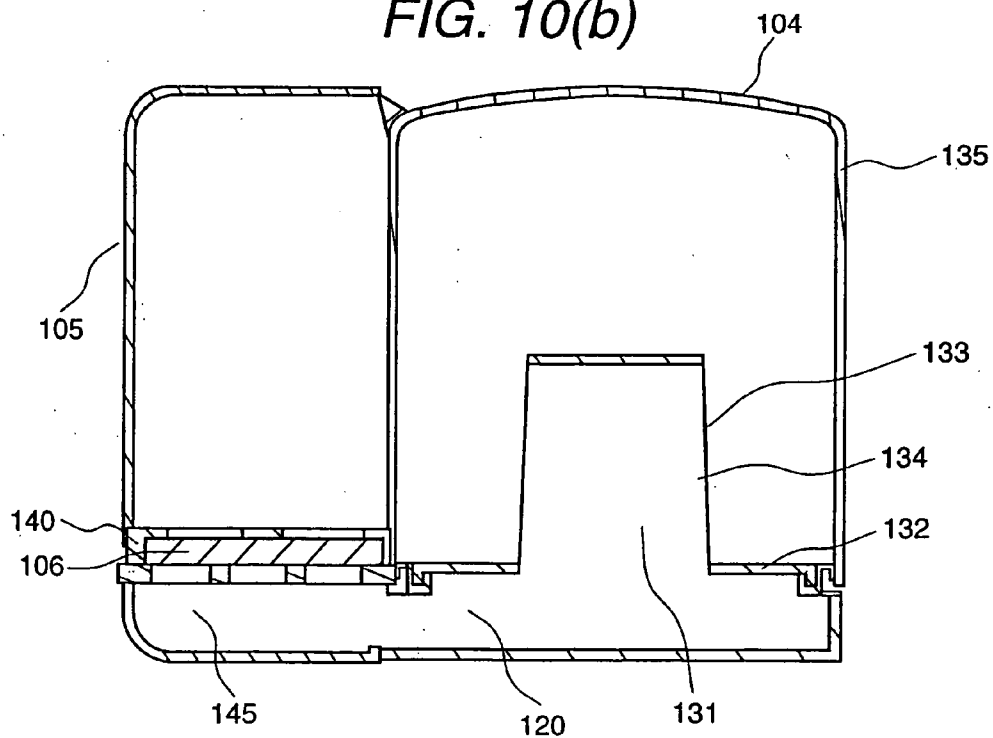


FIG. 11(a)

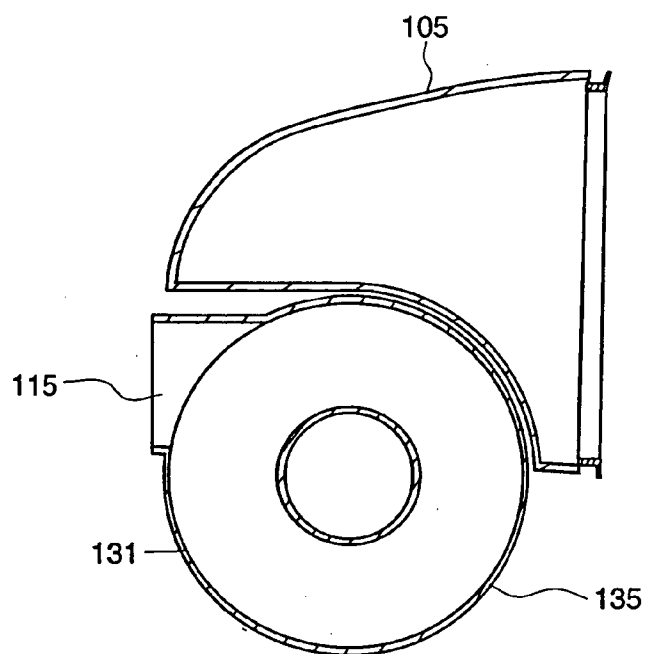


FIG. 11(b)

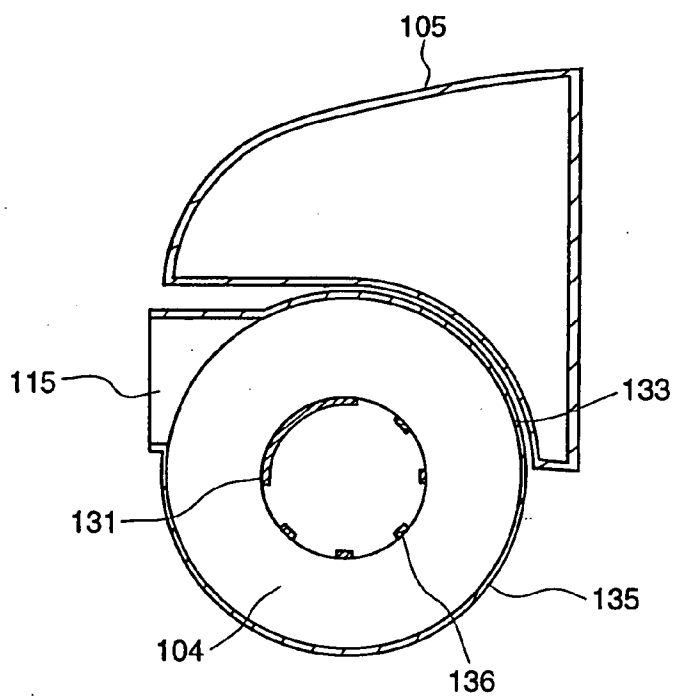


FIG. 12(a)

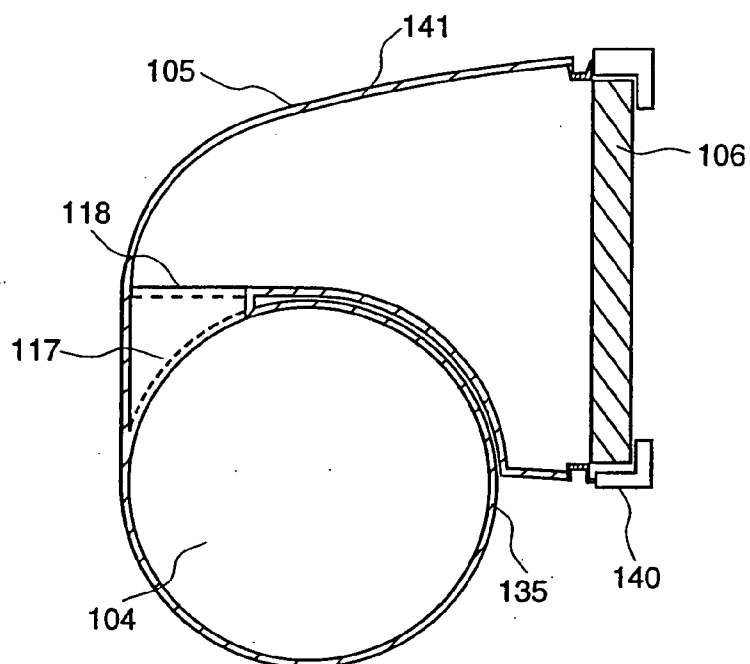


FIG. 12(b)

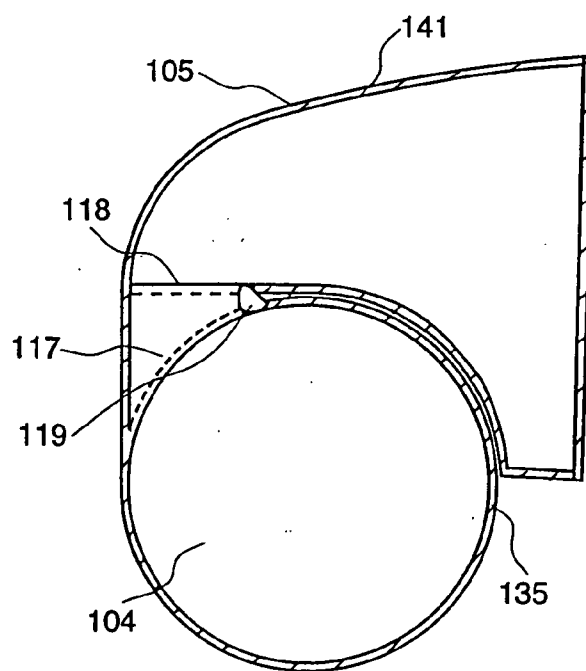


FIG. 13(a)

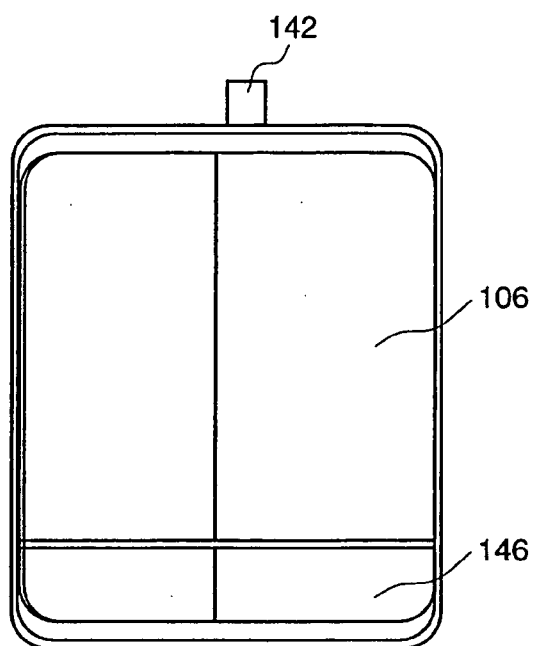


FIG. 13(b)

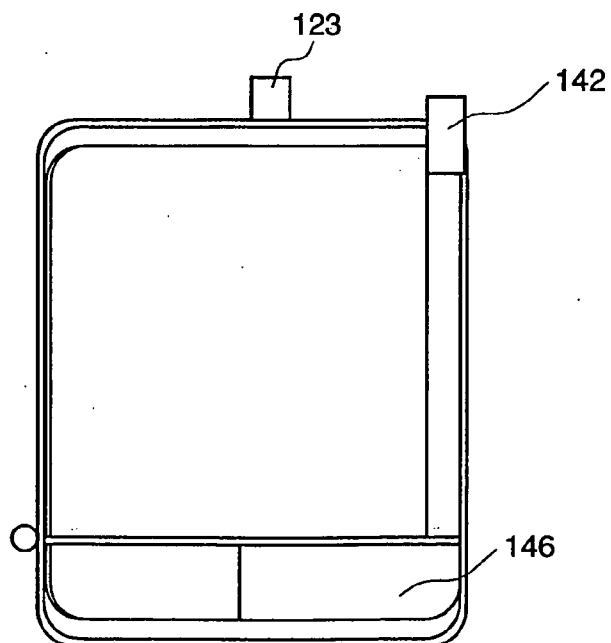


FIG. 14

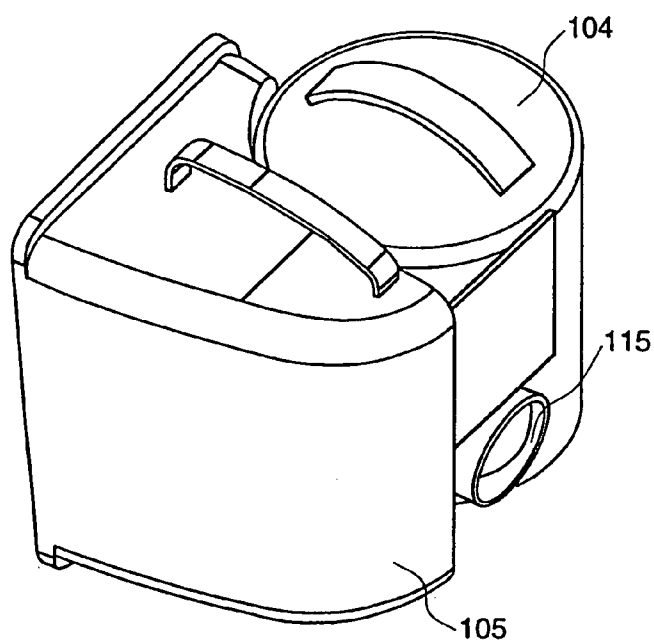


FIG. 15

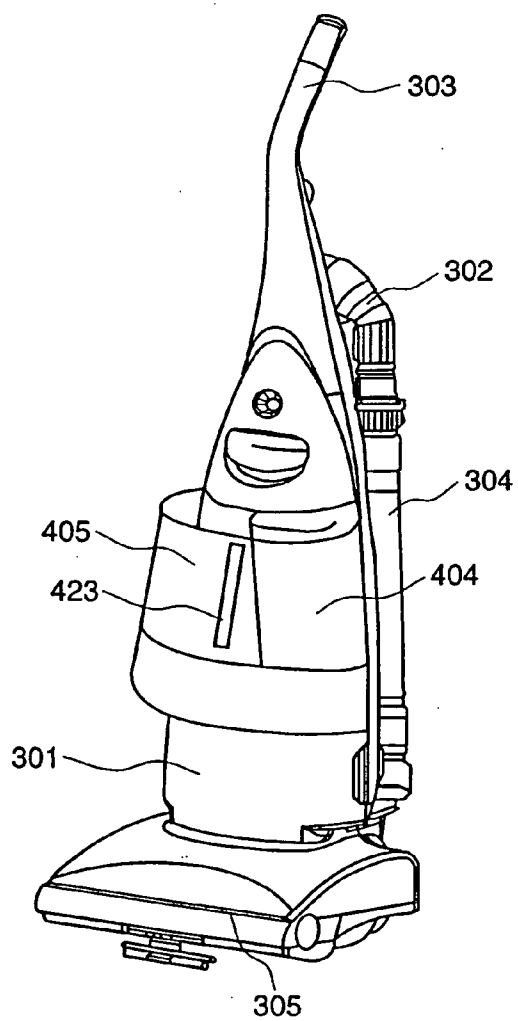


FIG. 16

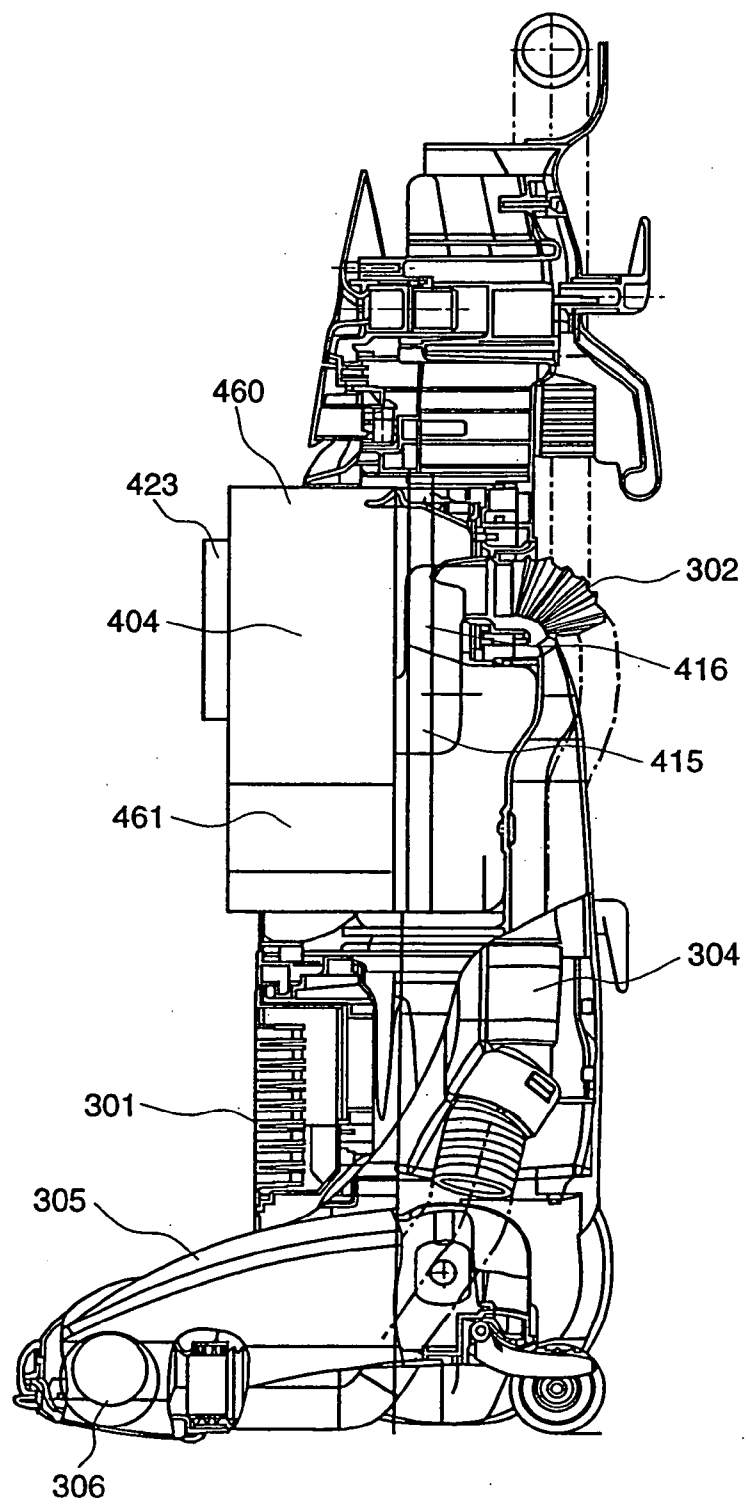


FIG. 17

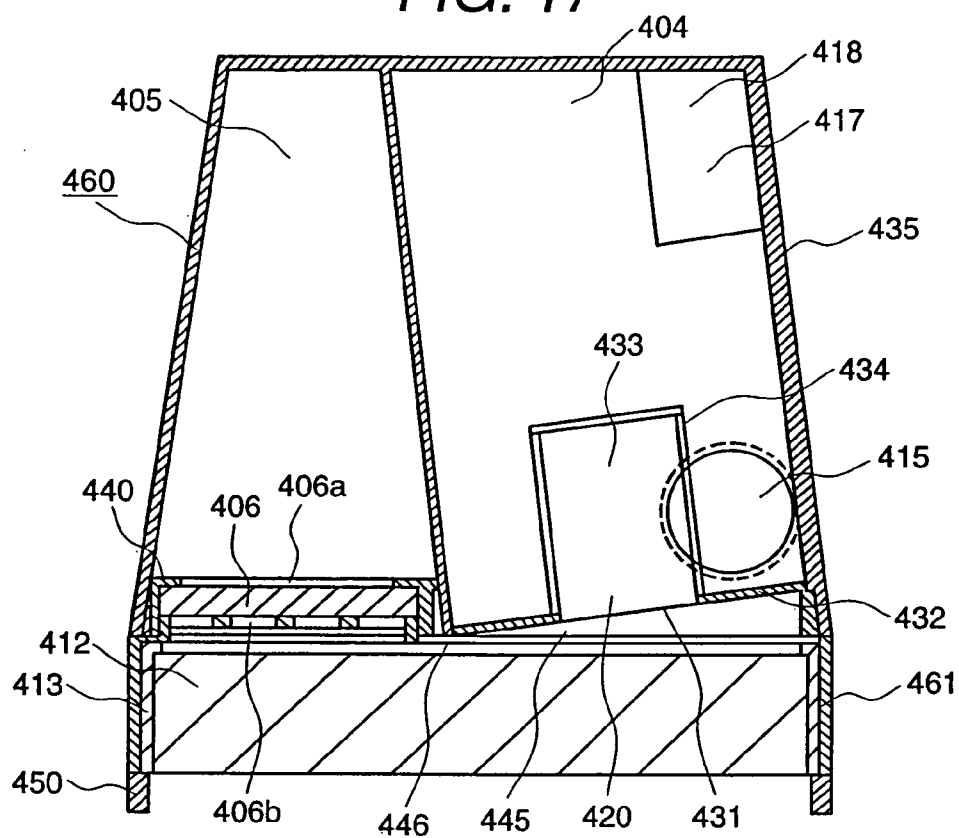


FIG. 18


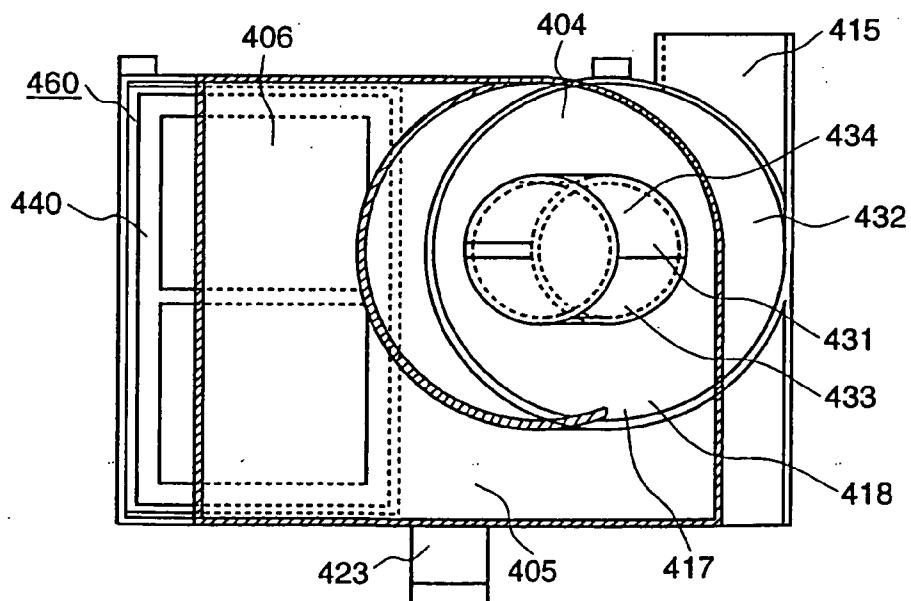


FIG. 19

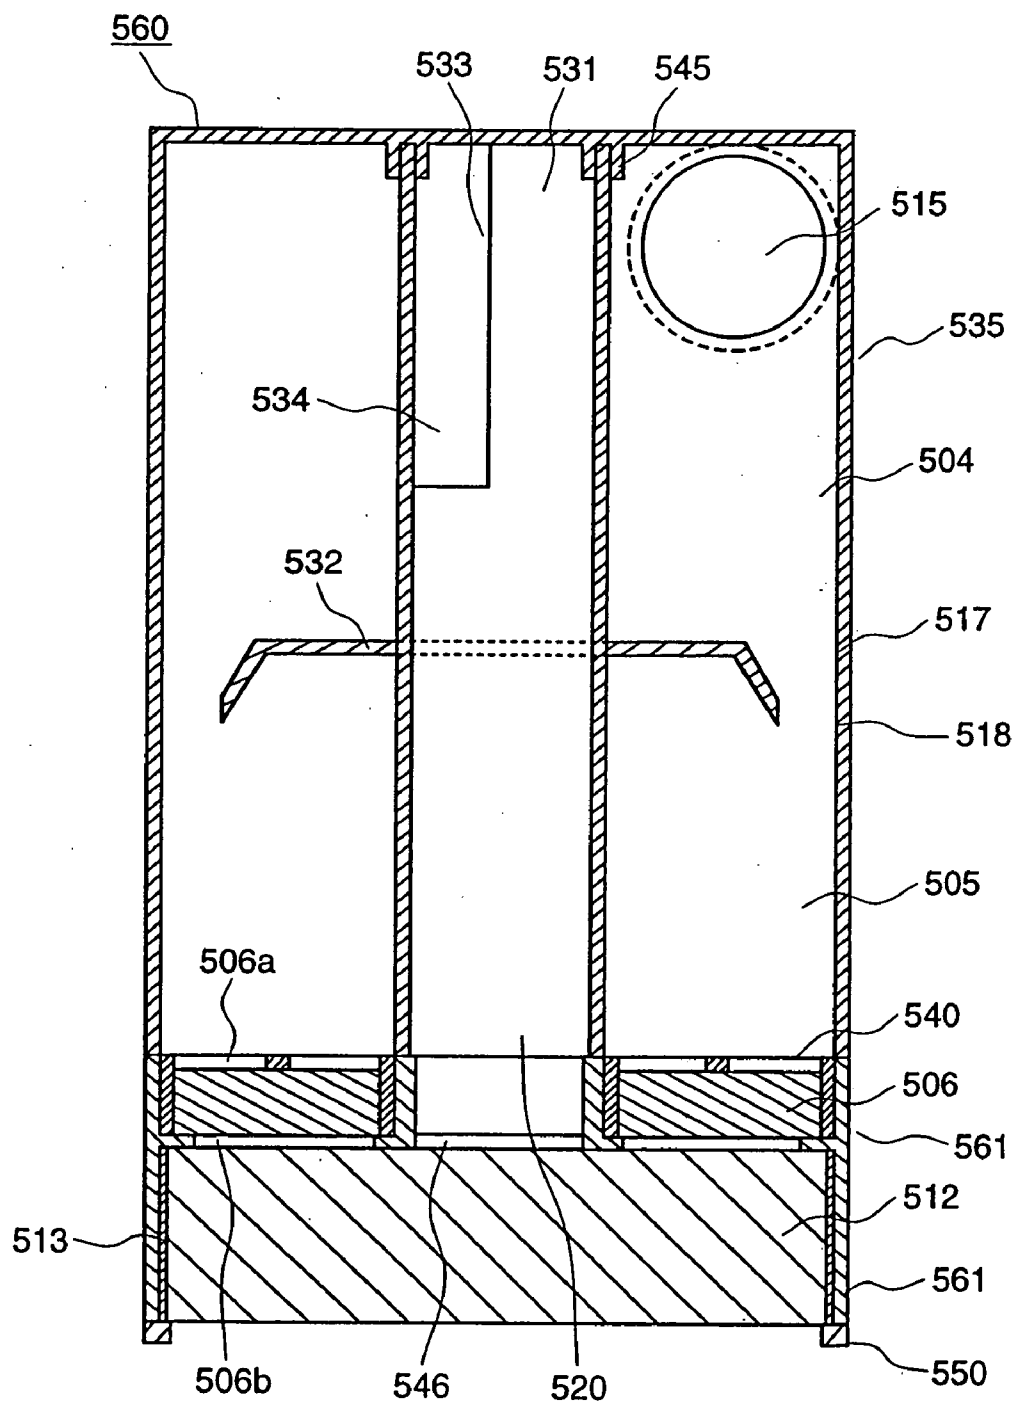

ELECTRIC VACUUM CLEANER

[0001] This application is a Divisional application of application Ser. No. 10/372,087, filed Feb. 25, 2003, which claims priority from Japanese patent applications JP 2002-169405, filed on Jun. 11, 2002, and JP 2002-305265 filed on Oct. 21, 2002, the contents of which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] The present invention is related to an electric vacuum cleaner.

[0003] A general electric vacuum cleaner is so constructed to take in dirty air through a floor nozzle, introduce it into the body of the vacuum cleaner, clean the air through a dust collector in the vacuum cleaner, and exhaust the cleaned air to the outside of vacuum cleaner. The dust collector captures dust by filtration using a paper filter or by centrifugal separation using a cylindrical separation cyclone to clean the air.

[0004] Japanese Application Patent Laid-Open Publication 2001-29288 discloses an electric vacuum cleaner with a cyclonic separation type dust collector. The dust collector in the electric vacuum cleaner is so constructed that one cyclonic separation cylinder may capture dust in dirty air by centrifugal separation.

[0005] Published Japanese translations of PCT international publication for patent applications 1880 discloses, as a cyclonic separation dust collector in an electric vacuum cleaner, a dust separator having a cyclonic separation type dust collector comprising outer and inner separation cylinders in which the outer separation cylinder centrifugally removes relatively large particles and the inner separation cylinder centrifugally removes fine particles.

[0006] For general home electric vacuum cleaners, it is most important that they are compact and convenient in handling. Further, their dust collector must be smaller and the collected dust must be disposed of easily.

[0007] The dust collector having a single cyclonic separation cylinder catches both large and fine dust particles together. This cannot prevent fine dust from being easily raised up when it is taken out from the vacuum cleaner for disposal. Further, the cyclonic separation cylinder must be longer and greater to increase the dust catching ability (or collecting and cleaning ability).

[0008] A dual-cylinder type cyclonic dust separator (dust collector) has a combination of inner and outer separation cylinders, but it is very difficult to make it compact and convenient in handling. For general home use, lots of large dust particles are captured and must be frequently taken out from the vacuum cleaner. In this dust separator configuration, it is impossible to take out only the outer cylinder that captured large dust particles for disposal.

SUMMARY OF THE INVENTION

[0009] It is therefore an object of the present invention to provide an electric vacuum cleaner with a compact and easy-to-handle cyclonic separation type dust collector.

[0010] It is yet a further object of the present invention to provide an electric vacuum cleaner with a compact cyclonic separation type dust collector that has a high dust collecting performance.

[0011] It is a still further object of the invention to provide an electric vacuum cleaner having a cyclonic separation type dust collector that can firmly hold the collected fine particles.

[0012] The above described objects can be attained by an electric vacuum cleaner equipped with a cyclonic separation cylinder that centrifugally cleans dirty air, wherein the central axis of the cyclonic separation cylinder is made vertical to the floor when the vacuum cleaner cleans the floor and that the cylinder has an inlet to take in dirty air on the bottom of the cylinder, an outlet to exhaust clean air on the bottom of the cylinder, and a communicating port with a dust collecting case on the side of the cylinder.

[0013] This invention is characterized in that the electric vacuum cleaner is equipped with a cyclonic separation cylinder including an internal cylinder having an air outlet, a dust collecting case communicating with the cyclonic separation cylinder through an communicating port formed on the cyclonic separation cylinder, a filter in the dust collecting case, and a fluid passage in which the clean air passing through the filter merges with the air discharged from the air outlet.

[0014] This invention is further characterized in that dust captured in the dust collecting case is taken out from the electric vacuum cleaner by opening and closing the filter.

[0015] This invention is furthermore characterized in that the cyclonic separation cylinder and the dust collecting case are detachable.

[0016] This invention is further characterized in that the electric vacuum cleaner is equipped with a cyclonic separation cylinder which takes in dirty air through the bottom of the cylinder from a floor nozzle during vacuum-cleaning, centrifugally de-dusts, then discharges the clean air to the outside of the cylinder through the bottom of the cylinder, and that the axis of the cyclonic separation cylinder is approximately vertical to the floor and the rotating shaft of the motor-driven blower which is an air driving source is horizontal.

[0017] This invention is further characterized by an electric vacuum cleaner comprising a motor-driven blower that is an air driving source and a cyclonic separation cylinder that centrifugally removes dust from dirty air taken in from the floor nozzle during vacuum-cleaning and discharges the clean air to the outside of the cylinder and has its axis approximately vertical to the floor, wherein the air inlet port is in the center (when viewed from the top), the cyclonic cleaning means is moved a little to the left or right from the center, and the motor-driven blower is positioned opposite to the cyclonic separation cylinder relative to the center.

[0018] This invention is further characterized in that the electric vacuum cleaner is equipped with a dust collecting case which communicates with the cyclonic separation cylinder through an opening formed on the cylinder, that the dust collecting case includes an air filter, and that a fluid passage is formed under the outlet of the cyclone to merge the clean air passing through the filter with the air discharged from the air outlet.

[0019] This invention is further characterized in that a filter is provided under the dust collecting case.

[0020] This invention is further characterized in that the cyclonic separation cylinder takes in dirty air from the bottom of the cylinder and that the cyclonic separation cylinder has an air outlet that discharges clean air from the cylinder on the bottom of the cylinder, an opening to communicate with the dust collecting case placed close by the cylinder on the top of the cylinder, and a means of opening and closing the filter to take out the accumulated dust from the dust collecting case.

[0021] This invention is further characterized in that the electric vacuum cleaner equipped with a cyclonic separation cylinder, that the cyclonic separation cylinder takes in dirty air from the bottom of the cylinder, that the cyclonic separation cylinder has an air outlet that discharges clean air from the cylinder on the bottom of the cylinder, and an opening to communicate with the dust collecting case placed close by the cylinder on the top of the cylinder, that the center axis of the cyclonic separation cylinder is a little slanted leftward or rightward from the center of the electric vacuum cleaner (when viewed from the front of the cleaner), and that the dust collecting case is a truncated pyramid with its wider end down.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] **FIG. 1** is an oblique perspective view of the appearance of an electric vacuum cleaner set which is an embodiment of the present invention.

[0023] **FIG. 2** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1**.

[0024] **FIG. 3** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open.

[0025] **FIG. 4** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open and without the dust collecting case.

[0026] **FIG. 5** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open and without the dust collecting case and the cyclonic separation cylinder.

[0027] **FIG. 6** is a top plan view of the main body of the electric vacuum cleaner without the upper casing and the upper cover.

[0028] **FIG. 7** is airflow diagrams of the electric vacuum cleaner.

[0029] **FIG. 8** is an oblique perspective view of the appearance of cyclonic separation cylinder **104**.

[0030] **FIG. 9** is an oblique perspective view of the appearance of dust collecting case **105**.

[0031] **FIG. 10** shows cross-sectional views taken along line A-A of **FIG. 6**.

[0032] **FIG. 11** shows cross-sectional views of cyclonic separation cylinder **104** including the air inlet port.

[0033] **FIG. 12** shows cross-sectional views of cyclonic separation cylinder **104** and dust collecting case **105** including communicating port **117**.

[0034] **FIG. 13** is a side view of dust collecting case **105** (viewed from the exhaust side).

[0035] **FIG. 14** is an oblique perspective drawing of a combination of cyclonic separation cylinder **104** and dust collecting case **105**.

[0036] **FIG. 15** is an oblique perspective view of the appearance of an upright electric vacuum cleaner set which is an embodiment of the present invention.

[0037] **FIG. 16** is a side view of the upright electric vacuum cleaner set of **FIG. 15**.

[0038] **FIG. 17** is a vertical cross-sectional view of a combination of cyclonic separation cylinder **404** and dust collecting case **405**.

[0039] **FIG. 18** shows a cross-sectional view of cyclonic separation cylinder **404** and dust collecting case **405** including communicating port **417**.

[0040] **FIG. 19** is a vertical cross-sectional view of a combination of cyclonic separation cylinder **404** and dust collecting case **405** which is an embodiment of the present invention.

BRIEF DESCRIPTION OF THE INVENTION

Embodiment 1

[0041] Preferred embodiments of the present invention are described below with reference to the accompanying drawings. **FIG. 1** is an oblique perspective view of the appearance of an electric vacuum cleaner set which is an embodiment of the present invention. **FIG. 2** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1**. **FIG. 3** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open. **FIG. 4** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open and without the dust collecting case. **FIG. 5** is an oblique perspective view of the main body of the electric vacuum cleaner of **FIG. 1** with the upper cover open and without the dust collecting case and the cyclonic separation cylinder. **FIG. 6** is a top plan view of the main body of the electric vacuum cleaner without the upper casing and the upper cover. **FIG. 7** is airflow diagrams in the main body of the electric vacuum cleaner.

[0042] In this embodiment, the electric vacuum cleaner set comprises cleaner body **1**, hose **2**, tube **3** with an operation panel, extension tube **4**, and cleaner head (or floor nozzle) **5** as shown in **FIG. 1**. For use, the tube **3** with an operation panel is connected to the cleaner body **1** with the hose **2**. The floor nozzle **5** is connected to the tube **3** with the extension tube **4**.

[0043] Cleaner body **1** takes in dirty air from floor nozzle **5** through extension tube **4**, tube **3** with an operation panel, and hose **2** by the suction force of a built-in motor-driven blower (to be explained later), cleans the air in the cyclonic separation type dust collector (to be explained later, and discharges the clean air to the outside of the cleaner.

[0044] Referring to **FIG. 2** to **FIG. 6**, cleaner body **1** detachably mounts a cyclonic separation cylinder **104** and dust collecting case **105** between lower casing **101** and upper cover **102** and contains second auxiliary filter **112**, motor-driven blower **107**, and cord reel assembly **110** between lower casing and upper cover **102**.

[0045] Referring to FIG. 7 (a), cleaner body 1 takes dirty air from hose 2 into cyclonic separation cylinder 104 through air inlet port 115, swirls up the air therein to centrifugally separate dust from the air and carry the dust into dust collecting case 105 through communicating port 117 on the upper part of the cyclonic separation cylinder, and sends the clean air from cyclonic separation cylinder 104 to air passage 120 provided under cyclonic separation cylinder 104 through inner cylinder 131. The dirty air carried into the dust collecting case 105 is filtered by first auxiliary filter 106. The filtered air is sucked into motor-driven blower 107 through communicating port 146 (behind first auxiliary filter 106) and second auxiliary filter 112. At the same time, the clean air passing through cyclonic separation cylinder 104 is also sucked into the motor-driven blower. The air blown out from motor-driven blower 107 is filtered by filter 108. One part of the filtered air is discharged to the outside through an air passage (not shown) and the other part of the air is sent to cord reel assembly 110 to cool it before being sent out to the outside.

[0046] Lower casing 101 is equipped with a guiding wheel (not shown) and wheels 208 for facilitating movement of the cleaner body 1 across a floor. Lower casing 101 also has cyclonic separation cylinder 104 and dust collecting case 105 that are detachably mounted in parallel. Second auxiliary filter 112 is also mounted in parallel with them on lower casing 101.

[0047] Upper cover 102 pivotally mounted on the upper rear part of the upper casing 150 is energized to make air inlet port 115 of cyclonic separation cylinder 104 hermetically contact with hose connection port 116 and communicating port 117 of cyclonic separation cylinder 104 hermetically contact with upper opening 118 of dust collecting case 105 when the upper cover is closed. Upper cover 102 is also energized to make air passage 120 under cyclonic separation cylinder 104 hermetically contact with air passage 165 under dust collecting case 105 and to make a space air tight between air outlet 146 of the cyclonic separator and filter casing 113 of second auxiliary filter 112. The axis of cyclonic separation cylinder 104 is vertical to the lower case but can be slanted.

[0048] Dust collecting case 105 provides pull-out handle 123 so that the user may pull out dust collecting case 105 for disposal of accumulated dust. The dust in dust collecting case 105 can be dumped by opening first auxiliary filter 106 in dust collecting case 105. As first auxiliary filter 106 is provided on the bottom of dust collecting case 105, the user can easily dump the accumulated dust without turning user's hand.

[0049] When the inside of cyclonic separation cylinder 104 becomes dirty, the user can pull out cyclonic separation cylinder 104 by pull-out handle 125 on the cylinder and clean the inside of the cyclonic separation cylinder 104.

[0050] The inner surfaces of cyclonic separation cylinder 104 and dust collecting case 105 are coated with UV curing clear resin to protect the surfaces against damages due to collision and scratches by dust particles that flow into cyclonic separation cylinder 104 and dust collecting case 105 and against contamination. This coat increases the friction resistance and contamination resistance of the surfaces. Therefore, even when outer cylinder 135 of cyclonic separation cylinder 104 and dust collecting case 105 are

made of clear plastic materials, the quantity of dust in the cylinder and the case can be easily recognized by eyes.

[0051] It is also preferable to mold cyclonic separation cylinder 104 and dust collecting case 105 with antistatic resin materials or to coat surfaces thereof with antistatic materials. This prevents static cling of dust particles to the surfaces of cyclonic separation cylinder 104 and dust collecting case 105 and they need not be cleaned so often.

[0052] Referring to FIG. 6, the layout of components of cleaner body 1 will be explained below.

[0053] FIG. 6 is a top plan view of the main body of the electric vacuum cleaner without upper casing 150 and the upper cover 102.

[0054] Hose connection port 116 is located in the center of the width of cleaner body 1 (when viewed from the top). The center axis of cyclonic separation cylinder 104 is moved a little from the center of the width of cleaner body 1. Further, air inlet port 115 to introduce the dirty air approximately tangentially to cyclonic separation cylinder 104 is arranged in alignment with hose connection port 116.

[0055] Dust collecting case 105 is placed opposite to the center axis of cyclonic separation cylinder 104 (in relation to the center of the width of cleaner body 1). Similarly motor-driven blower 107 is placed opposite to the center axis of cyclonic separation cylinder 104 (in relation to the center of the width of cleaner body 1). Second auxiliary filter 112 is provided in front of the motor-driven blower. Cord reel assembly 110 is provided next to motor-driven blower in the side where the center axis of cyclonic separation cylinder 104 exists (in relation to the center of the width of cleaner body 1).

[0056] This disposition can make the cleaner body shorter, smaller, and less weighted.

[0057] Further, this disposition requires no bending at the air inlet port of cyclonic separation cylinder 104 and can reduce a loss.

[0058] Below will be explained cyclonic separation cylinder 104 and dust collecting case 105 in detail with reference to FIG. 8 to FIG. 13. FIG. 8 is an oblique perspective view of the appearance of cyclonic separation cylinder 104. FIG. 9 is an oblique perspective view of appearance of dust collecting case 105. FIG. 10 (a) shows a cross-sectional view taken along line A-A of FIG. 6. FIG. 11 (a) shows a cross-sectional view of cyclonic separation cylinder 104 including the air inlet port. FIG. 12 (a) shows a cross-sectional view of cyclonic separation cylinder 104 and dust collecting case 105 including communicating port 117. FIG. 13 (a) is a side view of dust collecting case 105 (viewed from the exhaust side).

[0059] Outer cylinder 135 of cyclonic separation cylinder 104 has air inlet port 115 on the lower part of the cylinder (below the center of the longitudinal center axis of the cylinder) to introduce dirty air approximately tangentially to cyclonic separation cylinder 104 which is approximately cylindrical.

[0060] Cyclonic separation cylinder 104 also has communicating port 117 on the upper part of the cylinder to introduce dirty air into dust collecting case 105. Cyclonic separation cylinder 104 has inner cylinder 131 on the bottom

of the cyclonic separation cylinder **104** which communicates with lower communicating passage **120**. Inner cylinder **131** comprises partition wall **132** and cylindrical member **134** with which net filter **133** made of plastic fiber is formed in a body by insert-mounting. As shown in **FIG. 10 (a)**, net filter **133** can be formed singly on the top of the cylindrical member or together with the side of the cylindrical member. When net filter **133** is treated with antistatic agent, dust on net filter **133** can be easily knocked off.

[0061] Cyclonic separation cylinder **104** comprises outer cylinder **135**, inner cylinder **131**, and a member that forms air passage **120**. These components are respectively detachable and combined together to prevent air and dirt leaking there from. It is preferable to place a sealing member between the components that are combined. For cleaning of cyclonic separation cylinder **104**, outer cylinder **135**, inner cylinder **131**, and a member that forms air passage **120** are separated individually.

[0062] Dust collecting case **105** has upper opening **118** in alignment with communicating port **117** of cyclonic separation cylinder **104**. Upper opening **118** and communicating port **117** are linked in an air-tight manner. Dust collecting case **105** also has filter frame **140** with first auxiliary filter **106** on the exhaust side of the case. The frame has its sides open and can rotate around the lower side of the frame. When closed, filter frame **140** is hermetically in close contact with case **141** of dust collecting case **105**.

[0063] For dust disposal, the user takes out dust collecting case **105** by pull-out handle **123** thereof, pulls lever **142** of a clamp means that locks filter frame **140** to open the frame, and dumps dust collecting case **105**. The user can take out first auxiliary filter **106** from filter frame **140** to wash thereof.

[0064] Auxiliary filter **106** is preferably made of foamed washable plastic material such as sponge or washable non-woven cloth.

[0065] When first auxiliary filter **106** and second auxiliary filter **112** are treated with antistatic agent, dust on the filters can be easily knocked off.

[0066] Dust collecting case **105** has a combination of air passage **145** and communicating port **146** thereunder. Therefore, dust collecting case **105** comprises case **141**, air passage **145**, and communicating port **146** under filter frame **140**. They are linked hermetically in close contact with each other.

[0067] Filter frame **140** is also hermetically in close contact with filter casing **113** that holds second auxiliary filter **112** in front of motor-driven blower **107**. To assure their airtightness, an elastic sealing member is preferably placed between the filter frame and the filter case.

[0068] When motor-driven blower **107** is turned on, cleaner body **1** of the above configuration takes in dirty air from air inlet port **115** of cyclonic separation cylinder **104** into the cylinder by the suction force, swirls up the dirty air to separate dust centrifugally and deliver the separated dust into dust collecting case **105**, and sucks the clean air from inner cylinder **131** of cyclonic separation cylinder **104** into air passage **120** through net filter **133**. This net filter functions to capture lint.

[0069] The air from air passage **120** is sent to second auxiliary filter **112** through air passage **145** and communicating port **146**.

[0070] The dirty air coming from cyclonic separation cylinder **104** flows into dust collecting case **105** through upper opening **118** that communicates with communicating port **117**. The dust in the air is stopped by first auxiliary filter **106** and accumulates before the filter. The air passing through the auxiliary filter flows toward the second auxiliary filter.

[0071] The dust capturing performance of first auxiliary filter **106** is dependent upon the characteristics of the filter material and is expected to catch dust particles of some microns big. If the dust capturing performance is increased, the filter may be blocked quickly. Therefore, the dust capturing performance must be determined considering the whole dust capturing performance of the electric vacuum cleaner.

[0072] As almost all dust brought into cleaner body **1** together with air is accumulated in dust collecting case **105**, only dust collecting case **105** can be taken out from cleaner body **1** to dump it. It is preferable to perform this dumping before dust overflows dust collecting case **105**. To know the timing to dump dust collecting case **105**, dust indicator **155** is provided on dust collecting case **105** opposite to upper opening **118** as shown in **FIG. 9**. The user can judge the dumping timing by this indicator. The dust indicator is neither vertical nor horizontal, but it is slanted as the dust accumulates thinner near upper opening **118**.

[0073] Referring to **FIG. 7 (a)**, this embodiment divides the airflow into two in cleaner body **1**. These air flows cause a pressure difference in dust collecting case **105** and this pressure difference always presses the dust in dust collecting case **105**. This pressure difference becomes greater as more dust accumulates in dust collecting case **105**. Further the dust is compressed more strongly as the dust becomes more. This mechanism allows more dust to be accumulated in dust collecting case **105** and consequently reduces a dust dumping frequency.

[0074] Further, as this mechanism makes the air flow going out of cyclonic separation cylinder **104** less than the air flow when no air flows into dust collecting case **105**, the resistance of cyclonic separation cylinder **104** can be reduced and the vacuum cleaner can have a greater suction power.

[0075] As more dust accumulates in dust collecting case **105**, the resistance of air passing through dust collecting case **105** increases and the flow rate of air in the case reduces. This has an effect to reduce bad smells from the dust when the dust contains materials that give out bad smells. Therefore, less bad smells are exhausted out of the cleaner body.

[0076] It is also possible to easily clean air passage **145** and communicating port **146** (when they are dirty) with dust collecting case **105** removed.

[0077] Further, as cyclonic separation cylinder **104** has air inlet port **115** and inner cylinder **131** on the lower part thereof, the communicating port can be provided on the upper part. This prevents dust from leaking from cyclonic separation cylinder **104**.

[0078] Further as dust collecting case 105 is provided by cyclonic separation cylinder 104, the longitudinal length of cyclonic separation cylinder 104 can be made greater without increasing the height of cleaner body 1. This feature can increase the capacity of separating dust by swirling.

[0079] Further, heavy dust particles such as rings that are not affected by a fluid force are apt to stay in cyclonic separation cylinder 104. The user can easily take out such dust particles from air inlet port 115 just by taking up cyclonic separation cylinder 104 by pull-out handle 125 and tilting the cylinder.

[0080] As shown in FIG. 14, cyclonic separation cylinder 104 and dust collecting case 105 can be formed in a body. This unit is heavy and not so convenient in handling, but the connection between cyclonic separation cylinder 104 and dust collecting case 105 and the connection between air passage 120 and air passage 145 are formed in a body and made air-tight perfectly. This can suppress pressure loss due to leakage and increase the suction power.

[0081] It is also possible to form air passage 120, air passage 145, and communicating port 146 with a member of another material in close contact with lower casing 101. This mechanism does not facilitate cleaning of air passage 145 when it becomes dirty, but can reduce the number of places to be hermetically sealed. Further, this mechanism also facilitates sealing in a vertical direction only.

Embodiment 2

[0082] A second preferred embodiment of the present invention is described below with reference to FIG. 7 (b), FIG. 8, FIG. 9, FIG. 10 (b), FIG. 11 (b), FIG. 12 (b), FIG. 13 (b), FIG. 15, and FIG. 16.

[0083] Referring to FIG. 7 (b), cleaner body 1 takes dirty air from hose 2 into cyclonic separation cylinder 104 through air inlet port 115, swirls up the air therein to centrifugally separate dust from the air and carry the dust into dust collecting case 105 through communicating port 117 on the upper part of the cyclonic separation cylinder, and sends the clean air from cyclonic separation cylinder 104 to air passage 120 provided under cyclonic separation cylinder 104 through inner cylinder 131. The dirty air carried into the dust collecting case 105 is filtered by first auxiliary filter 106.

[0084] The filtered air is sucked into motor-driven blower 107 through air outlet 146 of the cyclonic separator (behind first auxiliary filter 106) and second auxiliary filter 112. At the same time, the clean air passing through cyclonic separation cylinder 104 is also sucked into the motor-driven blower through the air outlet 120, and air passage 145 together with the clean air from dust collecting case 105. The air blown out from motor-driven blower 107 is filtered by filter 108. One part of the filtered air is discharged to the outside through an air passage (not shown) and the other part of the air is sent to cord reel assembly 110 to cool it before being sent out to the outside. FIG. 8 is an oblique perspective view of the appearance of cyclonic separation cylinder 104. FIG. 9 is an oblique perspective view of the appearance of dust collecting case 105. FIG. 10 (b) shows a cross-sectional view taken along line A-A of FIG. 6. FIG. 11 (b) shows a cross-sectional view of cyclonic separation cylinder 104 including the air inlet port. FIG. 12 (b) shows a

cross-sectional view of cyclonic separation cylinder 104 and dust collecting case 105 including communicating port 117. FIG. 13 (b) is a side view of dust collecting case 105 (viewed from the exhaust side). Outer cylinder 135 of cyclonic separation cylinder 104 has air inlet port 115 on the lower part of the cylinder (below the center of the longitudinal center axis of the cylinder) to introduce dirty air approximately tangentially to cyclonic separation cylinder 104 which is approximately cylindrical.

[0085] Cyclonic separation cylinder 104 also has communicating port 117 on the upper part of the cylinder to introduce dirty air into dust collecting case 105. Cyclonic separation cylinder 104 has inner cylinder 131 on the bottom of the cyclonic separation cylinder 104 which communicates with lower communicating passage 120. Inner cylinder 131 comprises partition wall 132 and cylindrical member 134 with which net filter 133 made of plastic fiber is formed in a body by insert-mounting. As shown in FIG. 10 (b), net filter 133 can be formed on the wall of the cylindrical member or on both of the top and the cylindrical member.

[0086] In this embodiment, the net filter 133 is not formed on the whole periphery of the wall of inner cylinder 131. Net filter 133 and the opening are not provided in a 90-degree area of the inner cylinder near air inlet port 115. This prevents long dust particles such as hairs (sent from air inlet port 115) from directly hitting net filter 133, sticking into the net filter or being twined around with the net filter.

[0087] Similarly, this prevents sharp-pointed materials such as pins and needles (sent from air inlet port 115) from directly hitting net filter 133, breaking the net filter, and leaking.

[0088] Further, inner cylinder 131 requires a plurality of ribs 136 on the inner side of the cylinder to support the net filter because the net filter receives a centripetal force.

[0089] When net filter 133 is treated with antistatic agent, dust on the net filter can be easily knocked off and cleaned.

[0090] Outer cylinder 135 of cyclonic separation cylinder 104 has air inlet port 115 on the lower part of the cylinder (below the center of the longitudinal center axis of the cylinder) to introduce dirty air. Therefore, hose connection port 116 communicating with air inlet port 115 can also be placed on the lower part of cyclonic separation cylinder 104 (below the center of the longitudinal center axis of the cylinder).

[0091] As hose connection port 116 is provided on the lower part of cleaner body 1, the cleaner body can be pulled around steadily by moving the tube with the operation panel 3 that is connected to the cleaner body with hose 2.

[0092] Further, hose connection port 116 can be provided on the lower part of cleaner body 1 and need not be provided on upper cover 102. Therefore, it is possible to open the upper cover and take out dust collecting case 105 and cyclonic separation cylinder 104 easily without disconnecting the hose.

[0093] Cyclonic separation cylinder 104 comprises outer cylinder 135, inner cylinder 131, and a member that forms air passage 120. These components are respectively detachable and combined together to prevent air and dirt leaking therefrom. It is preferable to place a sealing member between the components that are combined. For cleaning of

cyclonic separation cylinder 104, outer cylinder 135, inner cylinder 131, and a member that forms air passage 120 are separated individually.

[0094] Dust collecting case 105 has upper opening 118 in alignment with communicating port 117 of cyclonic separation cylinder 104. Upper opening 118 and communicating port 117 are linked in an air-tight manner. Dust collecting case 105 also has filter frame 140 with first auxiliary filter 106 on the exhaust side of the case.

[0095] The frame has its sides open and can rotate around the lower side of the frame. When closed, filter frame 140 is hermetically in close contact with case 141 of dust collecting case 105. For dust disposal, the user takes out dust collecting case 105 by pull-out handle 123 thereof, pushes lever 142 of a clamp means that locks filter frame 140 to open the frame, and dumps dust collecting case 105. As dust collecting case 105 is wider towards the bottom, it is very easy to empty dust collecting case 105 completely.

[0096] The user can take out first auxiliary filter 106 from filter frame 140 to wash thereof.

[0097] Auxiliary filter 106 is preferably made of foamed washable plastic material such as sponge or washable non-woven cloth.

[0098] When first auxiliary filter 106 and second auxiliary filter 112 are treated with antistatic agent, dust on the filters can be easily knocked off.

[0099] Dust collecting case 105 has a combination of air passage 145 and air outlet 146 of the cyclonic separator thereunder. Therefore, dust collecting case 105 comprises case 141, air passage 145, and communicating port 146 under filter frame 140. They are linked hermetically in close contact with each other.

[0100] Filter frame 140 is also hermetically in close contact with filter casing 113 that holds second auxiliary filter 112 in front of motor-driven blower 107. To assure their airtightness, an elastic sealing member is preferably placed between the filter frame and the filter case.

[0101] When motor-driven blower 107 is turned on, cleaner body 1 of the above configuration takes in dirty air from air inlet port 115 of cyclonic separation cylinder 104 into the cylinder by the suction force, swirls up the dirty air to separate dust centrifugally and deliver the separated dust into dust collecting case 105, and sucks the clean air from inner cylinder 131 of cyclonic separation cylinder 104 into air passage 120 through net filter 133.

[0102] This net filter functions to capture lint, paper dust, and so on.

[0103] The air from air passage 120 is sent to second auxiliary filter 112 through air passage 145 and communicating port 146.

[0104] The dirty air coming from cyclonic separation cylinder 104 flows into dust collecting case 105 through upper opening 118 that communicates with communicating port 117. The dust in the air is stopped by first auxiliary filter 106 and accumulates before the filter. The air passing through the auxiliary filter flows toward the second auxiliary filter.

[0105] The dust capturing performance of first auxiliary filter 106 is dependent upon the characteristics of the filter material and is expected to catch dust particles of some microns big. If the dust capturing performance is increased, the filter may be blocked quickly. Therefore, the dust capturing performance must be determined considering the whole dust capturing performance of the electric vacuum cleaner.

[0106] As almost all dust brought into cleaner body 1 together with air is accumulated in dust collecting case 105, only dust collecting case 105 can be taken out from cleaner body 1 to dump it. It is preferable to perform this dumping before dust overflows dust collecting case 105. To know the timing to dump dust collecting case 105, dust indicator 155 is provided on dust collecting case 105 opposite to upper opening 118 as shown in FIG. 9. The user can judge the dumping timing by this indicator. The dust indicator is neither vertical nor horizontal, but it is slanted as the dust accumulates thinner near upper opening 118.

[0107] Referring to FIG. 7 (b), this embodiment divides the airflow into two in cleaner body 1. These air flows cause a pressure difference in dust collecting case 105 and this pressure difference always presses the dust in dust collecting case 105. This pressure difference becomes greater as more dust accumulates in dust collecting case 105. Further the dust is compressed more strongly as the dust becomes more.

[0108] As first auxiliary filter 106 is provided on the lower part of dust collecting case 105, the dust in dust collecting case 105 is compressed by its weight. This mechanism allows more dust to be accumulated in dust collecting case 105 and consequently reduces a dust dumping frequency.

[0109] The dust in dust collecting case 105 accumulates in layers in front of first auxiliary filter 106, catching up fine dust in the layers. This has an effect of preventing fine dust from rising up when the accumulated dust is disposed of.

[0110] Further, as this mechanism makes the air flow going out of cyclonic separation cylinder 104 through air outlet 120 less than the air flow when no air flows into dust collecting case 105, the resistance of cyclonic separation cylinder 104 can be reduced and the vacuum cleaner can have a greater suction power.

[0111] Dirty air introduced into cyclonic separation cylinder 104 though air inlet port 115 is forced to swirl therein. Dust particles in the dirty air are centrifugally separated from the air, lifted up in cyclonic separation cylinder 104, and delivered into dust collecting case 105.

[0112] Because of the air flow passing through first auxiliary filter 106 of dust collecting case 105 from cyclonic separation cylinder 104, dust that is centrifugally separated in cyclonic separation cylinder 104 is apt to go into dust collecting case 105 and immediately separated in dust collecting case 105. This increases the dust collection efficiency.

[0113] The dust that is centrifugally separated in cyclonic separation cylinder 104 and delivered to dust collecting case 105 will not go back to cyclonic separation cylinder 104. This prevents re-flow of dust from dust collecting case 105 and increase the dust collection efficiency.

[0114] As dust is captured by net filter 133 of inner cylinder 131, the flow rate of clean air from air outlet 120 of

cyclonic separation cylinder **104** reduces. This increases the flow rate of air that is filtered by first auxiliary filter **106** from air outlet **144** of dust collecting case **105**. Therefore, the dust on the net filter in dust collecting case **105** is apt to be delivered to dust collecting case **105**.

[0115] In this embodiment, the cross-section of air outlet **144** that flows air from first auxiliary filter **106** of dust collecting case **105** is made greater than the cross-section of air outlet **120** that flows the clean air from cyclonic separation cylinder **104**. This makes the cross-section of the first auxiliary filter and reduce the flow rate of air passing through the first auxiliary filter. This can reduce the quantity of dust that passes through the first auxiliary filter. Further, this can reduce the pressure loss of air that flows through first auxiliary filter **106** and consequently increases the suction power of the vacuum cleaner.

[0116] Here, it is possible to prevent dust from being caught by downstream end **119** of communicating port **117** of cyclonic separation cylinder **104** by curving the downstream end or applying a smooth slippery material (of a low friction coefficient) to the downstream end. When the upper side of downstream end **119** is tilted towards first air outlet **144** that is the outlet of air from dust collecting case **105** (or when the upper part of the opening of communicating port **117** is made wider), it is possible that dust particles caught at downstream end **119** of communicating port **117** are moved up in the communicating port and ripped away by the air flowing from cyclonic separation cylinder **104** to dust collecting case **105**.

[0117] As more dust accumulates in dust collecting case **105**, the resistance of air passing through dust collecting case **105** increases and the flow rate of air in the case reduces. This has an effect to reduce bad smells from the dust when the dust contains materials that give out bad smells. Therefore, less bad smells are exhausted out of the cleaner body.

[0118] Air passage **145** and cyclonic separator air outlet **146** (when dirty) can be cleaned with dust collecting case **105** removed.

[0119] Further, as air inlet port **115** and inner cylinder **131** are provided on the lower part of cyclonic separation cylinder **104**, communicating port **117** of cyclonic separation cylinder **104** and upper opening **118** of dust collecting case **105** can be provided on the upper part thereof. Dust coming into dust collecting case **105** goes down by gravity and will not go back to cyclonic separation cylinder **104**.

[0120] Further, upper opening **118** of dust collecting case **105** is provided on the upstream side of dust collecting case **105**. When cleaner body **1** stands upright for storage, upper opening **118** of dust collecting case **105** comes over dust collecting case **105**. Therefore, dust in dust collecting case **105** will never fall back into cyclonic separation cylinder **104**.

[0121] Further as dust collecting case **105** is provided by cyclonic separation cylinder **104**, the longitudinal length of cyclonic separation cylinder **104** can be made greater without increasing the height of cleaner body **1**. This feature can increase the capacity of separating dust by swirling.

[0122] A valve can be provided near air inlet port **115** to close the air inlet port when motor-driven blower **107** stops

and to close a space between inner cylinder **131** and part of the inner wall of outer cylinder **135** in cyclonic separation cylinder **104**.

[0123] Heavy dust particles such as rings that are not affected by a fluid force will come into collision with the valve and stop swirling. This protects the inner wall of outer cylinder **185** against damages by collision of dust particles. This valve can prevent leaking of dust when motor-driven blower **107** is turned off and cyclonic separation cylinder **104** is taken out from the cleaner body.

[0124] As heavy dust particles such as rings that are not affected by a fluid force will not be carried into dust collecting case **105** from cyclonic separation cylinder **104**, first auxiliary filter **106** of dust collecting case **105** cannot be broken and will not let any dust pass through.

[0125] As shown in FIG. 14, cyclonic separation cylinder **104** and dust collecting case **105** can be formed in a body. This unit is heavy and not so convenient in handling, but the connection between cyclonic separation cylinder **104** and dust collecting case **105** and the connection between air passage **120** and air passage **145** are formed in a body and made air-tight perfectly. This can suppress pressure loss due to leakage, increase the suction power, and suppress leaking of dust.

[0126] It is also possible to form air passage **120**, air passage **145**, and communicating port **146** with a member of another material in close contact with lower casing **101**. This mechanism does not facilitate cleaning of air passage **145** when it becomes dirty, but can reduce the number of places to be hermetically sealed. Further, this mechanism also facilitates sealing in a vertical direction only and increase the suction power.

Embodiment 3

[0127] A third preferred embodiment of the present invention is described below with reference to FIG. 15 to FIG. 18. FIG. 15 is an oblique perspective view of the appearance of an upright electric vacuum cleaner set which is an embodiment of the present invention.

[0128] FIG. 16 is a side view of the upright electric vacuum cleaner set of FIG. 15. This is a partial sectional view of the vacuum cleaner to explain airflow thereof. FIG. 17 is a vertical cross-sectional view of a combination of cyclonic separation cylinder **404** and dust collecting case **405**. FIG. 18 shows a cross-sectional view of cyclonic separation cylinder **404** and dust collecting case **405** including communicating port **417**.

[0129] Vacuum cleaner **301** has a floor cleaning head **305** which is open to the floor and rotatable in a predetermined angle range. The floor cleaning head contains a floor-contacting rotating brush member **306**. Vacuum cleaner **301** detachably contains dust collector **460** which rotatably comprises cyclonic separation cylinder **404**, dust collecting case **405**, and dust collector lid **461** thereunder. Motor-driven blower is located above floor cleaning head **305** and below dust collector **460** (under cleaner body **301**) to drive brush member **306** in floor cleaning head **305** and the blower by the rotation of the rotary shaft of the motor-driven blower. The suction force of the motor-driven blower introduces dirty air from floor cleaning head **305**, carries it to dust collecting case **405** by cyclonic separation cylinder **404**

through joint tube **304** and hose **302**. Handle **303** is provided on cleaner body **301** to move the electric vacuum cleaner across the floor.

[0130] Cleaner body **301** takes dirty air from hose **302** into cyclonic separation cylinder **404** through air inlet port **415**, swirls up the air therein to centrifugally separate dust from the air and carry the dust into dust collecting case **405** through communicating port **417** on the upper part of the cyclonic separation cylinder, and sends the clean air from cyclonic separation cylinder **404** to air passage **420** provided under cyclonic separation cylinder **404** through inner cylinder **431**. The dirty air carried into the dust collecting case **405** is filtered by first auxiliary filter **406**. The filtered air is sucked into the motor-driven blower through air outlet **446** of the cyclonic separator (behind first auxiliary filter **406**) and second auxiliary filter **412**.

[0131] At the same time, the clean air passing through cyclonic separation cylinder **404** is also sucked into the motor-driven blower through the air outlet **420**, and air passage **445** together with the clean air from dust collecting case **405**. The air blown out from the motor-driven blower is filtered and discharged to the outside of the cleaner body.

[0132] The components are so energized that air inlet port **415** of cyclonic separation cylinder **404** may be in airtight contact with hose connection port **416**, that air outlet **420** under cyclonic separation cylinder **404** may be in airtight contact with air passage **445**, and that outlet **446** of cyclonic separation cylinder **104** may be in airtight contact with filter casing **413** containing second auxiliary filter **412**.

[0133] An elastic material is provided between dust collector lid **461** and each of cyclonic separation cylinder **404** and dust collecting case **405** so that they may be in airtight contact with each other when a vertical force is applied thereto. Further, elastic sealing member **450** is provided between the inlet of the motor-driven blower and cleaner body **301** to make them in airtight contact with each other. The above airtightness becomes perfect when a vertical force is applied thereto. In other words, this airtightness is assured when the user pushes down dust collector **460** against vacuum cleaner **301** and fastens the dust collector down to the cleaner body with fasteners (not shown). This prevents leaking of dust and air. Elastic sealing member **450** also works to support second auxiliary filter **412** on dust collector lid **461**.

[0134] The axis of cyclonic separation cylinder **404** is not vertical but slanted a little. With this, the longitudinal length of cyclonic separation cylinder **404** can be made greater and the dust collection performance can be increased without increasing the height of cleaner body **301**.

[0135] The user can take out cyclonic separation cylinder **404** and dust collecting case **405** from cleaner body **301** by pull-out handle **423**.

[0136] First auxiliary filter **406** and auxiliary filter casing **440** are provided on the exhaust side of dust collecting case **405** and net filter **406a** is insert-mounted on the opening of auxiliary filter casing **440**.

[0137] The back of first auxiliary filter **406** is supported by dust collector lid **461** having a filter support that comprises a plurality of rectangular openings filled with filter **406b**.

[0138] The dust collector lid **461** also makes the edges of first auxiliary filter **406** and auxiliary filter casing **440** airtight.

[0139] Dust collector lid **461** is provided under first auxiliary filter **406** and air outlet **420** of the cyclonic separation cylinder. The whole inside of the dust collector lid **461** is filled with second auxiliary filter **412** supported by filter frame **413**.

[0140] First auxiliary filter **406** is preferably made of sponge or other material that can capture a lot of dust. Washable sponge materials made from ether are more preferable in handling. When treated by antistatic agent, net filter **406a** before first auxiliary filter **406** can knock off dust easily and make dust disposal easier. Filter **406** attached to dust collector lid **461** can prevent leaking of dust from dust collecting case **405** when it is of a nonwoven or net filter type. For easy handling, filter **406** made of a nonwoven material or the like is insert-mounted with dust collector lid **461** in a body.

[0141] Preferably, second auxiliary filter **412** can be a pleated nonwoven filter. As this filter supports the whole lower part of cyclonic dust collector **460**, the filtering area can be made greater and consequently the air flow resistance can be reduced. Further, as the air can be directly flown to the motor-driven blower, the air flow resistance can be reduced and as the result, the suction power can be increased.

[0142] First auxiliary filter **406** is provided on the bottom of dust collecting case **405** far away from communicating port **417**. In other words, communicating port **417** is on the upper right corner of FIG. 17 and first auxiliary filter **406** is on the lower left corner of FIG. 17. The dirty air passing through communicating port **417** is apt to flow to the lower left part as it is sucked from the side of first auxiliary filter **406**. Dust in the dirty air is accumulated and compressed from the lower left side of dust collecting case **405**. Therefore, more dust can be accumulated in dust collecting case **405**. Further, as first auxiliary filter **406** is provided on the bottom of dust collecting case **405**, dust in the dust collecting case is compressed by its weight and more dust can be accumulated in the dust collecting case. Consequently, this reduces a dust dumping frequency. Further this mechanism has a feature of preventing fine dust from rising up when the accumulated dust is disposed of as fine particles such as lint, sands, and soil in dust are caught up in dust layers.

[0143] When dust collector **460** is mounted on cleaner body **401**, cyclonic separation cylinder **404** is behind dust collecting case **405** (when viewed from the front of the electric vacuum cleaner).

[0144] As communicating port **417** and upper opening **418** of dust collecting case **405** are provided before the cyclonic separation cylinder, a dust indicator line (not shown) can be marked on the front side opposite to upper opening **418** so that the user can know proper timing to dump the dust. The dust indicator line is marked aslant because the dust accumulates thinner near upper opening **418**.

[0145] For dust disposal, dust collector lid **461** is opened. As dust collecting case **405** is wider towards the bottom, it is very easy to empty dust collecting case **405** completely and almost no dust will remain in dust collecting case **405**.

[0146] When filters are clogged, the user takes steps of opening dust collector lid **461** and auxiliary filter casing **440**, taking out the first auxiliary filter, wash it, drying it by air seasoning, then remounting the dry filter. To clean second auxiliary filter **412**, the user takes steps of taking the second auxiliary filter together with auxiliary filter frame **413**, wash them, drying them by air seasoning, then remounting the dry filter together with the filter frame.

[0147] It is also possible to mount inner cylinder **431** on dust collector lid **461** and make it open together when dust collector lid **461** is closed for disposal of dust. This mechanism facilitates disposal of dust that overloaded from dust collecting case **405** into cyclonic separation cylinder **404** when dust collecting case **405** is overloaded.

[0148] The inner surfaces of cyclonic separation cylinder **404** and dust collecting case **405** are coated with UV curing clear resin, to protect the surfaces against damages due to collision and scratches by dust particles that flow into cyclonic separation cylinder **404** and dust collecting case **405** and against contamination. This coat increases the friction resistance and contamination resistance of the surfaces. Therefore, even when outer cylinder **435** of cyclonic separation cylinder **404** and dust collecting case **405** are made of clear plastic materials, the quantity of dust in the cylinder and the case can be easily recognized by eyes.

[0149] When cyclonic separation cylinder **404** and dust collecting case **405** are molded with antistatic materials or when surfaces thereof are coated with antistatic materials, the cyclonic separation cylinder and the dust collecting case become less contaminated and consequently, they need not be cleaned so frequently.

[0150] Outer cylinder **435** of cyclonic separation cylinder **404** has air inlet port **415** on the lower part of the cylinder (below the center of the longitudinal center axis of the cylinder) to introduce dirty air approximately tangentially to cyclonic separation cylinder **404** which is approximately cylindrical. Therefore, hose connection port **416** can be provided below cleaner body **301**, which can make hose **302** shorter. This can also reduce frictional losses and so on.

[0151] Communicating port **417** is provided on the upper part (above the center) of cyclonic separation cylinder **404** to introduce dirty air into dust collecting case **405**. Inner cylinder **431** is provided below cyclonic separation cylinder **404** and communicates with air outlet **420** thereunder. As air outlet **420** can be provided below the cyclonic separation cylinder, the air passage towards the motor-driven blower can be made shorter. This configuration can make cleaner body **301** shorter, compact, and less weight. This also has an effect to reduce frictional losses.

[0152] Inner cylinder **431** comprises partition wall **432** and cylindrical member **434** with which net filter **433** made of plastic fiber is formed in a body by insert-mounting. Net filter **433** can be formed on the wall of the cylindrical member or on the top of the cylindrical member. In this embodiment, the net filter **433** is not formed on the whole periphery of the wall of inner cylinder **431**. Net filter **433** and the opening are not provided in a 90-degree area of the inner cylinder near air inlet port **415**. This prevents long dust particles such as hairs (sent from air inlet port **415**) from directly hitting net filter **433**, sticking into the net filter or being twined around with the net filter. Similarly, when air

inlet port **415** is curved upward, this prevents sharp-pointed materials such as pins and needles (sent from air inlet port **415**) from directly hitting net filter **433**, breaking the net filter, and leaking. Further, a plurality of ribs are provided on the inner side of the cylinder to support the net filter because net filter **433** receives a centripetal force.

[0153] When net filter **433** is treated with antistatic agent, dust on the net filter can be easily knocked off and cleaned.

Embodiment 4

[0154] A fourth preferred embodiment of the present invention is described below with reference to **FIG. 19**.

[0155] **FIG. 19** is a vertical cross-sectional view of a cyclonic dust collector **560** comprising a cyclonic separation cylinder **504** and a dust collecting case **505** which is an embodiment of the present invention.

[0156] The cyclonic separation section comprises cyclonic separation cylinder **504** which is approximately cylindrical, dust collecting case **505**, and filter casing **513** which is under the dust collecting case. This cyclonic separation section is mounted on the cleaner body detachably. The motor-driven blower is provided under this cyclonic separation section. Air inlet port **515** is formed in a body on cyclonic separation cylinder **504** to introduce air into cyclonic separation cylinder **504** along the periphery of the cylinder. Air inlet port **515** is circular in the section but can be rectangular with rounded corners.

[0157] Dust collecting case **505** is provided in a body under cyclonic separation cylinder **504**. The inner cross-section of the cyclonic separation section becomes greater as you go from cyclonic separation cylinder **504** to dust collecting case **505**. In other words, the cyclonic separation section becomes wider as you go downward. The dust collecting case **505** has a circular cross-section but can have a rectangular cross-section with rounded corners.

[0158] Inner cylinder **531** comprises cylindrical member **534** having a circular cross-section, downward-curved partitioning wall which separates cyclonic separation cylinder **504** from dust collecting case **504** and an opening on the upper part. Net filter **533** is formed in a body on the opening by insert-molding.

[0159] The upper end of inner cylinder **531** is fit to cylinder-fixing rib **531** which is formed in a body on cyclonic separation cylinder **504**. This rib has a mechanism (not shown) to fasten the inner cylinder in an air-tight state when the inner cylinder is fit into the rib and turned. The lower part of inner cylinder **531** has air outlet **520** to discharge air from the cyclonic separation cylinder **504**.

[0160] The cyclonic separation section has dust collector lid **561** comprising filter casing **513** and others on its bottom.

[0161] The dust collector lid **561** has first auxiliary filter **506** and filter frame **540** that covers the first auxiliary filter on the upper part of the dust collector lid **561**. The filter frame contains net filter **406a** in a body by insert-molding. Filter frame **540** has an approximately circular section in its center.

[0162] The dust collector lid **561** contains filter casing **513** which holds second auxiliary filter **512**. The filter casing **513** is in close contact with dust collecting case **505**. The upper

part of filter casing **513** comprises a partitioning wall having a lot of openings and a cylindrical section to be fit to inner cylinder **531** in the center thereof. The partitioning wall contains net filter **406a** in a body by insert-molding. The partitioning wall supports the first auxiliary filter and filter frame **540** is detachably mounted thereon. Dust collector lid **561** has, on its bottom edge, an elastic member in close contact with the opening at the entrance of the motor-driven blower. This elastic member also works to hold second auxiliary filter **512**.

[0163] When the cyclonic separation section is mounted on the cleaner body, the dust collector lid **561** is strongly pressed by the partitioning wall having the opening in the entrance of the motor-driven blower.

[0164] The air-tightness between dust collector lid **561** and each of dust collecting case **505** and inner cylinder **531** is assured by means of an elastic sealing member therebetween when a vertical force is applied. This can prevent leaking of dust and air.

[0165] Next will be explained how air and dust flow through the electric vacuum cleaner of this embodiment.

[0166] Dirty air is introduced from air inlet port **515** into cyclonic separation cylinder **504**, and made to swirl there to centrifugally separate dust from the air. The separated dust is delivered into dust collecting case **505** through communicating port **517**. The clean air from cyclonic separation cylinder **504** is sucked into inner cylinder **531** through net filter **533** on the upper part of inner cylinder **531** and sent toward dust collector lid **561** through air outlet **520** provided on the bottom of cyclonic separation cylinder **504**.

[0167] Further part of air is sucked into dust collecting case **505** through communicating port **517** formed outside of partitioning wall **532** of inner cylinder **531** and de-dusted by first auxiliary filter **506**. The clean air from dust collecting case **505** passes through net filter **506b** under first auxiliary filter **506**, and flows into the second auxiliary filter together with air from the cylindrical member formed in the center of filter casing **513**. These two air passages forms outlet **546** of the dust separation cyclone. The clean air passing through second auxiliary filter **512** is sucked into the motor-driven blower.

[0168] Cyclonic dust collector **560** is equipped with a pull-out handle (not shown) by which the user can take out the dust collector from the cleaner body. For disposal of dust, the user opens dust collector lid **561** under dust collecting case **505** and dumps dust collecting case **505**. As the dust collecting case **505** becomes wider downward, dust in dust collecting case **505** is apt to fall to the bottom and dust can hardly remain in dust collecting case **505**.

[0169] As first auxiliary filter **506** is provided under dust collecting case **505** to pass air, the flow resistance increases as dust accumulates further. With this, the dust in dust collecting case **505** is compressed. Further as first auxiliary filter **506** is on the bottom of dust collecting case **505**, dust is further compressed by its weight. Therefore, much more dust can be accumulated in dust collecting case **505** and the dust dumping frequency can be made smaller. Further as fine particles such as lint, sands, and soil in dust are caught up in dust layers, rise up of fine dust can be suppressed when the dust is disposed of.

[0170] The user can clean cyclonic separation cylinder **504** (when it is dirty) after taking out inner cylinder **531**. This also enables the user to clean net filter **533** of inner cylinder **531**.

[0171] Further, the user can wash and clean first auxiliary filter **506** after taking the filter from filter frame **540**. The first auxiliary filter is made of washable foamed materials such as urethane sponge.

[0172] It is possible to simplify the air passages, reduce the height of the cleaner body, and make the cleaner body smaller and less weight by introducing air from cyclonic separation cylinder **504** into inner cylinder **531** and flowing air linearly to air outlet **520** therebelow (than those designed to introduce air from the inner cylinder downward through the outside of cyclonic separation cylinder **504**). This mechanism can eliminate flow bending, loss due to air disturbance, and loss due to friction. Consequently, this mechanism has an effect of increasing the suction power.

[0173] Net filter **538** on the opening of part **534** of inner cylinder **531** does not cover the whole cylindrical part **534**. The cylindrical part of about 90 degrees near air inlet port **515** is formed with the wall of the cylindrical part **534**. This prevents long dust particles such as hairs (sent from air inlet port **515**) from directly hitting net filter **533**, sticking into the net filter or being twined around with the net filter. Similarly, this prevents sharp-pointed materials such as pins and needles (sent from air inlet port **515**) from directly hitting net filter **533**, breaking the net filter, and leaking.

[0174] As already explained, the present invention can provide a small and easy-to-operate cyclonic separation type dust collector by comprising a cyclonic separation cylinder that swirls air upwards and a dust collecting case that contains filters.

[0175] In accordance with the present invention, the center axis of the cyclonic separation cylinder is moved a little away from the center of the cleaner body and a motor-driven blower is placed opposite to the cyclonic separation cylinder. This can make the cleaner body shorter.

[0176] Further in accordance with the present invention, a cyclonic separation cylinder which takes in dirty air from downwards and discharges clean air downwards and flowing part of clean air into a dust collecting case having a filter can provide a small easy-to-operate cyclonic separation type dust collector of high dust-capturing performance.

What is claimed is:

1. A vacuum cleaner comprising:

an electric vacuum cleaner main body within which an electrically driven blower installed;

a cyclonic separation cylinder provided on said electric vacuum cleaner main body for flowing dust containing air sucked from a suction port into an inlet tube and removing dust according to a centrifugal separation; and

an inner cylinder provided on said cyclonic separation cylinder having an exhaust air port;

wherein

said exhaust air port includes an opening portion arranged in a substantially parallel orientation with said inlet tube.

2. An electric vacuum cleaner according to claim 1, wherein

said electric vacuum cleaner further comprises:

a dust collecting case provided on said electric vacuum cleaner main body and having an opening which communicate with said cyclonic separation cylinder;

a filter arranged on said dust collecting case; and

a communicating passage formed separately from said cyclonic separation cylinder and said dust collecting case for communicating with said exhaust air port; wherein

air passed through said filter and air blown out from said communicating passage are merged, and said merged air is sucked into said electrically driven blower.

3. An electric vacuum cleaner according to claim 1 or 2, wherein a net filter is provided at a cylindrical portion of said inner tube.

4. An electric vacuum cleaner according to claim 1 or 2, wherein

said cyclonic separation cylinder is formed with a substantially cylindrical shape; and

said inlet tube is arranged at a position where air flows into at a substantially tangential direction to said cyclonic separation cylinder.

* * * * *