

(51) International Patent Classification:
B26B 21/40 (2006.01)

(21) International Application Number:
PCT/US2017/049244

(22) International Filing Date:
30 August 2017 (30.08.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
16188223.8 09 September 2016 (09.09.2016) EP

(71) Applicant: **THE GILLETTE COMPANY LLC**
[US/US]; One Gillette Park, Boston, Massachusetts 02127
(US).

(72) Inventors: **WALKER, Vincent, Paul**; One Gillette Park,
Boston, Massachusetts 02127 (US). **HARRINGTON,
Nicholas, Robert**; One Gillette Park, Boston, Massachu-
setts 02127 (US). **GARDINER, Andrew, John**; One
Gillette Park, Boston, Massachusetts 02127 (US). **LEE,
Alejandro, Carlos**; 366 Putnam Avenue #3, Cambridge,
Massachusetts 02139 (US).

(74) Agent: **KREBS, Jay A.**; c/o THE PROCTER & GAMBLE
COMPANY, Global IP Services, One Procter & Gamble
Plaza, C9, Cincinnati, Ohio 45202 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: SHAVING RAZOR CARTRIDGE

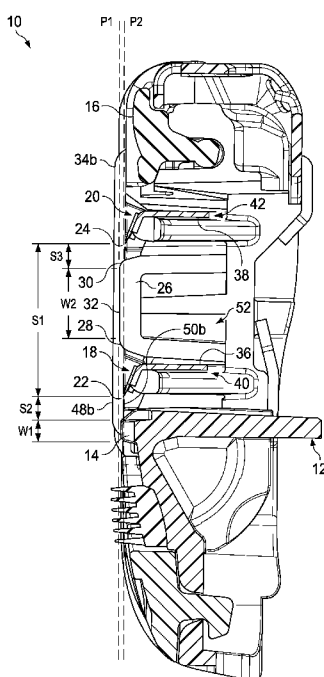


FIG. 2A

(57) Abstract: A shaving cartridge (10) with a housing (12), having a primary guard (14) at a front of the housing and a secondary cap (16) at a rear of the housing. A bridge member 26 having a primary cap surface (28) and a secondary guard surface (30) is positioned between the primary guard and the secondary cap. A first blade (18) has a cutting edge (24). The first blade is mounted to the housing between the primary guard and the primary cap surface. A second blade (20) having a cutting edge (24) extending in the same direction as the cutting edge of the first blade is mounted to the housing between the secondary guard surface and the secondary cap. A width W2 of the bridge member is greater than 50% of an interblade span S1 between the cutting edge of the first blade and the cutting edge of the second blade and the interblade span is greater than 3mm.

Published:

— *with international search report (Art. 21(3))*

SHAVING RAZOR CARTRIDGE

FIELD OF THE INVENTION

The present invention relates to shaving razors and more particularly to shaving
5 cartridges having two guards, two caps, and plurality of blades.

BACKGROUND OF THE INVENTION

In general, shaving razors of the wet shave type include a cartridge or blade unit with at
least one blade with a cutting edge, which is moved across the surface of the skin being shaved
10 by means of a handle to which the cartridge is attached. The cartridge may be mounted
detachably on the handle to enable the cartridge to be replaced by a fresh cartridge when the
blade sharpness has diminished to an unsatisfactory level, or it may be attached permanently to
the handle with the intention that the entire razor be discarded when the blade or blades have
become dulled (i.e., disposable razor). The connection of the cartridge to the handle provides a
15 pivotal mounting of the cartridge with respect to the handle so that the cartridge angle adjusts to
follow the contours of the surface being shaved. In such systems, the cartridge can be biased
toward a rest position by the action of a spring-biased plunger (a cam follower) carried on the
handle against a cam surface on the cartridge housing.

Razor cartridges usually include a guard which contacts the skin in front of the blade(s)
20 and a cap for contacting the skin behind the blade(s) during shaving. The cap and the guard aid
in establishing the so-called "shaving geometry", i.e., the parameters which determine the blade
orientation and position relative to the skin during shaving, which in turn have a strong influence
on the shaving performance and efficacy of the razor. The cap and the guard may aid in
establishing the exposure of the blades. The blade exposure is defined to be the perpendicular
25 distance or height of the blade edge measured with respect to a plane tangential to the skin
contacting surfaces of the blade unit elements next in front of and next behind the edge.
Therefore, for a three-bladed blade unit, the exposure of the first or primary blade is measured
with reference to a plane tangential to the guard and the edge of the second blade, and the
exposure of the third or tertiary blade is measured with reference to a plane tangential to the edge
30 of the second blade and the cap.

The minimum acceptable exposure may be influenced by other blade unit dimensions,
such as the distance from the skin engaging surface of the guard to the edge, i.e. "the span" of the
primary blade. As referred to herein, "the span" means the distance from the blade edge to the
skin contacting element immediately in front of that edge as measured along a tangent line
35 extending between the said element and the blade edge. The guard may include a generally rigid

guard bar that may be formed integrally with the housing or platform structure, which provides a support for the blades. Guards may also include skin stretching elements made from various types of elastomeric materials that are intended to stretch the skin and/or align hair in front of the blade.

5 Safety razors having cartridges with several blades have in recent years been sold in very large numbers and are generally acknowledged to give a better quality of shave, especially in terms of closeness, than single bladed razors. A blade unit having many blades can produce a closer shave than a similar blade unit with only one or two blades. However, closeness of shave obtained is only one parameter by which razor users judge the performance of a razor. Comfort
10 is another important characteristic to consider. For example, many consumers describe themselves as having sensitive skin, which is prone to nicks, cuts and irritation. Discomfort during a shave, often described by shavers as a “pull & tug” sensation is caused by the nerves around the follicle being stimulated. This nerve stimulation can happen by moving the hairs, pulling and/or cutting the hairs and by dragging the razor cartridge over the surface of the skin.

15 Additionally, many consumers suffer from acne and/or pseudofolliculitis barbae (PFB) that make shaving uncomfortable. PFB or shaving bumps is a foreign body inflammatory reaction involving papules and pustules. It is a common dermatologic condition principally affecting adult men who have naturally coarse or tightly curling hair, particularly those who shave closely on a regular basis. The leading edge of closely cropped facial hair re-entering the
20 epidermis of the skin or transecting the wall of the hair follicle results in localized inflammatory reactions over the affected site. The process can lead to secondary skin infections and, in severe cases, permanent scarring. Accordingly, what is needed is a shaving razor cartridge that provides a more comfortable shave and/or decrease skin issues caused by shaving the face and body (e.g., PFB, irritation, redness, razor bumps, ingrown hairs, acne etc.).

25 SUMMARY OF THE INVENTION

In one aspect, the invention features, in general, a shaving cartridge with a housing, having a primary guard at a front of the housing and a secondary cap at a rear of the housing. A bridge member having a primary cap surface and a secondary guard surface is positioned
30 between the primary guard and the secondary cap. A first blade has a cutting edge. The first blade is mounted to the housing between the primary guard and the primary cap surface. A second blade having a cutting edge extending in the same direction as the cutting edge of the first blade is mounted to the housing between the secondary guard surface and the secondary cap. A width of the bridge member is greater than 50% of an interblade span between the cutting edge of

the first blade and the cutting edge of the second blade and the interblade span is greater than 3mm.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features and advantages of the invention will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a top view of a shaving razor cartridge.

FIG. 2A is section view of the shaving razor cartridge, taken generally along the line 2-2 of Fig. 1.

FIG. 2B is perspective section view of the shaving razor cartridge, taken generally along the line 2-2 of Fig. 1.

FIG. 3A is an assembly view of the shaving razor cartridge of FIG 1.

FIG. 3B is an assembly view of another possible embodiment of a shaving razor cartridge.

FIG. 3C is an assembly view of another possible embodiment of a shaving razor cartridge.

FIG. 4 is a schematic view of the shaving razor cartridge of FIG. 1.

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, a top view is shown of a shaving razor cartridge 10. The shaving razor cartridge 10 may include a housing 12 having a primary guard 14 toward a front of the housing 12 and a secondary cap 16 toward a rear of the housing 12. In certain embodiments, there may be a first blade 18 and a second blade 20 mounted to the housing 12 between the primary guard 14 and the secondary cap 16. Each of the blades 18 and 20 may have a respective cutting edge 22 and 24 facing in the same direction (e.g., toward the primary guard 14). The blades 18 and 20 may be spring loaded within the housing 12 such that the blades 18 and 20 are biased against one or more clips 34a and 34b. In certain embodiments, the clips 34a and 34b may allow the blades 18 and 20 to move in an up and down direction during a shaving stroke.

A bridge member 26 may be positioned between the first blade 18 and the second blade 20. The bridge member 26 may have a primary cap surface 28 and a secondary guard surface 30. Accordingly, the primary guard 18 and the primary cap surface 28 may establish a shaving plane for the first cutting edge 22. Similarly, the secondary guard surface 30 and the secondary cap 16 may establish the shaving plane for the second cutting edge 24. The primary cap surface 28 and

the secondary guard surface 30 may be a unitary member that is molded integrally with the bridge member 26 and the housing 12. The bridge member 26 may have a top surface 32 between the primary cap surface 28 and the secondary guard surface 30.

As will be explained in greater detail below, the blades 18 and 20 may be secured to the housing 12 with the at least one clip 34a and 34b may be bent around a portion of the housing 12. Although the clips 34a and 34b are shown as two separate components fixing the blades 18 and 20 and bridge member 26 to the housing 12, the clips 34a and 34b may also be a single piece construction. In addition, the clips 34a and 34b may not necessarily be bent or formed around a portion of the housing 12 to secure the blades 18 and 20 and the bridge member 26 relative to the housing 12. For example, the clips 34a and 34b may be snapped fit, press fit, glued, or ultrasonically welded to the housing 12. The clips 34a and 34b may comprise a metal (e.g., aluminum or stainless steel) or a polymeric material (e.g., Noryl™ (a blend of polyphenylene oxide (PPO) and polystyrene developed by General Electric Plastics, now SABIC Innovative Plastics), acrylonitrile butadiene styrene (ABS), acetal, polypropylene, high impact polystyrene, or any combinations thereof. The clips 34a and 34b may contact the cutting edges 22 and 24 of the respective blades 18 and 20. In certain embodiments, the clips 34a and 34b may be spaced apart (i.e., not in contact) from the primary cap surface 28 and/or the secondary guard surface 30. The spacing of the clips 34a and 34b from the bridge member 26 may facilitate proper skin contact of the bridge member 26 and the cutting edges 22 and 24. For example, if the clips 34a and 34b extended over or around the bridge member 26, then the clips 34a and 34b may prevent proper skin and hair contact with the cutting edges 22 and 24. Furthermore, the position of the bridge member 26 would be limited by the bottom surface of the clips 34a and 34b. In certain embodiments, it may be advantageous for the primary cap surface 28 and the secondary guard surface 30 of the bridge member 26 to be positioned on a plane above the cutting edges 22 and 24. The cutting edges may be preloaded against the bottom surface of the clips 34a and 34b. The positioning of the bridge member 26 above the cutting edges 22 and 24 may allow for a more comfortable shave.

It is believed, without being held to theory, that it is possible to minimize skin irritation and PFB by cutting hair close to skin level, but not below the skin's surface. Multi-blade shaving razor cartridges take advantage of what is known as the hysteresis effect. Hysteresis is the metastable extension of hair that occurs after a hair is cut during shaving. In present day razors, sharp cutting edges of the cartridge engage with individual hairs during a shaving stroke, exerting a force on the hairs and causing them to be lifted out of the follicle as the razor is moved across the surface of the skin. Once the hair has been cut and the force is removed, the hair retracts back

into the skin. However, in multi-bladed systems, a trailing blade (i.e., second blade) engages the hair and cuts it before the hair is able to retract back into the skin. This concept of consecutive blades cutting hairs before they have fully retracted into the skin is known as "hysteresis cutting". If the second and consecutive blades also engage and pull hairs while cutting, it becomes possible to get a significantly closer cut than when using a single blade razor.

In razor cartridges with multiple, closely spaced blades it is possible that a single hair may be subjected to engagement with more than one blade during a single cutting episode, multiplying the stimulation of the nerve and the sensation of discomfort. Less closely spaced blades are less likely to engage the same hair in a single cutting episode and therefore less likely to exaggerate nerve stimulation, and discomfort. It is believed, without being held to theory, that decreasing the likelihood of single hairs engaging with multiple blades during a cutting episode may reduce uncomfortable nerve stimulation. Furthermore, decreasing the likelihood of single hairs engaging with multiple blades during a cutting episode may help prevent the hair from being cut too close or below the skin's surface which may limit growing hair from re-entering the epidermis of the skin.

Referring to FIGS. 2A and 2B, cross section views of the shaving razor cartridge 10 are shown, taken generally along the line 2-2 of FIG. 1. FIG. 2A illustrates the cross section from a side view and FIG. 2B illustrates the cross section from a perspective view. The blades 18 and 20 may have a respective blade support member 36 and 38. The blade support members 36 and 38 may be a unitary part of the blades 18 and 20 or alternatively, the blades 18 and 20 may be mounted to the respective blade support members 36 and 38. The blade support members 36 and 38 may be positioned within a respective blade slot 40 and 42 in the housing 12. In certain embodiments, the first blade 18 (e.g., blade support member 36) may be spaced apart from the bridge member 26 to define a rinse channel 44 there between (see Fig. 2B). Accordingly, less shaving debris may be present when the second blade 20 engages and cuts hair, thus resulting in a more efficient and comfortable shave.

The primary cap surface 28 and the secondary guard surface 30 may be arcuate to provide a comfortable skin support surface. The top surface 32 of the bridge member 26 between the primary cap surface 30 and the secondary guard surface 28 may be flat. It is understood that although the bridge member 26 is shown a flat rectangular shape, numerous other shapes are also possible, such as rounded surfaces or other shapes. The top surface 32 of the bridge member 26 may be positioned on a plane P1 between a top surface 48b and a bottom surface 50b of the clip 34b. Although only one clip 34b is shown in FIGS. 2A and 2B, it is understood clip 34a may also have a corresponding top surface and bottom surface. As will be explained in greater detail

below, the bridge member 26 (e.g., top surface 32 of the bridge member) may be spaced apart (i.e., not contacting) the clips 34a and 34b to facilitate proper shaving geometry and minimize the obstruction of the clips 34a and 34b on a shaving stroke. Accordingly, the position of the bridge member 26 (e.g., height of the bridge member 26 relative to the cutting edges 22 and 24 of the blades 18 and 20) may be independent of the clips 34a and 34b. For example, the top surface 32 of the bridge member 26 may be positioned above the top surface 48b of the clip 34b and the cutting edges 22 and 24. It is understood, the top surface 32 of the bridge member 26 may also be positioned above the top surface 48a of clip 34a (not shown) in a similar manner.

The bridge member 26 may define a cavity 52 beneath the top surface 32 of the bridge member 26. The cavity 52 may provide for improved manufacturability of the housing 12. The position of the bridge member 26 may be fixed relative to the primary guard 14. For example, the bridge member 26 and the primary guard 14 may be integrally formed as part of the housing 12. However, the cutting edges 22 and 24 may be preloaded against the bottom surface 50b of the clip 34b (and clip 34a, not shown). Accordingly, the cutting edges 22 and 24 may float (i.e., move in an up and down direction toward and away from the clips 34a and 34b) during a shaving stroke while the position of the bridge member 26 remains fixed. It is believed, while not being held to theory, the combination of floating blades with fixed surfaces that establish the shaving plane (e.g., the primary guard 14, the primary cap 28, the secondary guard surface 30 and the secondary cap 16) may provide a more consistent and comfortable shave.

In certain embodiments, an interblade span "S1" between the cutting edge 22 of the first blade 18 and the cutting edge 24 of the second blade 20 may be greater than 3.0mm. For example, the interblade span "S1" between the cutting edge 22 of the first blade 18 and the cutting edge 24 of the second blade 20 may be about 3mm to about 6mm. In certain embodiments the interblade span S1 may be about 4.0mm to about 5mm. A span "S2" between the primary guard 14 and the cutting edge 20 of the first blade 18 may be about 0.5mm to about 0.8mm. A span "S3" between the secondary guard surface 28 and the cutting edge 22 of the second blade 20 may be about 0.3mm to about 0.7mm. The interblade span S1 may help minimize double engagement of hair and hysteresis, which may result in discomfort and hairs being cut below the skin surface.

The primary guard 14 may have a width "W1" of about 0.35mm to about 0.85mm. The bridge member 26 may have a width "W2" that is greater than W1. The width "W2" may be measured as an overall width of the bridge member 26 (in a front to rear direction) measured at a plane P2 tangent to the cutting edges 22 and 24 (e.g., plane P2 may be at bottom surface 50b of the clip 34b). In certain embodiments, W2 may be about 1.75mm to about 4mm, preferably

about 2mm to about 3mm. The width of the bridge member 26 may facilitate establishing proper shaving geometry and prevent hair from being cut below the skin surface. For example, the width W2 of the bridge member 26 may facilitate sufficient spacing between the cutting edges 22 and 24 to allow the hairs to retract back into the hair follicle after being cut by the cutting edge 22 of the first blade 18 prior to being engaged by the cutting edge 24 of the second blade 20. Furthermore, the width and spacing of the bridge member 26 may reduce double engagement of hair (e.g., when both cutting edges 22 and 24 engage the same hair at the same time). As the interblade span S1 increases (see FIG. 2), skin bulge between the cuttings edges 22 and 24 may also increase, which may result in increased nicks and cuts. The width of the bridge member 26 may provide sufficient skin support to minimize skin bulge, which can result in nicks, cuts and discomfort, especially as the interblade span S1 increases.

In certain embodiments, the width "W2" of the bridge member 26 may be greater than 45% of the interblade blade span S1. For example, the width "W2" of the bridge member 26 may be about 50% to about 75% of the interblade blade span S1. Accordingly, if the interblade span S1 was 4.0mm, then the width W2 of the bridge member 26 may be greater than 2.0mm. In certain embodiments, width "W2" of the bridge member 26 may be about 60% to about 70% of the interblade blade span S1. The bridge member 26 with an increased width may provide increased skin support that results in a more comfortable shave by reducing skin bulge while also minimizing double engagement of hairs and hysteresis.

Referring to FIG. 3A, an assembly view of the shaving razor cartridge 10 is shown. The bridge member 26 may be integrally molded as part of the housing 12. The blade 18 may be mounted to the housing 12 on a pair of spring members 60 and 62. Similarly, the blade 20 may be mounted to the housing 12 on a pair of spring members 64 and 66. The spring members 60, 62, 64 and 66 may pre-load the cutting edges 22 and 24 against the bottom surfaces 50a and 50b of the respective clips 34a and 34b. A pair of lateral ends 54 and 56 of the bridge member 26 (e.g., lateral ends of the primary cap 26 and lateral ends of the secondary guard surface 30) may be spaced apart (i.e., not in contact) from the clips 34a and 34b. Accordingly, the clips 34a and 34b may be mounted to the housing 12 at a depth independent of the bridge member 26. For example, when the clips 34a and 34b are mounted and secured to the housing 12, the top surfaces 48a and 48b of clips 34a and 34b may be approximately the same height as the top surface 32 of the bridge member 26, thus providing a more uniform shaving surface.

The top surface 32 of the bridge member 26 may allow for branding on the bridge member 26. For example, an insignia or logo 58 may be positioned on the top surface 32 by machining, etching, mold finish, painting, pad printing, etc. In certain embodiments, the top

surface 32 of the bridge member 26 may have a glossy surface (e.g., 6000 Grit Diamond Buff to 1200 grit diamond buff) to improve glide during a shaving stroke. The bridge member 26 may be coated (poly-para-Xylylene or PTFE) or plated (e.g., chrome plating) to improve lubricity. Alternatively, top surface 32 of the bridge member 26 may have a very rough surface to provide for exfoliation of the skin during a shaving stroke (e.g., 600 grit stone or less).

Referring to FIG. 3B, an assembly view of a second possible embodiment of a shaving razor cartridge 100 is shown having a housing 102 with a bridge member 104 comprising a water leachable shaving aid. The bridge member 104 may be substituted for the bridge member 26 in the shaving cartridge 10 of FIG. 3A. For example, the bridge member 104 may be integrally molded as part of the housing 102 between a primary guard 103 and a secondary cap 105 on the housing, as previously described for bridge member 26. The bridge member 104 may include a top surface 106 that defines an opening 108 configured to receive a lubrication member 110. The opening 108 may be a recess or extend completely through the bridge member 104. However, it is understood that the lubrication member 110 is optional. For example, in certain embodiments, the opening 108 may be left open to allow for improved rinsing and debris removal. The lubrication member 110 may comprise one or more water leachable shaving aids. The water leachable shaving aid may be formed by an injection molding, extrusion, or thermal/ultrasonic compression manufacturing process. The bridge member 104 (e.g., the lubrication member 110) may provide a primary cap surface 112 and a secondary guard surface 114. Accordingly, the lubrication member 110 may provide for lubrication behind the first blade 18 and in front of the second blade 20, which may reduce irritation or eliminate the need for shave prep. The primary cap surface 112 and/or the secondary guard surface 114 may be arcuate to provide a comfortable skin support surface. The lubrication member 110 of the bridge member 104 may have a top surface 116 between the primary cap surface 112 and the secondary guard surface 114. The top surface 116 may allow for branding, as previously described above. For example, a logo 118 may be positioned on the top surface 116.

When the clips 34a and 34b are secured to the housing 102, the clips 34a and 34b may be approximately the same height as the top surface 116 of the lubrication member 110 and/or the primary cap surface 112 and the secondary guard surface 114, thus providing a more uniform shaving surface. Similar to the shaving razor cartridge 10 of FIG. 3A, the clips 34a and 34b may be spaced apart from the bridge member 104 and/or the lubrication member 110. The bridge member 104 may have a width “W3” from a forward edge 120 to a rear edge 122 of about 1.5mm to about 4mm from the primary cap surface 112 to the secondary guard surface 114. The lubrication member 110 may have a width “W4” of about 1.5mm to about 4mm. The width of

the bridge member 104 and/or the lubrication member 110 may allow for proper shaving geometry to minimize double engagement of hairs and prevent hair from being cut below the skin surface.

The blades 18 and 20 may each be mounted on a pair of respective spring fingers 124, 126, 128 and 130. As previously described for the shaving razor cartridge 10 of FIG. 3A, the clips 34a and 34b may be mounted over the blades 18 and 20, but not the bridge member 104. The clips 34a and 34b may then be secured to the housing 102. The spring fingers 124, 126, 128 and 130 may lift the respective blades 18 and 20 against the clips 34a and 34b. The independent movement of the blades 18 and 20 relative to the bridge member 104 may provide a more comfortable shave by providing a more consistent shaving geometry. As previously shown and described in FIG. 2B, the blade 20 may be spaced apart from the bridge member 104 to provide for improved rinsing.

Referring to FIG. 3C, an assembly view of a third possible embodiment of a shaving razor cartridge 200 is shown having a housing 202 with a bridge member 204 comprising a plurality of spaced apart parallel ribs 206 that extend transverse to the cutting edges 22 and 24 of the blades 18 and 20. The housing 202 may be similar to the housing 12 previously shown and described in FIG. 3A, with the exception that the bridge member 204 may be substituted for the bridge member 26. The bridge member 204 may provide similar benefits as the bridge member 26 previously described. The spaced apart parallel ribs 206 may provide the added benefit of aligning hairs in front of the second blade 20 to improve cutting efficiency. The plurality of spaced apart parallel ribs 206 may provide a primary cap surface 208 and a secondary guard surface 210. The bridge member 204 may have a top surface 212 extending between the primary cap surface 208 and the primary guard surface 210. The bridge member 204 may have a width “W5” from the primary cap surface 208 to the secondary guard surface 210 of about 1.5mm to about 4mm. The width of the bridge member 204 may allow for proper shaving geometry to minimize double engagement of hairs and prevent hair from being cut below the skin surface. The plurality of spaced apart parallel ribs 206 may define a plurality of corresponding rinse openings 214 extending thru the bridge member 204 to aid in the removal of cut hair and excess shave prep or soap.

The blades 18 and 20 may each be mounted on a pair of respective spring fingers 216, 218, 220 and 222. As previously described for the shaving razor cartridge 10 of FIG. 3A, the clips 34a and 34b may be mounted over the blades 18 and 20, but not the bridge member 204. As previously described for the other embodiments, the blade 20 may be spaced apart from the bridge member 204 to provide for improved rinsing. The clips 34a and 34b may then be secured

to the housing 12. The spring fingers 216, 218, 220 and 222 may lift the respective blades 18 and 20 against the clips 34a and 34b. The independent movement of the blades 18 and 20 relative to the bridge member 204 may provide a more comfortable shave by providing a more consistent shaving geometry.

5 Referring to FIG. 4, a schematic view of the shaving razor cartridge 10 of FIG. 1 is shown. Another factor, which can influence drag forces associated with the blades, is the blade tangent angle or BTA. The shaving razor cartridge 10 may have a first shaving plane 70 tangent to the primary guard 14 and the primary cap surface 28. The first shaving plane 70 may intersect a blade plane 72 of the first blade 18 at a first blade tangent angle β_1 . The shaving razor
10 cartridge 10 may have a second shaving plane 74 tangent to the secondary guard surface 30 and the secondary cap 16. The second shaving plane 74 may intersect a second blade plane 76 of the second blade 20 at a second blade tangent angle β_2 . A lower blade tangent angle may result in a more comfortable shave for the shaving razor cartridge 10. In certain embodiments, the first blade tangent angle β_1 may be about 15 degrees, for example 10 degrees to 25 degrees. It is not
15 necessary for both blades 18 and 20 to have the same blade tangent angles. For example, the second blade tangent angle β_2 may be less than the blade tangent angle β_1 of the first blade 18, for example about 10 degrees. It is understood that the shaving razor cartridges 100 and 200 shown in FIGS. 3B and 3C, respectively, can have the same blade tangent angles as described in FIG. 4.

20 The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm." Furthermore, dimensions should not be held to an impossibly high standard of
25 metaphysical identity that does not allow for discrepancies due to typical manufacturing tolerances. Therefore, the term "about" should be interpreted as being within typical manufacturing tolerances.

CLAIMS

What is claimed is:

1. A shaving razor cartridge (10, 100, 200) comprising:
 - a housing (12, 102, 202) having a primary guard (14, 103, 203) at a front of the housing and a secondary cap (16, 105, 205) at a rear of the housing;
 - a bridge member (26, 104, 204) having a primary cap surface (28, 112, 208) and a secondary guard surface (30, 114, 210) positioned between the primary guard and the secondary cap;
 - a first blade (18) having a cutting edge (22), the first blade mounted to the housing between the primary guard and the primary cap surface;
 - a second blade (20) having a cutting edge (24) extending in the same direction as the cutting edge of the first blade, the second blade mounted to the housing between the secondary guard surface and the secondary cap, wherein a width (W2, W3, W5) of the bridge member is greater than 50% of an interblade span (S1) between the cutting edge of the first blade and the cutting edge of the second blade and the interblade span is greater than 3mm.
2. The shaving razor cartridge (10, 100, 200) of claim 1 wherein the interblade span is greater than 4.5mm.
3. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the width (W2, W3, W5) of the bridge member is 2.5mm to 4mm.
4. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the interblade span is 3.8mm to 4.5mm.
5. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the bridge member (26, 104, 204) is spaced apart from a blade support member (36) of the first blade (18).
6. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the shaving razor cartridge only has two blades (18, 20) having cutting edges (22, 24) extending in the same direction.

7. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the position of the bridge member (26, 104, 204) is fixed relative to the housing (12, 102, 202) and the first and second blades (18, 20) are mounted on a pair of respective spring members (60, 62, 64, 66, 124, 126, 128, 130, 216, 218, 220, 222) within the housing.
8. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims further comprising a pair of clips (34a, 34b) mounted to the housing (12), wherein a top surface (32, 116, 212) of the bridge member is positioned on plane (P1) between a top surface (48a, 48b) of the clips and a bottom surface (50a, 50b) of the clips.
9. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the bridge member (26) has a top surface (32) comprising a logo (58).
10. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the bridge member (104) defines an opening (108).
11. The shaving razor cartridge (10, 100, 200) of claim 10 wherein the opening (108) extends thru the bridge member (104).
12. The shaving razor cartridge (10, 100, 200) of claim 10 further comprising a lubrication member (110) positioned within the opening.
13. The shaving razor cartridge (10, 100, 200) according to any one of the preceding claims wherein the bridge member (104) comprises a water leachable shaving aid.
14. The shaving razor cartridge (10, 100, 200) according to any one claims 1-9 wherein the bridge member (204) comprises a plurality of spaced apart ribs (206) extending transverse to the cutting edge (22) of the first blade (18).
15. The shaving razor cartridge (10, 100, 200) of claim 14 wherein bridge member (204) defines a plurality of openings (214).

1/7

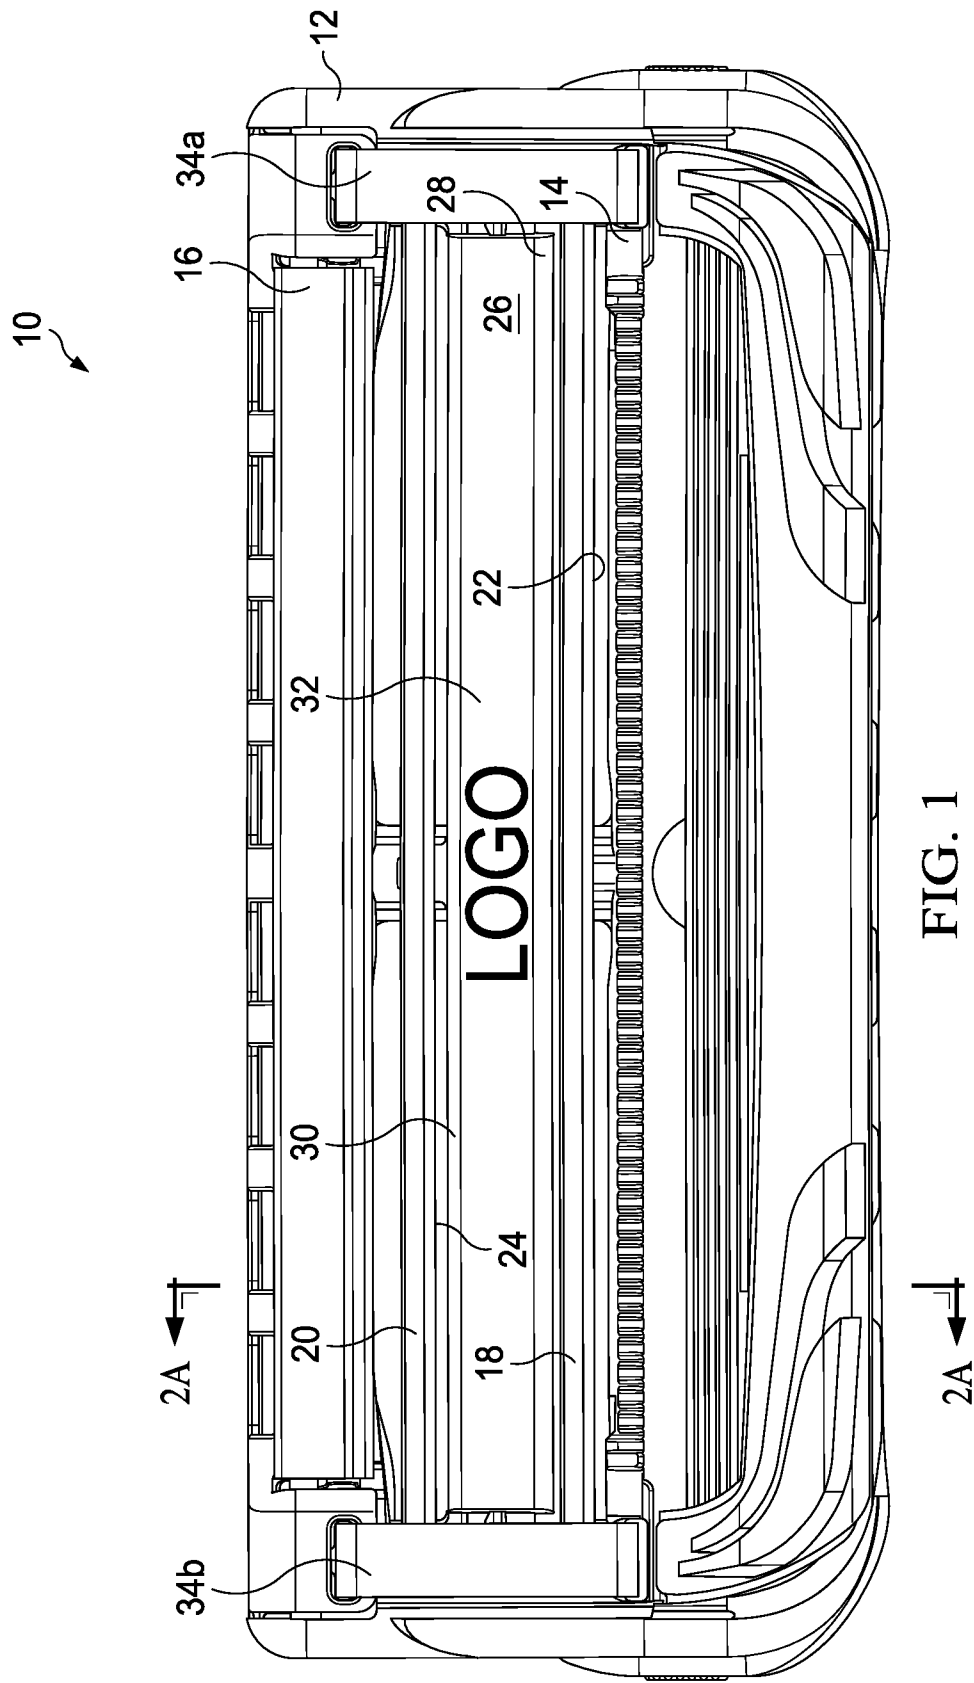


FIG. 1

2/7

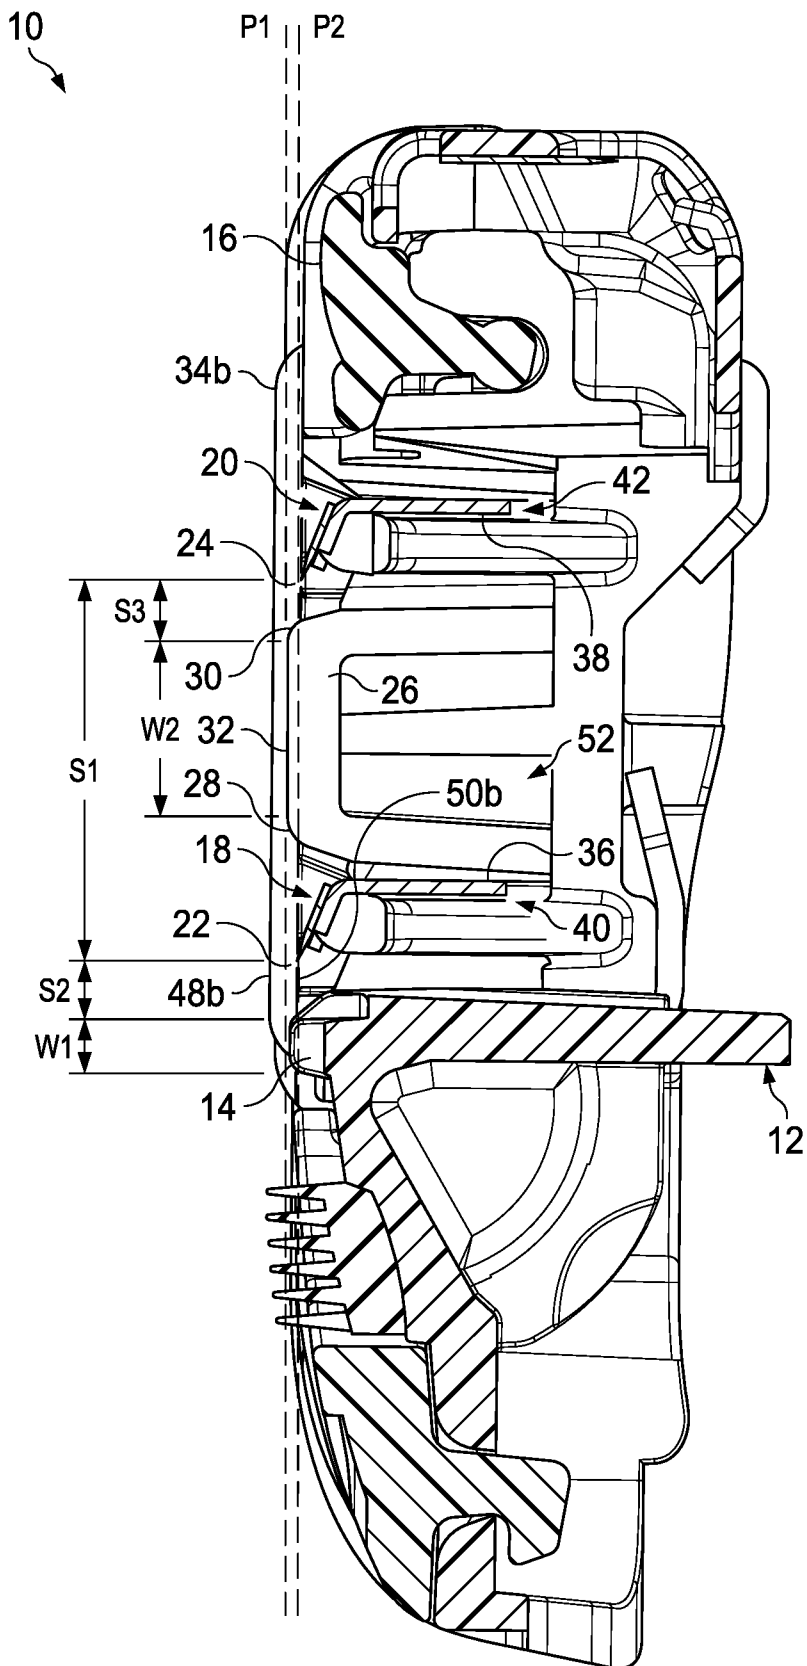


FIG. 2A

3/7



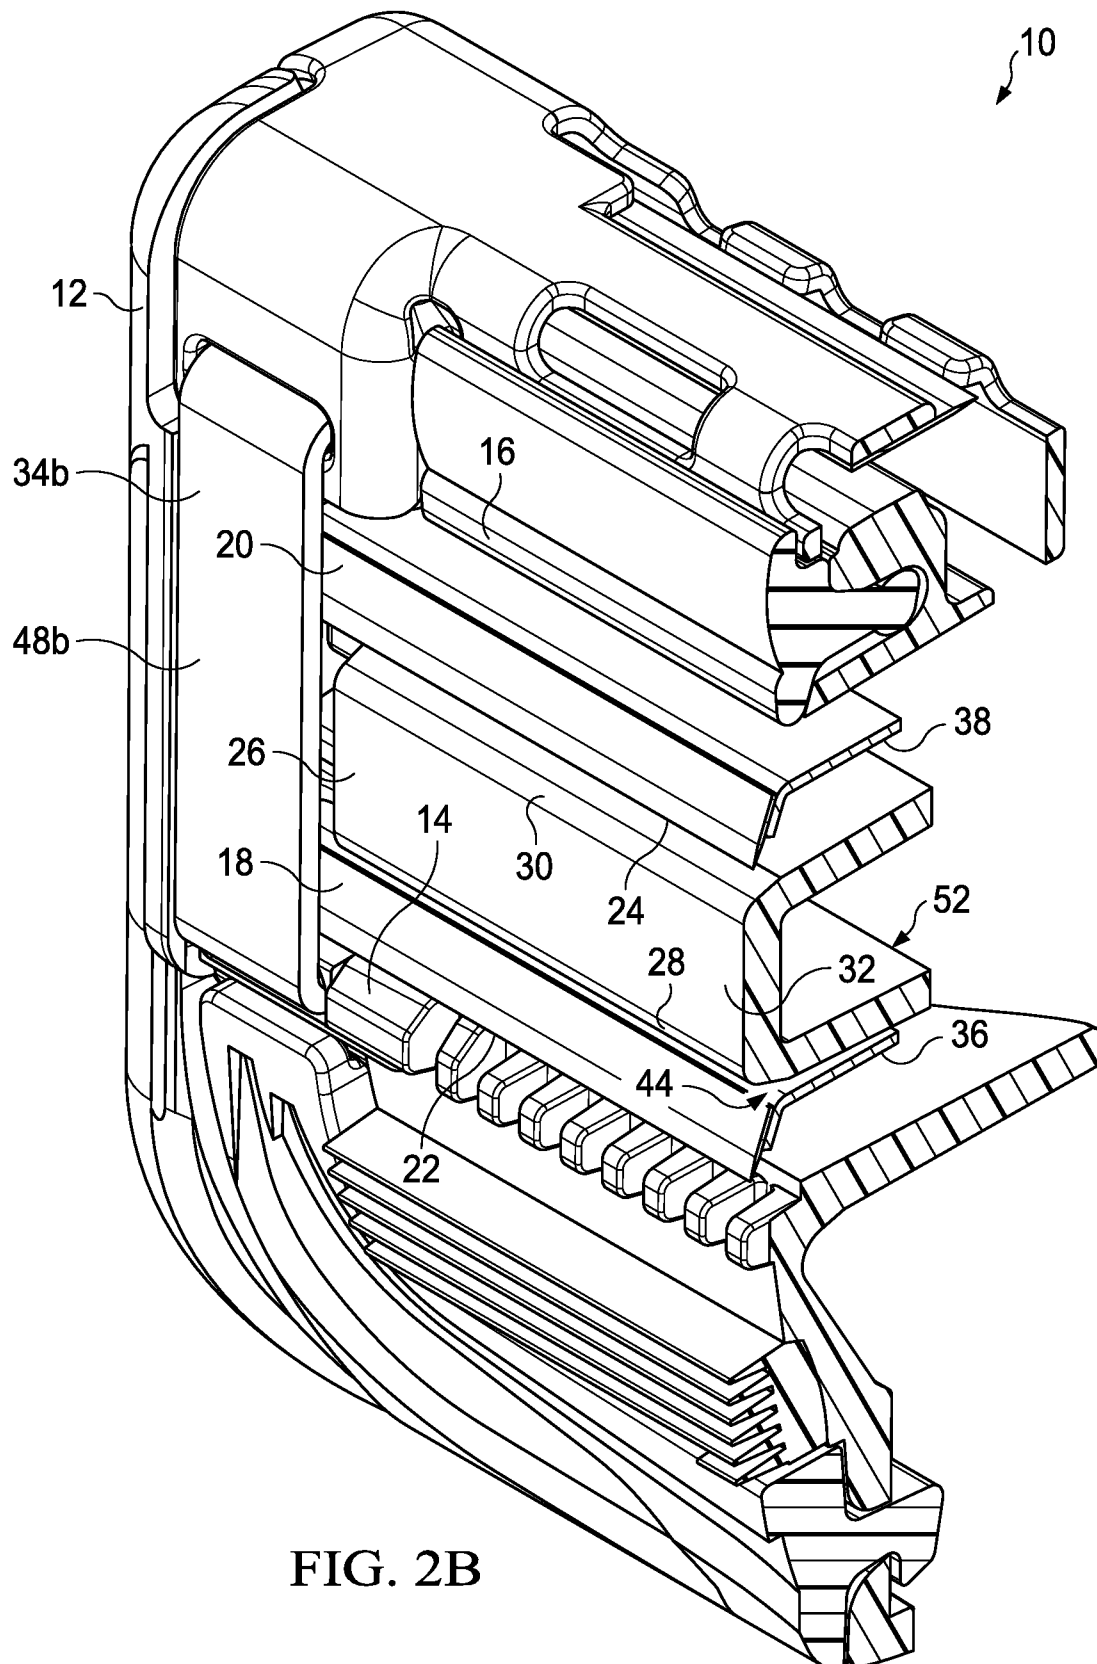


FIG. 2B

4/7

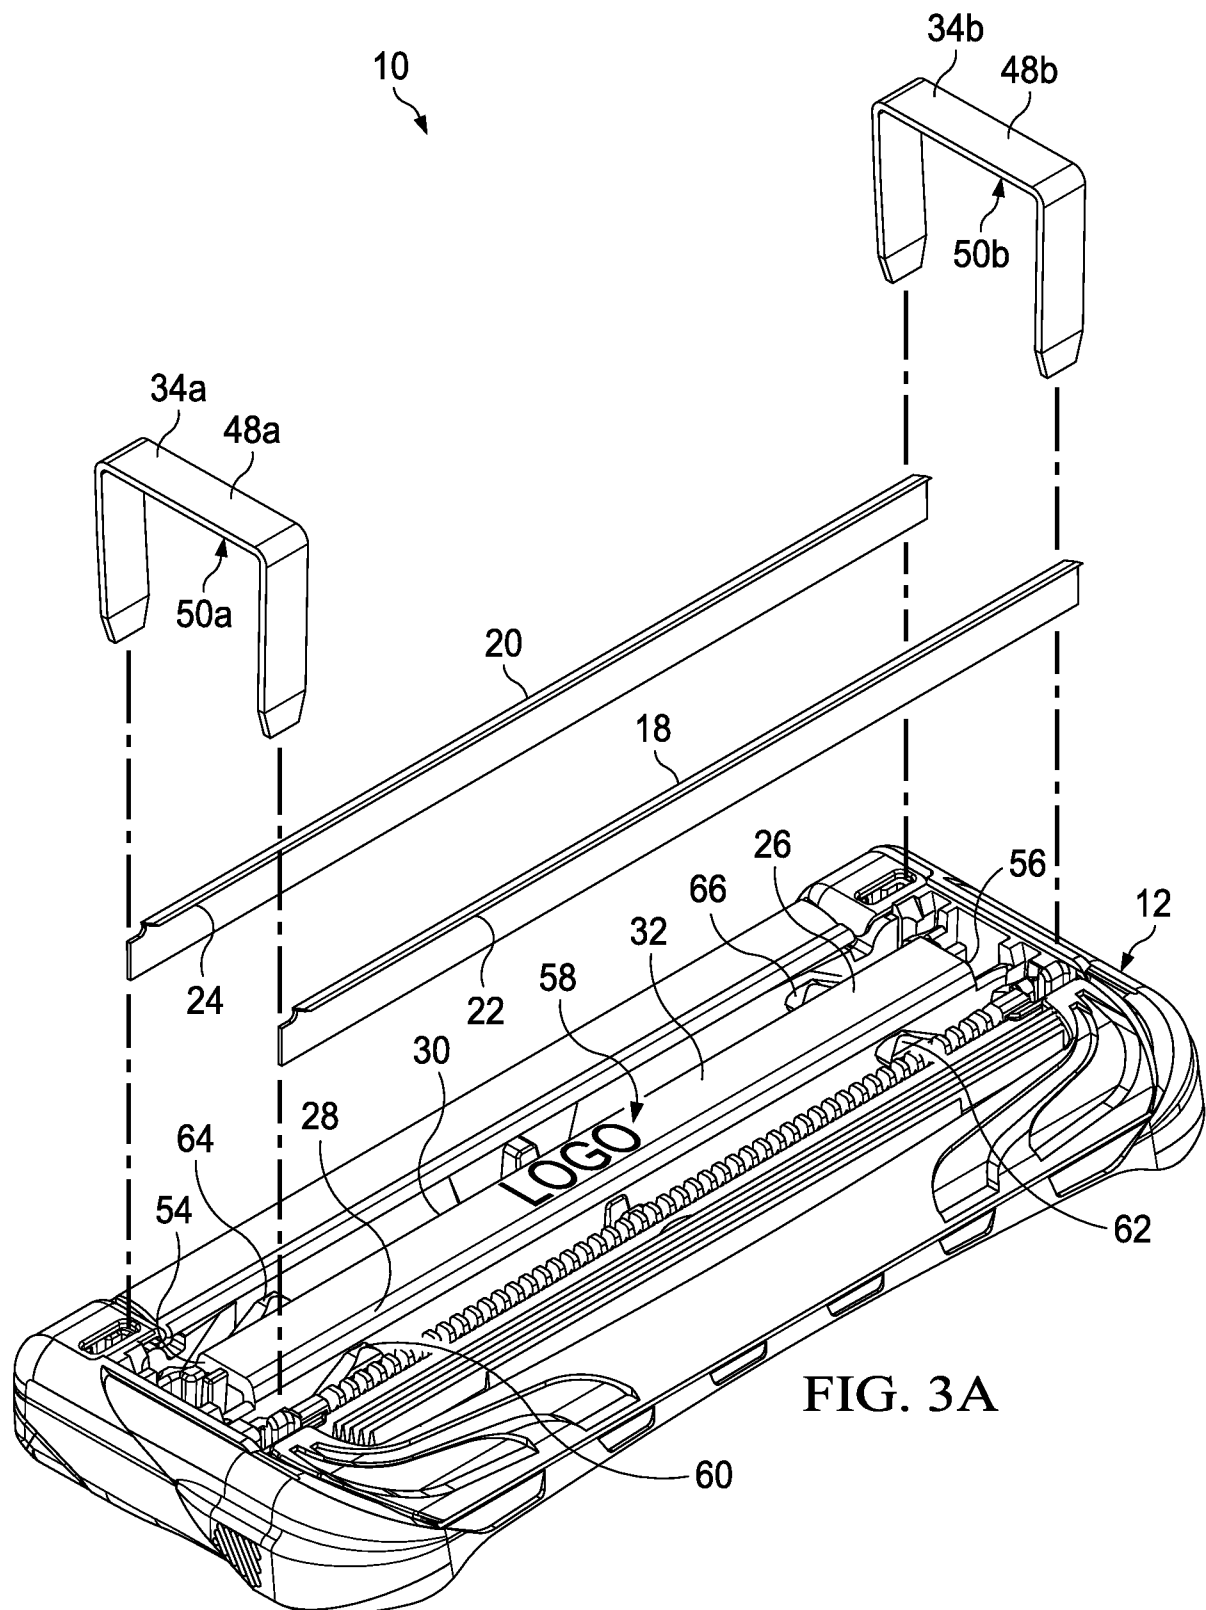

5/7

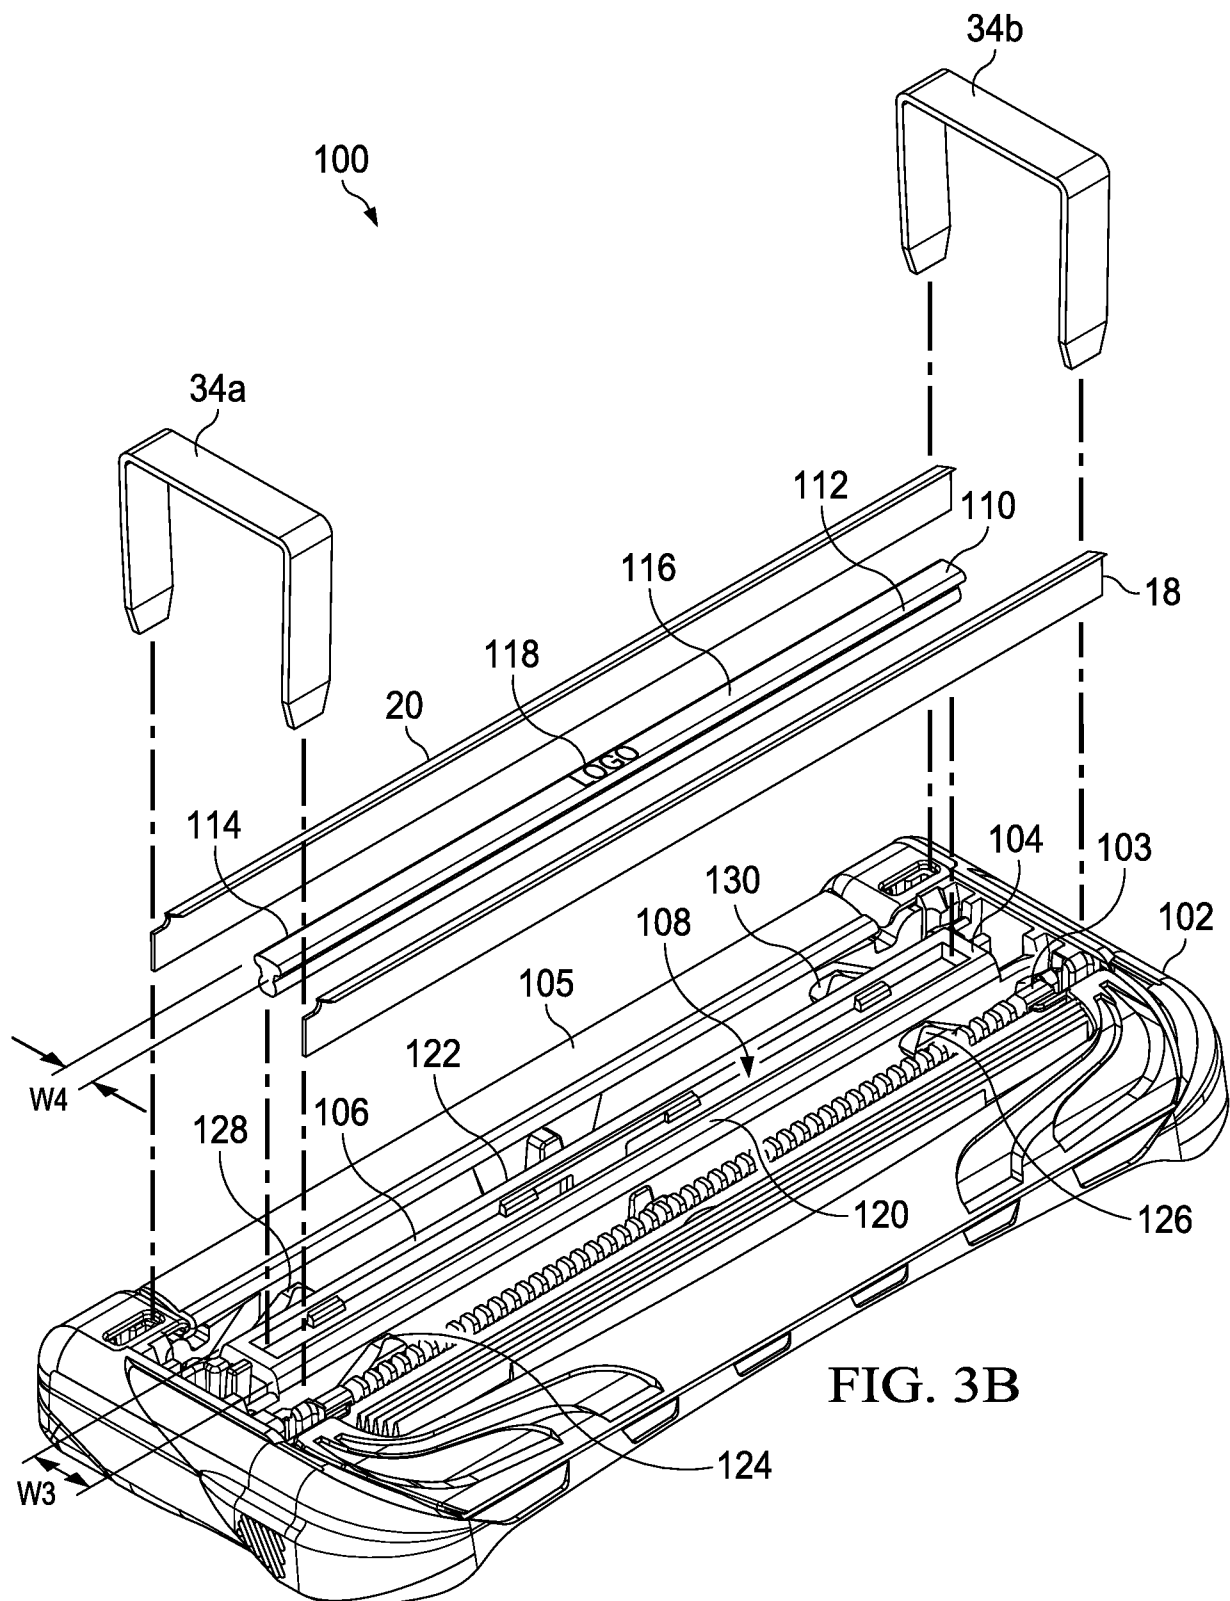

6/7

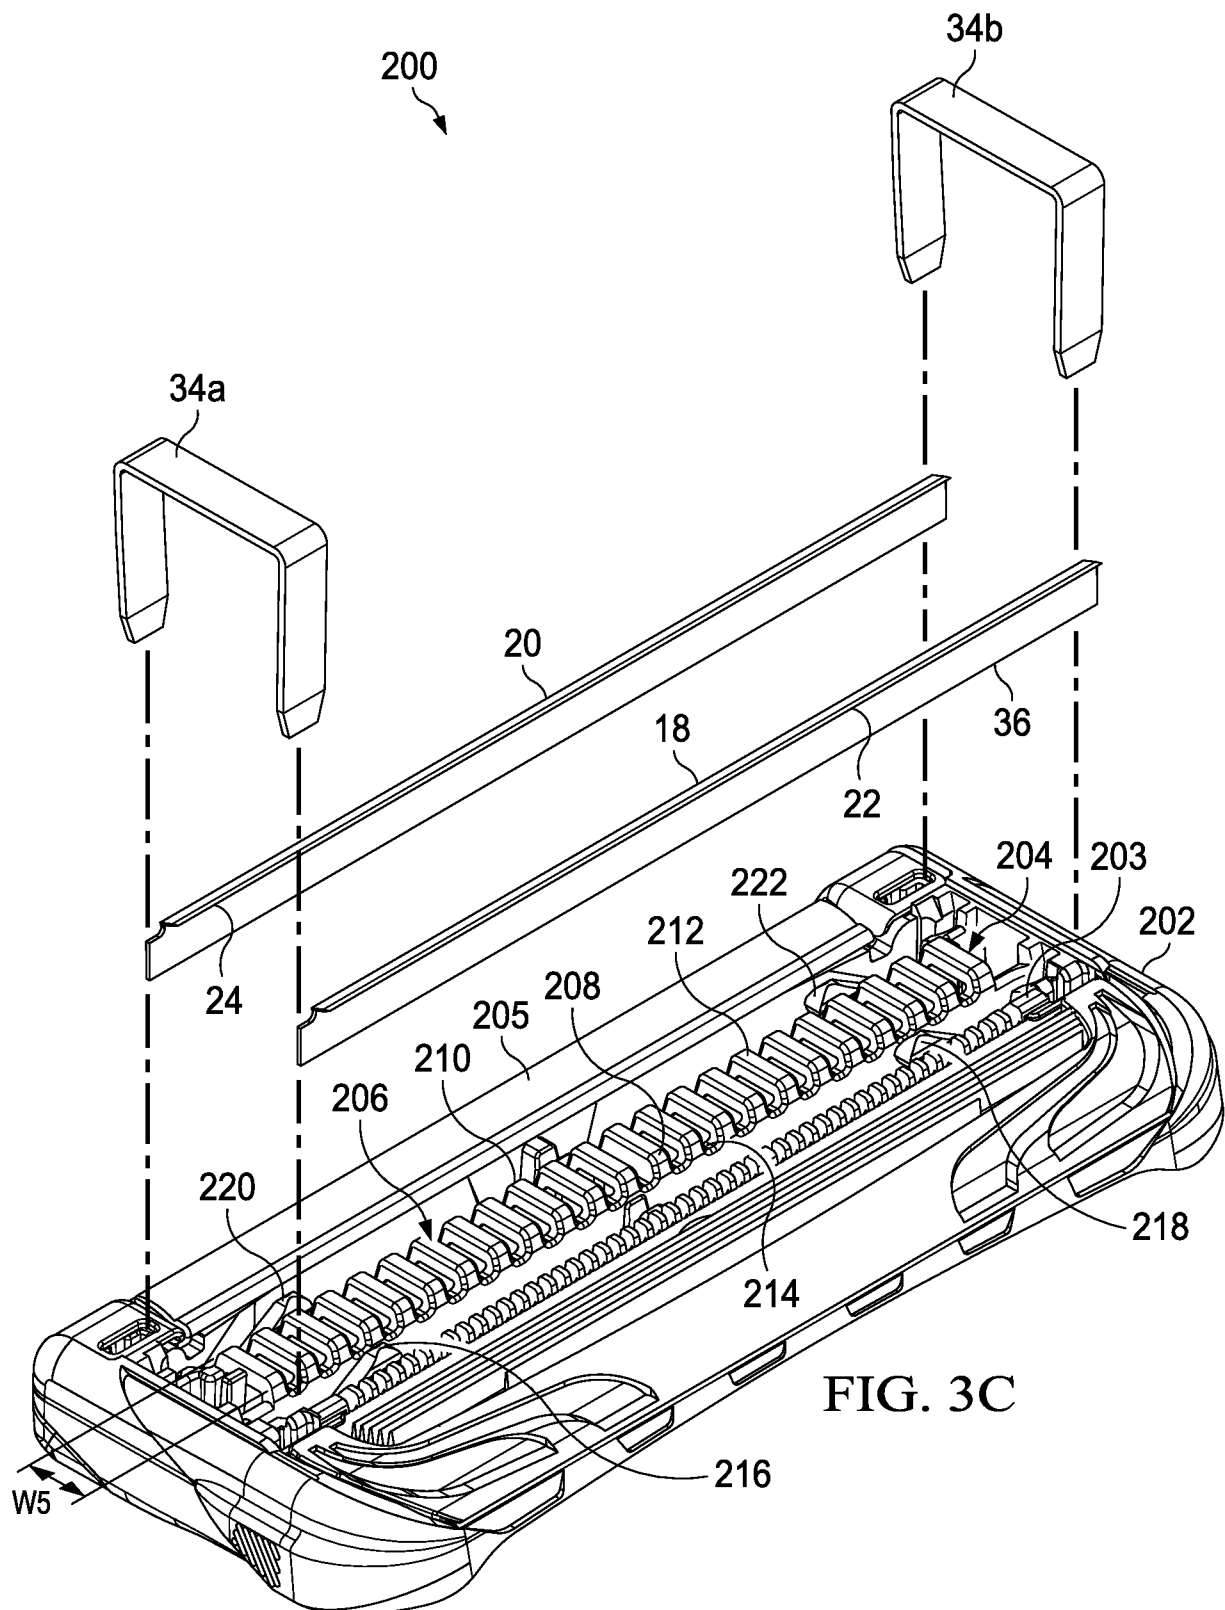


FIG. 3C

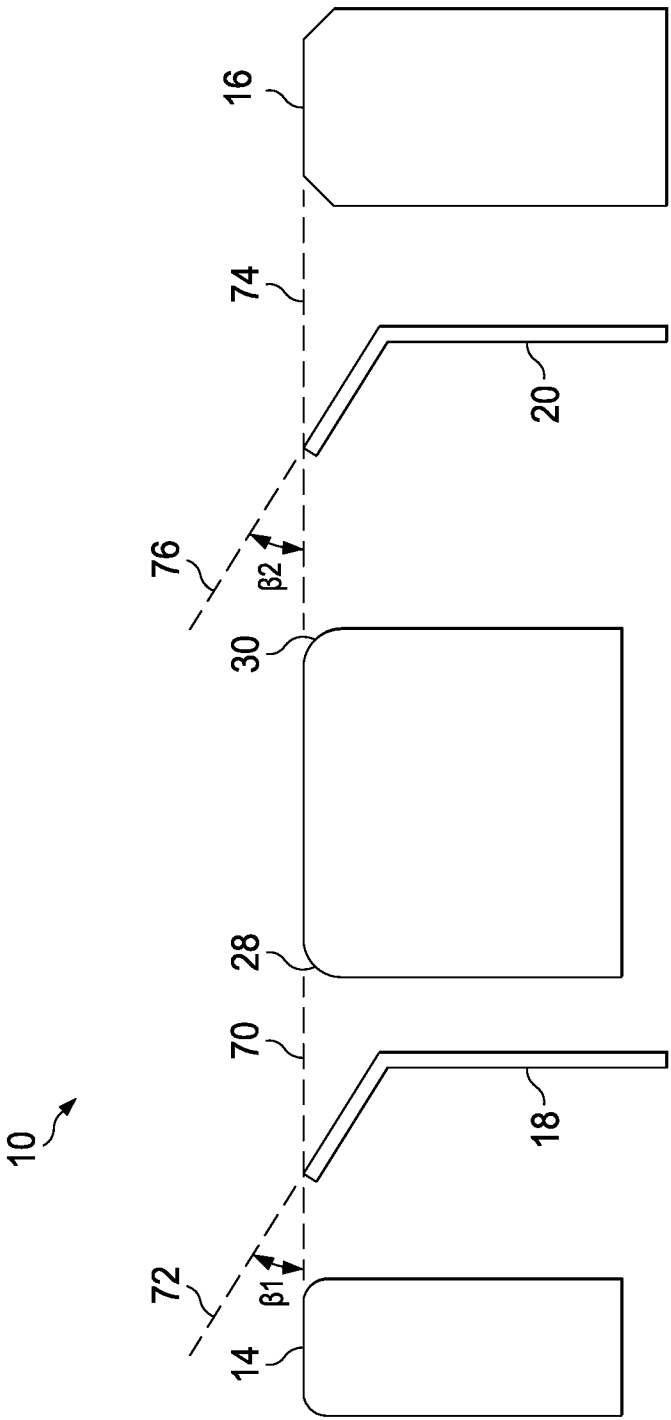


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/049244

A. CLASSIFICATION OF SUBJECT MATTER
INV. B26B21/40
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B26B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 831 731 A (ELITS MIREL [CA]) 23 May 1989 (1989-05-23)	1-3,5,6, 9
Y	column 2, lines 3-30; figures 1-3 -----	13
Y	US 2011/146079 A1 (CLARKE SEAN PETER [GB] ET AL) 23 June 2011 (2011-06-23) paragraphs [0039], [0042]; figures 1, 2, 5E, 5F -----	13
X	US 2 505 493 A (FRED HERRMANN) 25 April 1950 (1950-04-25) column 2, lines 14-31; figures 2, 3 -----	1-4,6, 10,11, 14,15
X	WO 2011/027962 A2 (DORCO CO LTD [KR]; MOON HYUN SEOK [KR]; LEE KYUNG SIK [KR]) 10 March 2011 (2011-03-10) abstract; figures 1(a), 2, 5(a) ----- -/-	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 November 2017

Date of mailing of the international search report

07/12/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rattenberger, B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/049244

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 537 648 A1 (GILLETTE CO [US]) 26 December 2012 (2012-12-26) paragraph [0035]; figures 1, 2 -----	1-15
A	WO 95/29043 A1 (GILLETTE CO [US]; WAIN KEVIN JAMES [GB]; BROWN FRANK EDWARD [GB]) 2 November 1995 (1995-11-02) page 9, paragraph 2; figure 4 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/049244

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4831731	A	23-05-1989	CA 1308247 C 06-10-1992 DE 68900594 D1 06-02-1992 EP 0336355 A1 11-10-1989 US 4831731 A 23-05-1989
US 2011146079	A1	23-06-2011	AU 2010331917 A1 12-07-2012 CA 2784116 A1 23-06-2011 CN 102655993 A 05-09-2012 EP 2512761 A1 24-10-2012 JP 5996685 B2 21-09-2016 JP 2013514145 A 25-04-2013 JP 2015107360 A 11-06-2015 RU 2012120622 A 27-01-2014 US 2011146079 A1 23-06-2011 WO 2011075505 A1 23-06-2011
US 2505493	A	25-04-1950	NONE
WO 2011027962	A2	10-03-2011	EP 2474396 A2 11-07-2012 KR 20110024234 A 09-03-2011 US 2012151772 A1 21-06-2012 WO 2011027962 A2 10-03-2011
EP 2537648	A1	26-12-2012	AU 2012273142 A1 16-01-2014 BR 112013032466 A2 31-01-2017 CA 2838085 A1 27-12-2012 CN 103619548 A 05-03-2014 EP 2537648 A1 26-12-2012 JP 5739064 B2 24-06-2015 JP 2014524790 A 25-09-2014 MX 344689 B 04-01-2017 PL 2537648 T3 31-01-2017 RU 2013156463 A 27-07-2015 US 2012317818 A1 20-12-2012 WO 2012177677 A1 27-12-2012
WO 9529043	A1	02-11-1995	AT 171410 T 15-10-1998 AU 682765 B2 16-10-1997 BR 9507321 A 30-09-1997 CA 2185900 A1 02-11-1995 CN 1146171 A 26-03-1997 CO 4410356 A1 09-01-1997 CZ 9603078 A3 16-04-1997 DE 69504963 D1 29-10-1998 DE 69504963 T2 18-02-1999 EP 0756533 A1 05-02-1997 ES 2121364 T3 16-11-1998 IL 113257 A 31-12-1999 JP 3672566 B2 20-07-2005 JP H09511939 A 02-12-1997 NZ 283401 A 27-07-1997 TW 255848 B 01-09-1995 US 5802721 A 08-09-1998 WO 9529043 A1 02-11-1995 ZA 9502945 B 20-12-1995