

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2006273621 B2**

(54) Title
Multilayered electrochemical energy storage device and method of manufacture thereof

(51) International Patent Classification(s)
H01G 9/155 (2006.01) **H01G 9/02** (2006.01)

(21) Application No: **2006273621** (22) Date of Filing: **2006.07.27**

(87) WIPO No: **WO07/013077**

(30) Priority Data

(31) Number	(32) Date	(33) Country
169932	2005.07.27	IL

(43) Publication Date: **2007.02.01**

(44) Accepted Journal Date: **2011.02.24**

(71) Applicant(s)
Cellergy Ltd.

(72) Inventor(s)
Lang, Joel

(74) Agent / Attorney
Cullens Patent and Trade Mark Attorneys, Level 32 239 George Street, Brisbane, QLD, 4000

(56) Related Art
US-B1-6 212 062
WO 031071563
US-A-5 172307

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2007 (01.02.2007)

PCT

(10) International Publication Number
WO 2007/013077 A3

(51) International Patent Classification:
H01G 9/155 (2006.01) **H01G 9/02** (2006.01)

(21) International Application Number:
PCT/IL2006/000870

(22) International Filing Date: 27 July 2006 (27.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
169932 27 July 2005 (27.07.2005) IL

(71) Applicant (for all designated States except US): **CEL-
LERGY Ltd.** [IL/IL]; Naiot Technological Center Ltd.,
New Industrial Park, P.o.box 620, 20692 Yoqneam (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LANG, Joel** [IL/IL];
30 Palmach St., Givataim (IL).

(74) Agents: **PYERNIK RUTMAN** et al.; Beit Etzion, 91
Herzl St., P.o.box 10012, 84106 Beer-sheva (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT,
LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA,
NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC,
SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
24 May 2007

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MULTILAYERED ELECTROCHEMICAL ENERGY STORAGE DEVICE AND METHOD OF MANUFACTURE
THEREOF

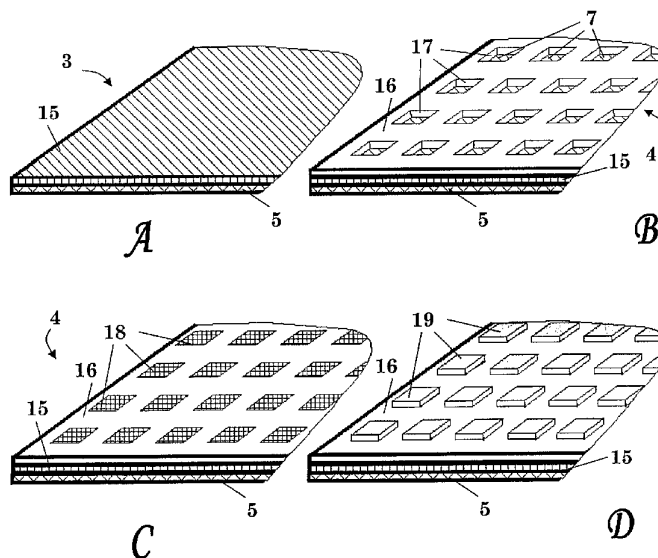

(57) Abstract: An energy storage device comprising one or more cells, wherein each cell is defined by a pair of electrodes and a separator placed therebetween, wherein each cell is bounded by two current collectors, the geometric form and size of said separator being identical to the form and size of said current collectors, and wherein in each cell, one electrode is printed on one of said two current collectors and the other electrode is printed on one face of the separator, the two electrodes being electronically insulated by means of said separator, and wherein the peripheral region of the separator, which surrounds the electrode printed thereon, is sealed.



WO 2007/013077 A3

- 1 -

**MULTILAYERED ELECTROCHEMICAL ENERGY STORAGE DEVICE AND METHOD
OF MANUFACTURE THEREOF**

Field of the Invention

The present invention relates to energy storage devices, and specifically, to a multilayered electrochemical energy storage devices and to a method for manufacturing the same. More particularly, the invention relates to a method for manufacturing multilayered electrochemical capacitors or batteries comprising printable electrodes.

Background of the Invention

A single cell energy storage device typically consists of two conducting plates (hereinafter current collectors) and an electronically insulating layer (dielectric, hereinafter separator) disposed therebetween. Electrodes are usually disposed between the current collectors and the separator and a liquid electrolyte (e.g., sulfuric acid) contained therein is used as a charge accumulation interface.

Electrochemical energy storage devices (e.g., primary or secondary batteries, electrochemical cells such as fuel cells) are generally divided into two distinct categories, according to the type of electrolyte used for preparing the electrode, which may be either an aqueous or organic electrolyte solution. The former type may generate up to 1.2 volt per cell, whereas the latter type typically provides about 2.5 to 4.0 volts per cell. The operating voltage of electrochemical energy storage devices may be increased by assembling a plurality of the individual cells described above in series, to obtain an arrangement known in the art as a bipolar cell (e.g., bipolar capacitor).

- 2 -

US 6,212,062 describe the construction of a multi layered capacitor cell wherein carbon electrodes are disposed on the current collectors of the cell.

WO 03/071563 describes an electrochemical energy storage device comprising double layered electrochemical cells and a method for manufacturing the same. In this electrochemical energy storage device, the electrode are printed on the current collectors of the cells and a separating medium is disposed therebetween, wherein the pores of said separating medium in the regions corresponding to the non-printed regions on the current collector (i.e., complementary to the region including the printed electrode) are blocked by a layer of adhesive or other polymer.

According to these methods construction of a bipolar energy storage device consisting from a stack of energy storage cells involves providing electrodes on both sides of each internal current collector in the stack, and one electrode in contact with the inner face of the two external current collectors (the current collectors placed at the top and the bottom of the stack). This construction is cumbersome due to this electrode arrangement wherein two electrodes are provided on the two sides of each internal current collector of the bipolar energy storage device. Moreover, the sealing and packaging of such cell stacks is not a simple task and the width of their multilayered structure is relatively large.

It is an object of the present invention to provide a simplified multilayered energy storage device construction wherein electrodes may be printed on one side of each current collector.

- 3 -

It is another object of the present invention to provide an improved process for the manufacture of bipolar energy storage devices based on a multi layered stack.

It is a further object of the present invention to provide a method for manufacturing a plurality of energy storage devices stacks wherein an individual energy storage device can be easily cut out by scissors or knife or other mechanical means.

Other objects and advantages of the invention will become apparent as the description proceeds.

Summary of the Invention

The terms "separator" or "separating medium" are interchangeably used herein to describe all thin porous films or membranes commonly used to electronically separate between electrodes in an electrochemical cell. It has now been found that it is possible to seal the pores of the separator in the peripheral region thereof, forming one or more non-sealed regions thereon according to a desired pattern, and then to directly print electrodes onto said one or more non-sealed regions of the separator. The resultant construct, namely, a separator having one or more electrodes printed thereon, such that each electrode is surrounded by a sealed region of the separator, may be effectively used in the preparation of multilayered structures that may serve, *inter alia*, as bi-polar electrochemical capacitors.

Accordingly, the present invention provides an energy storage device comprising one or more cells, wherein each cell is defined by a pair of electrodes and a separator placed therebetween, wherein each cell is bounded by two current collectors, the geometric form and size of said separator being

- 4 -

identical to the form and size of said current collectors, and wherein in each cell, one electrode is printed on one of said two current collectors and the other electrode is printed on one face of the separator, the two electrodes being electronically insulated by means of said separator, and wherein the peripheral region of the separator, which surrounds the electrode printed thereon, is sealed.

The term "sealed" is used to indicate that the region is non-permeable to the electrolyte contained in the electrode; the sealed region surrounding the electrode printed on the separator prevents the seepage of the electrolyte from the electrode to the circumferential region of the cell. According to one preferred embodiment, the sealed peripheral region of the separator, which surrounds the electrode printed thereon, is impregnated with an electrically non-conductive material, preferably an adhesive, which blocks the pores of the separator in said region and also allows the attachment of the separator to the current collectors.

The number of cells in the energy storage device, hereinafter sometimes designated n , is an integer equal to or greater than 1, and is preferably, in the range of 2 to 100, and more preferably, in the range of 3 to 20, and most preferably 3 to 10. When the energy storage device of the invention comprises more than one cell, said cells are electrically connected in serial in a stack structure, with adjacent cells sharing the same current collector. Accordingly, in this arrangement, the number of current collectors equals $n+1$, of which two may be referred to as external current collectors. The external current collectors may differ in composition and thickness from the internally positioned current collectors, and from one another.

- 5 -

It has now been made possible to considerably simplify the construction of an energy storage device having the arrangement described hereinabove (e.g., a bi-polar electrochemical capacitor), in view of the fact that one of the two electrodes placed in each cell may be directly printed onto the surface of the separator. Accordingly, the present invention is also directed to a method for preparing a multilayered structure, which structure comprises one or more energy storage devices, each of which containing n cells, as described above, wherein the method comprises:

providing $n+1$ current collectors and n separators, sealing the pores in the peripheral area in each of said n separators, thus forming one or more discrete non-sealed regions in each of said separators, printing electrodes onto said one or more non-sealed regions of each of said separators, printing one or more electrodes on one side of each of n current collectors selected from the $n+1$ current collectors, such that each of said n current collectors has only one face with electrode(s) deposited thereon, alternately arranging said $n+1$ current collectors and said n separators to form a multilayered structure. In this multilayered structure, the current collector having no electrode(s) deposited thereon is, most simply, externally positioned.

Most preferably, the discrete electrode regions printed on each of the n separators correspond in number, size, form and position to the electrodes printed on each of the n current collectors, such that said multilayered structure is constructed by the apposition of said electrodes.

- 6 -

Most preferably, the sealing is accomplished by applying on one side of each of said n separators an electrically non-conducting material such that said non-conducting material seals the pores of said separator in the peripheral area thereof, whereby one or more non-sealed regions are formed in said separator. As explained above, the electrodes are printed onto these non-sealed regions of the separator.

The multilayered structure obtained by the method described above is a spatial body, typically having a shape of a rectangular parallelepiped. The height of this body is determined by the number of the vertically aligned layers (the $n+1$ current collectors and the n separators). The number of the individual energy storage devices that may be isolated from the multilayered structure depends on the number of discrete electrodes distributed on the surface of the n current collectors and the corresponding number of discrete electrodes printed on the surface of the separators. Thus, a plurality of individual energy storage devices, each of which comprises n vertically aligned cells, may be conveniently isolated from the multilayered structure by scissors, cutter, knife, or other mechanical means.

Preferably, the method further comprises initially mounting each of the separators on a support, before the sealing and printing thereon, which support is detached from the separator after placing said separator in the multilayered structure.

The method may further comprise a step wherein excess electrolyte is removed from the printed electrodes, where said removal is preferably accomplished by drying the electrodes and/or absorbing said excess electrolyte therefrom by means of an absorbent placed on the electrodes. Slight pressure may be

- 7 -

applied, to facilitate the absorbance of the excess electrolyte from the printed electrodes.

The term "printing" or "printed" and the like, as used herein, refer to known printing techniques, such as, but not limited to, screen-printing, stencil printing, ink jet printing and any other form of transferring a paste-like material or ink-like material onto a substrate.

Brief Description of the Drawings

In the drawings:

- Figs. 1A-1C schematically illustrates the preparations of the inner and the top (external) current collectors of the bipolar energy storage device stack of the invention;
- Figs. 2A-2D schematically illustrates the preparations of the separators of the bipolar energy storage device of the invention;
- Figs. 3A-3B are flowcharts illustrating the process of preparation of the current collectors and the separators, and the stacking of the same in a bipolar construction;
- Fig. 4 schematically illustrates construction of a bipolar energy storage device comprising n cells;
- Fig. 5 schematically illustrates a structure comprising a plurality of energy storage devices each of which comprising 5 electrochemical cells; and
- Figs. 6A-6C shows a single cell capacitor product and a multiple parallel and serial cell capacitor products.

Detailed Description of Preferred Embodiments

The present invention is directed to a multilayered energy storage device and to a method of its manufacture. More particularly, the present invention is directed to a bipolar capacitor constructed from a stack of $n+1$ current collectors

- 8 -

and n separators disposed therebetween, wherein an electrode is attached to n current collectors and n separators (wherein n is an integer, $n \geq 1$) of the stack.

Current collectors to be used according to the present invention are made of a conductive material that is chemically inert to the aqueous electrolyte contained in the electrode. The current collector may be provided in the form of a metal foil, such as aluminum foil, plated metal or metal coated with a protective oxide. Alternatively, the current collector is a polymeric or a co-polymeric sheet, such as polyethylene or polytetrafluoroethane (Teflon), rubber or PVC (polyvinylchloride) loaded with conductive particles such as carbon black, graphite, metallic or plated metallic particles. In another embodiment, the current collector has a multilayer structure comprising alternating layers of suitable polymers, metal foils and carbon or graphite, or similar combinations. The thickness of the current collector is preferably in the range of $10\mu\text{m}$ to $150\mu\text{m}$.

The external current collectors (uppermost and bottommost current collectors in the multilayered structure) are preferably made of a metallic foil covered by at least one corrosion resistant layer (e.g., carbon and/or suitable conductive polymeric composition). The surface of the metallic foil is preferably roughened (e.g., by metal deposition, sputtering, electronic deposition, or mechanical roughening or chemical etching). The term "rough surface" is used throughout the specification to indicate roughness that is due to small irregularities of the surface, which are intended to maximize the contact between the metallic foil and the corrosion resistant layers applied thereon. The internal current collectors may be either metallic, or alternatively be made of

- 9 -

polymeric sheets or metal sheets coated with polymers, as described above.

The electrodes may comprise carbon, graphite, carbon nanoparticles, fullerene, hollow graphite tubes, metallic particles, particles of metal oxides and/or metal salts, electrically conductive polymers, quinones and their derivatives, ketone compounds, multivalent oxidation compounds, clays, intercalation compounds, ceramic oxides, and mixtures thereof. The electrode may contain aqueous electrolyte (acidic, alkaline, or neutral), and binders (organic or inorganic), and other additives. The electrode may be in the form of a foil, a cloth or a dense powdered structure.

Fig. 3A is a flowchart illustrating the preliminary steps of preparing the current collectors and the separators for the bipolar capacitor of the invention, as also schematically illustrated in Figs. 1A-1C and 2A-2D. The process starts in step 30 wherein n separators 15 are mounted on n liners 5 (Fig. 2A). The separators 15 may be provided by a permeable membrane (e.g., polyethylene, Polytetrafluoroethylene, olefins, polyvinylidene fluoride (commercially available as Kynar®); most preferably, the separators are provided by a porous film. For example, according to one preferred embodiment the mounted separators 3 are prepared from a 25 micron thick teflon based material and mounted on a 150 micron thick silicone liners by means of conventional lamination techniques. The mounting of the separator medium 15 on the liner is required in order to prevent the occurrence of folds and/or collapse of the separator during the further steps of the process.

Next, in step 31, the mounted separators 3 are coated by a layer of adhesive 16, such that separator 15 is sandwiched

- 10 -

between the liner **5** and the adhesive layer **16**. Adhesive layer **16** is preferably applied via a template (not shown) for providing complete coverage of the circumferential area of the mounted separator **3** by adhesive and for leaving adhesive-free regions **17** through which separator regions **7** may be accessed (Fig. 2B). In this way the pores in those regions of the separator medium **15** to which adhesive layer **16** is applied are blocked by the adhesive.

This step may be carried out utilizing printing techniques, as described in WO 03/071563. The adhesive used for coating separator **15** may be a type of solvent based pressure sensitive adhesive, UV based pressure sensitive adhesive, UV based heat activated adhesive, solvent based heat activated pressure sensitive adhesive, molten pressure sensitive adhesive, molten heat activated adhesive, or any other polymer with adhesive characteristics. For example, the adhesive may be C-70 manufactured by Coates.

According to one preferred embodiment of the invention a 15-30 micron thick layer of adhesive is applied to an 120×105 mm mounted separator **3** via a suitable template by means of screen-printing for providing 7 rows and 8 columns of (e.g., rectangular) adhesive-free regions **17** of a bout 6-100 mm². The coated separator **4** is then dried of the adhesive solvent. The drying may be carried out, for example, by passing it through a common heat drying tunnel, or any other drying process, such as a static or a convection drying processes, at room temperature or at elevated temperature. Step **31** may be repeated if additional adhesive layers are needed in order to achieve a thicker layer of adhesive **16** on the coated separator **4**.

- 11 -

In step **32** a water based polymer **18** (Fig. 2C) is applied to the adhesive-free regions **17** of the coated separator **4**. The water based polymer **18** provides improved shelf life to the final product. The water based polymer **18** may be a single blend or multi-blend of water based polymers, such as PVA (polyvinyl alcohol), PAA (polyacrylic acid), PEO (polyethylene oxide), PEI (polyethylene imide), imidazole, or other water based polymer or copolymer. The vehicle used to carry the water soluble polymer may further include organic or inorganic additives, such as surfactants and thickeners. The solution used in this step may be water based or a composition of water and organic solution or even organic solutions such as ethanol, isopropanol or a combination thereof. The water based polymer **18** may be applied by means of screen-printing. Preferably, a layer of 10-30 micron thick of water based polymer **18** is printed into the adhesive-free regions **17**, thereby filling the pores of the accessible separator regions **7**. If needed, the applied water based polymer **18** is dried, for example, by passing it through a common heat drying tunnel or any other drying process, such as a static or a convection drying processes, at room temperature or at elevated temperature. This step (**32**) may be repeated, if needed, in order to provide additional polymer composition **18** in the pores of the accessible separator regions **7**.

Next, or concurrently to steps **30-32**, in step **33** the surface **9** of one of the sides of each current collector **10** is coated by a layer of adhesive **11** (Figs. 1A and 1B). Adhesive layer **11** is preferably applied via a template (not shown) for providing complete coverage of the circumferential area of the current collector **10** by adhesive and for leaving adhesive-free regions **12** through which current collector regions **2** may be accessed (Fig. 1B). The location and area of the adhesive-free regions **12** of the coated current collector **6** substantially corresponds

- 12 -

to the location and area of the adhesive-free regions **17** of the coated separator **4**.

Similarly, this step may be carried out utilizing common printing techniques. The adhesive used for coating current collector **10** may be a type of solvent based pressure sensitive adhesive, UV based pressure sensitive adhesive, UV based heat activated adhesive, solvent based heat activated pressure sensitive adhesive, molten pressure sensitive adhesive, molten heat activated adhesive, or any other polymer with adhesive characteristics. For example, the adhesive may be C-70 by coates.

The separator mediums **15** and the current collectors **10** are substantially of the same spatial dimensions.

For example, in one preferred embodiment of the invention the external current collectors are manufactured from a 4-100 micron metallic foil.

Each of the external current collectors may be manufactured from a different material, and the width of one, or both, external current collector(s) may be thicker than the width of the internal current collectors. Alternatively or additionally, the inner side (i.e., the side facing a separator medium) of at least one of the external current collector, manufactured from any suitable electrically conductive material such as discussed above, may be covered with one or more materials for rendering its surface more resistant to the seepage of the electrolyte. For example, the inner side of the external current collector(s) may be covered by a non-metallic yet conductive polymer material (e.g., Baytron®) or titanium oxide.

- 13 -

The internal current collectors (e.g., 45-2 in Fig. 4) may be manufactured from carbon and polymer plates, or from a suitable corrosion durable metallic foil. Most preferably the external current collectors are in the form of a metallic foil of about 6-20 microns thickness, made of copper, nickel or nickel-coated copper (which are commercially available), covered by one or more corrosion resistant layers (made of carbon and/or suitable polymeric compositions), the thickness of said layer(s) being in the range of 30-150 micron; preferably a layer of about 100 micron thickness is applied onto said foil. The corrosion resistant layer may be attached to the metallic foil via a corrosion resistant electrically conducting adhesive layer (e.g., 5-40 micron). The surface of the metallic foil is preferably roughened in order to maximize the contact between the corrosion resistant layer and the surface of the metallic foil. The roughening of the metallic foil surface may be obtained for example by metal deposition, sputtering, electronic deposition, or mechanical roughening or chemical or etching.

According to one preferred embodiment of the invention a 15-30 microns thick layer of adhesive is applied to an ~10.5×15 mm current collector 10 with thickness of about 30-70 micron, via a suitable template by means of screen-printing for providing 12 rows and 12 columns of (e.g., rectangular) adhesive-free regions 12 of a bout 10×10 mm. The coated current collector 6 is then dried of the adhesive solvent. The drying may be carried out, for example, by passing it through a common heat drying tunnel, or any other drying process, such as a static or a convection drying process, at room temperature or at elevated temperature. This step (33) may be repeated if additional adhesive layers are needed in order to achieve a thicker layer of adhesive 11 on the coated current collector 6.

- 14 -

Fig. 3B is a flowchart demonstrating the steps of constructing an energy storage device according to the invention, as also demonstrated in Fig. 4. The first layer of the stack is placed in step **34**, wherein the bottom layer of the stack **45-1** (Fig. 4), an external current collector, is placed such that its coated surface **9** is directed upwardly. In step **35** electrodes **19** (Fig. 2D) are applied to the adhesive-free regions **17** of the coated separator **4**. Electrodes **19** may be prepared utilizing conventional suitable electrode compositions, for example the carbon based compositions described in WO 03/071563 (which contain an aqueous electrolyte) and they are preferably applied via a suitable mesh No. 40-200 (e.g., such as, but not limited to, stainless steel mesh, coated stainless steel mesh, or polyester mesh) utilizing screen-printing techniques, or other techniques, such as stencil techniques. Such a mesh may be developed using suitable photo emulsion or other masking techniques, using as known by skilled in the art.

Preparation of a separator layer **46** is completed after applying electrodes **19** to the coated separator **4**. In step **36** blotting, or other drying process, is (optionally) performed, wherein the electrodes are compressed and excess electrolyte is absorbed by an absorbent material. For example, a blotting material (not shown) is placed above electrodes **19** and a pressure is applied by a blotting method in order to remove the excess electrolyte which is absorbed in the blotting material. The blotting material is then removed from electrodes **19** and discarded. In step **37** the separator (e.g., separator **46-1** of the first cell **48-1**) is placed on the stack such that the side containing electrodes **19** covers the upper side of the previously placed current collector (e.g., **45-1**). The separator **46** is then attached to the current collector **45**, for example, by welding them together at elevated temperature and pressure, at partial

- 15 -

vacuum, or full vacuum. Welding may be performed via heat welding of the layers or impulse heat welding or other welding techniques. After attaching the separator **46** to the current collector **45** the liner **5** is removed from the upper side of the separator.

If it is determined in step **38** that the last separator layer (**46-n**) was placed in the stack in the previous step (**37**), then the process is finalized by carrying out steps **42-44**. In step **42** electrodes **13** (Fig. 1C) are applied to the adhesive-free regions **12** of the coated current collector **6**. Electrodes **13** preferably comprise the same ingredients as in electrodes **19**, and they are preferably applied via a suitable mesh as in step **35**. Preparation of the topmost (external) current collector **45-(n+1)** is completed after performing the (optional) blotting (or drying) step **43**, wherein excess electrolyte is absorbed under pressure into a blotting material (not shown), as in step **36** above. Finally, in step **44**, the topmost current collector **45-(n+1)** is placed on the last separator layer **46-n** in the stack, such that the side of the topmost current collector **45-(n+1)** containing the electrodes **13** covers the upper side of the previously placed separator layer **46-n**.

The topmost current collector **45-(n+1)** is then attached to the previously placed separator layer **46-n**, for example, by welding them together at elevated temperature and pressure, at partial vacuum, or full vacuum. Welding may be performed via heat welding of the layers or impulse heat welding or other welding techniques.

If it is determined in step **38** that additional cell layers should be added to the stack an internal current collector is prepared and placed in steps **39-41** and a new cell is then added

- 16 -

by transferring the control to step 35. Preparation of the internal current collector (e.g., 45-2) includes applying electrodes 13 (step 39) to the adhesive-free regions 12 of a coated current collector 6, removing excess electrolyte in the (optional) blotting or drying step 40, and in step 41 connecting the internal current collector to the previously placed separator (e.g., 46-1) such that the side of the current collector containing the electrodes 13 covers the upper side of the previously placed separator layer. The internal current collector is then attached to the previously placed separator layer, for example, by welding them together at elevated temperature and pressure, at partial vacuum, or full vacuum. Welding may be performed via heat welding of the layers or impulse heat welding or other welding techniques.

Fig. 5 shows a multilayer construction of a stack 55 comprising numerous energy storage devices 50. In this example each energy storage device 50 is comprised of 5 cells ($n = 5$), 48-1, 48-2,..., 48-5. The width w of such a stack 55 when using 10-30 micron thick separator mediums 15 coated with a layer of glue of about 50-90 microns, and a 40-70 microns thick current collectors, coated with a layer of glue of about 5-40 micron, is about 1-1.2 mm. As exemplified above, this multilayer construction comprises 5 separators and 4 internal current collectors, each of which comprises electrodes, and 2 external current collectors, wherein only the topmost external current collector comprises electrodes. The energy storage devices 50 may be easily cut out of stack 55 by a scissors or a knife or other instrument.

It is of course possible to construct a similar multilayer stack wherein electrodes are also disposed on the external current collector at the bottom of the stack. In this case the

- 17 -

separator placed on top of the external current collector at the bottom of the stack may be prepared and placed without carrying step **35**, namely without applying electrodes to its adhesive-free regions.

Fig. 6A shows a single cell capacitor product **60**. Capacitor **60** comprises a multilayered energy storage device **50** and two wire or flat cable leads **61** which are attached to the external current collectors of the multilayered energy storage device **50**, preferably by welding or by utilizing conductive epoxy glue. Fig. 6B shows and an m -cell capacitor product **62**, wherein a stack of m multilayered energy storage devices, **50-1**, **50-2**, **50-3**,... **50- m** , are stacked in series to form a parallel capacitor product **62**. In the parallel capacitor product **62** lead wires **61** are attached to the (bottom) external current collector of the multilayered energy storage device **50-1** and to the (top) external current collector of the multilayered energy storage device **50- m** .

Fig. 6C shows and an m -cell capacitor product **66**, wherein m multilayered energy storage devices, **50-1**, **50-2**, **50-3**,... **50- m** , are connected in series to form a serial capacitor product **66**. As shown, $m-1$ conducting mediums **65** (e.g., metallic foil) serially connects multilayered energy storage devices, **50-1**, **50-2**, **50-3**,... **50- m** , and lead wires **61** to current collectors of multilayered energy storage devices **50-1** and **50- m** .

All of the abovementioned parameters are given by way of example only, and may be changed in accordance with the differing requirements of the various embodiments of the present invention. Thus, the abovementioned parameters should not be construed as limiting the scope of the present invention in any way.

- 18 -

The above examples and description have of course been provided only for the purpose of illustration, and are not intended to limit the invention in any way. As will be appreciated by the skilled person, the invention can be carried out in a great variety of ways, employing more than one technique from those described above, all without exceeding the scope of the invention.

- 19 -

CLAIMS

- 1) An energy storage device comprising one or more cells, wherein each cell is defined by a pair of electrodes and a separator placed therebetween, wherein each cell is bounded by two current collectors, the geometric form and size of said separator being identical to the form and size of said current collectors, and wherein in each cell, one electrode is printed on one of said two current collectors and the other electrode is printed on one face of the separator, the two electrodes being electronically insulated by means of said separator, and wherein the peripheral region of the separator, which surrounds the electrode printed thereon, is sealed.
- 2) An energy storage device according to claim 1, wherein the sealed peripheral region of the separator, which surrounds the electrode printed thereon, is impregnated with an electrically non-conductive adhesive.
- 3) An energy storage device according to claim 1, which comprises a plurality of cells that are electrically connected in serial in a stack structure located between two external current collectors.
- 4) An energy storage device according to claim 3, which is a bi-polar electrochemical capacitor.
- 5) An energy storage device according to claim 3, wherein the external current collectors are made of a metallic foil optionally covered by one or more corrosion resistant layers.

- 20 -

6) An energy storage device according to claim 5, wherein one or more of the corrosion resistant layers comprises carbon and/or conductive polymers.

7) An energy storage device according to claim 5, wherein the surface of the metallic foil is a rough surface having increased contact surface area.

8) An energy storage device according to claim 3, wherein the internal current collectors are made of conductive polymeric sheets, metal sheets or metal sheets coated with a conductive polymer.

9) A method for preparing a multilayered structure, which structure contains one or more energy storage devices according to claim 1, said method comprising:

providing $n+1$ current collectors and n separators, sealing the pores in the peripheral area in each of said n separators, thus forming one or more discrete non-sealed regions in each of said separators, printing electrodes onto said one or more non-sealed regions of each of said separators, printing one or more electrodes on one side of each of n current collectors selected from the $n+1$ current collectors, such that each of said n current collectors has only one face with electrode(s) deposited thereon, alternately arranging said $n+1$ current collectors and said n separators to form a multilayered structure.

10) A method according to claim 9, wherein the discrete electrode regions printed on each of the n separators correspond in number, size, form and position to the electrodes printed on each of the n current collectors.

- 21 -





11) A method according to claim 9, wherein the sealing comprises applying on one side of each of said n separators an electrically non-conducting material such that said non-conducting material seals the pores of said separator in the peripheral area thereof, whereby one or more discrete non-sealed regions are formed in said separator.

12) A method according to claim 9, which further comprises initially mounting each of the separators on a support, before the sealing and printing thereon, which support is detached from the separator after placing said separator in the multilayered structure.


13) A method according to claim 9, which further comprises removing excess electrolyte from the printed electrodes.

14) A method according to claim 13, wherein said removing comprises drying the electrodes, and/or absorbing the electrolyte therefrom by means of an absorbent placed on said electrodes, optionally under pressure.

15) A separator suitable for use in electrochemical cells, which separator comprises a thin porous film or a membrane having one or more electrodes printed thereon, wherein each electrode is surrounded by a sealed region of the separator, the pores in said sealed region being impregnated with an electrically non-conductive adhesive.

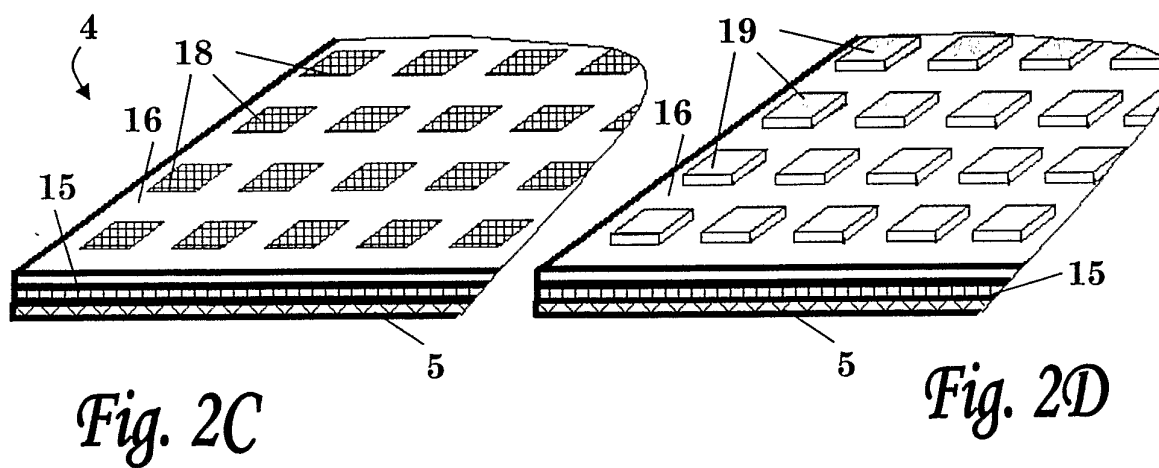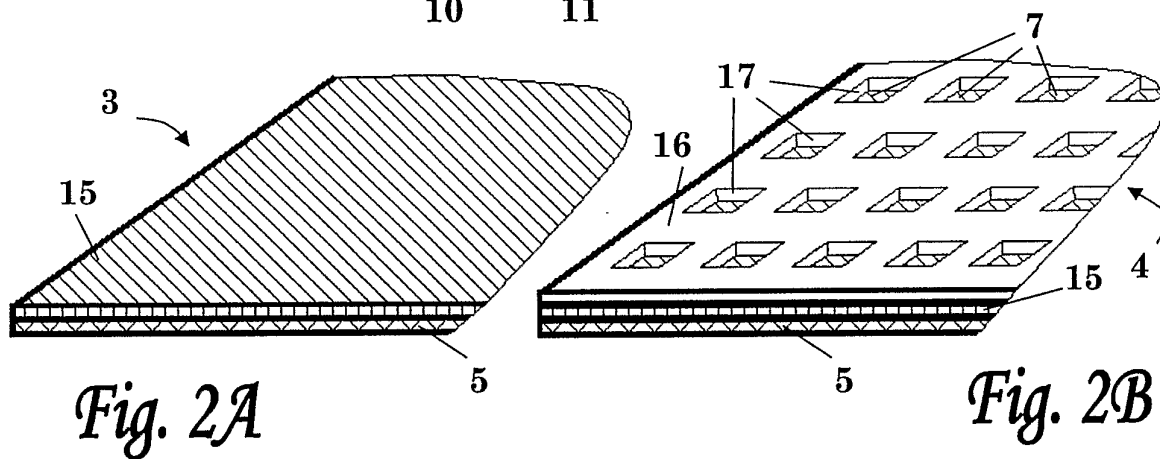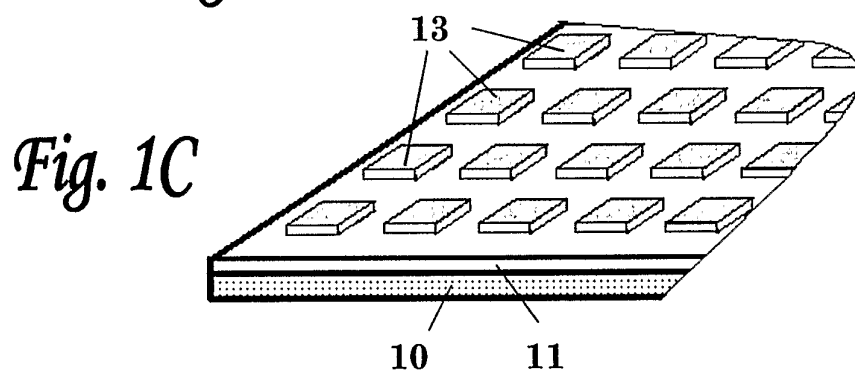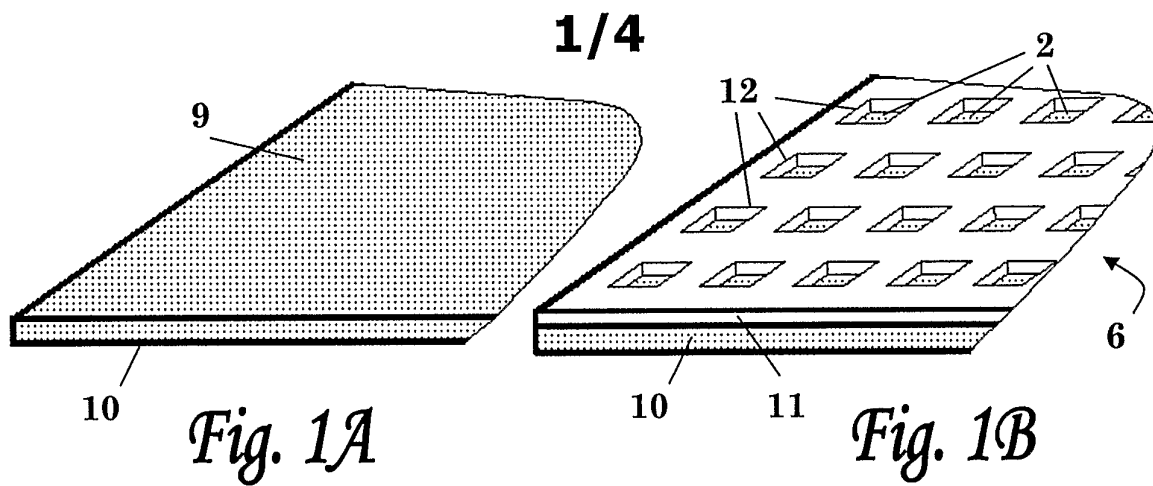

2/4

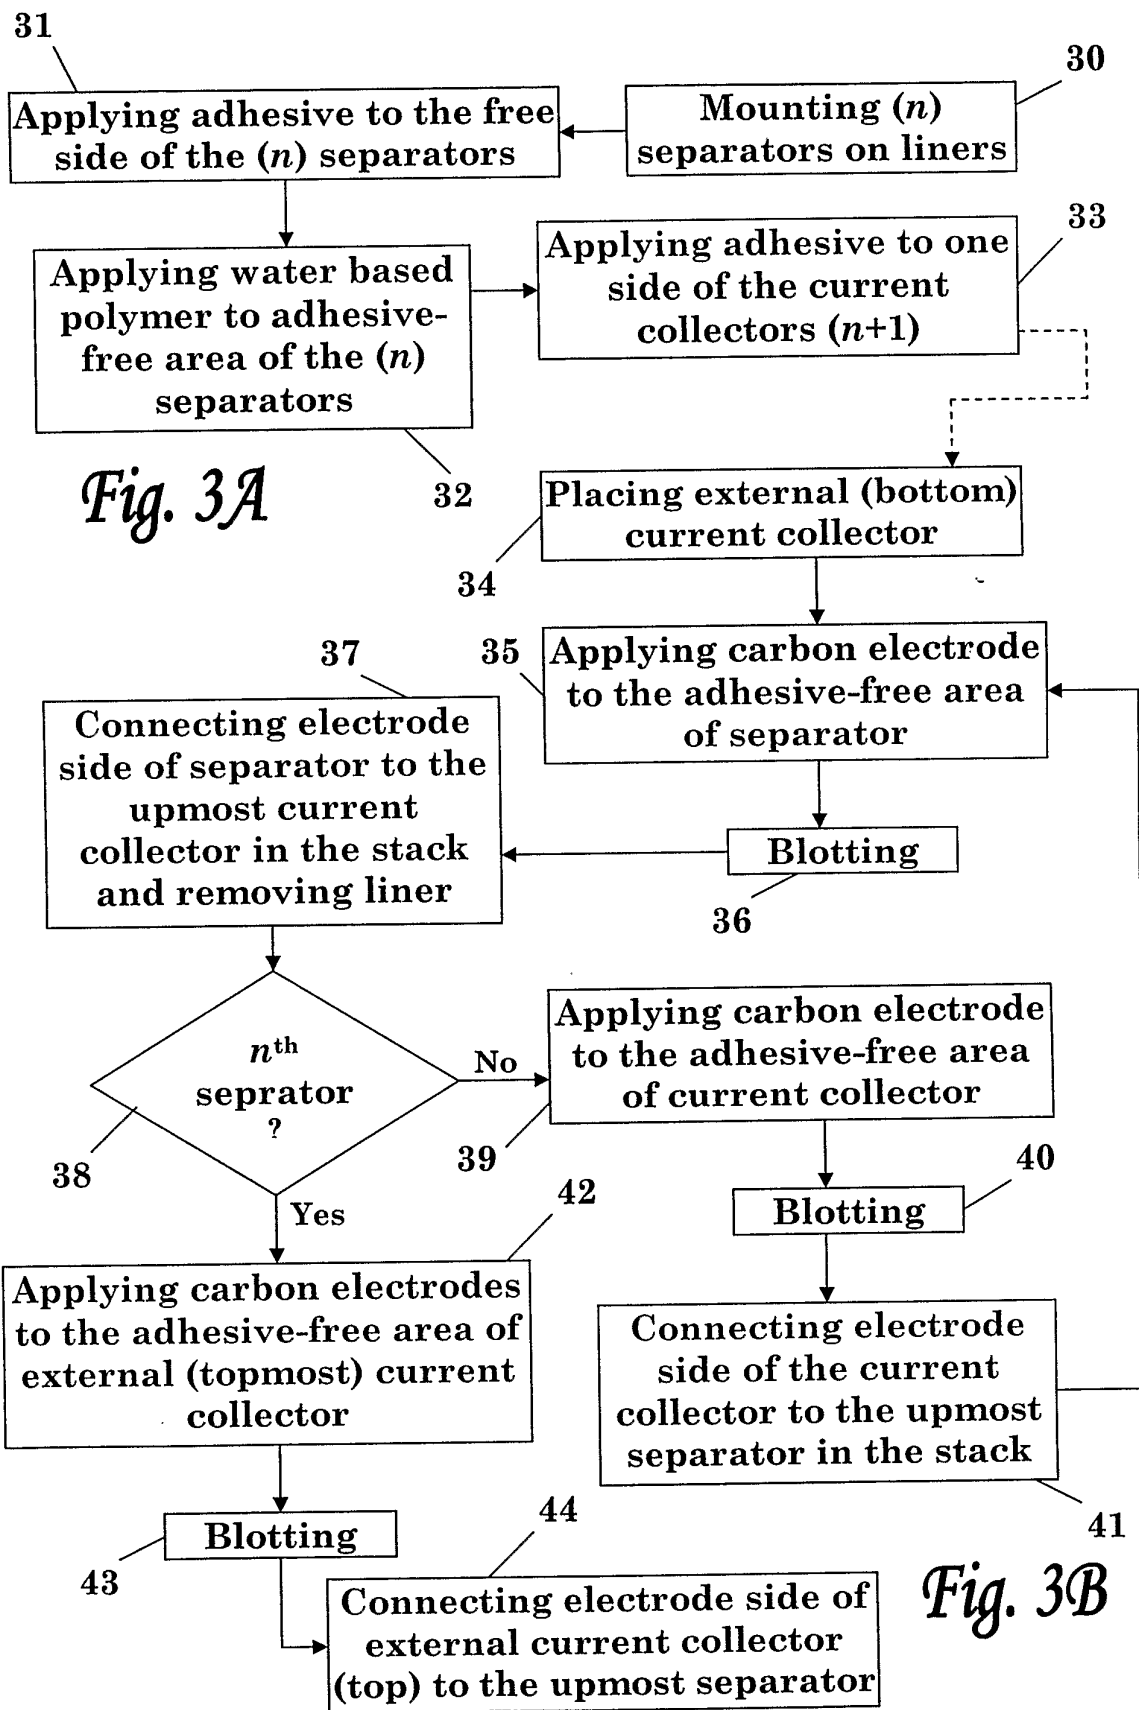

3/4

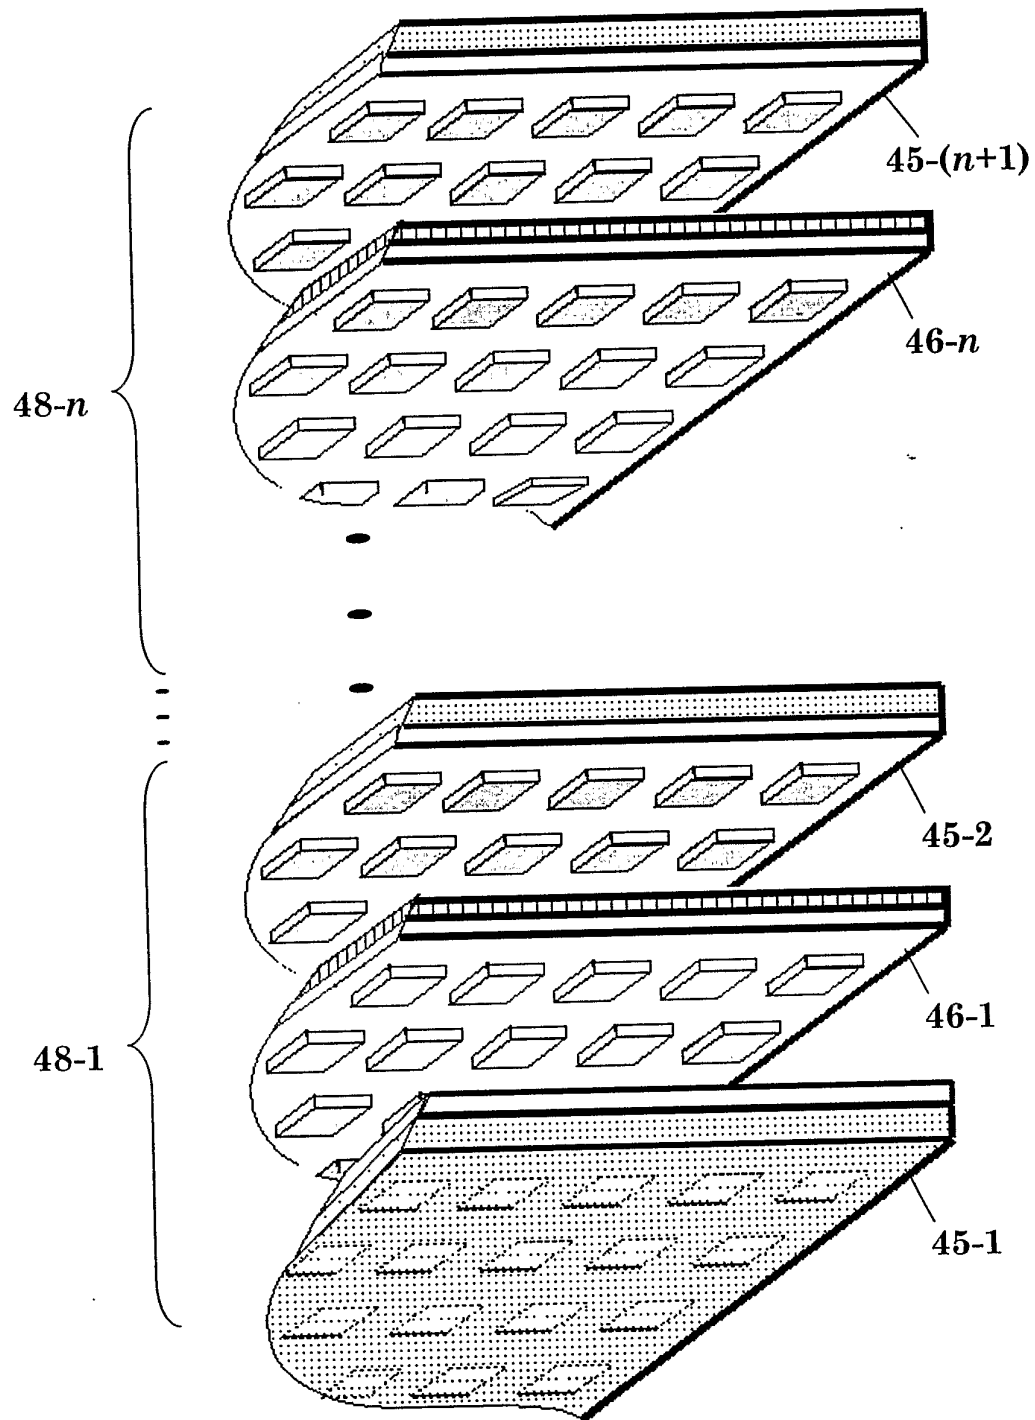


Fig. 4

4/4

