



(86) Date de dépôt PCT/PCT Filing Date: 1994/10/05

(87) Date publication PCT/PCT Publication Date: 1995/12/07

(45) Date de délivrance/Issue Date: 2005/12/13

(85) Entrée phase nationale/National Entry: 1996/11/29

(86) N° demande PCT/PCT Application No.: IT 1994/000164

(87) N° publication PCT/PCT Publication No.: 1995/032912

(30) Priorité/Priority: 1994/05/31 (PR94U000008) IT

(51) Cl.Int.⁷/Int.Cl.⁷ B66B 13/06


(72) Inventeur/Inventor:
BONDAVALLI, ROLANDO, IT

(73) Propriétaire/Owner:
INVENTIO AG, CH

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : ELEMENT DE SUPPORT ET DE RACCORDEMENT PLURIFONCTIONNEL DANS UN MECANISME DE
COMMANDE DE PORTE AUTOMATIQUE POUR ASCENSEURS ET MONTE-CHARGES

(54) Title: A MULTIFUNCTION CONNECTION AND SUPPORT ELEMENT IN A MECHANISM FOR AUTOMATIC DOOR
MOTION FOR LIFTS AND ELEVATORS

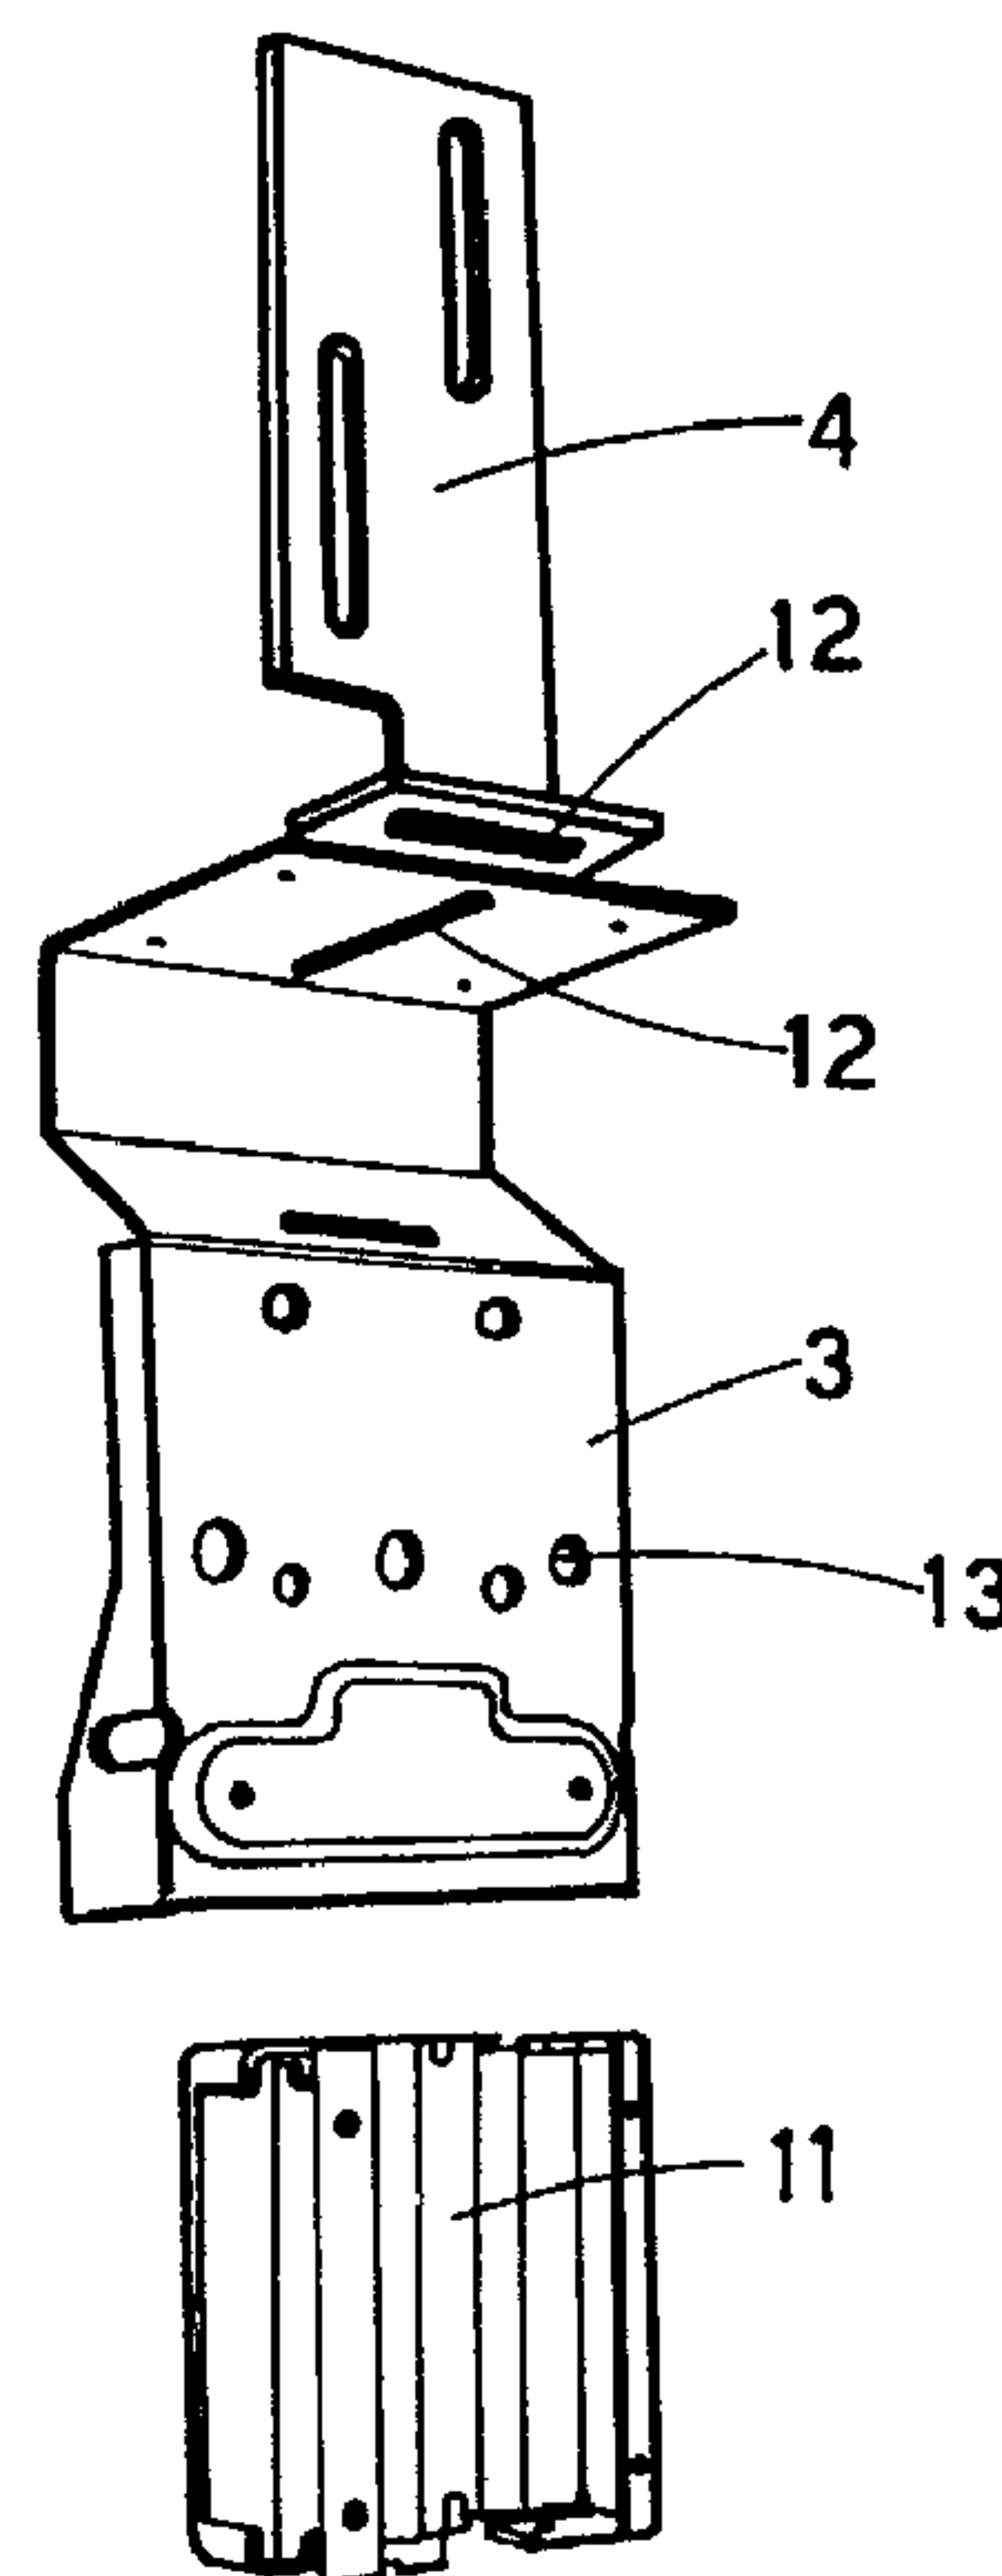

(57) **Abrégé/Abstract:**

The invention relates to a multifunction connection and support element in a mechanism for automatic door motion for lifts and elevators. The element consists, for each lateral jamb, in a connection and support bracket (3) which connects and unites each jamb (1) with the architrave (2) and the means for anchoring (4) to a fixed wall. The means for anchoring (4), preferably a further bracket, also functions as a guide for sliding carriages (8) of a door (7) motion mechanism. The bracket (4) performs all functions which in the past were carried out by several distinct connection and support elements.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :
B66B 13/30

A1

(11) International Publication Number: WO 95/32912

(43) International Publication Date: 7 December 1995 (07.12.95)

(21) International Application Number: PCT/IT94/00164

(22) International Filing Date: 5 October 1994 (05.10.94)

(30) Priority Data:
PR94U000008 31 May 1994 (31.05.94) IT

(71) Applicant (for all designated States except US): SELCOM
S.p.A. [IT/IT]; Via Macedonio Melloni, 7, I-43052 Vedole
- Colomo (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BONDAVALLI, Rolando
[IT/IT]; Via Bassa per Boretto, 18, I-42041 Brescello (IT).

(74) Agent: GOTRA, Stefano; Bugnion S.p.A, Via Garibaldi, 22,
I-43100 Parma (IT).

(81) Designated States: AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), ES, FI, FI (Utility model), GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).

Published


With international search report.

2191720

(54) Title: A MULTIFUNCTION CONNECTION AND SUPPORT ELEMENT IN A MECHANISM FOR AUTOMATIC DOOR MOTION FOR LIFTS AND ELEVATORS

(57) Abstract

The invention relates to a multifunction connection and support element in a mechanism for automatic door motion for lifts and elevators. The element consists, for each lateral jamb, in a connection and support bracket (3) which connects and unites each jamb (1) with the architrave (2) and the means for anchoring (4) to a fixed wall. The means for anchoring (4), preferably a further bracket, also functions as a guide for sliding carriages (8) of a door (7) motion mechanism. The bracket (4) performs all functions which in the past were carried out by several distinct connection and support elements.

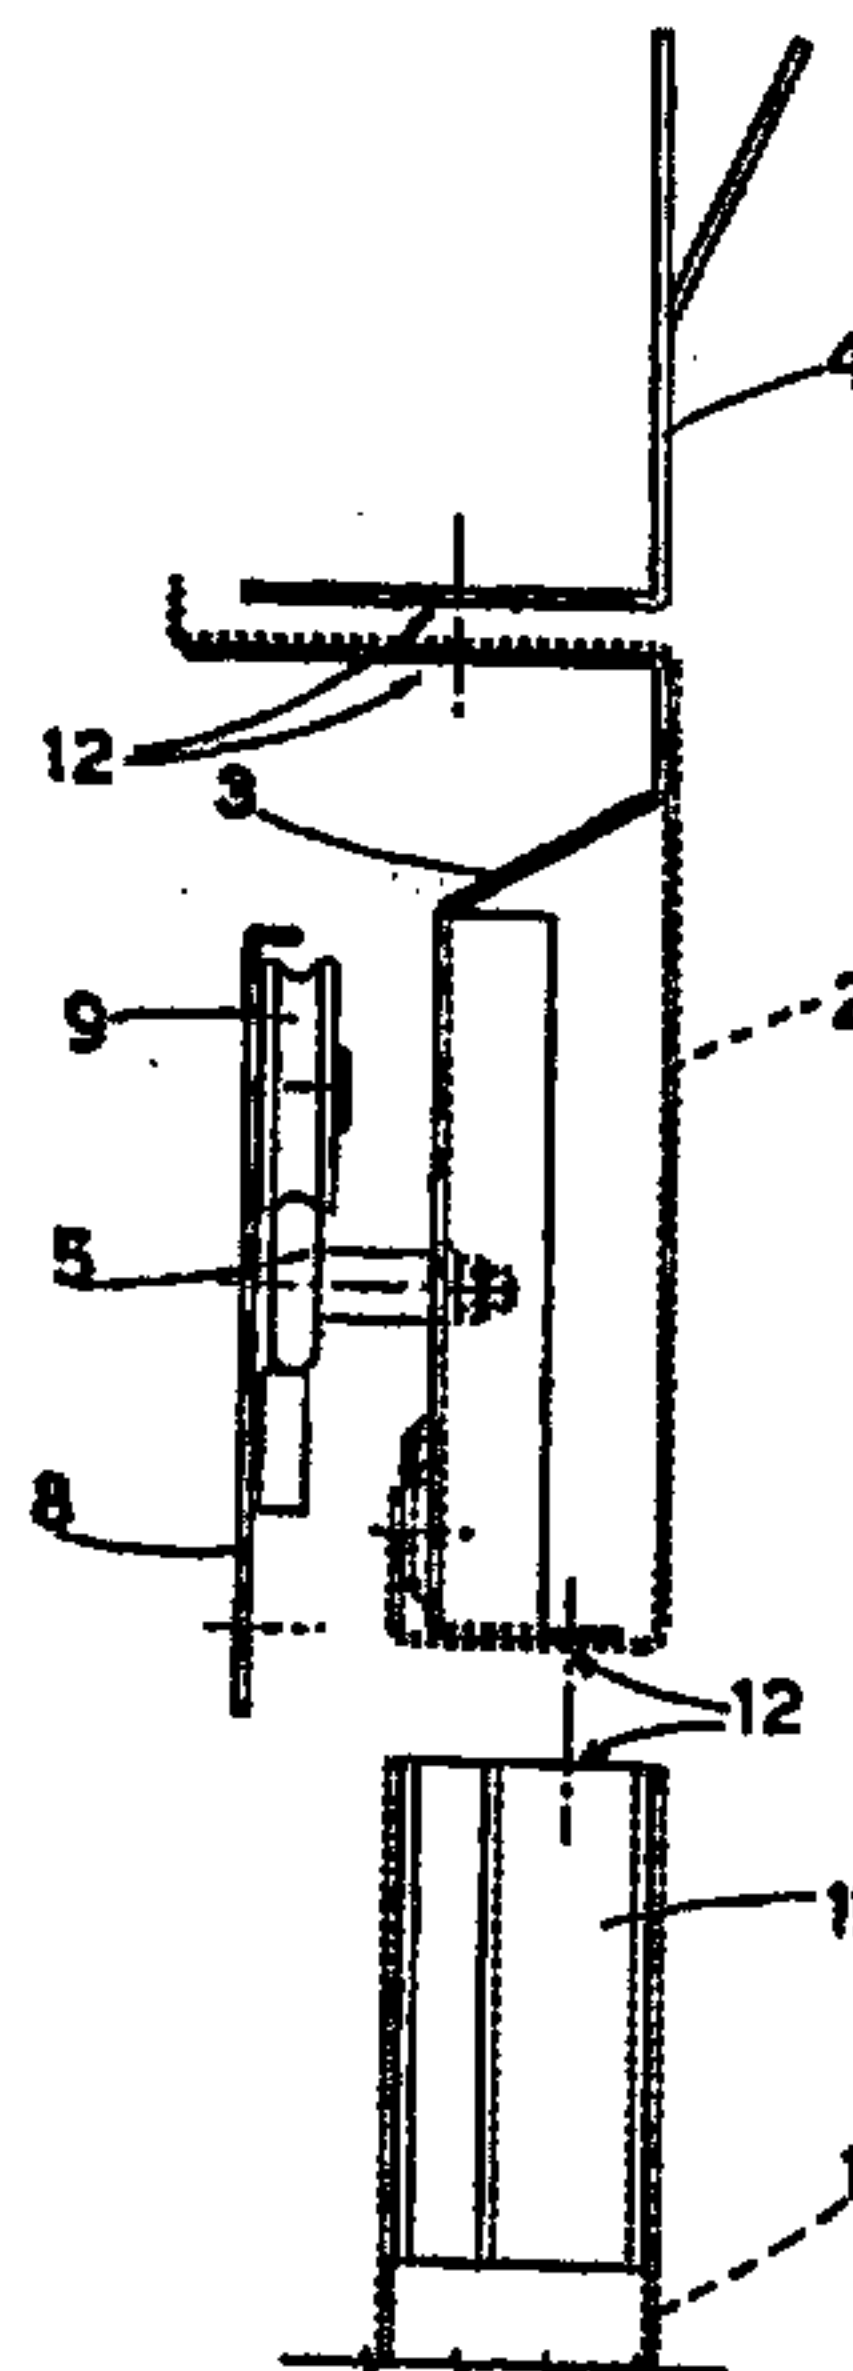

05/19/132191720

1

A Multifunction Connection and Support Element in
a Mechanism for Automatic Door Motion for Lifts
and Elevators.

Description.

The invention relates to a multifunction connection and support element in a mechanism for automatic door motion for lifts and elevators.

05 Known-type lifts generally comprise two lateral jambs and a transversal superior element, or architrave, which connects the two jambs (for example by bolting) and houses the motion mechanism of the lift doors.

10 The architrave is provided with means for anchoring to a fixed wall of the lift shaft, which means for anchoring are constituted by brackets bolted to the architrave in the central zone thereof and fixed to the wall by screws.

15 Internally of the architrave there are also supports for the guides of the door motion mechanisms, which supports are completely separate from the above-mentioned screws and are not applied thereat.

20 The principal drawback of the above realizations is the need to arrange a large number of

2191720

2

connection or support elements for fixing the various components of the door and for the support of the guides of the movement carriages of the doors.

05 A further drawback is that the numerous connection and support elements are positioned rather distributedly along the architrave, which can lead to slight bending thereof.

The main aim of the present invention is to
10 obviate the above drawbacks by providing a multifunction connection and support element able efficiently to perform the functions of numerous elements employed in the prior art, and also able better to stiffen and strengthen the door
15 structure.

The above aims are fully attained by the multifunction connection and support element, object of the present invention, which is characterized as set out in the accompanying
20 claims and in particular in that it consists of a connection and support bracket for each lateral door jamb, which contemporaneously connects and unites the jamb with the architrave as well as with the means for anchoring the architrave to a
25 fixed wall.

The bracket preferably also supports the sliding guides of the door motion carriages.

In a further aspect of the invention a multifunction connection and support element in a
5 mechanism for automatic door motion for elevators, comprising two lateral jambs and an architrave which connects the two jambs and which houses motion mechanisms of doors of an elevator, said architrave being constrained by
10 anchoring means to a fixed wall in an elevator shaft in which the elevator moves up and down, wherein the multifunction connection and support element consists of, for each lateral jamb, a connection and support bracket which connects
15 and unites the jamb with the architrave and the anchoring means.

In another aspect of the invention a multifunction connection and support automatic door apparatus for use with an elevator door opening in a wall of
20 an elevator shaft comprising: a pair of laterally spaced jambs for positioning at opposite sides of a door opening in a wall of an elevator shaft; an

3a

architrave for coupling upper ends of said jambs;
a means for moving housed in said architrave for
operating at least one elevator door; an elevator
door mounted for movement in the door opening
5 and connected to said means for moving; an
anchoring means for coupling to said architrave
and for attachment to the wall of the elevator
shaft at the door opening; and at least a pair of
connection and support brackets attached to and
10 coupling said jambs with said architrave and said
anchoring means.

Further characteristics and advantages of the
present invention will better emerge from the
detailed description that follows, of an
15 embodiment of the invention, illustrated in the
form of a non-limiting example in the
accompanying drawings, in which:

- figure 1 shows the multifunction element in an
exploded perspective view;
- 20 - figure 2 shows the multifunction element in
place, in a frontal perspective view;
- figure 3 shows the element in a lateral view;

3b

- figure 4 is a transversal section of the profile of a door;
- figure 5 is a schematic view of a lift gate with an automatic door.

5 With reference to the figures, 1 denotes the side jambs of a gate having automatic doors 7, in particular used for lifts and elevators. The doors 7 can be of the centre-to-side opening type, or of the telescopic type, with segments telescoping
10 either to the right or the left.

The means for moving the doors, of known type, are housed internally to an architrave 2 which

2191720

4

connects the two jambs 1. The means for moving the doors usually comprise door support carriages (one of which is schematically denoted by 8 in figure 3), which slide by means of rollers 9 on guides 5.

05 A multifunction connection and support element is housed in the architrave 2, which element is constituted by a bracket 3 connecting the jamb 1 with the architrave 2, and the architrave 2 with a second bracket 4 constituting a means for

10 anchoring the jamb 2 to a wall, not illustrated, in the lift shaft.

The bracket 3 also functions as a support for the guide 5 of the door motion mechanism carriage.

At least two brackets 3 are present, one

15 positioned at each jamb, and further intermediate brackets can be applied if necessary, along the architrave 2, to afford further support to the guide 5.

It is clear how having provided a multifunction

20 bracket 3 and its positioning such as to create a continuous arrangement among the various components of the door structure (jamb 1, architrave 2, second bracket 4) help to obtain greater rigidity and a strengthening of the whole

25 structure with respect to prior art realizations.

2191720

5

The bracket 3 is fixed to the jamb 1 and the second bracket 4 by means for fixing of known type, for example bolts 10. The bracket is also provided with a plurality of slots 12 for the insertion of the fixing means. Similarly, slots are also provided in the jamb 1 and the second bracket 4.

The front part of the bracket 3 is further provided with a plurality of apertures 13 in which the means for fixing the guides 5 are inserted.

In the upper part of the jamb 1 a connector 11 can be inserted, for further stiffening the structure by creating a sort of internal reinforcement in the jamb.

With reference in particular to figure 4, a door 7 is illustrated which is provided with a reinforcement rib 6 extending over the whole height of the door, and having the function of stiffening the door itself, and in particular the opening side of the door so that it will not be susceptible to bending.

The bracket and the connector 11 are preferably made in metal.

CLAIMS

1. A multifunction connection and support element in a mechanism for automatic door motion for elevators, comprising two lateral jambs (1) and an architrave (2) which connects the two jambs and which houses motion mechanisms of doors (7) of an elevator, said architrave (2) being constrained by anchoring means (4) to a fixed wall in an elevator shaft in which the elevator moves up and down, wherein the multifunction connection and support element consists of, for each lateral jamb, a connection and support bracket (3) which connects and unites the jamb (1) with the architrave (2) and the anchoring means (4).

2. A multifunction connection and support element as in claim 1, wherein the connection and support bracket (3) supports at least one guide (5) of movement carriages (8) of the doors (7).

3. A multifunction connection and support element as in claim 2, wherein the connection and support bracket (3) is provided with at least one slot (12, 13) for an insertion of means (10) for fixing the jamb (1), the architrave (2) and the guide (5) and the anchoring means (4) all together.

4. A multifunction connection and support element as in claim 1, characterised in that the connection with the jamb (1) employs a connector (11) which snugly inserts into and reinforces the jamb (1).

5. A multifunction connection and support automatic door apparatus for use with an elevator door opening in a wall of an elevator shaft comprising:

a pair of laterally spaced jambs (1) for positioning at opposite sides of a door opening in a wall of an elevator shaft;

an architrave (2) for coupling upper ends of said jambs (1);

a means for moving (8) housed in said architrave (2) for operating at least one elevator door;

an elevator door (7) mounted for movement in the door opening and connected to said means for moving (8);

an anchoring means (4) for coupling to said

architrave (2) and for attachment to the wall of the elevator shaft at the door opening; and

at least a pair of connection and support brackets (3) attached to and coupling said jambs (1) with said architrave (2) and said anchoring means (4).

6. The apparatus according to claim 5 including a connector (11) inserted in said upper end of said jamb (1) for reinforcing said jamb.

7. The apparatus according to claim 5 wherein said door (7) includes a generally vertically extending reinforcing rib (6) formed at an opening side edge of a said door.

8. The apparatus according to claim 5 wherein said connection and support brackets (3) support a guide (5) on which a door support carriage (8) of said means for moving moves.

9. The apparatus according to claim 8 wherein said connection and support bracket (3) has formed therein a plurality of apertures (13) for receiving and retaining said guide (5).

10. The apparatus according to claim 8 including at least one roller (9) rotatably attached to said

door support carriage (8) for contacting said guide (5).

11. The apparatus according to claim 5 wherein each said connection and support bracket (3) and said anchoring means (4) have formed therein a pair of transversely extending slots (12) for receiving a means for fixing (10) to attach said connection and support bracket (3) to said architrave (2) and to said anchoring means (4).

12. The apparatus according to claim 11 wherein said means for fixing is a bolt (10).

FIG.1

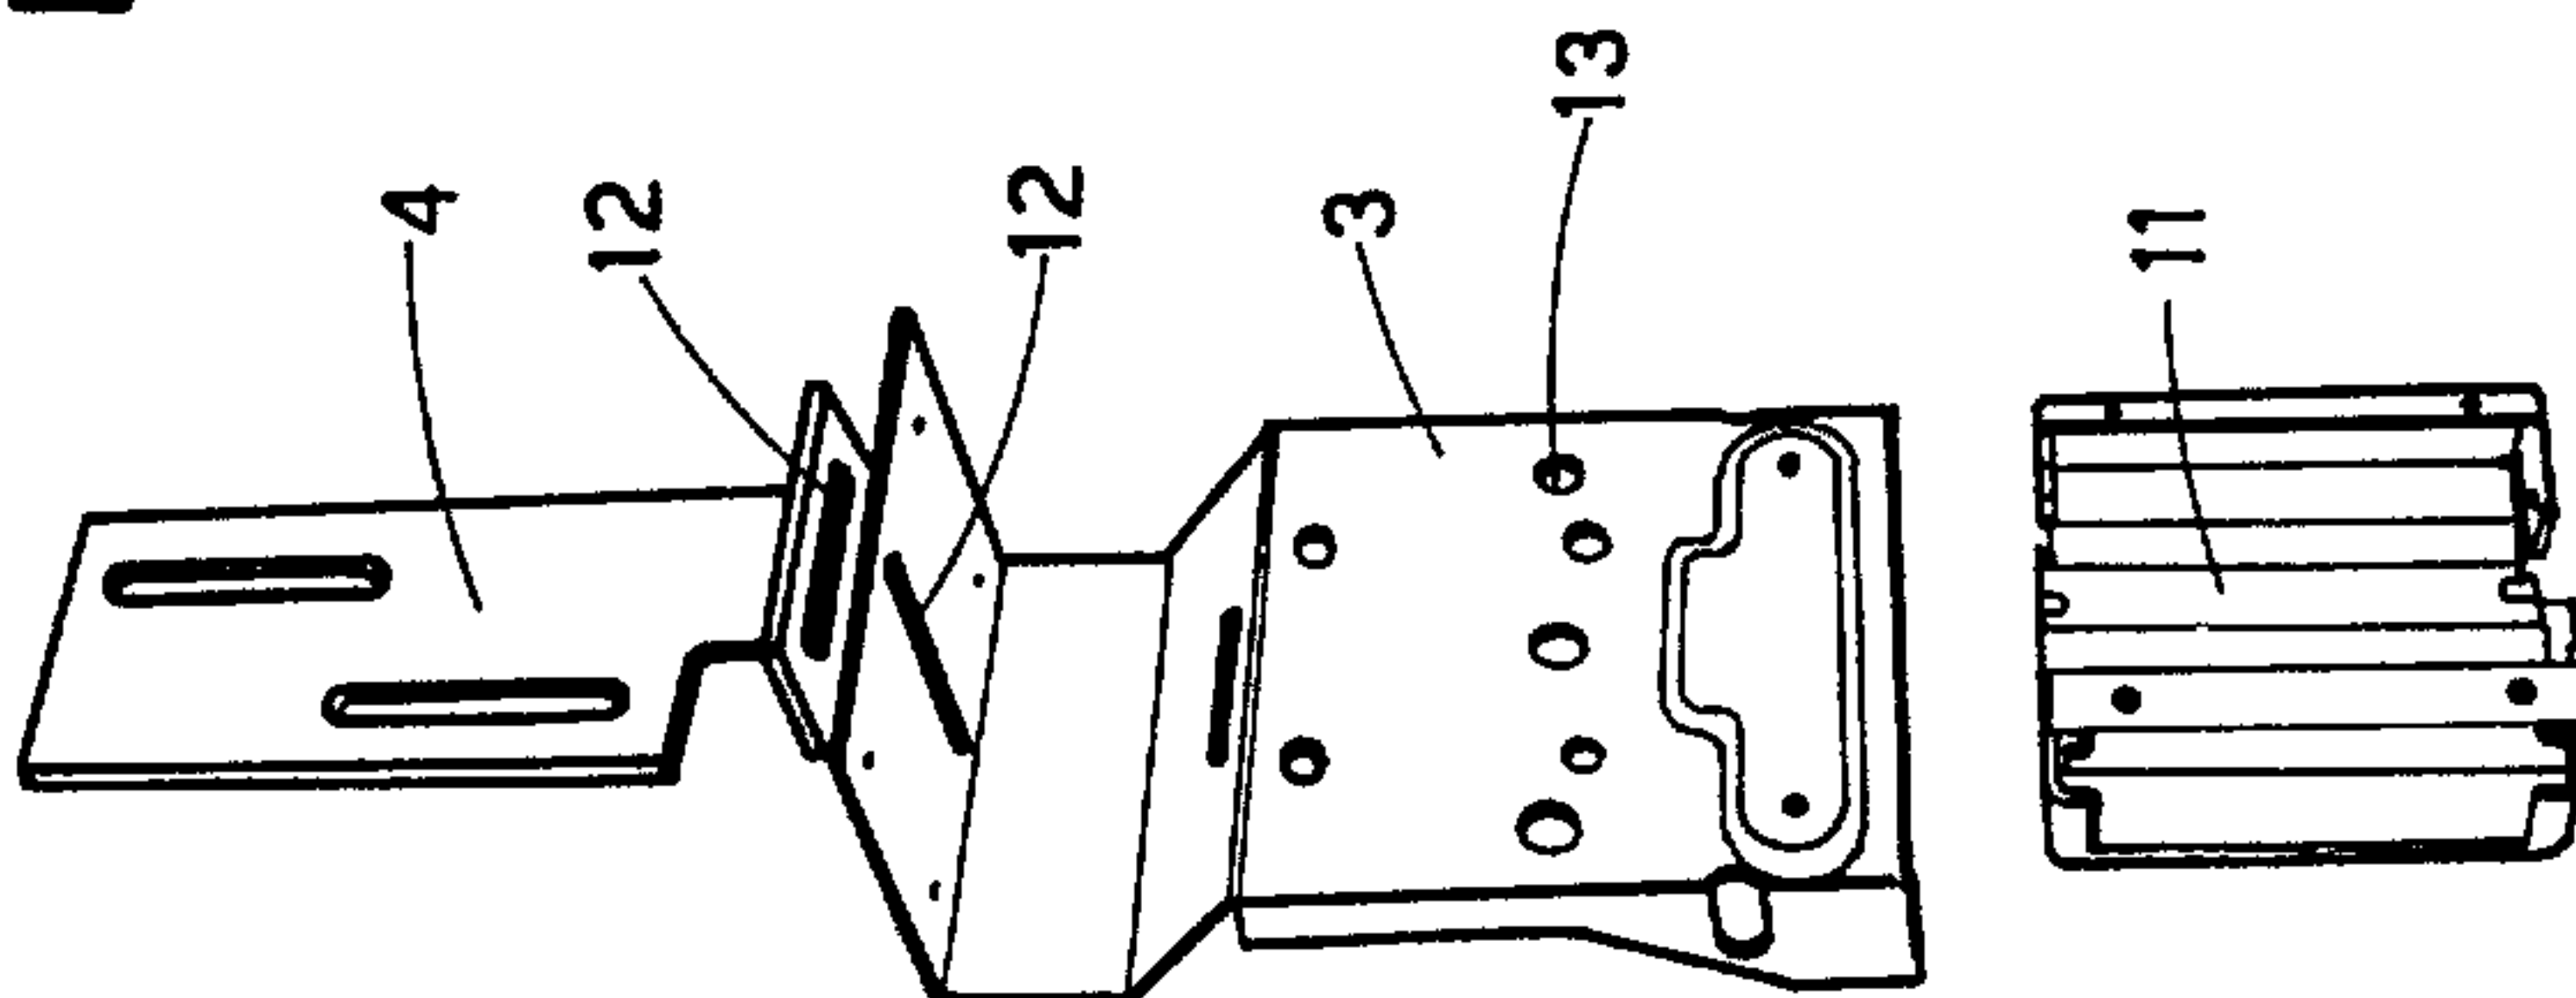
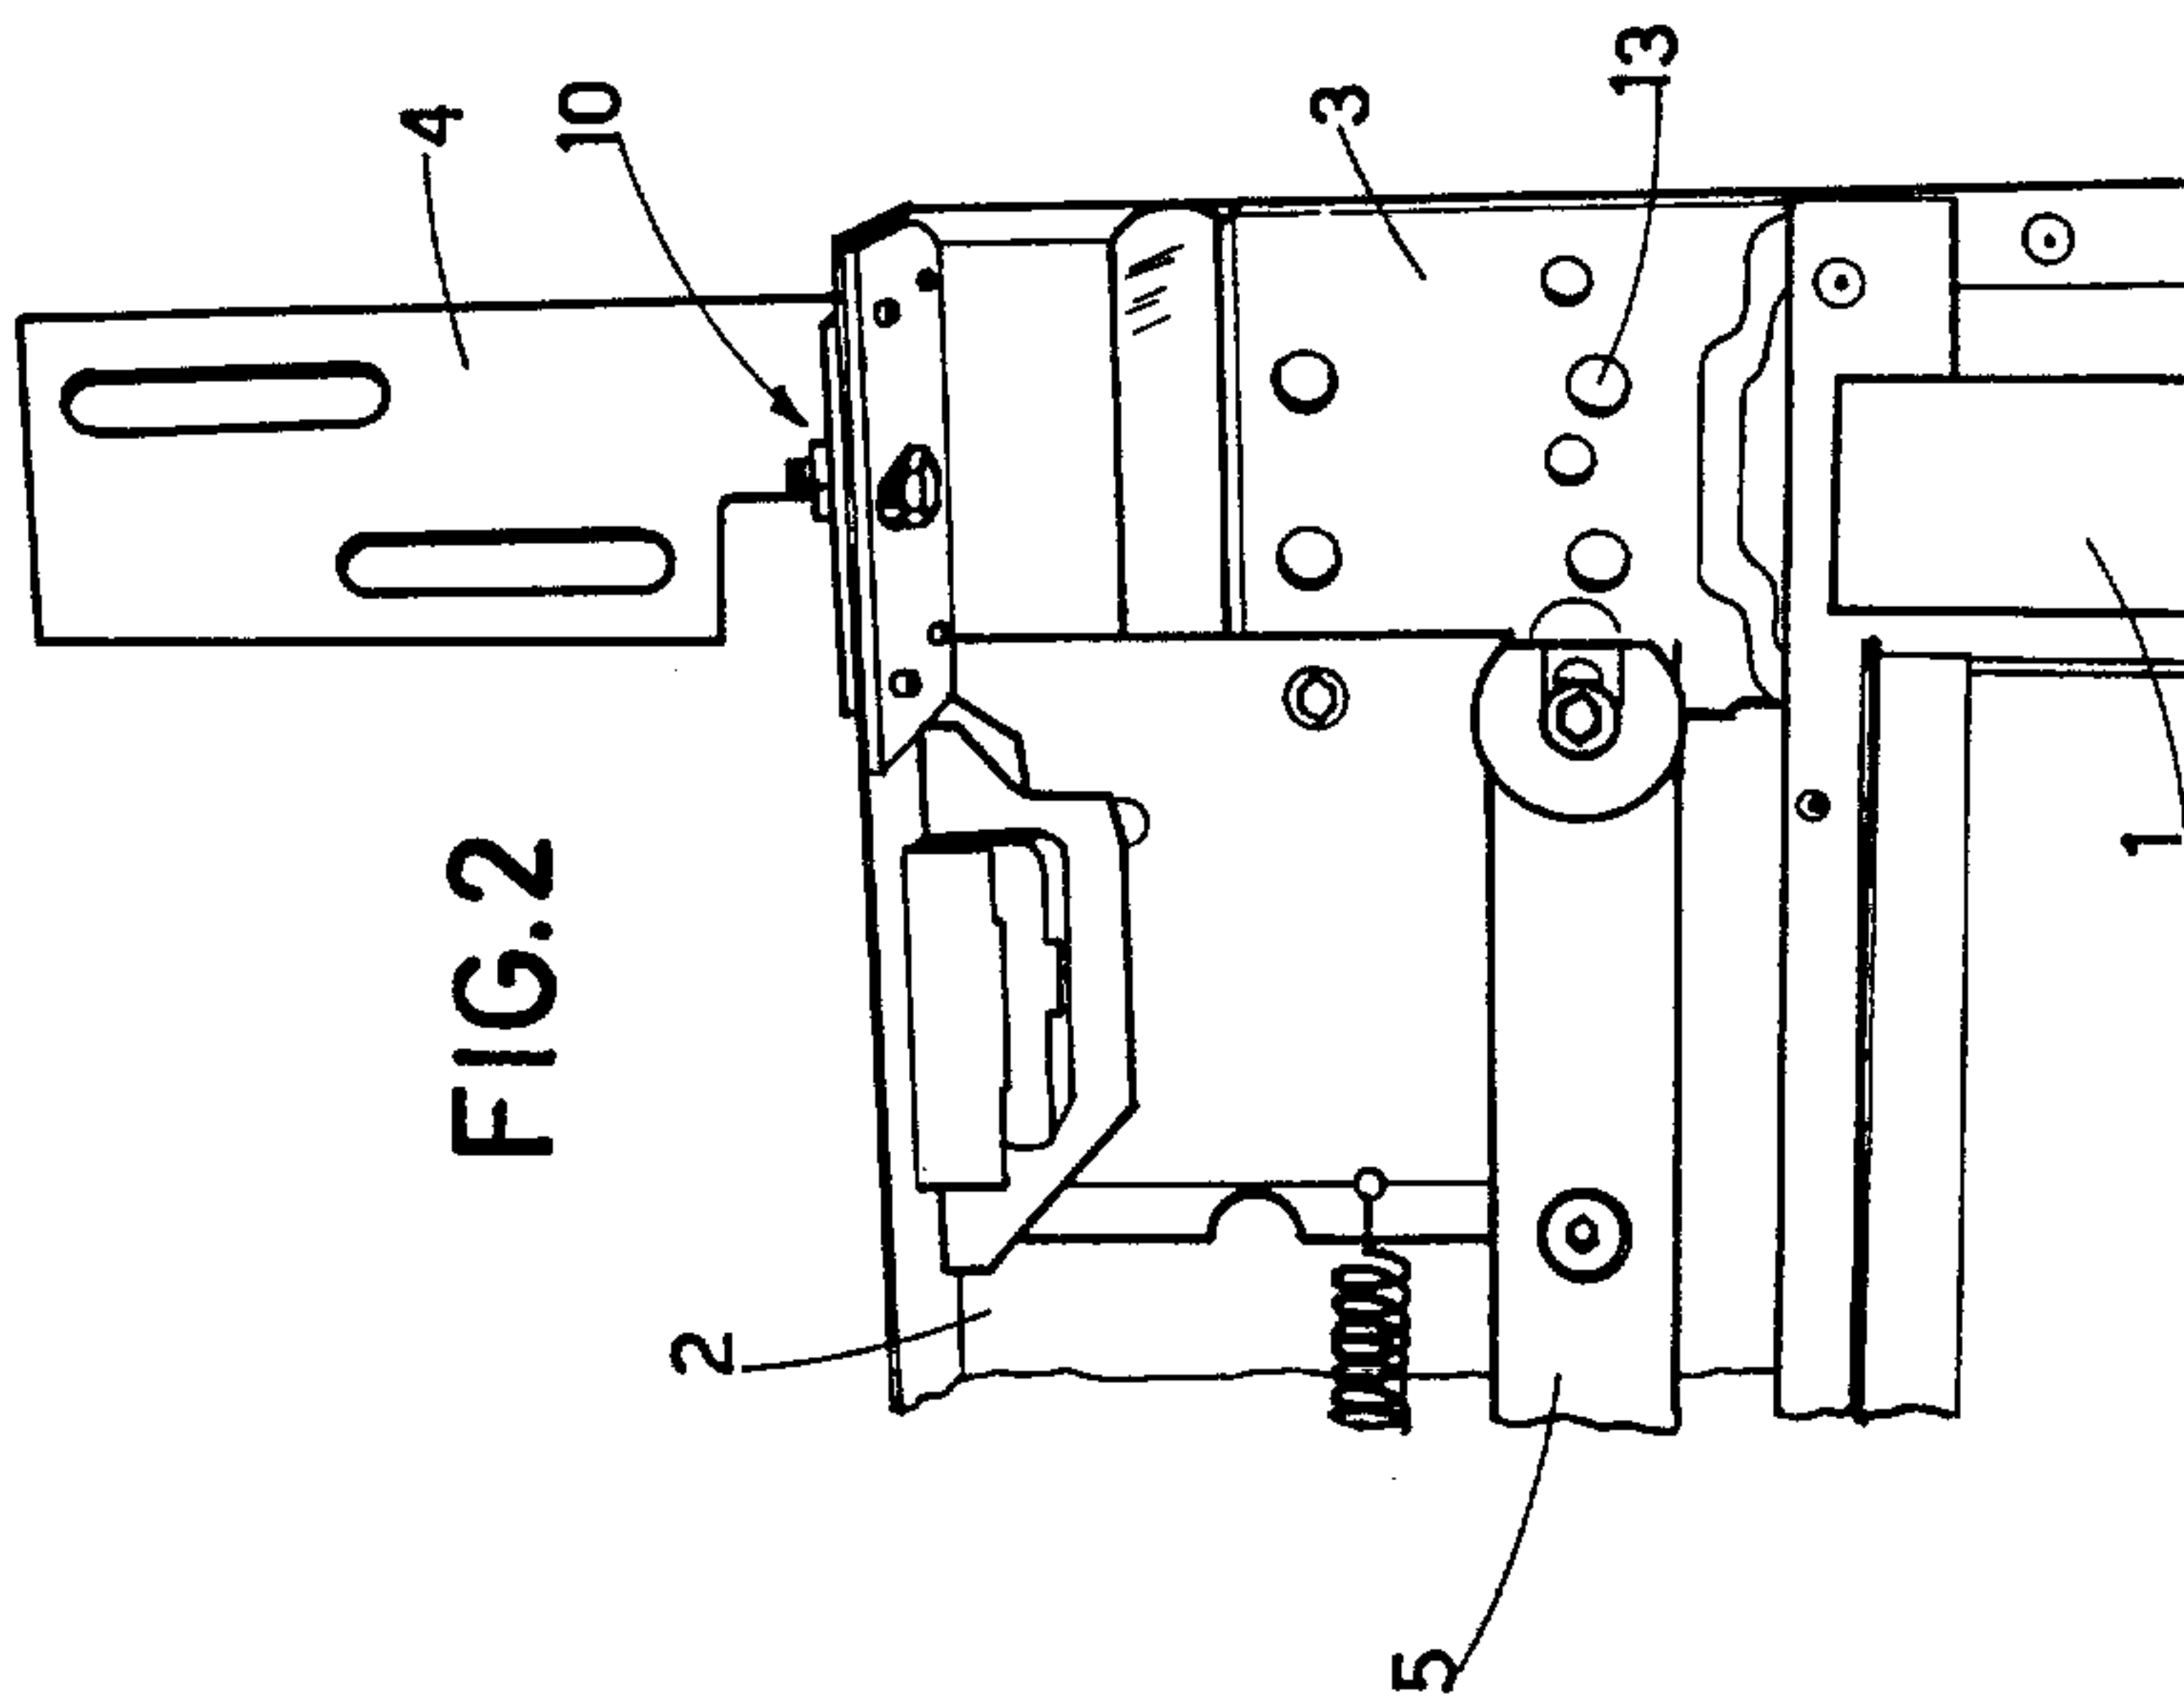


FIG.2



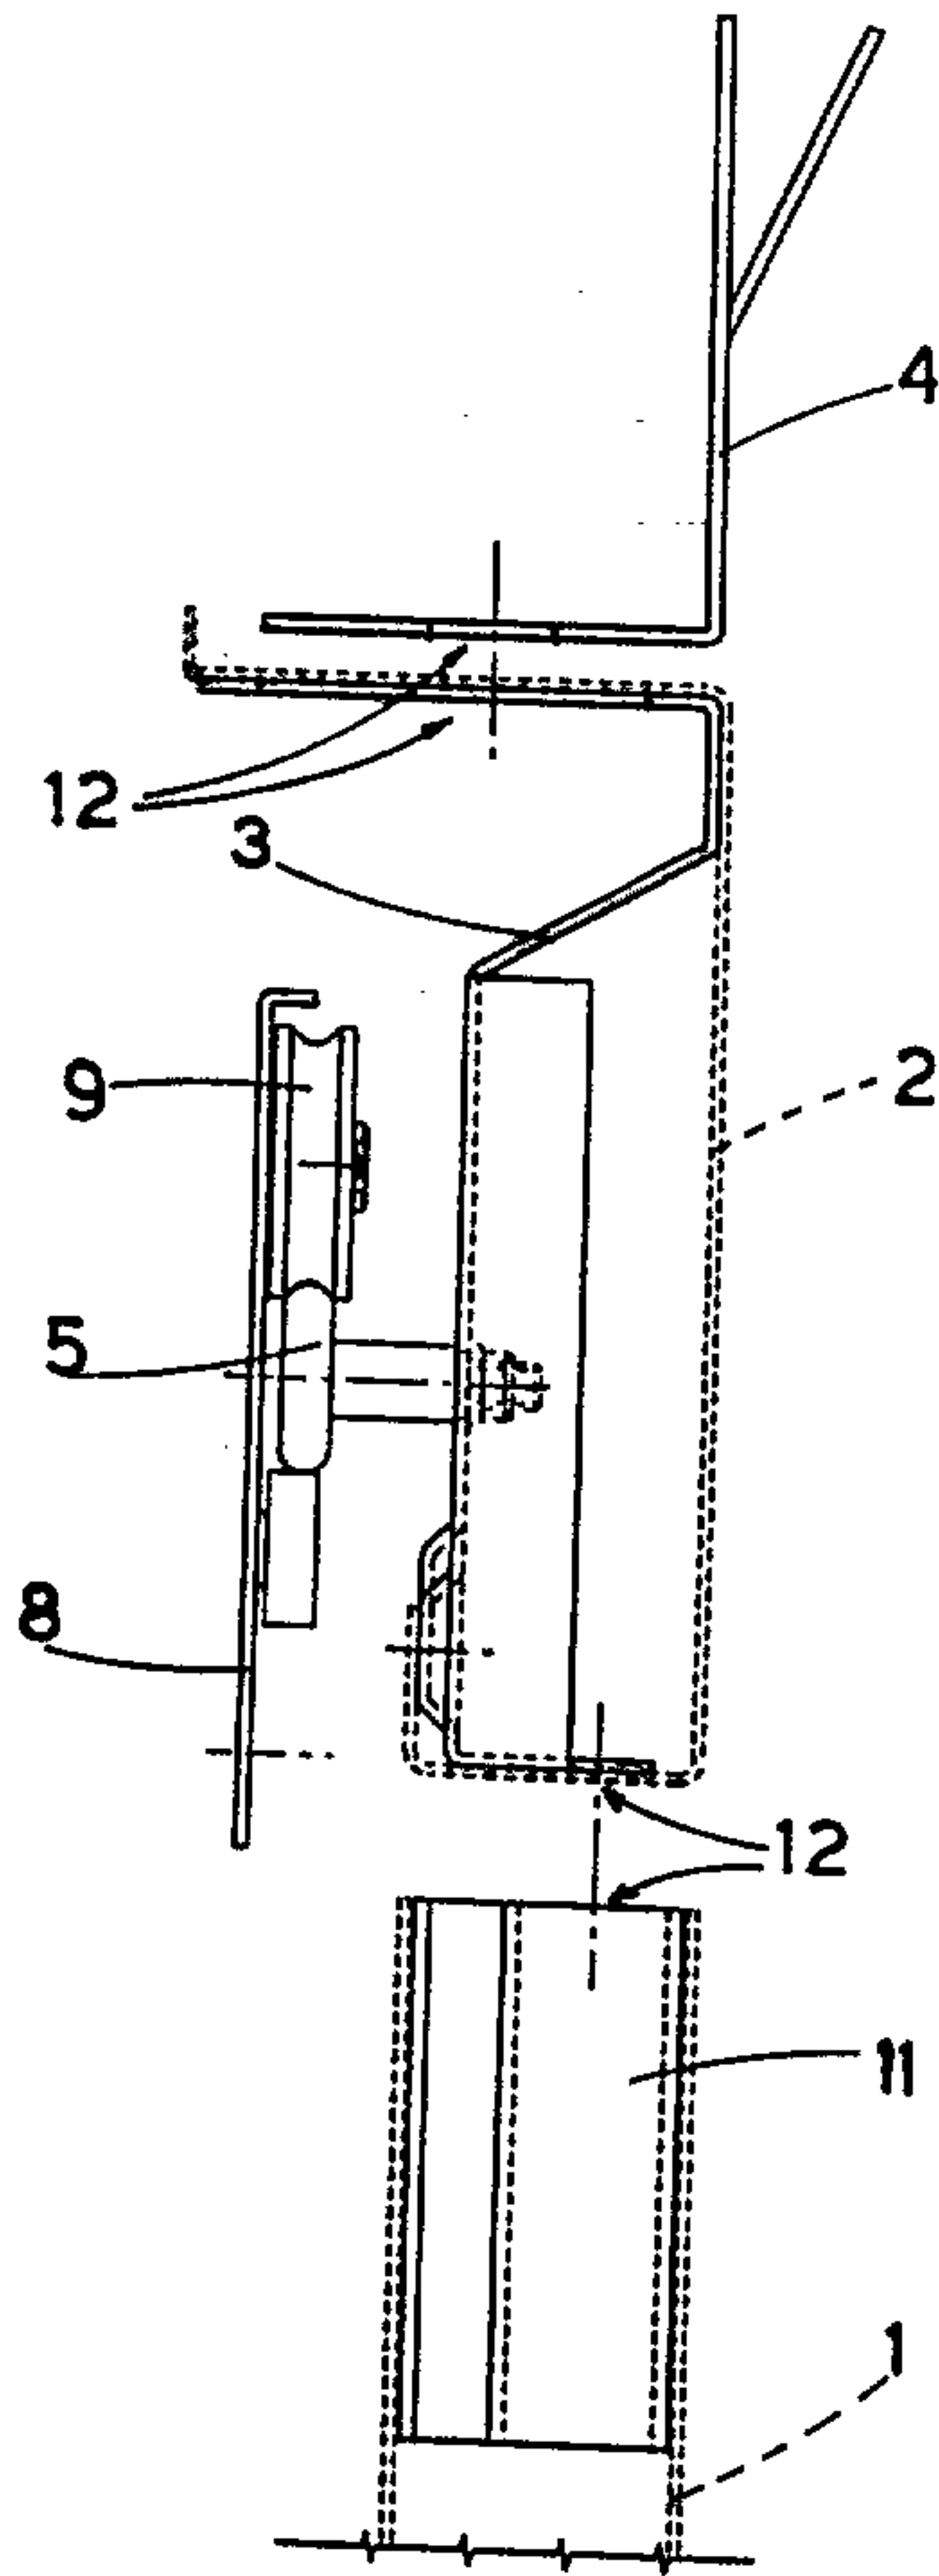


FIG. 3


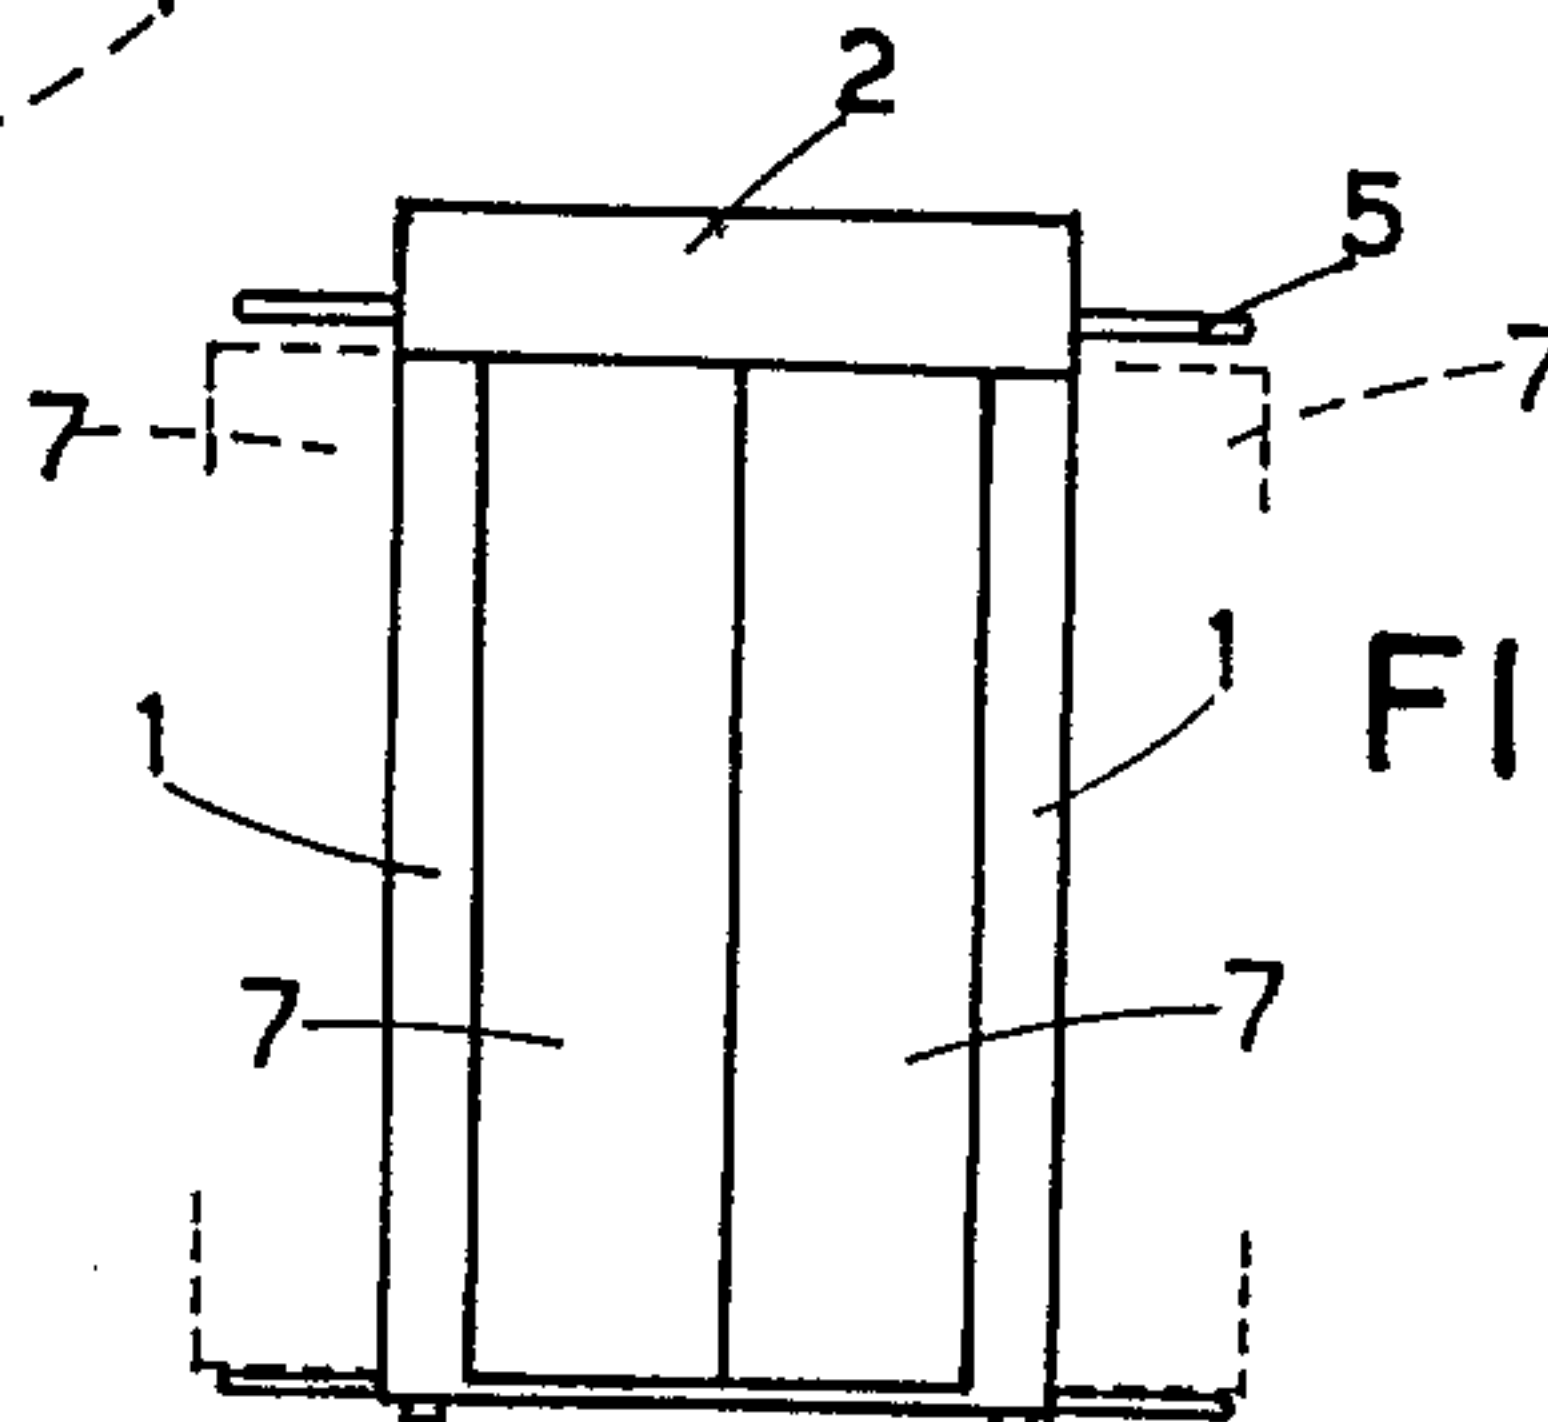


FIG. 5

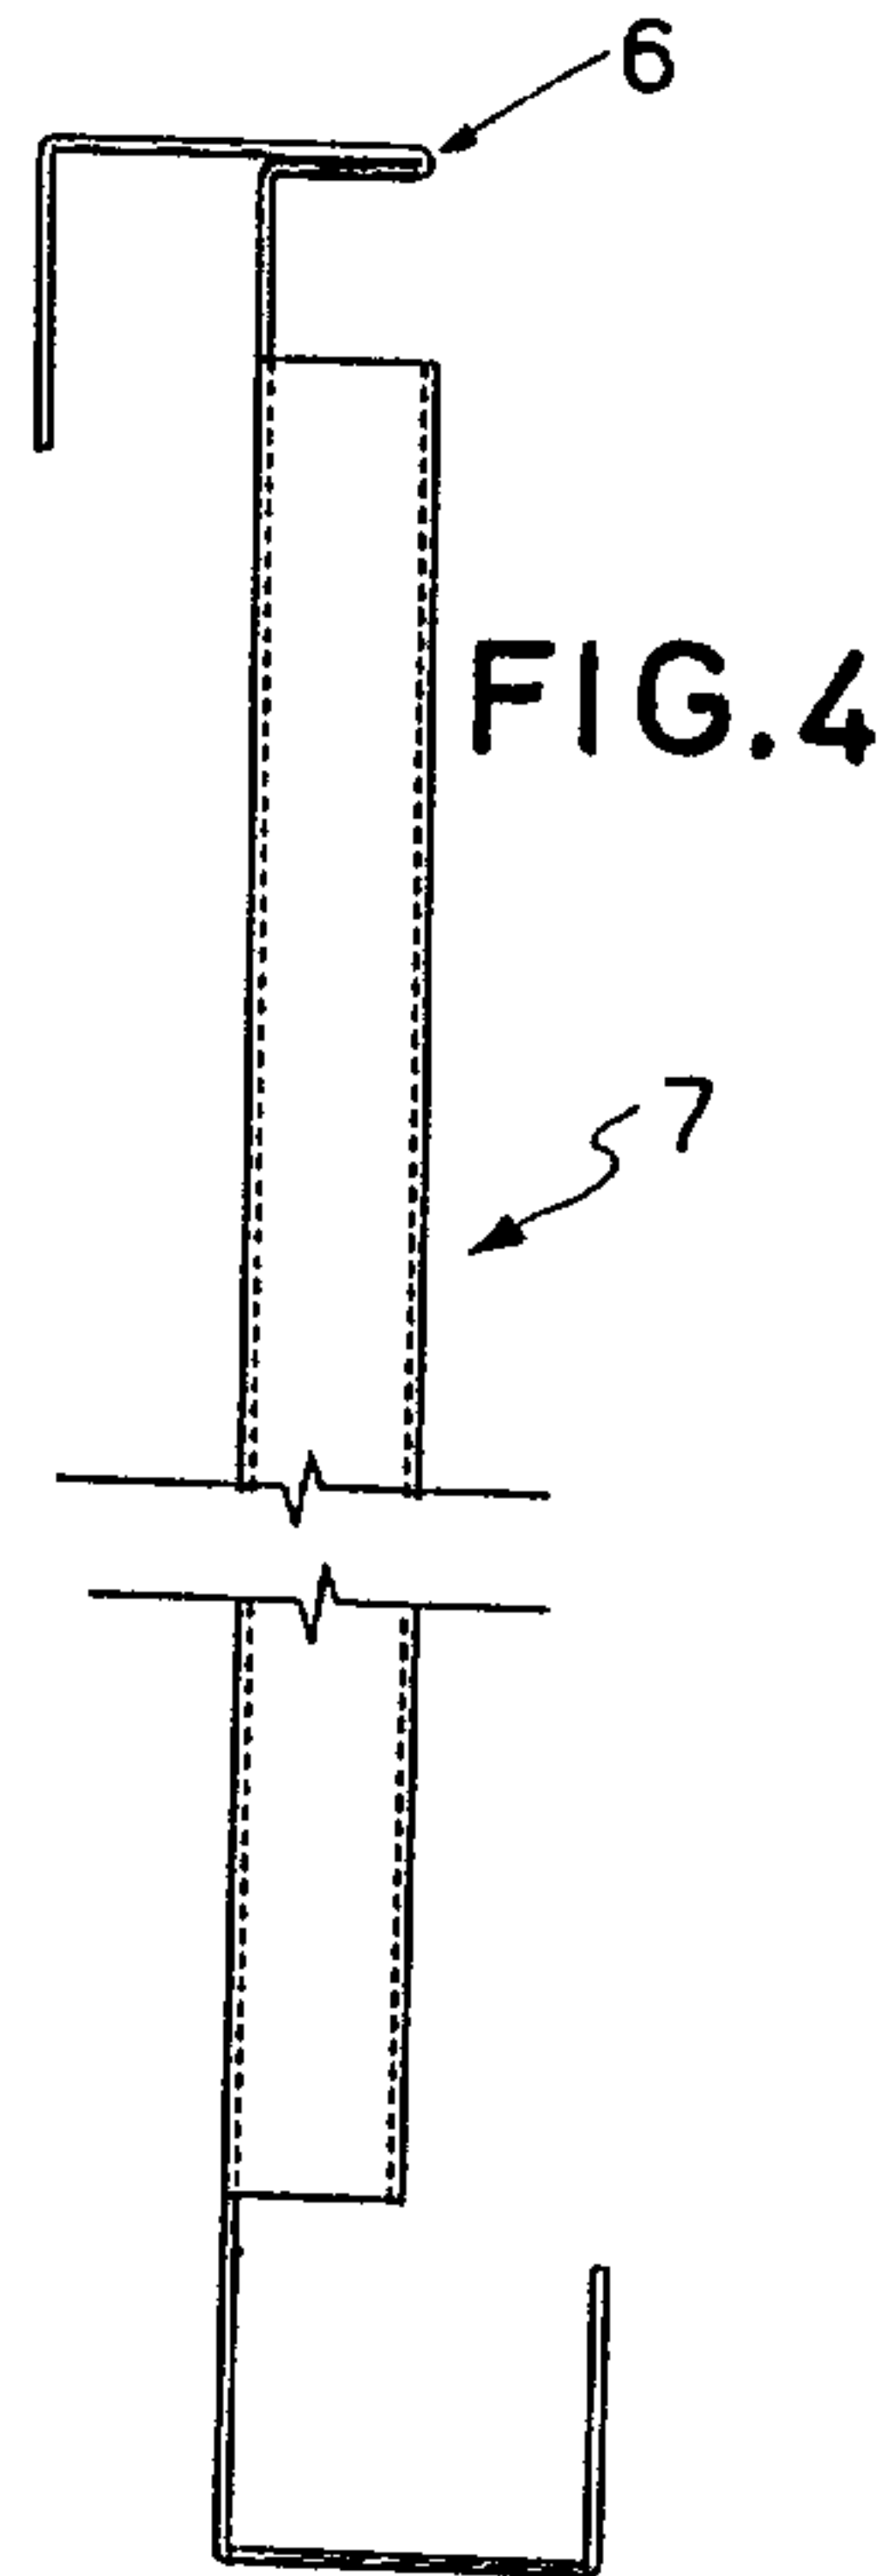