



- (51) International Patent Classification: *H01B 7/285* (2006.01)
- (21) International Application Number: PCT/US2014/015237
- (22) International Filing Date: 7 February 2014 (07.02.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 13/829,853 14 March 2013 (14.03.2013) US
- (71) Applicant: **TELEDYNE INSTRUMENTS, INC.** [US/US]; 1049 Camino Dos Rios, Thousand Oaks, California 91360 (US).
- (72) Inventors: **MCCLEARY, Alan D.**; 440 Lobelia Road, St. Augustine, Florida 32086 (US). **CROOM, John Bradley**; 185 S. Finley Avenue, Basking Ridge, New Jersey 07920 (US). **XI, Huijiang**; 240 Lake Seminary Circle, Maitland, Florida 32751 (US). **GREENE, Michael C.**; 2013 Clover St. NE, Palm Bay, Florida 32905 (US).
- (74) Agents: **PROCTOR, Katherine** et al.; Procopio, Cory, Hargreaves & Savitch LLP, 525 B Street, Suite 2200, San Diego, California 92101 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: IMPEDANCE CONTROLLED SUBSEA ETHERNET OIL FILLED HOSE

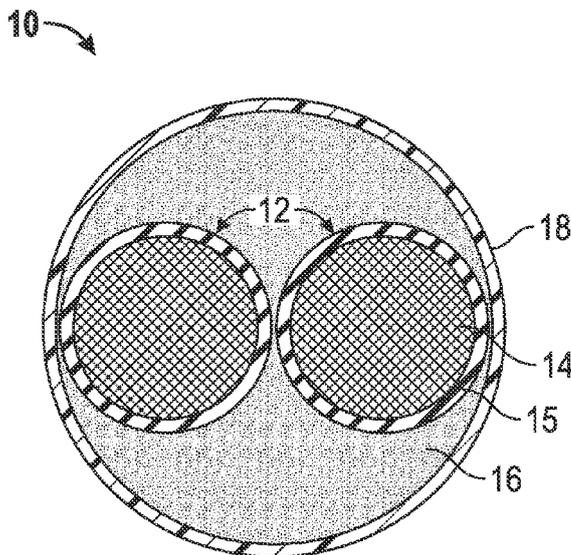


FIG. 1

(57) Abstract: One or more insulated conductive wire assemblies are incorporated in a pressure balanced, oil-filled (PBOF) hose. Each conductive wire assembly has a pair of conductive wires each having an insulation layer, an insulating material surrounding the insulated wires, and an outer insulating layer surrounding the insulating material. The insulating material may be selected to have a dielectric constant substantially matching the dielectric constant of the oil in the PBOF hose, so that the insulated pair of conductors perform in the same way both before and after the assembly is submerged in oil in the jumper hose. One or more parameters of the conductive wire assembly are selected such that the assembly has a predetermined impedance when submerged in oil within the PBOF hose.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG). **Published:**

— with international search report (Art. 21(3))

IMPEDANCE CONTROLLED SUBSEA ETHERNET OIL FILLED HOSE

BACKGROUND

1. Field of the Invention

[0001] The present invention relates to communications interlink devices for connection of equipment used in subsea operations, such as equipment used in the subsea oil and gas industry, and to insulated conductive wire assemblies incorporated in such interlinks. Such interlinks may be in the form of pressure balanced oil-filled (PBOF) hose, or undersea cables containing electrical or fiber-optic conductors.

2. Related Art

[0002] Subsea communication systems or interlink devices generally employ electrical Ethernet through electrical telecommunications twisted pair cable, or are purely optical fiber communication systems that may be included in PBOF hose or as a special submarine cable. Purely electrical systems have some limitations in the subsea environment. Standard electrical input/output interconnects and electrical cables can only step out to a distance of around 50 meters. Per industry specifications, a land based 10/100BaseT Ethernet cable has a maximum transmission distance of 100 meters at standard atmospheric pressure, after which the signal performance may be unacceptable

[0003] Subsea PBOF hose interlinks or cables commonly contain silicone oil or other fluid to provide pressure compensation. Standard terrestrial Ethernet cable is adversely affected by submergence in oil, which causes a reduction in impedance, increased back reflection, reduced transmission power and the distance that a signal can be sent along the cable without increasing power. The longer the cable becomes, the more of a problem this becomes. The maximum transmission distance for subsea PBOF hose Ethernet interlink using terrestrial CAT cable is about 70 meters, so such interlinks are normally limited to 70 meters in length.

SUMMARY

[0004] An impedance controlled subsea Ethernet PBOF hose and method of making an impedance controlled subsea Ethernet PBOF hose which allows signal transmission over longer distances is provided. In one aspect, an insulated conductive wire assembly for transmitting electrical signals is provided for incorporation in a pressure balanced, oil filled hose. In one embodiment, the insulated conductive wire assembly is constructed to have a predetermined impedance which is unchanged or substantially unchanged before

and after submerging the assembly in oil, and comprises a pair of conductive wires, each wire having an insulation layer, an insulating material surrounding the insulated wires, and an outer insulating layer surrounding the insulating material. The insulating material in one embodiment is selected to have a dielectric constant substantially matching the dielectric constant of the oil in the jumper cable or PBOF hose in which the conductive wire assembly is to be installed, so that the insulated pair of conductors perform in the same way outside the cable as if they were submerged directly in oil. This allows parameters of the conductive wire assembly to be controlled prior to installation in the oil-filled jumper cable or hose, in order to achieve a predetermined impedance which remains at least substantially unchanged when the assembly is installed in the hose.

[0005] The insulating material surrounding the conductive wires may be a mobile medium such as a dielectric gel having a dielectric constant substantially matching the dielectric constant of the oil in the hose in which the assembly is installed, and in one embodiment the mobile medium is a suitable water blocking gel. The conductive wires are of larger gauge than those used in typical Ethernet cables. The thickness of the insulation layers surrounding the wires is adjusted in order to provide the desired, predetermined impedance, and in one embodiment the impedance may be around 100 ohms.

[0006] According to another aspect, a subsea Ethernet interlink comprises an outer hose containing pressure compensating oil having a first dielectric constant, and at least a first insulated electrical conductor assembly submerged in the oil and extending along the length of the cable, the first insulated electrical conductor assembly having a predetermined impedance and comprising a pair of conductive wires, an insulation layer covering each wire, an outer insulation layer surrounding the insulated conductive wires to leave a space between the outer insulation layer and wire covering insulation layers, and an insulation material having a dielectric constant substantially matching the first dielectric constant surrounding the insulated conductors and filling the space between the outer insulation layer and the wire covering insulation layers. The predetermined impedance is selected to reduce or eliminate impedance drop off due to submerging an insulated conductor in oil and thus improve Ethernet communication. In one embodiment, the predetermined impedance is around 100 ohms, per IEEE standard 802.3 for electrical Ethernet communication.

[0007] In one embodiment, the pair of insulated wires in the insulated conductor assembly are in a twisted pair configuration, but other configurations may be used in alternative

embodiments. One, two or more insulated wire devices or assemblies each having a pair of insulated wires enclosed in gel inside an outer insulation layer may extend within the oil filled hose, depending on the number of circuits to be connected by the cable.

[0008] The PBOF hose has end fittings at each end such as an underwater mateable plug or receptacle connector units for releasable mating engagement with matching receptacle or plug units of underwater equipment, a hose termination, or the like. Underwater connectors such as Nautilus wet mateable electrical connectors manufactured by Teledyne ODI of Daytona Beach, Florida, or other wet mateable connectors may be provided at one or both ends of the hose.

[0009] By matching the impedance of the insulated conductor assembly to the desired impedance of the oil filled cable for Ethernet communication purposes, and by surrounding the insulated conductors with a gel having a dielectric constant substantially matching that of the pressure compensating oil in which the conductor assembly is installed, any change in impedance due to submerging the conductor assembly in the oil is reduced and the length over which a signal can be sent is increased. The desired or predetermined impedance of the conductor assembly can be achieved by suitable selection of the parameters of the various elements of the assembly, such as dielectric constants of the insulation layers, the diameter of the conductive wires, and the thickness of the insulation layers. For example, increasing the insulation thickness increases overall impedance, while increasing the dielectric constant of one or more components of the insulated wire assembly decreases impedance. In one embodiment, the thickness of the wire surrounding each conductive wire was varied until the desired impedance was achieved, while leaving other parameters of the assembly unchanged.

[0010] Other features and advantages of the present invention should be apparent from the following description which illustrates, by way of example, aspects of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The details of the present invention, both as to its structure and operation, may be gleaned in part by study of the accompanying drawings, in which like reference numerals refer to like parts, and in which:

[0012] FIG. 1 is a cross-sectional view of one embodiment of an insulated conductor assembly for installation in a pressure balanced, oil-filled subsea Ethernet hose or jumper;

[0013] FIG. 2 is a perspective view of a subsea Ethernet pressure balanced oil-filled hose incorporating one or more of the insulated conductor assemblies of FIG. 1; and

[0014] FIG. 3 is a cross-sectional view on the lines 3-3 of FIG. 2 of one embodiment of the subsea Ethernet pressure balanced oil-filled hose incorporating four of the insulated conductor assemblies of FIG. 1.

DETAILED DESCRIPTION

[0015] Certain embodiments as disclosed herein provide for a pressure balanced, oil filled (PBOF) subsea Ethernet hose or jumper which can transmit electrical signals over greater lengths underwater. One or more electrical conductor assemblies extending inside the oil-filled cable with the conductor devices have a predetermined impedance which is controlled by varying one or more selected parameters of the devices to improve Ethernet communication when submerged in the oil-filled cable.

[0016] After reading this description it will become apparent to one skilled in the art how to implement the invention in various alternative embodiments and alternative applications. However, although various embodiments of the present invention will be described herein, it is understood that these embodiments are presented by way of example only, and not limitation. As such, this detailed description of various alternative embodiments should not be construed to limit the scope or breadth of the present invention.

[0017] FIG. 1 illustrates one embodiment of an insulated conductor assembly 10 for submerging in oil in a subsea Ethernet hose or jumper 20 as illustrated in FIGS. 2 and 3. The insulated conductor assembly in one embodiment comprises a pair of insulated conductors 12 each comprising a conductive wire 14 and an insulation layer 15 surrounding each wire. An insulating material 16 coats and surrounds the insulated wires 12, and an outer insulating layer 18 surrounds the insulating material. The insulating material is selected to have a dielectric constant substantially matching the dielectric constant of the oil in the jumper or hose 20 in which the conductive wire assembly is to be installed, so that the insulated pair of conductors perform in the same way as if they were submerged directly in oil. This allows parameters of the conductive wire assembly to be controlled in order to achieve a predetermined impedance level which remains at least substantially unchanged when the assembly is installed in the PBOF hose, as described in more detail below.

[0018] In one embodiment, the insulating material surrounding the conductive wires is a mobile substance or medium such as a dielectric gel having a dielectric constant substantially matching the dielectric constant of the oil in the hose in which the assembly

is installed, and a suitable water blocking gel may be used. For example, where the oil filling the hose is silicone oil, the gel may be a silicone based gel, such as Dow Corning 111 Valve Lubricant and Sealant manufactured by Dow Corning of Elizabethtown, Kentucky, or other similar gels. Matching the dielectric constant of the insulating material surrounding the insulated conductors to the dielectric constant of the oil in the hose means that the impedance of the assembly prior to installation in a silicone oil filled hose is the same or at least substantially the same as if the insulated conductors were submerged directly in silicone oil. Other impedance controlling parameters of the assembly can therefore be selected by testing of impedance level outside the hose and varying one or more parameters in order to achieve the desired overall impedance.

[0019] The insulating gel 16 coats the wire insulating layers 15 of the twisted pair of conductors and acts to control impedance of the conductors from one end of the hose assembly to the other. The outer insulation layer 18 may be any suitable insulating material such as Mylar[®] tape or other electrically insulating polyester tape, which is wound around the gel coated conductors to hold the gel around the insulated wires 12.

[0020] In one embodiment, the pair of insulated wires in the insulated conductor assembly are in a twisted pair configuration as known in the field, but other configurations may be used in alternative embodiments. One, two or more insulated conductor assemblies each having a pair of insulated wires enclosed in gel inside an outer insulation layer may be provided within the oil filled hose, depending on the number of circuits to be connected by the hose.

[0021] FIGS. 1 and 2 illustrate one embodiment of an Ethernet hose or jumper 20 which comprises an outer flexible tube or hose 24 containing pressure compensating oil 22 and four insulated conductor assemblies 10 extending between opposite ends of the hose. A greater number or lesser number of insulated conductor assemblies may be installed in the oil filled hose in alternative embodiments, depending on the total number of electrical circuits or signals to be transmitted. Standard end fittings 25, 26 are connected at each end of the hose and include contacts which communicate with the conductors in conductor assemblies 10. Each end fitting may be an underwater mateable plug or receptacle connector unit for releasable mating engagement with matching receptacle or plug unit on underwater equipment, or other end fittings such as a hose termination or the like may be provided at one end. End fittings of different types may be provided in different hose assemblies depending how the hose is to be used. In the illustrated embodiment, end

fittings 25, 26 are underwater plug and socket connectors such as Nautilus wet mateable electrical connectors manufactured by Teledyne ODI of Daytona Beach, Florida. Contacts in the end fittings are suitably coupled to opposite ends of the wires extending through insulated conductor assemblies 10. It will be understood that other end fittings suitable for subsea use may be connected at opposite ends of the hose assembly in other embodiments, depending on its intended installation.

[0022] As best illustrated in FIG. 3, hose 24 contains four insulated conductor assemblies 10 which are submerged in the pressure compensating oil 22 filling the hose and extend between opposite ends of the hose for connection to the end fittings to provide electrical signal communication between equipment connected to the respective end fittings.

[0023] Each insulated conductor assembly has a predetermined impedance selected so as to reduce back reflection of signals transmitted along the conductors. There are several factors or parameters which control impedance of assembly 10 when submerged in an oil such as silicone oil in a PBOF hose. As discussed above, the gel material 16 surrounding the insulated wires in one embodiment is selected to have a dielectric constant close or identical to the dielectric constant of oil 22, so that the twisted conductor pair performs in the gel outside the hose similarly to how it would perform in oil. This allows one or more parameters of the assembly which affect impedance to be adjusted prior to assembly in the PBOF hose so as to provide the desired or predetermined impedance Z , providing for more convenient manufacture of the oil-filled hose. The impedance of each insulated conductor assembly 10 is controlled such that, when the conductor devices 10 are combined with the surrounding oil 22 in the PBOF hose assembly 20, an acceptable impedance is achieved. In one embodiment, the predetermined impedance is around 100 ohms, as is appropriate for Ethernet communication per IEEE standard 802.3.

[0024] The impedance of the assembly 10 is dependent on wire diameter d , insulation thickness t , and dielectric constants of the insulation layers of the assembly. Thus, the impedance can be adjusted by varying one or more of these parameters. The following equation approximates the relationship between these parameters for a twisted pair configuration, although there are various other ways to define Z :

$$Z = \frac{120}{\sqrt{\epsilon}} \operatorname{acosh} \frac{d + 2t}{d}$$

where d = diameter of wire 14, or wire gauge.

t = insulation thickness (i.e. total thickness of the wire insulation layer 15, gel 16, and outer insulation layer 18).

ϵ = Dielectric constant of the entire assembly, using the relationship:

$1/\epsilon_{\text{total}} = (1/\epsilon_a) + (1/\epsilon_b) + (1/\epsilon_c) \dots$, where ϵ_a , ϵ_b , etc. are the dielectric constants of individual insulating components of the assembly.

[0025] The wire diameter, insulation thickness, and dielectric constants of the insulating layers are selected so that the impedance Z is at or close to the desired or predetermined impedance value for optimum Ethernet communication, nominally around 100 ohms. In general, increase in insulation thickness increases impedance and increases in dielectric constant decrease impedance. Increase in conductor diameter also affects impedance but the effect is variable since variation in the wire diameter or gauge also affects separation of the insulated wires 12. Typically there is not a wide range of choice of impedance values for an acceptable pressure compensating oil 22 or gel 16. In practice, parameters of the pressure compensating oil 22 cannot be varied significantly in view of hose diameter considerations as well as the fact that there is not a wide range of choice for the oil 22. In one embodiment, oil 22 was silicone oil and the insulating gel 16 was a silicone based gel as described above, having a dielectric constant matching or substantially matching that of the oil. In one embodiment, the overall impedance of the assembly was primarily controlled by varying the thickness of insulating layer 15 while keeping other parameters unchanged until the insulated wire yielded an acceptable impedance when combined with the gel and oil. Other parameters of assembly 10 may be controlled to adjust impedance to the desired level in other embodiments.

[0026] In one embodiment of an insulated conductor assembly 10 having a predetermined impedance of around 100 ohms, the wire gauge was selected to be larger than in conventional twisted pair conductors, in order to improve manufacturability and durability. Wires 14 in one embodiment were 20 AWG (American Wire Gauge) wires, but wires in the range from 18 to 22 AWG may be used in other embodiments. Wires 14 may be of copper or other conductive material such as silver plated copper in order to reduce resistive losses. Insulation layers 15 may be of any suitable insulating material, and these layers in one embodiment were of Polytetrafluoroethylene (PTFE). Testing was carried out with wires having different insulation thicknesses in order to select an insulated wire that yielded an acceptable impedance when combined with the gel and surrounding oil in the configuration of Fig. 1. Wire insulation layer 15 may have a thickness in the range

from 0.005 to 0.025 inches and the thickness of layer 15 was around 0.015 inches in one specific example. Other insulation thicknesses may be used in alternative embodiments to achieve the desired overall impedance level, depending on the wire diameter and dielectric constants of the materials used in the assembly.

[0027] In the foregoing embodiments, the conductor gauge, insulation thickness, and gel dielectric constant of an insulated conductor assembly are chosen so as to achieve the desired impedance when submerged in oil in an Ethernet hose in order to improve Ethernet communication. By controlling the impedance to be at or close to the acceptable impedance for Ethernet communication in an Ethernet hose (nominally at or close to 100 ohms), the effective signal transmission distance in a subsea Ethernet hose can be increased. Currently, the longest subsea Ethernet hoses have a transmission distance limited to 70 meters. A subsea Ethernet hose as described above in connection with the embodiment of FIGS. 1 to 3 may achieve signal transmission distances of up to 100 meters.

[0028] The above embodiments allow better control of the adverse drop in impedance of paired insulated conductors when immersed in oil, to allow longer subsea Ethernet jumpers to be used. Surrounding the insulated conductors with a gel encapsulated within an outer insulating layer allows impedance to be controlled more readily to acceptable levels while also providing better pressure compensation. In an alternative embodiment, the predetermined impedance of each insulated conductor assembly may be controlled such that the desired or predetermined impedance of around 100 ohms is achieved only when the assembly is submerged in oil in the hose, but this is a less desirable for manufacturing purposes, since the final impedance is unknown prior to assembly in the hose. In the embodiments described above, the predetermined impedance of the insulated conductor assembly outside the hose is the same as the desired impedance when assembled in the hose, since the impedance is at least substantially unchanged when the assembly is submerged in oil in the hose, due to the matching of the dielectric constant of the gel to the dielectric constant of the pressure compensating oil in the hose.

[0029] The above description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles described herein can be applied to other embodiments without departing from the spirit or scope of the invention. Thus, it is to be understood that the description and drawings

presented herein represent a presently preferred embodiment of the invention and are therefore representative of the subject matter which is broadly contemplated by the present invention. It is further understood that the scope of the present invention fully encompasses other embodiments that may become obvious to those skilled in the art and that the scope of the present invention is accordingly limited by nothing other than the appended claims.

CLAIMS

What is claimed is:

1. An insulated conductive wire assembly for incorporation in a pressure balanced, oil-filled hose, comprising:
 - a pair of conductive wires, each wire having an insulation layer surrounding the conductive wire;
 - an insulating material surrounding the insulated wires; and
 - an outer insulating layer surrounding the insulating material;
 - the assembly having a predetermined impedance Z .
2. The assembly of claim 1, wherein the predetermined impedance Z is at least substantially unchanged when the assembly is submerged in a pressure balanced, oil filled jumper hose.
3. The assembly of claim 2, wherein the insulating material has a dielectric constant substantially matching the dielectric constant of a selected pressure compensating oil used in oil-filled jumper hoses.
4. The assembly of claim 3, wherein the insulating material is a mobile substance.
5. The assembly of claim 3, wherein the insulating material is a gel.
6. The assembly of claim 5, wherein the gel is a silicone based gel material having a dielectric constant substantially the same as the dielectric constant of silicone oil.
7. The assembly of claim 1, wherein the conductive wires have a diameter the range from 18 to 22 AWG (American Wire Gauge).
8. The assembly of claim 7, wherein the thickness of the insulation layer surrounding each wire is in the range from 0.005 to 0.025 inches.
9. The assembly of claim 1, wherein at least one of the following assembly parameters is selected to provide the predetermined impedance Z : thickness of the wire insulating layers; thickness of the outer insulating layer, thickness of the mobile insulating material, and dielectric constants of one or more insulating layers.
10. The assembly of claim 9, wherein each wire insulating layer is of Polytetrafluoroethylene (PTFE) and has a thickness in the range from 0.005 to 0.025 inches.

11. The assembly of claim 10, wherein each conductive wire has a diameter range from 18 to 22 AWG (American Wire Gauge)
12. The assembly of claim 1, wherein the outer insulating layer comprises a tape of insulating material wound around the mobile insulating material to hold the mobile insulating material around the insulated conductive wires.
13. The assembly of claim 12, wherein the tape is an electrically insulating polyester tape.
14. The assembly of claim 1, wherein the predetermined impedance Z is around 100 ohms.
15. The assembly of claim 1, wherein the pair of insulated conductive wires are in a twisted pair configuration.
16. A subsea Ethernet jumper hose, comprising:
 - an outer hose containing pressure compensating oil having a first dielectric constant; and
 - at least one insulated electrical conductor assembly submerged in the oil and extending along the length of the hose;
 - the insulated electrical conductor assembly having a predetermined impedance and comprising a pair of conductive wires, each wire having an insulation layer surrounding the conductive wire, an insulating material surrounding the insulated wires, and an outer insulating layer surrounding and containing the insulating material.
17. The hose of claim 16, wherein the insulating material has a dielectric constant substantially matching the dielectric constant of the pressure compensating oil.
18. The hose of claim 17, wherein the predetermined impedance is around 100 ohms both in air and when submerged in the pressure compensating oil in the hose.
19. The hose of claim 16, wherein the at least one insulated electrical conductor assembly comprises two or more identical insulated electrical conductor assemblies submerged in the oil and extending side by side along the length of the hose.
20. The hose of claim 16, wherein the pair of insulated wires in the insulated conductor assembly are in a twisted pair configuration.
21. The hose of claim 16, further comprising an end fitting secured at each end of the hose having contacts in electrical communication with the conductive wires, the end fittings comprising underwater mateable connector units.

22. The hose of claim 17 wherein the insulating material comprises a mobile insulating material.
23. The hose of claim 17 wherein the insulating material surrounding the insulated conductive wires is a water blocking gel.
24. The hose of claim 23 wherein the pressure compensating oil is silicone oil and the water blocking gel is a silicone based gel.
25. The hose of claim 16, wherein the conductive wires have a diameter the range from 18 to 22 AWG (American Wire Gauge).
26. The hose of claim 25 wherein the thickness of the insulation layer surrounding each wire is in the range from 0.005 to 0.025 inches.
27. The hose of claim 22, wherein the outer insulating layer of said at least one insulated electrical conductor assembly comprises a tape of insulating material wound around the mobile insulating material to hold the mobile insulating material around the insulated conductive wires.
28. A method of making an impedance controlled subsea Ethernet hose, comprising:
forming at least one insulated conductor assembly by surrounding a pair of conductive wires each having an insulating layer extending over the conductive wire with a gel material having a first dielectric constant, and wrapping an outer layer of insulating material around the gel material to hold the gel material around the insulated conductive wires;
the conductive wire diameter, wire insulating layer material and thickness, and outer insulating layer material and thickness being selected such that the insulated conductor assembly has a predetermined impedance Z ;
filling a flexible hose of insulating material with pressure compensating oil;
submerging at least one insulated conductor assembly in the pressure compensating oil such that the insulated conductor assembly extends along the length of the hose;
the pressure compensating oil having a dielectric constant which is at least substantially equal to the first dielectric constant, whereby the predetermined impedance Z is substantially unchanged when the at least one insulated conductor assembly is installed along the hose; and
attaching opposite ends of the hose to first and second underwater connector units having contacts in electrical communication with opposite ends of the conductive wires.

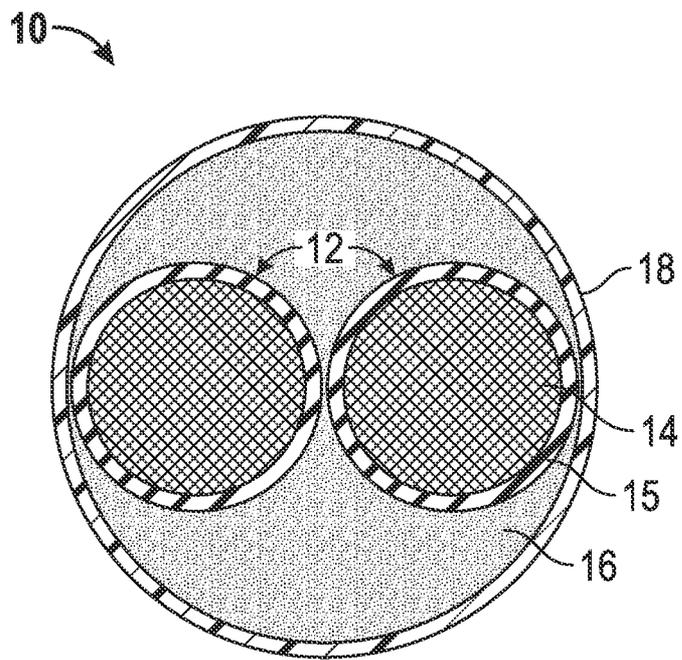


FIG. 1

2/2

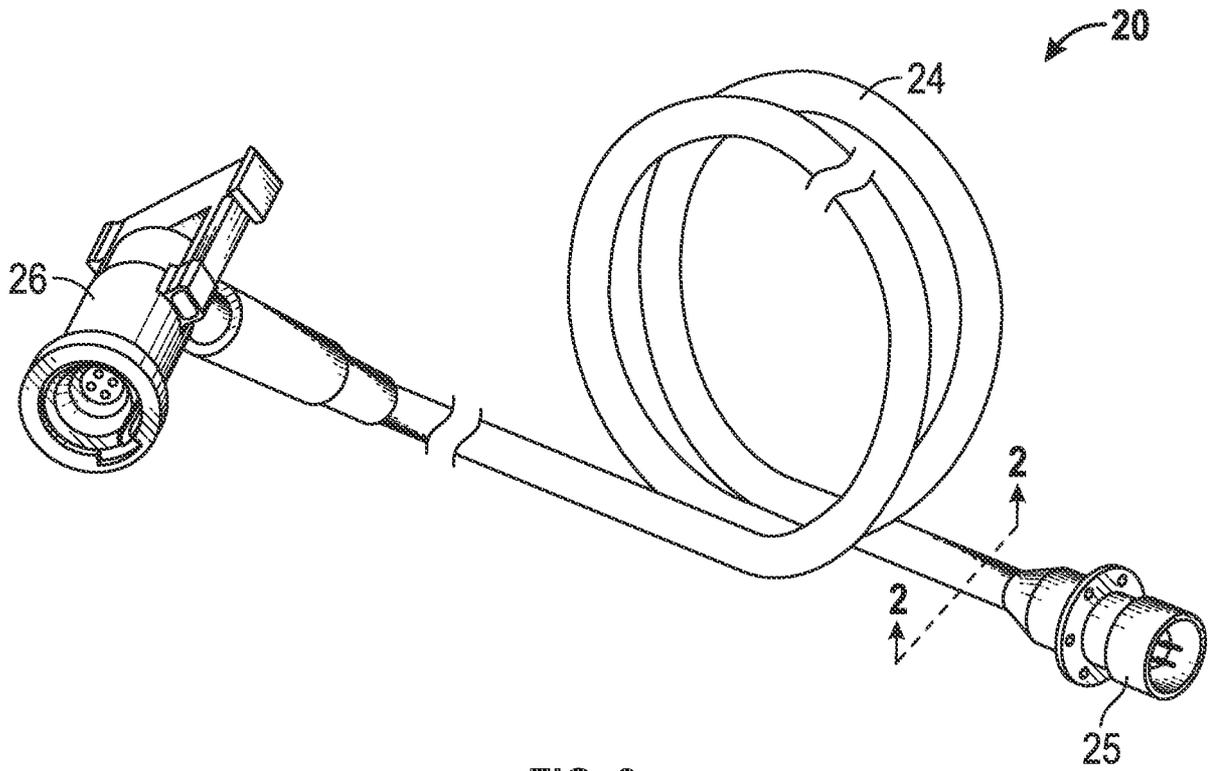


FIG. 2

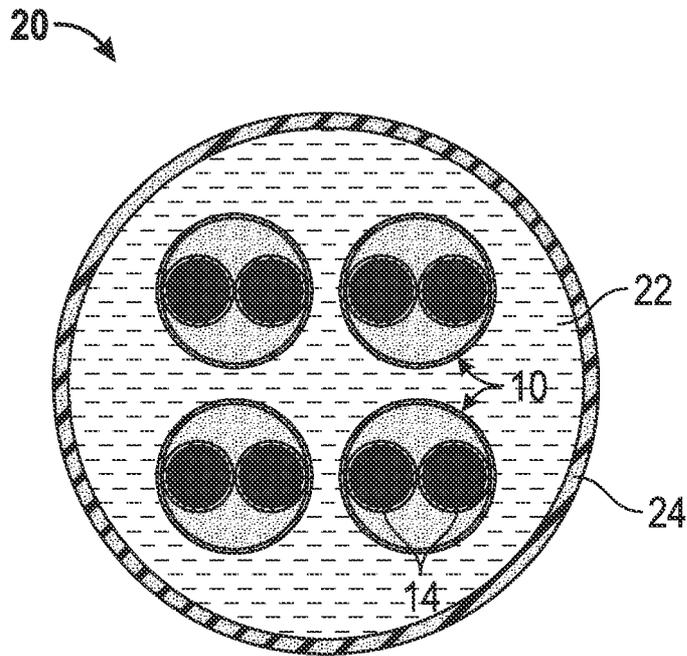


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/015237

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01B7/285
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, CHEM ABS Data, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 178 577 A (CINI HECTOR J [US] ET AL) 11 December 1979 (1979-12-11) column 2, line 15 - line 18; claims 1-9; figure 2	1-28
A	----- EP 2 278 666 A1 (SUMITOMO WIRING SYSTEMS [JP]) 26 January 2011 (2011-01-26) paragraph [0047]	1-28
A	----- WO 88/08440 A1 (FREEMAN CLARENCE S [US]) 3 November 1988 (1988-11-03) claims 1-5	1-28

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 19 May 2014	Date of mailing of the international search report 27/05/2014
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Lehnert, Andreas
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/015237

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4178577	A	11-12-1979	NONE

EP 2278666	A1	26-01-2011	EP 2278666 A1 26-01-2011
			US 2011053398 A1 03-03-2011
			WO 2009139220 A1 19-11-2009

WO 8808440	A1	03-11-1988	AT 84058 T 15-01-1993
			AU 622112 B2 02-04-1992
			BR 8807482 A 27-03-1990
			DE 3877198 T2 29-04-1993
			DK 731288 A 01-03-1989
			EP 0353251 A1 07-02-1990
			JP 2989192 B2 13-12-1999
			JP H02503684 A 01-11-1990
			NO 885807 A 29-12-1988
			WO 8808440 A1 03-11-1988
