




(22) Date de dépôt/Filing Date: 2018/09/27
 (41) Mise à la disp. pub./Open to Public Insp.: 2019/04/03
 (45) Date de délivrance/Issue Date: 2024/03/19
 (62) Demande originale/Original Application: 3 019 081
 (30) Priorité/Priority: 2017/10/03 (US62/567,339)

(51) Cl.Int./Int.Cl. *G02B 6/44* (2006.01),
H05K 7/14 (2006.01)
 (72) Inventeur/Inventor:
PILON, VINCENT, CA
 (73) Propriétaire/Owner:
BELDEN CANADA ULC, CA
 (74) Agent: LAVERY, DE BILLY, LLP

(54) Titre : SYSTEME ET PROCEDE DE CASSETTE DE FIBRES OPTIQUES MODULAIRE
 (54) Title: MODULAR FIBER OPTIC CASSETTE, SYSTEM AND METHOD

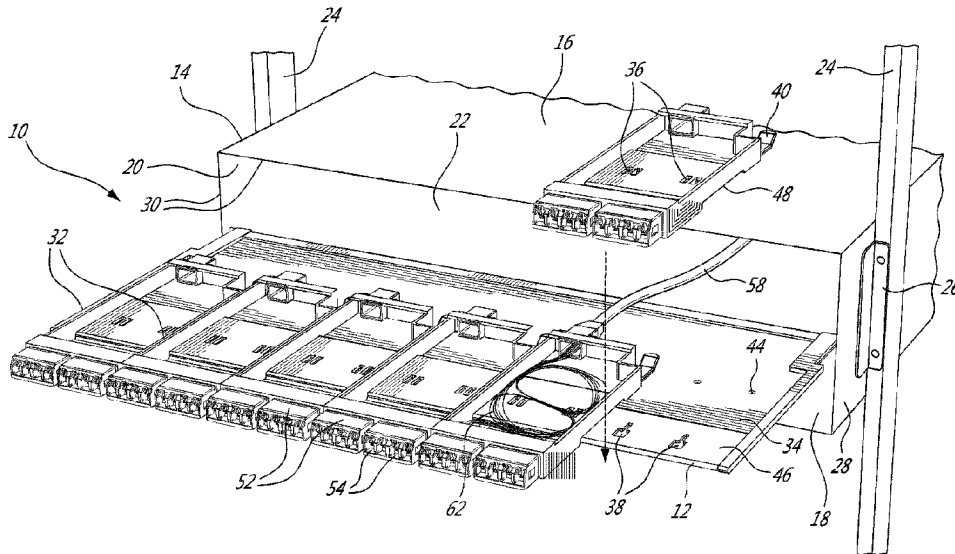

(57) **Abrégé/Abstract:**

A modular fiber optic cassette system, method and cassette is disclosed. The system comprises a case defining a tray receiving space and an opening to a tray receiving space, at least one tray slideably received within the case for movement between a stored position wherein the tray is inside the case and an accessible position wherein a front end of the tray is in front of the opening and outside of the case, a plurality of fiber optic cassettes arrangeable side by side along the tray front end, a first of the cassettes comprising a first cassette width of one of one, two, three, four or six standard width units and a second of the cassettes comprising a second cassette width different from the first cassette width and one of one, two, three, four or six standard width units, and a fastener assembly for removeably securing each of the cassettes to the tray.

Abstract

A modular fiber optic cassette system, method and cassette is disclosed. The system comprises a case defining a tray receiving space and an opening to a tray receiving space, at least one tray slideably received within the case for movement between a stored position wherein the tray is inside the case and an accessible position wherein a front end of the tray is in front of the opening and outside of the case, a plurality of fiber optic cassettes arrangeable side by side along the tray front end, a first of the cassettes comprising a first cassette width of one of one, two, three, four or six standard width units and a second of the cassettes comprising a second cassette width different from the first cassette width and one of one, two, three, four or six standard width units, and a fastener assembly for removeably securing each of the cassettes to the tray.

TITLE OF THE INVENTION

MODULAR FIBER OPTIC CASSETTE, SYSTEM AND METHOD

5 **FIELD OF THE INVENTION**

[0001]The present invention relates to a modular fiber optic cassette, system and method. In particular, the present invention relates to a fiber optic cassette comprising a width of one or more standard width units and such that fiber optic
10 cassettes of different widths can be arranged on the same tray while optimizing the use of tray space.

BACKGROUND OF THE INVENTION

15 [0002]The prior art discloses fiber optic cassettes or splice boxes for use in terminating fiber optic trunk cables and splitting them out to patch cables which are removeably arranged on tray systems within a rack mounted case. One drawback of these cassettes and tray systems is that they are typically preconfigured to terminate fiber optic cables comprising a single predetermined
20 number of optic fibers. Another drawback is that cassettes which are used to terminate fiber optic cables comprising different numbers of optic fibers are generally incompatible with one another and additionally require trays with different spacing, securing mechanisms and the like.

25 **SUMMARY OF THE INVENTION**

[0003]In order to address the above and other drawbacks there is provided a modular fiber optic cassette system. The system comprises a case comprising a top and a bottom wall and two opposed side walls, each of the sidewalls attached
30 between respective side edges of the top and bottom wall, the walls together defining a tray receiving space there between and a forward edge of each the

wall together defining an opening to the tray receiving space, at least one tray slideably received within the tray receiving space for movement between a stored position wherein the tray is completely inside the tray receiving space and an accessible position wherein a front end of the tray is in front of the opening and outside of the tray receiving space, a set of fiber optic cassettes, a selected plurality of the cassettes arrangeable side by side along the tray front end wherein each of the cassettes comprises a plurality of optic plug receiving receptacles arranged side by side in a row along a front thereof, a first of the set of cassettes comprising a first cassette width as measured between outer side edges thereof of one of one, two, three, four and six standard width units and a second of the cassettes comprising a second cassette width as measured between outer side edges thereof different from the first cassette width and one of one, two, three, four and six standard width units, and a fastener for removeably securing each of the cassettes to the tray, wherein when arranged on the tray an outer side edge of each of the selected cassettes is directly adjacent an outer side edge of at least one other selected cassette.

[0004] There is also provided a method for organising a tray comprising a front edge in a fiber optic interconnect system. The method comprises defining a standard width unit wherein a width of the front edge is substantially evenly divisible by the standard width unit, selecting a plurality of cassettes for installation on the tray from a set of cassettes having a plurality of different widths as measured between respective outer side edges thereof, wherein each of the different widths is evenly divisible by the standard width unit, and releasably securing the selected cassettes along the front edge of the tray. When arranged on the tray an outer side edge of each of the selected cassettes is directly adjacent an outer side edge of at least one other selected cassette.

BRIEF DESCRIPTION OF THE DRAWINGS

30

[0005] Figure 1 provides a right front perspective view of a modular fiber optic

cassette and system mounted in a rack and in accordance with an illustrative embodiment of the present invention;

5 **[0006]** Figures 2A and 2B provide respectively a raised right front perspective view and a lowered right front perspective view of a modular fiber optic cassette in accordance with an illustrative embodiment of the present invention;

10 **[0007]** Figure 3 provides a front plan view of a modular fiber optic cassette system mounted in a rack in accordance with an illustrative embodiment of the present invention;

15 **[0008]** Figures 4A through 4D provide raised right front perspective views of a tray populated with respectively six (6), four (4), three (3) and two (2) cassettes of different widths;

[0009] Figure 5A, 5B and 5C provide front plan views of a modular fiber optic cassette and system mounted in a rack respectively in accordance with first, second and third alternative embodiments of the present invention;

20 **[0010]** Figures 6A and 6B provide respectively a raised right front perspective view and a lowered right front perspective view of a modular fiber optic cassette in accordance with an alternative illustrative embodiment of the present invention; and

25 **[0011]** Figures 7A and 7B provide respectively a raised right front perspective view of a tray comprising a plurality modular fiber optic cassettes and a pair of cable management brackets and lowered right front perspective view of a cable management bracket in accordance with a second alternative illustrative embodiment of the present invention.

30

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

[0012] Referring now to Figure 1, a modular cassette system, generally referred to using the reference numeral 10, will now be described. The modular cassette
5 comprises a slideable tray 12 illustratively mounted within a case 14. The case 14 comprises a top wall 16, a bottom wall 18 and a pair of opposed side walls 20 defining a tray receiving space 22 therebetween. The case 14 is illustratively mounted to the rails 24 of a rack via a pair of mounting brackets 26 wherein one of the brackets 26 is attached to an outer surface 28 of a respective one of the
10 sidewalls 20. The front edges 30 of the walls 16, 18, 20 define an opening via which the tray receiving space 22 can be accessed. In a particular illustrated embodiment the system 10 is shown for mounting in a 19" rack, however in a particular embodiment the system 10, with suitable modifications, may be mounted equally in a cross connect system, fiber bay or wall mount or the like.

15

[0013] Referring to Figures 2A and 2B in addition to Figure 1, the tray 12 receives a plurality of removable fiber optic module or cassettes 32 arranged side by side on an upper surface 34 thereof. In a first embodiment each fiber optic cassette 32 is secured to the tray 12 using a fastener comprising tabs 36 of inverted "T" cross section which engage with respective slots 38 machined or otherwise
20 formed in the tray 12. A flexible tab 40 is also provided which comprises a boss 42 that engages a respective aperture 44 machined or otherwise formed in the tray 12 when the tabs 36 are engaged within their respective slots 38, thereby releasably securing the cassette 32 to the tray 12. In order to better orient the
25 cassette 36 on the tray during installation, the tray 12 comprises a raised shoulder 46 which is received within a channel 48 moulded or otherwise formed in an underside 50 of the cassette 32.

[0014] Still referring to Figures 2A and 2B, each cassette 32 illustratively
30 comprises a plurality of receptacle modules 52 each comprising a plurality of receptacles 54, illustratively LC Quad type receptacles, arranged in a row and

exposed along a forward edge 56 of the cassette 32. The cassette 32 also illustratively terminates a fiber optic cable 58, such as a trunk cable or the like, comprising a plurality of optic fibers at a multi-fiber connector receiving receptacle 60 on a rearward edge. Each optic fiber of the fiber optic cable 58 is interconnected with a respective one of the receptacles 54 using an optic fiber segment 62 comprising a receptacle end which is terminated by a plug 64. The segments 62, which are typically longer than the distance between the forward edge and the rearward edge, are typically looped several times within the cassette 32, for example in a serpentine or the like. A person of ordinary skill in the art will understand that an optic fiber terminated with a plug (not shown) inserted into a selected one of the receptacles 54 will interconnect the optic fiber with a selected optic fiber segment 62.

[0015] Referring now to Figure 3 and Figures 4A through 4D, as discussed above, each cassette 32 illustratively comprises a plurality of receptacle modules 52 each comprising four (4) receptacles 54. It is foreseen to provide a set of four (4) different cassette sizes to accommodate terminating fiber optic cables comprising different number of optic fibers. Each of the different cassette sizes of the set is based on an integer multiple of a standardised pitch or width unit W wherein one standardized width unit accommodates a single receptacle module 52 comprising four (4) receptacles 54. Illustratively, a 2W cassette 32 comprising two (2) modules 52 accommodating eight (8) optic fibers (Figure 4A) is provided, a 3W cassette 32 comprising three (3) modules 52 accommodating twelve (12) optic fibers (Figure 4B) is provided, a 4W cassette 32 comprising four (4) modules 52 accommodating sixteen (16) optic fibers (Figure 4C) is provided and a 6W cassette 32 comprising six (6) modules 52 accommodating twenty-four (24) optic fibers (Figure 4D) is provided for. The 2W, 3W, 4W and 6W cassettes 32 are typically used only with like cassettes 32 as illustrated and such that respectively six (6), four (4), three (3) and two (2) cassettes fit snugly side by side on the 12W tray, although in a particular embodiment cassettes 32 of different widths could be used together.

[0016] Although the present illustrative embodiment in a particular embodiment the pitch/width W is based on a LC Quad (SC Duplex) technology footprint comprising four (4) connectors, in an alternative embodiment the pitch/width W could be based on a different technology footprint, including SC Duplex comprising two (2) connectors and MPO type connectors comprising *inter alia* multiple optic fibers such as MPO-12, MPO-16 and MPO-24.

[0017] Still referring to Figures 3, 4A through 4D in addition to Figure 1, a person of ordinary skill in the art will now understand that the disclosed system of cassettes 32 can be used to accommodate optic fiber cables 58 comprising different numbers of optic fibers 62 while ensuring that the same number of optic fibers 62 are accessible via the exposed receptacles 54.

[0018] Referring back to Figure 1, the spacing between adjacent slots 38 as well as the spacing between adjacent apertures 44 conforms to the standardised width unit W and such that the $2W$, $3W$, $4W$ and $6W$ cassettes 32 can be readily accommodated on the tray.

[0019] Referring now to Figure 5A, in a first alternative embodiment of the system each receptacle modules 52 comprises a duplex type module arranged vertically. Additionally in a first cassette size four (4) of such duplex modules 52 are provided to provide for eight (8) receptacles 54 for terminating a fiber optic cable (not shown) comprised of eight (8) optic fibers. Similar to the first embodiment discussed above, sizes for twelve (12), sixteen (16) and twenty four (24) receptacles are also provided. Again, as the width of the cassettes is an integer multiple of the same pitch/width, cassettes of different widths can be used in the same tray system or in some cases on the same tray without modification or changing the density of the receptacles 54 for terminating optic fibres.

30

[0020] Referring now to Figure 5B, in a second alternative embodiment of the

system each receptacle modules 52 comprises a Quad type module arranged vertically. In a first cassette size two (2) of such quad modules 52 are provided to provide for eight (8) receptacles 54 for terminating a fiber optic cable (not shown) comprised of eight (8) optic fibers. Cassettes comprising three (3), four
5 (4) and six (6) quad type modules 52 are provided to provide respectively twelve (12), sixteen (16) and twenty-four (24) receptacles. Again, as the width of the cassettes is an integer multiple of the same pitch/width, cassettes of different widths can be used in the same tray system or in some cases on the same tray without modification or changing the density of the receptacles 54 for terminating
10 optic fibres.

[0021] Referring now to Figure 5C, in a third alternative embodiment of the system each receptacle modules 52 comprises a duplex type module arranged horizontally in two rows. In a first cassette size four (4) of such duplex modules
15 52 are provided to provide for eight (8) receptacles 54 for terminating a fiber optic cable (not shown) comprised of eight (8) optic fibers. Cassettes comprising six (6), eight (8) and twelve (12) duplex type modules 52 are provided to provide respectively twelve (12), sixteen (16) and twenty-four (24) receptacles. Again, as the width of the cassettes is an integer multiple of the same pitch/width, cassettes
20 of different widths can be used in the same tray system or in some cases on the same tray without modification or changing the density of the receptacles 54 for terminating optic fibres.

[0022] Referring now to Figures 6A and 6B in addition to Figure 1, in an
25 alternative embodiment of an assembly for securing the cassettes 32 to the tray 12 the tray 12 is manufactured from a ferrous material such as steel or the like and the fastener comprises a magnet 66 which is attracted to the tray and embedded or otherwise secured within a recess 68 formed in the underside 50 of the cassette 32. The tray 12, further comprises a series of spaced slots 70
30 arranged along the raised shoulder 46 which engage bosses 72 to ensure correct positioning of the cassettes 32 on the tray 12.

[0023] Referring now to Figure 7A in a second alternative illustrative embodiment other equipment, such as a cable management bracket 74 can be provided with the same width W and such that they can be mounted to together with the cassettes 32 to the tray 12. In this regard, and with reference to Figure 7B in addition to Figure 7, the cable management bracket 74 is provided with tabs 76 comprising an inverted "T" cross section which engage with engage a slot 38 on the tray 12. A flexible tab 78 is provided which comprises a boss 80 that engages one of the apertures 44 in the tray 12 when the tab 76 is engaged within its respective slot 38, thereby releasably securing the cable management bracket 74 to the tray 12. In order to better orient the cable management bracket 74 on the tray during installation, the raised shoulder 46 of the tray 12 is received within a channel 82 moulded or otherwise formed in the underside 84 of the cable management bracket 74. Additionally, each cable management bracket 74 includes a cable management loop 86 for receiving a plurality of optic fibres (not shown) which are terminated at respective ones of the receptacles 54. A flexible strip 88 across the mouth of the cable management loop 86 is provided to releasably retain the plurality of optic fibers within the loop 86.

[0024] Although the present invention has been described hereinabove by way of specific embodiments thereof, it can be modified, without departing from the spirit and nature of the subject invention as defined in the appended claims.

Claims

1. A modular fiber optic cassette system, the system comprising:
 - 5 a case comprising a top and a bottom wall and two opposed side walls, each of the sidewalls attached between respective side edges of the top and bottom wall, the walls together defining a tray receiving space there between and a forward edge of each the wall together defining an opening to the tray receiving space;
 - 10 at least one tray slideably received within the tray receiving space for movement between a stored position wherein the tray is completely inside the tray receiving space and an accessible position wherein a front end of the tray is in front of the opening and outside of the tray receiving space;
 - 15 a set of fiber optic cassettes, a selected plurality of the cassettes arrangeable side by side along the tray front end wherein each of the cassettes comprises a plurality of optic plug receiving receptacles arranged side by side in a row along a front thereof, a first of the set of cassettes comprising a first cassette width as measured between outer side edges thereof of one of one, two, three, four and six standard width units and a second of the cassettes comprising a second cassette width as measured between outer side edges thereof different from the first cassette width and one of one, two, three, four and six standard width units; and
 - 20 a fastener for removeably securing each of the cassettes to the tray;
 - 25 wherein when arranged on the tray an outer side edge of each of the selected cassettes is directly adjacent an outer side edge of at least one other selected cassette.

2. The modular fiber optic cassette system of claim 1, wherein the tray has a width dimensioned to receive at least twelve standard width units side by side.
- 5 3. The modular fiber optic cassette system of claim 1, wherein each of the cassettes comprises a multi fiber connector receiving receptacle arranged on a rear thereof and a plurality of optic fibers, one of the optic fibers interconnecting a respective one of the optic plug receiving receptacles with the multi fiber connector receiving receptacle.
- 10 4. The modular fiber optic cassette system of claim 1, wherein each of the cassettes comprises four fiber optic plug receiving receptacles arranged side by side in a row along a front thereof for each standard width unit.
- 15 5. The modular fiber optic cassette system of claim 1, wherein the system is for mounting in a rack and further comprising a pair of mounting brackets, one of the brackets attached to each of the sidewalls on either side of an outside of the case, the mounting brackets for securing the case to the rack.
- 20 6. The modular fiber optic cassette system of claim 1, wherein the tray is manufactured from a ferrous metal and the fastener comprises a magnet.
- 25 7. The modular fiber optic cassette system of claim 1, further comprising at least one elongate cable management bracket comprising a cable management loop and a fastener for removeably securing the at least one bracket to the tray, the bracket having a bracket width of one of the standard width units and further wherein when installed on the tray adjacent an installed one of the cassettes, the cable management loop is positioned in front of and to a side of the plurality of optic plug receiving receptacles of the installed cassette.
- 30

8. A method for organising a tray comprising a front edge in a fiber optic interconnect system, the method comprising:
- 5 defining a standard width unit wherein a width of the front edge is substantially evenly divisible by the standard width unit;
- selecting a plurality of cassettes for installation on the tray from a set of cassettes having a plurality of different widths as measured between respective outer side edges thereof, wherein each of the different widths is evenly divisible by the standard width unit; and
- 10 releasably securing the selected cassettes along the front edge of the tray;
- wherein when arranged on the tray an outer side edge of each of the selected cassettes is directly adjacent an outer side edge of at least one other selected cassette.
- 15
9. The method for organising a tray of claim 8, wherein the set of cassettes comprises cassettes comprising widths of one, two, three, four and six standard width units.
- 20
10. The method for organising a tray of claim 8, wherein the selected cassettes all comprise the same width.
11. The method for organising a tray of claim 8, wherein the selected cassettes comprise a first cassette having a first width and a second cassette having a second width different from the first width.
- 25
12. The method for organising a tray of claim 8, wherein the width of the front edge is substantially evenly divisible by a maximum of twelve (12) of the standard width units.
- 30

13. The method for organising a tray of claim 12, wherein the selected cassettes further comprise a third cassette comprising a third width different from the first width and the second width.

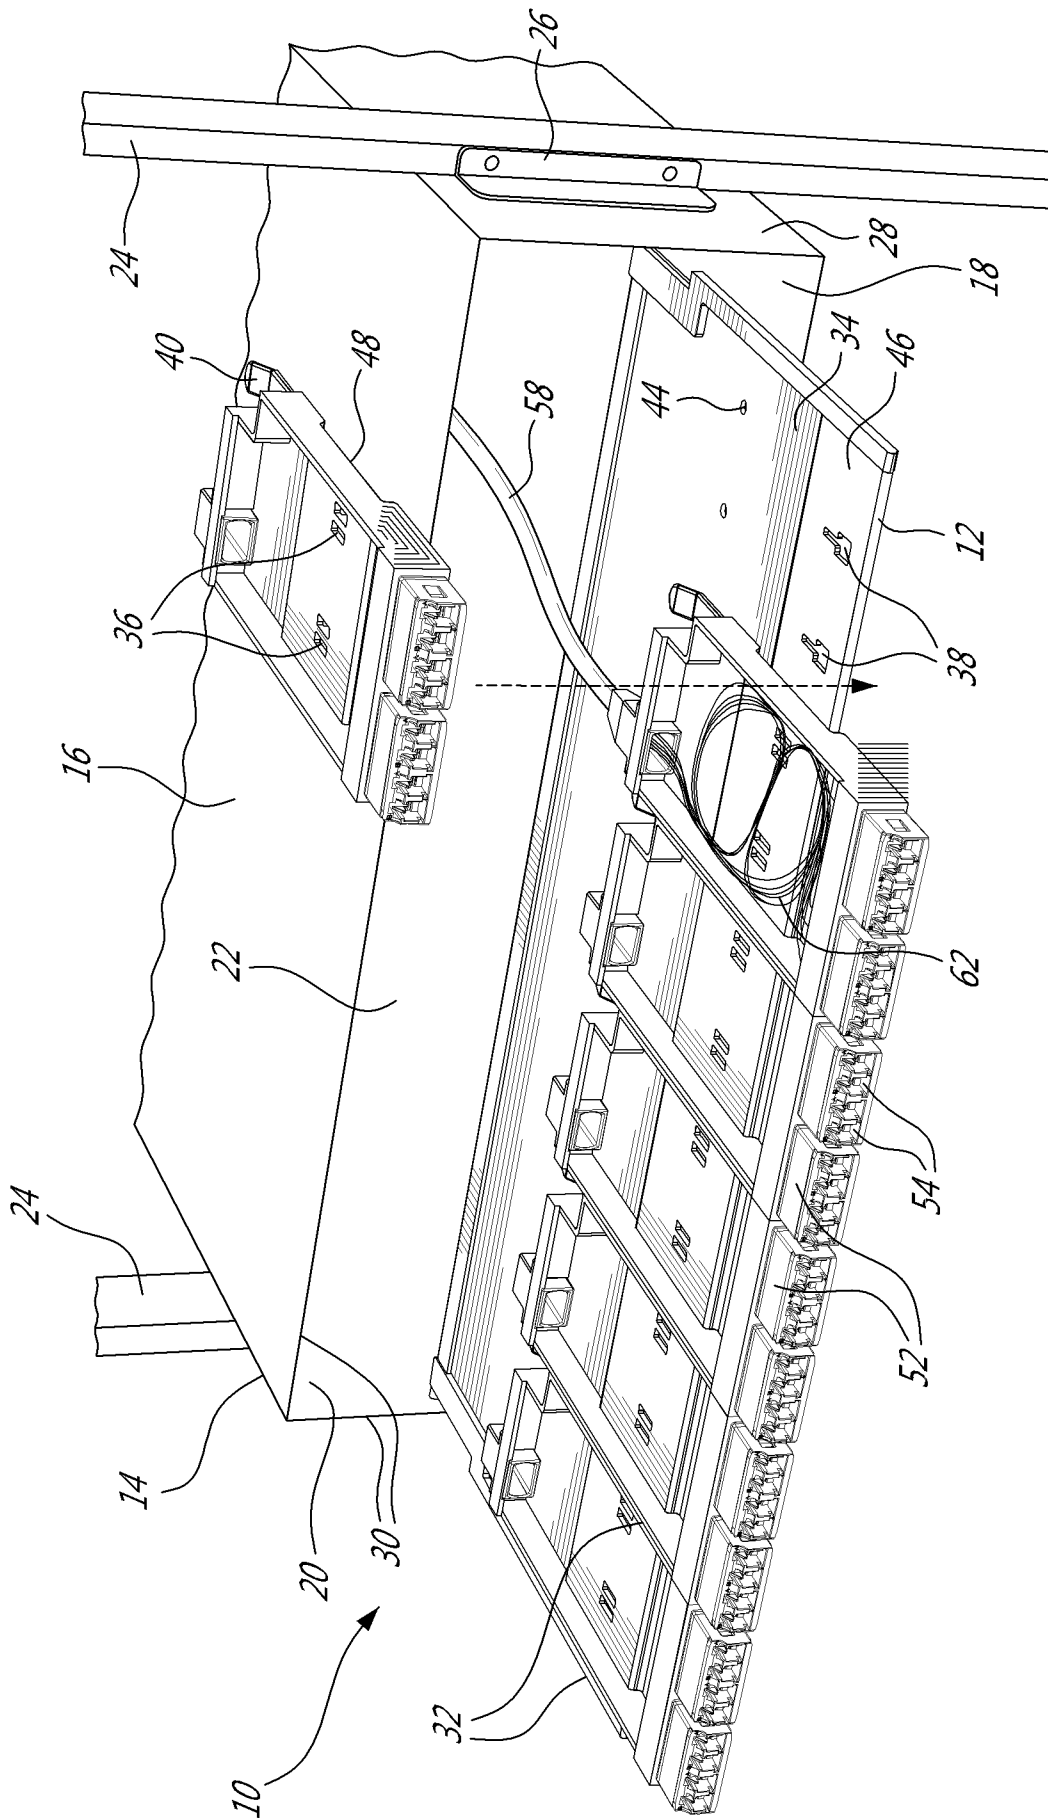


FIG. 1

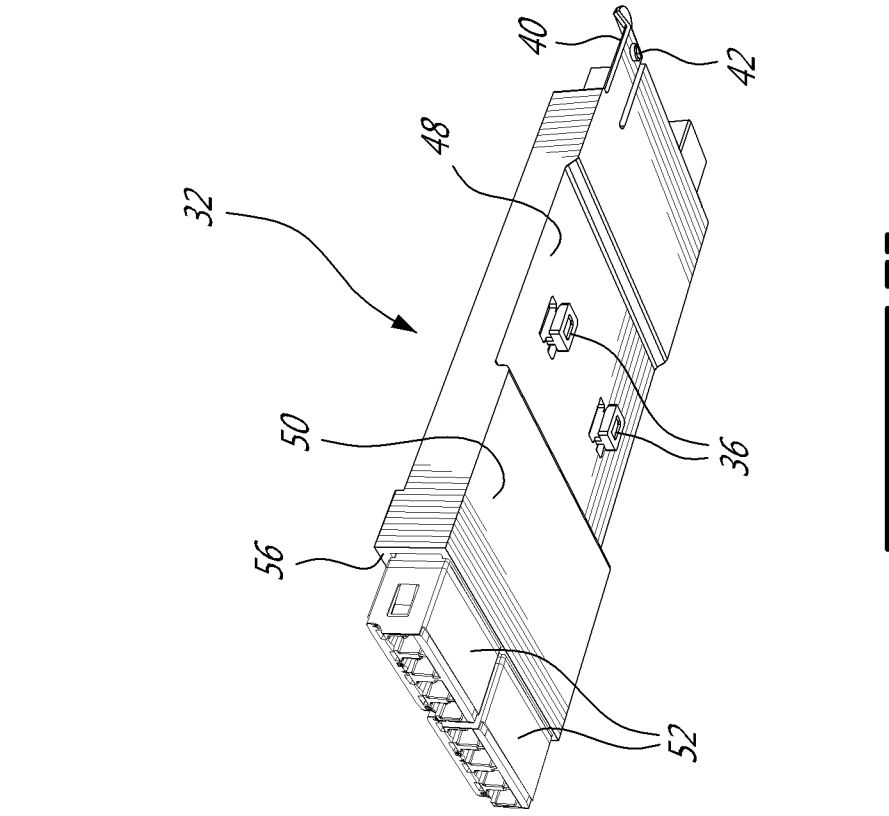


FIG. 2B

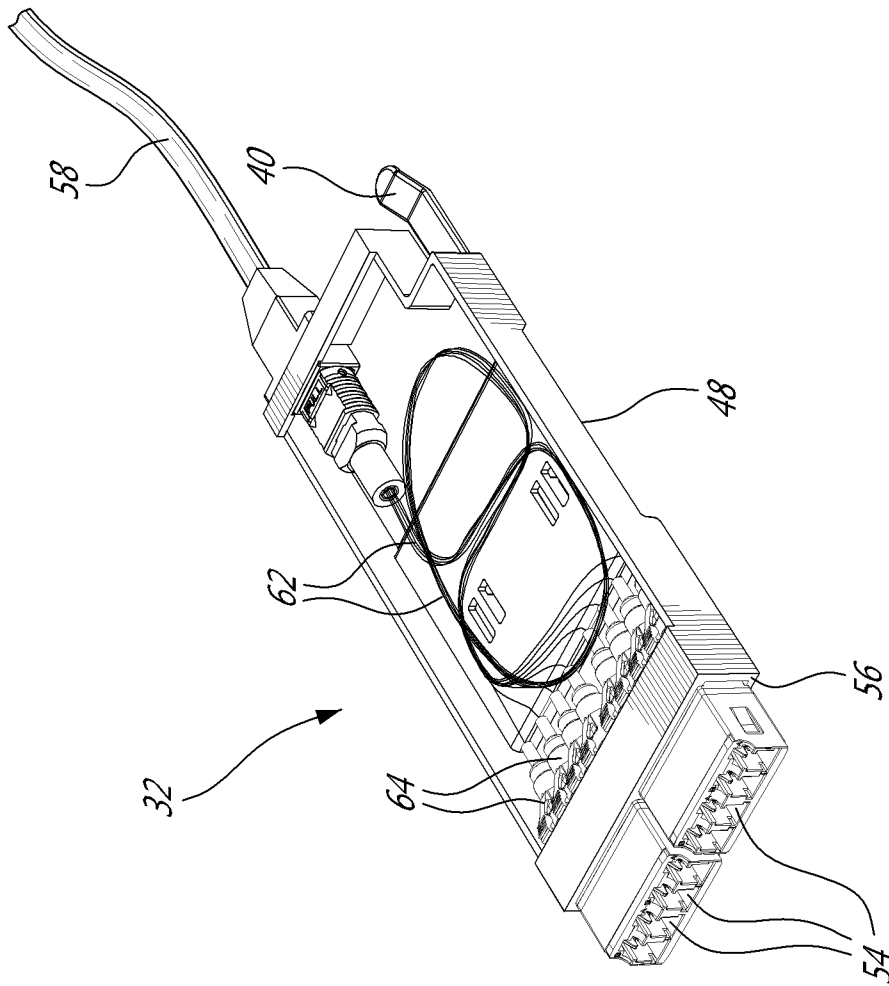
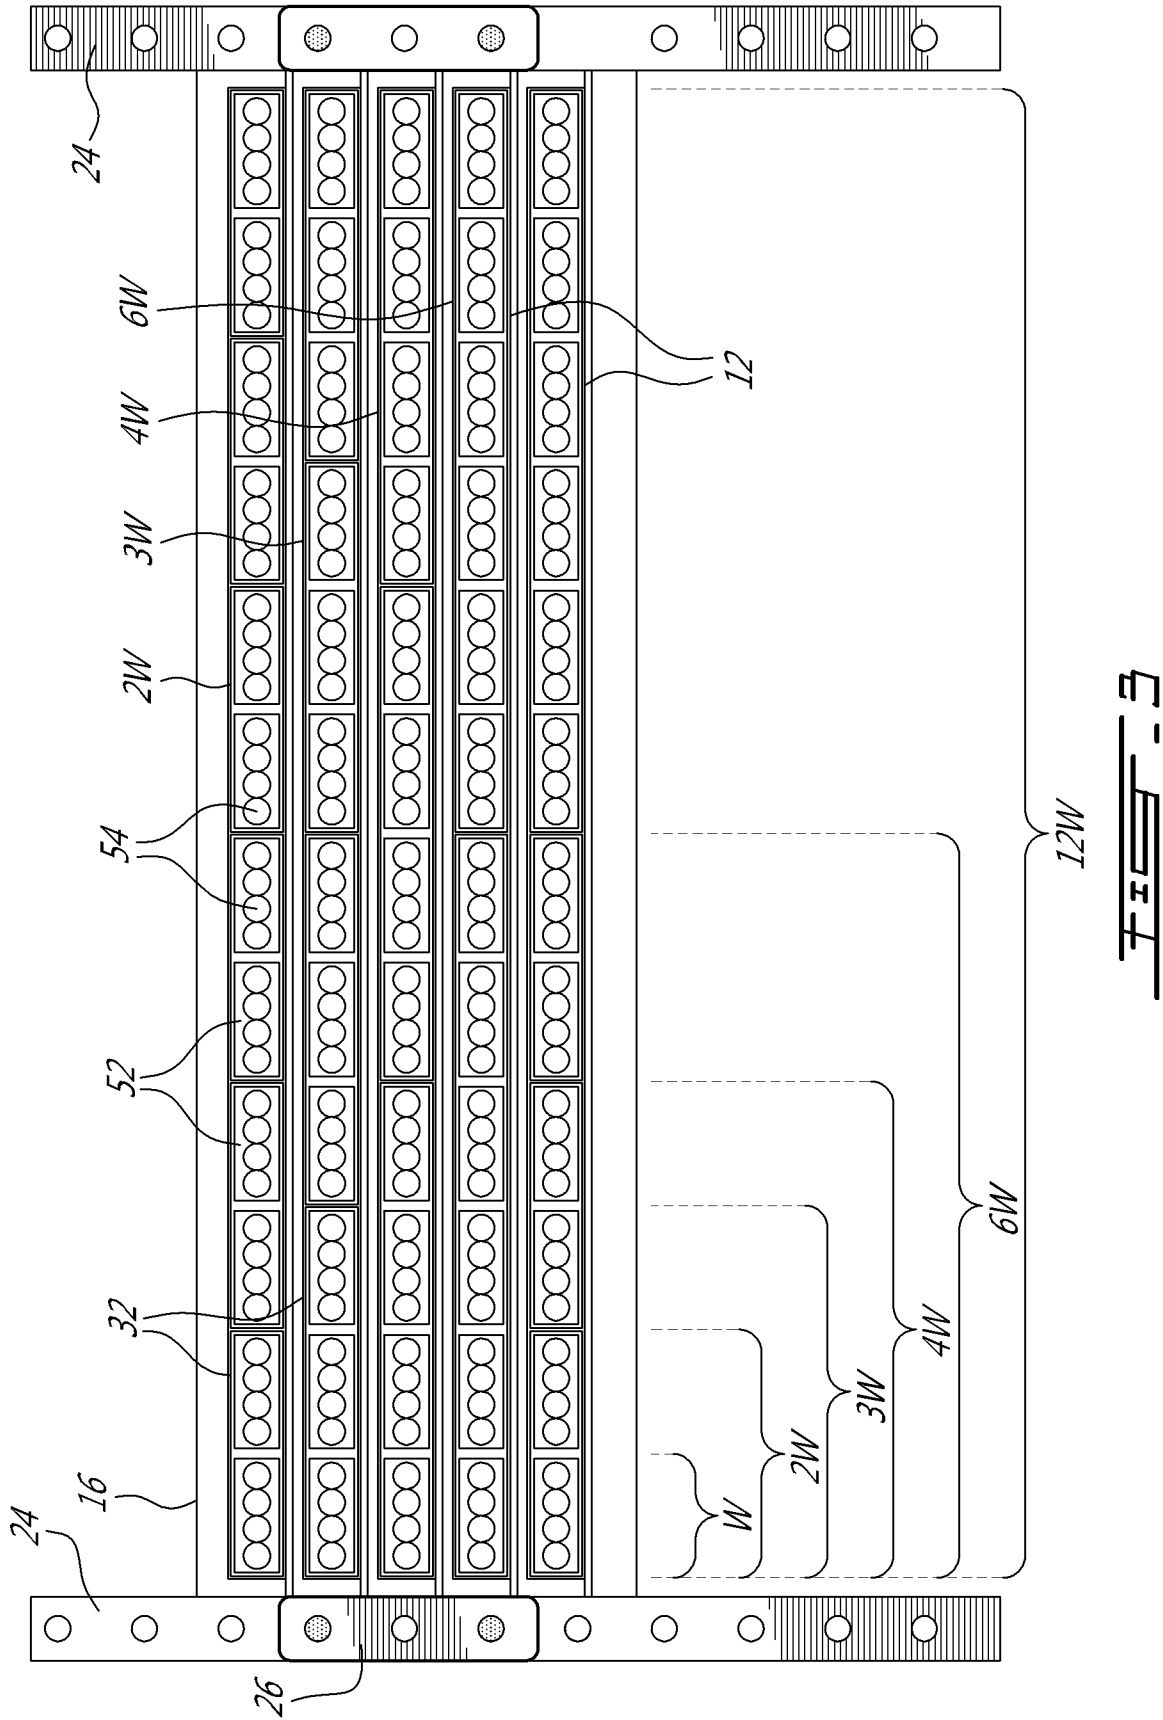


FIG. 2A



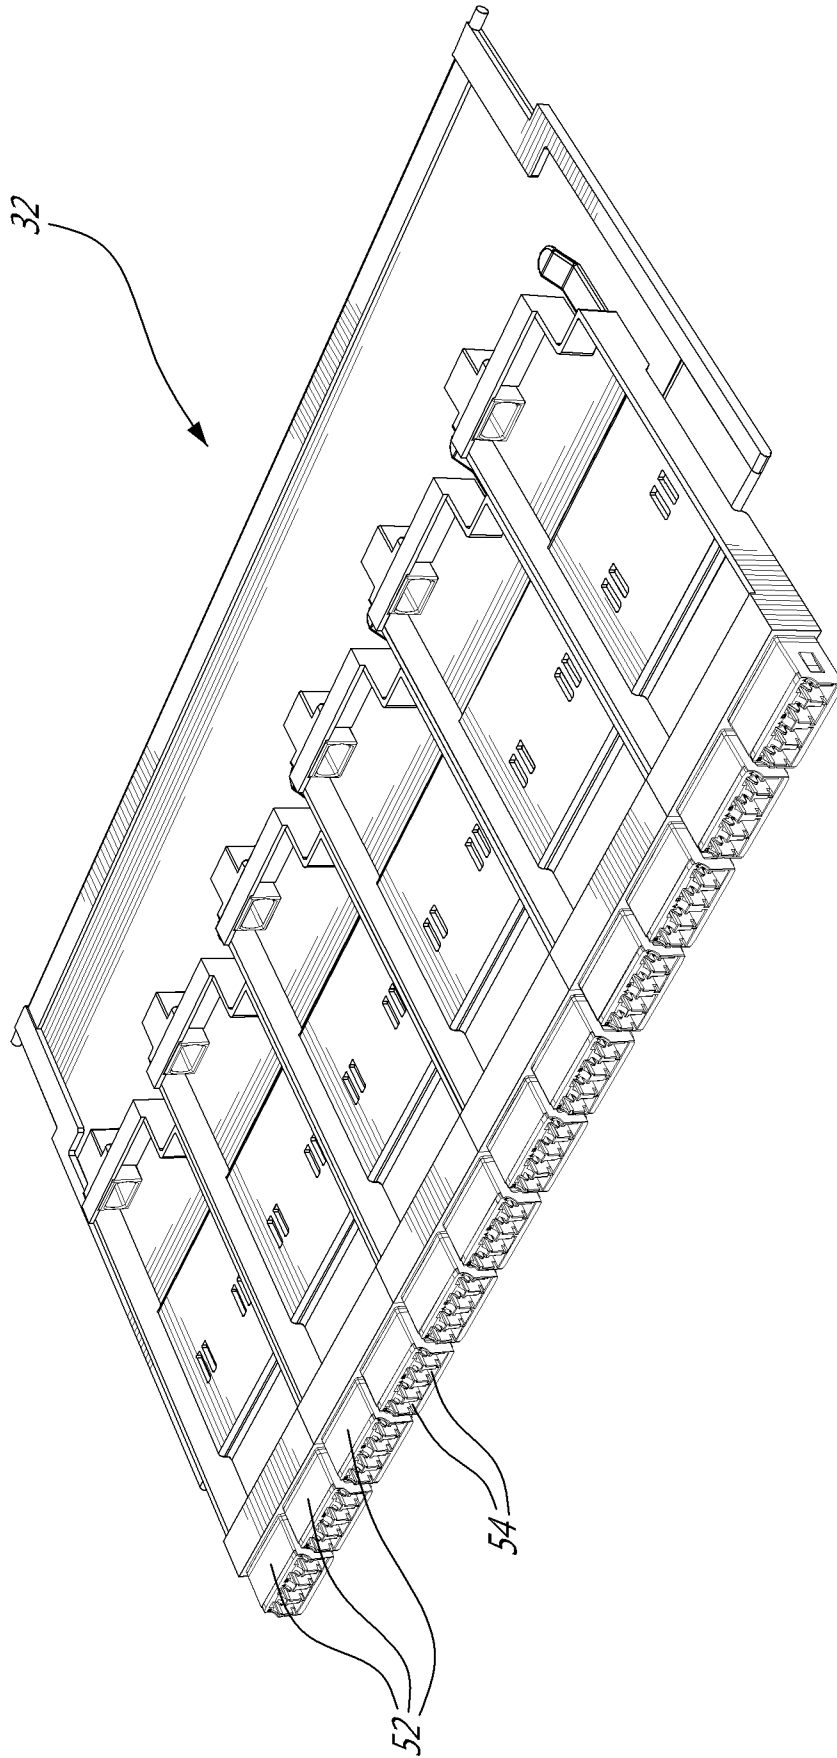


FIG. 4A

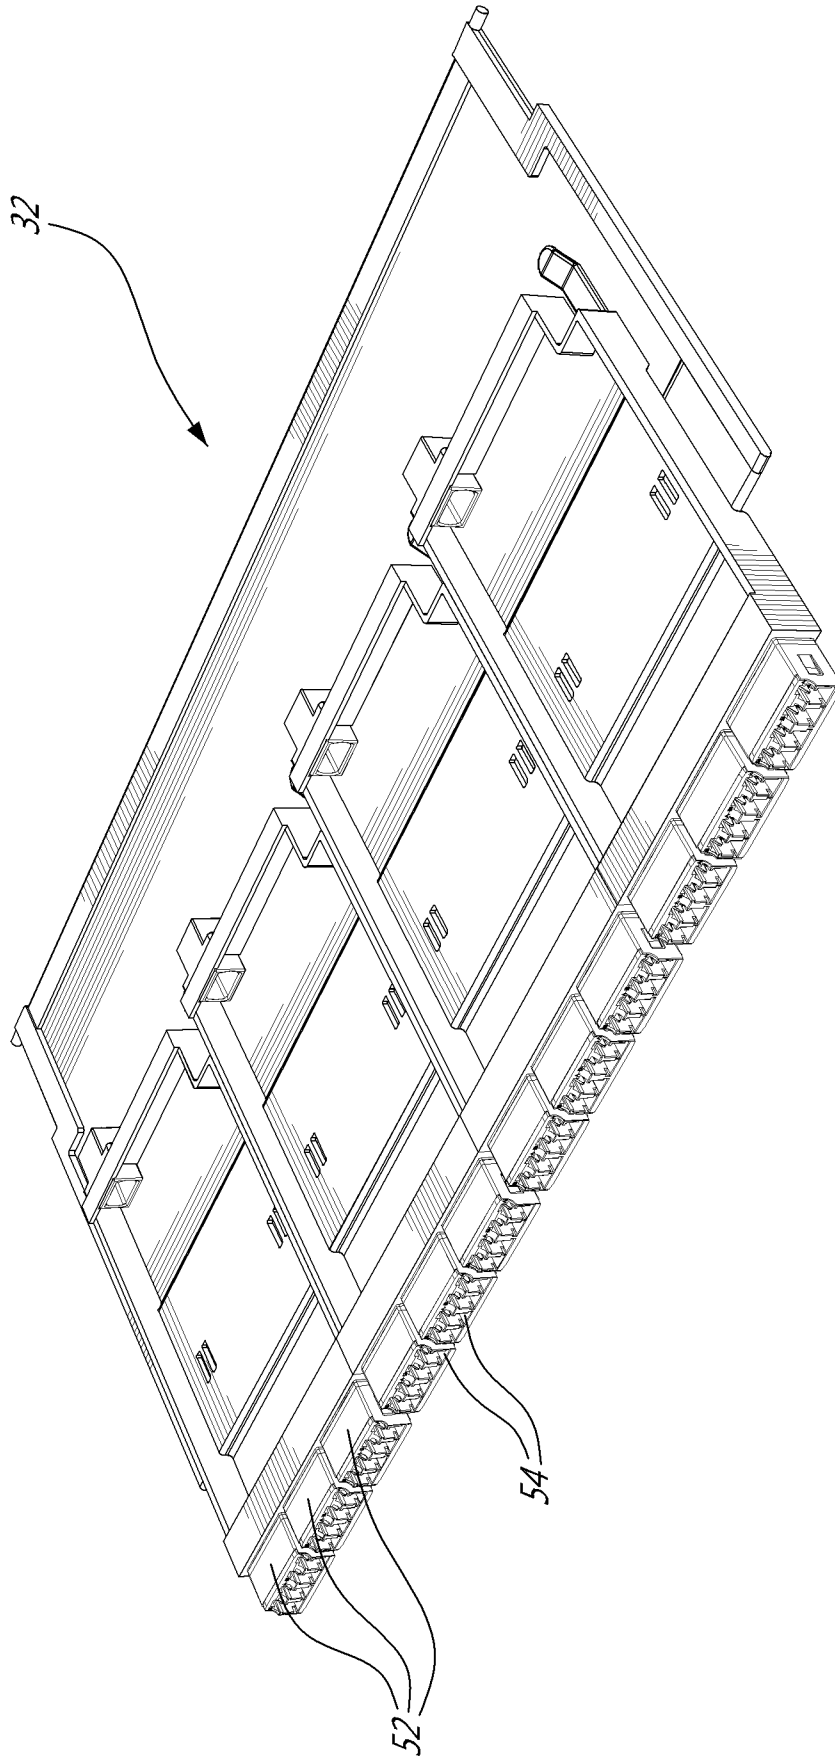


FIG. 4B

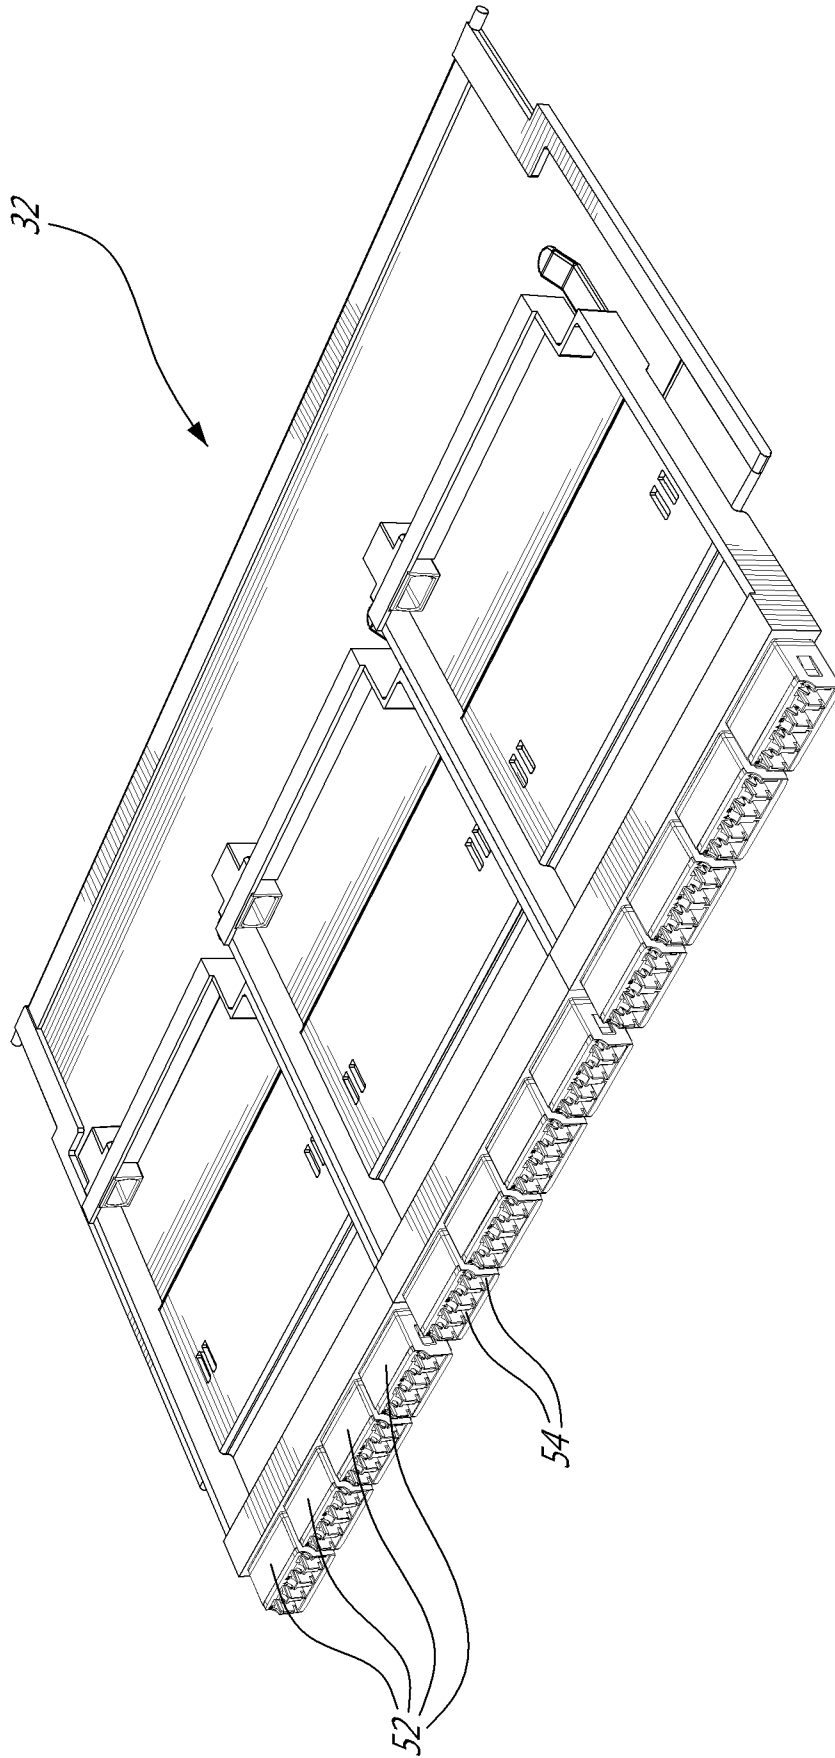


FIG. 4C

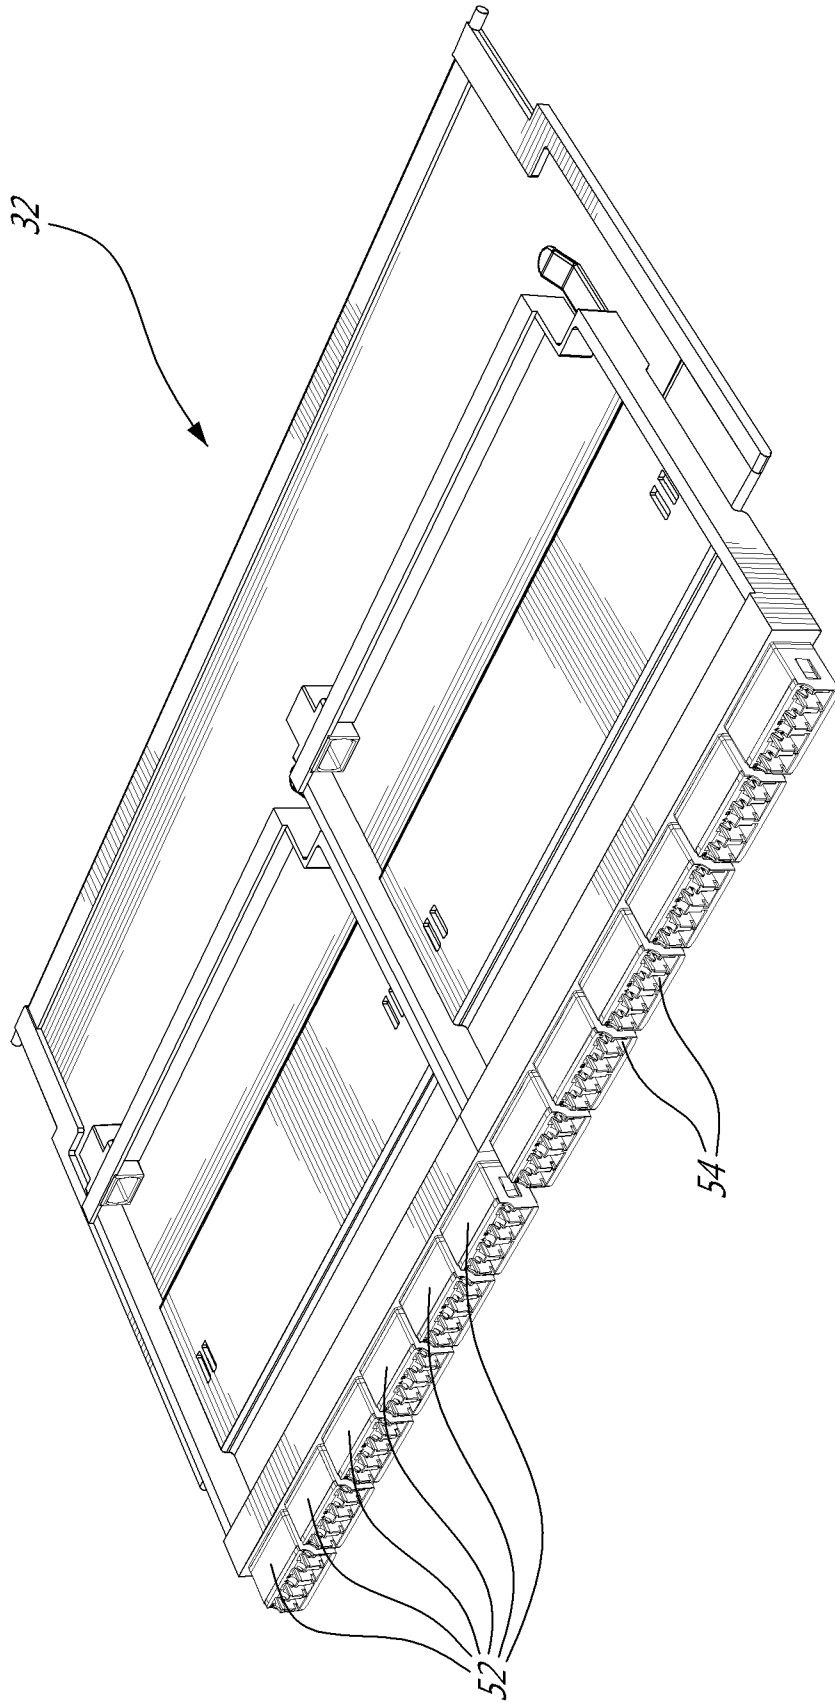


FIG. 40



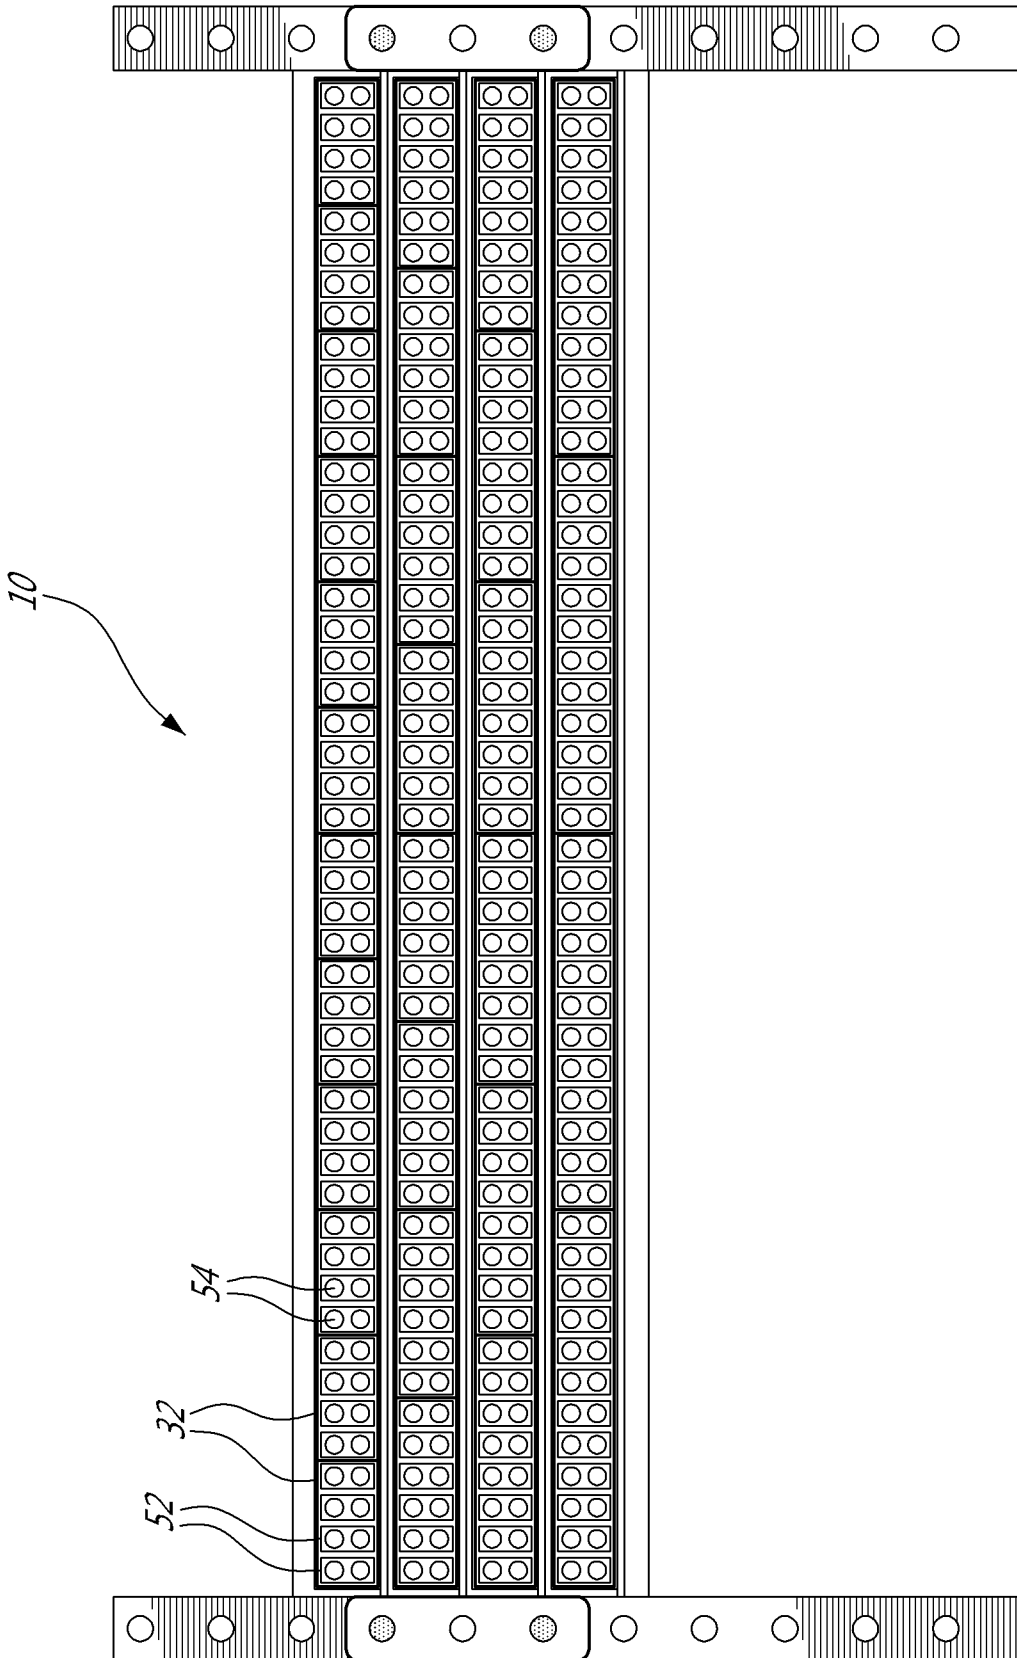


FIG. 5A

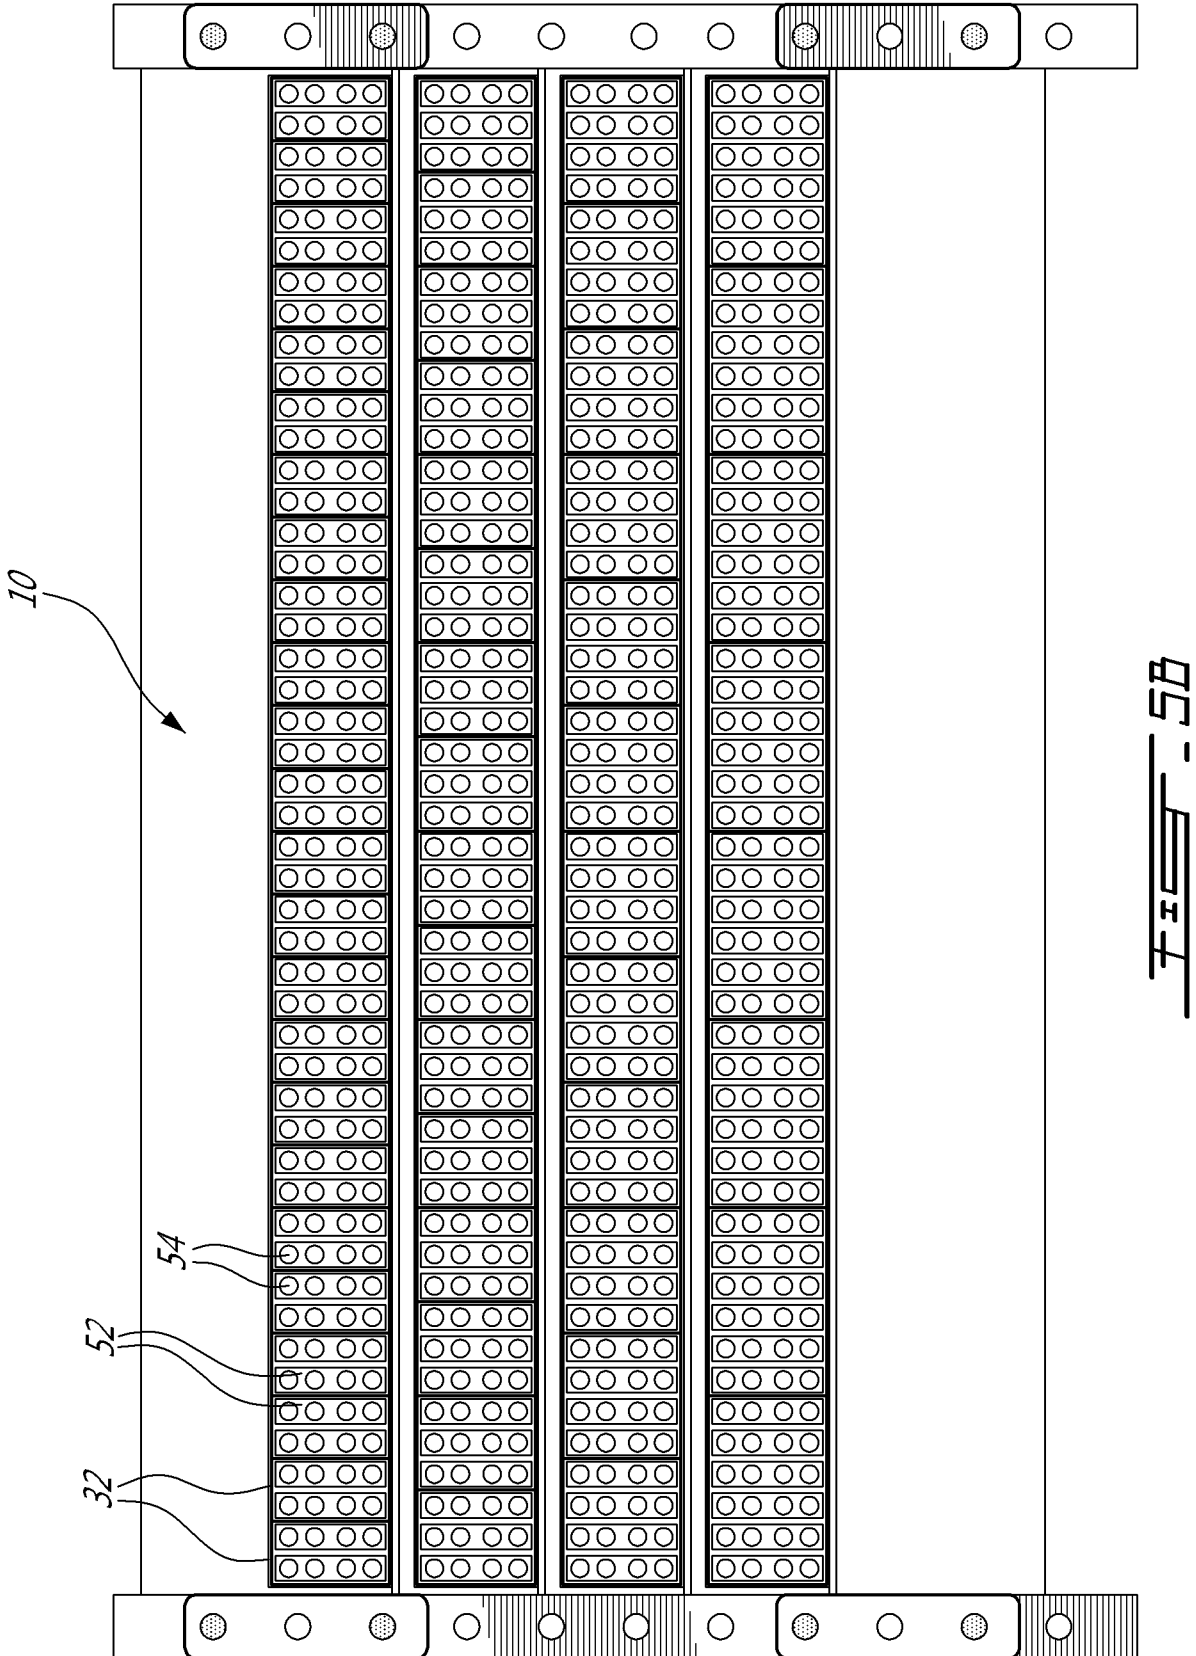

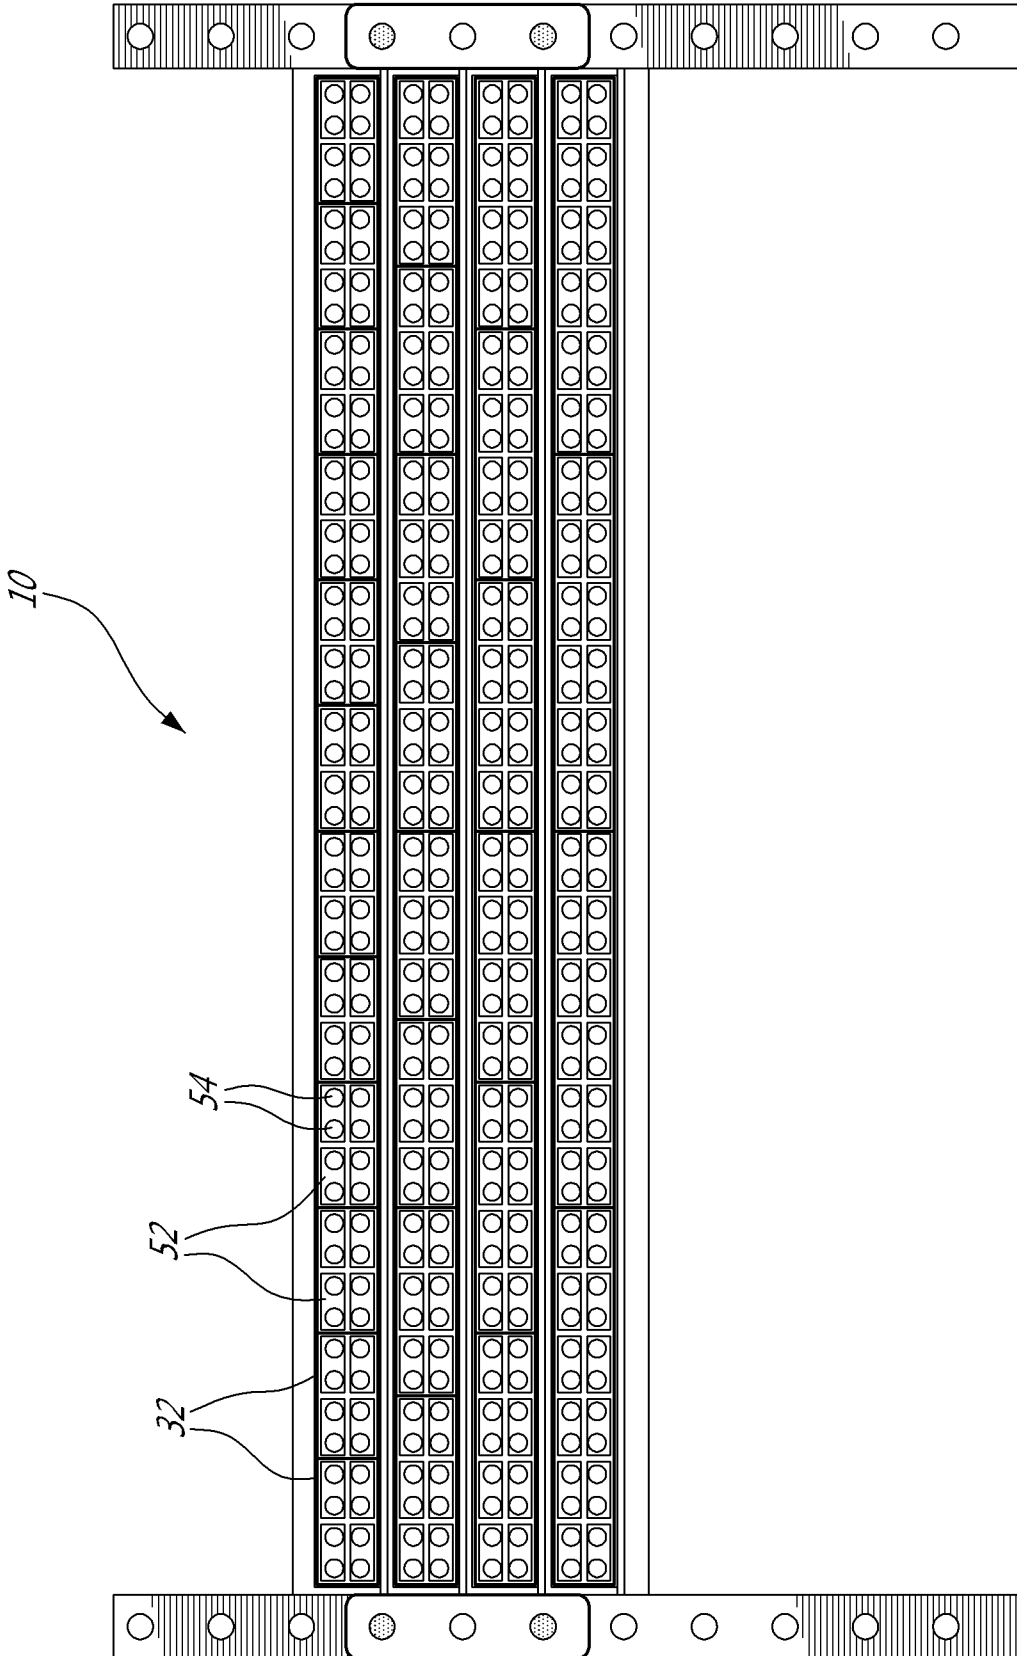

75 - 5C

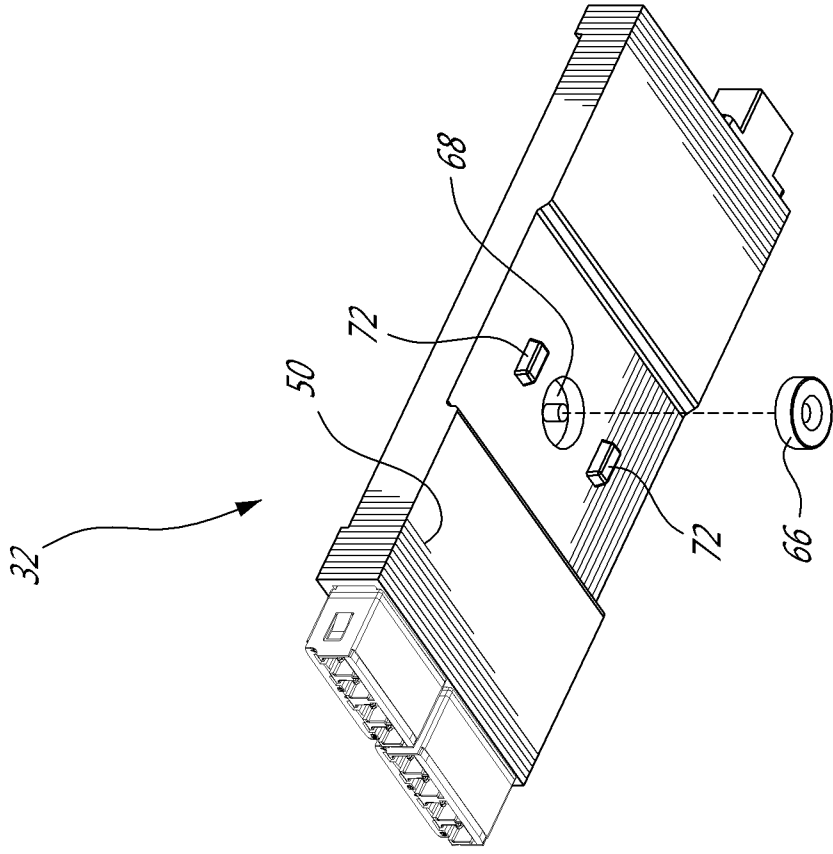


FIG. 6B

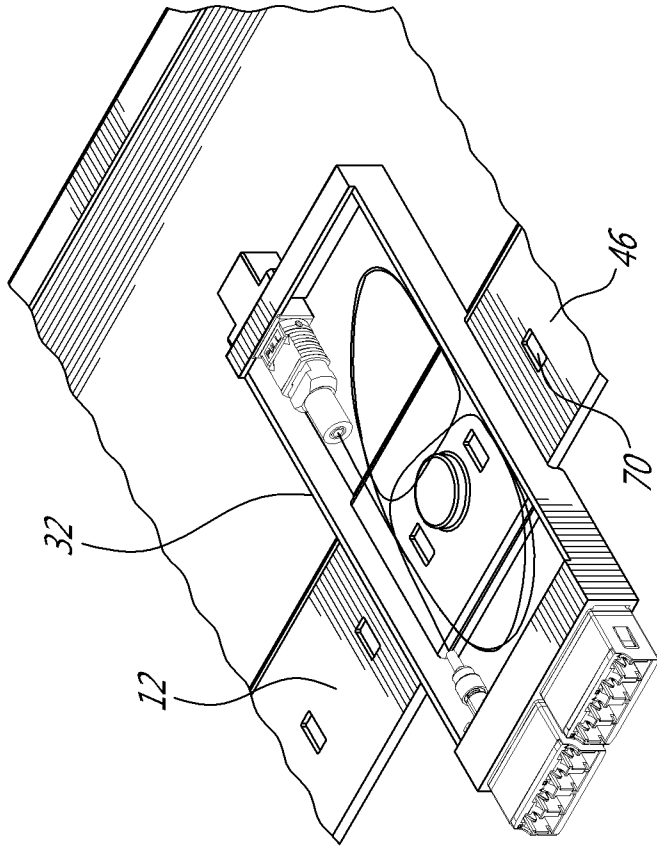


FIG. 6A

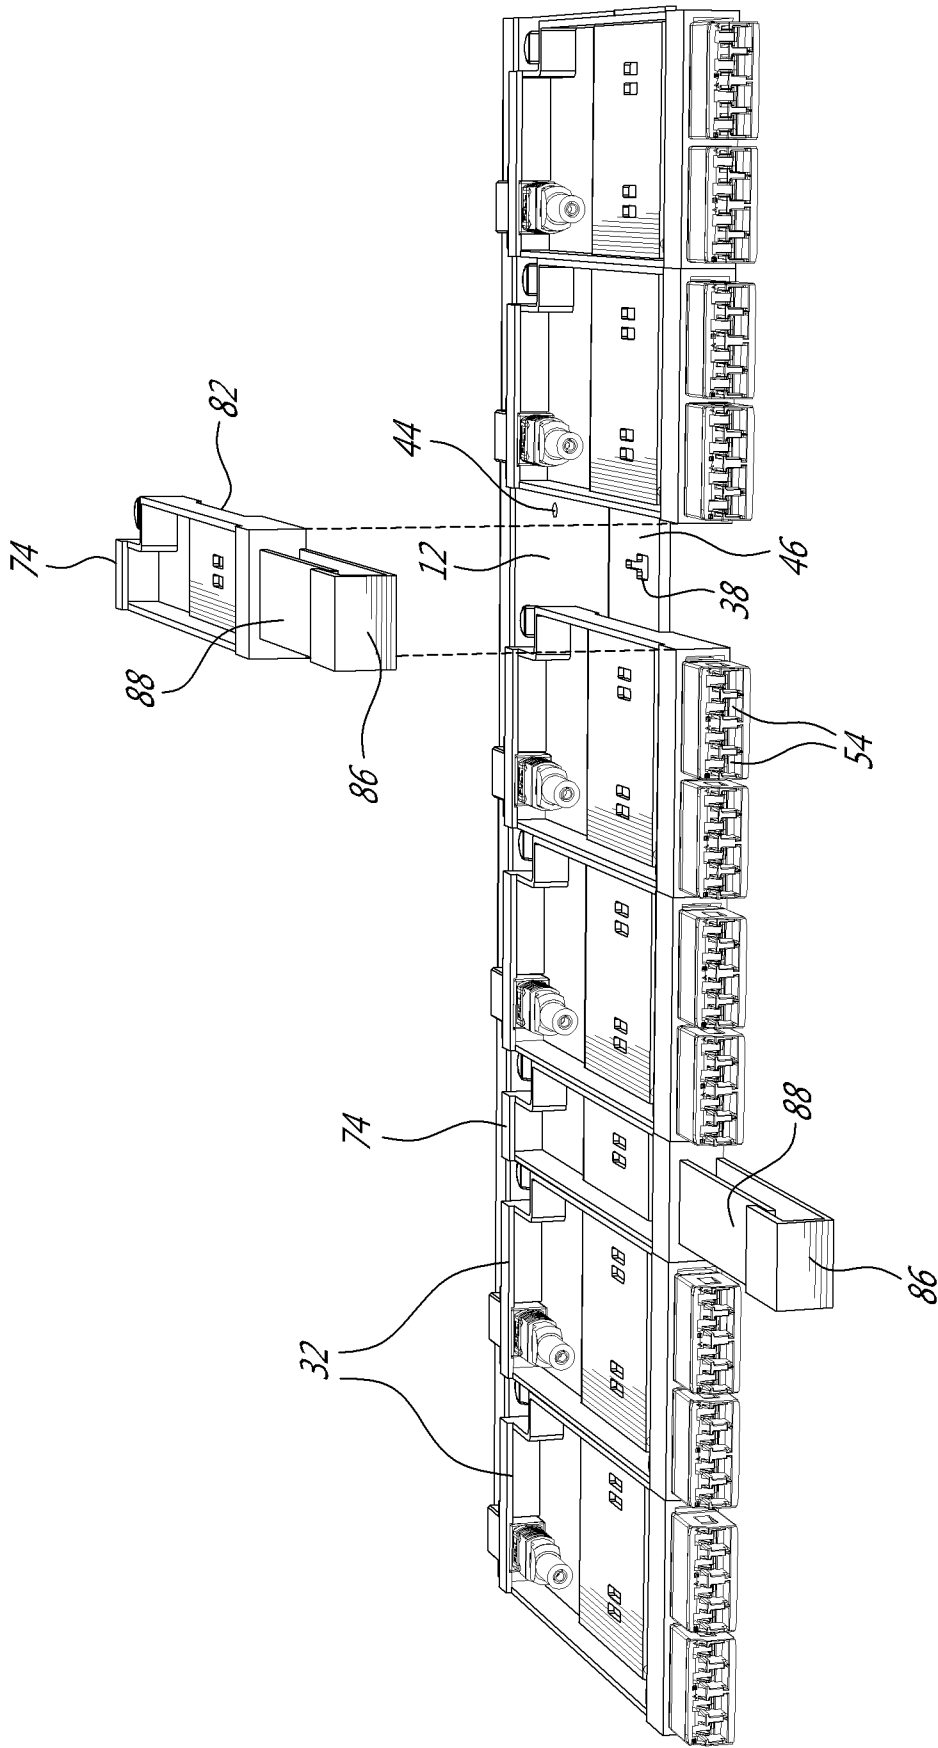


FIG. 7A

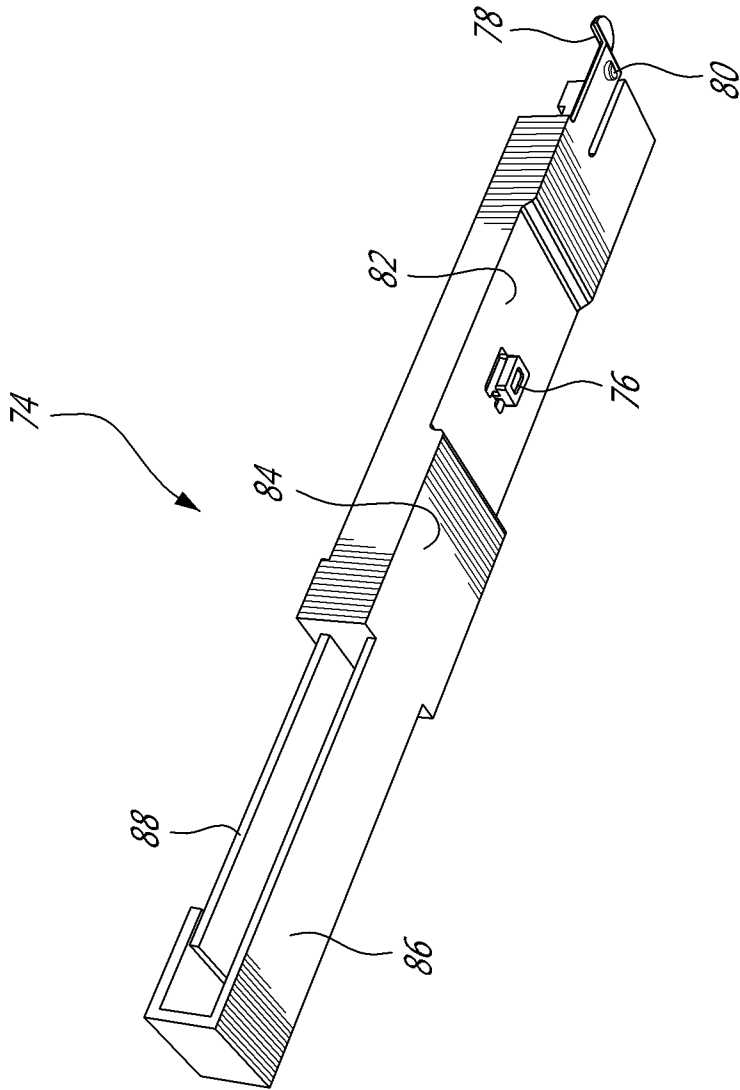


FIG. 7B

