

(86) **Date de dépôt PCT/PCT Filing Date:** 2014/11/13

(87) **Date publication PCT/PCT Publication Date:** 2015/05/21

(45) **Date de délivrance/Issue Date:** 2018/07/17

(85) **Entrée phase nationale/National Entry:** 2016/04/26

(86) **N° demande PCT/PCT Application No.:** US 2014/065487

(87) **N° publication PCT/PCT Publication No.:** 2015/073692

(30) **Priorités/Priorities:** 2013/11/13 (US61/903,950);
2014/09/22 (US62/053,784)

(51) **Cl.Int./Int.Cl. B23K 9/29** (2006.01),
B21D 3/16 (2006.01), **B21D 41/02** (2006.01)


(72) **Inventeur/Inventor:**
HASSAN, KHALID, US

(73) **Propriétaire/Owner:**
VICTOR EQUIPMENT COMPANY, US

(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : ENSEMBLE BUSE ET POINTE DE CONTACT HAUTES PERFORMANCES A REFROIDISSEMENT AMELIORE POUR APPAREIL DE SOUDAGE A L'ARC**

(54) **Title: HIGH PERFORMANCE CONTACT TIP AND NOZZLE ASSEMBLY WITH IMPROVED COOLING FOR USE IN AN ARC WELDING APPARATUS**

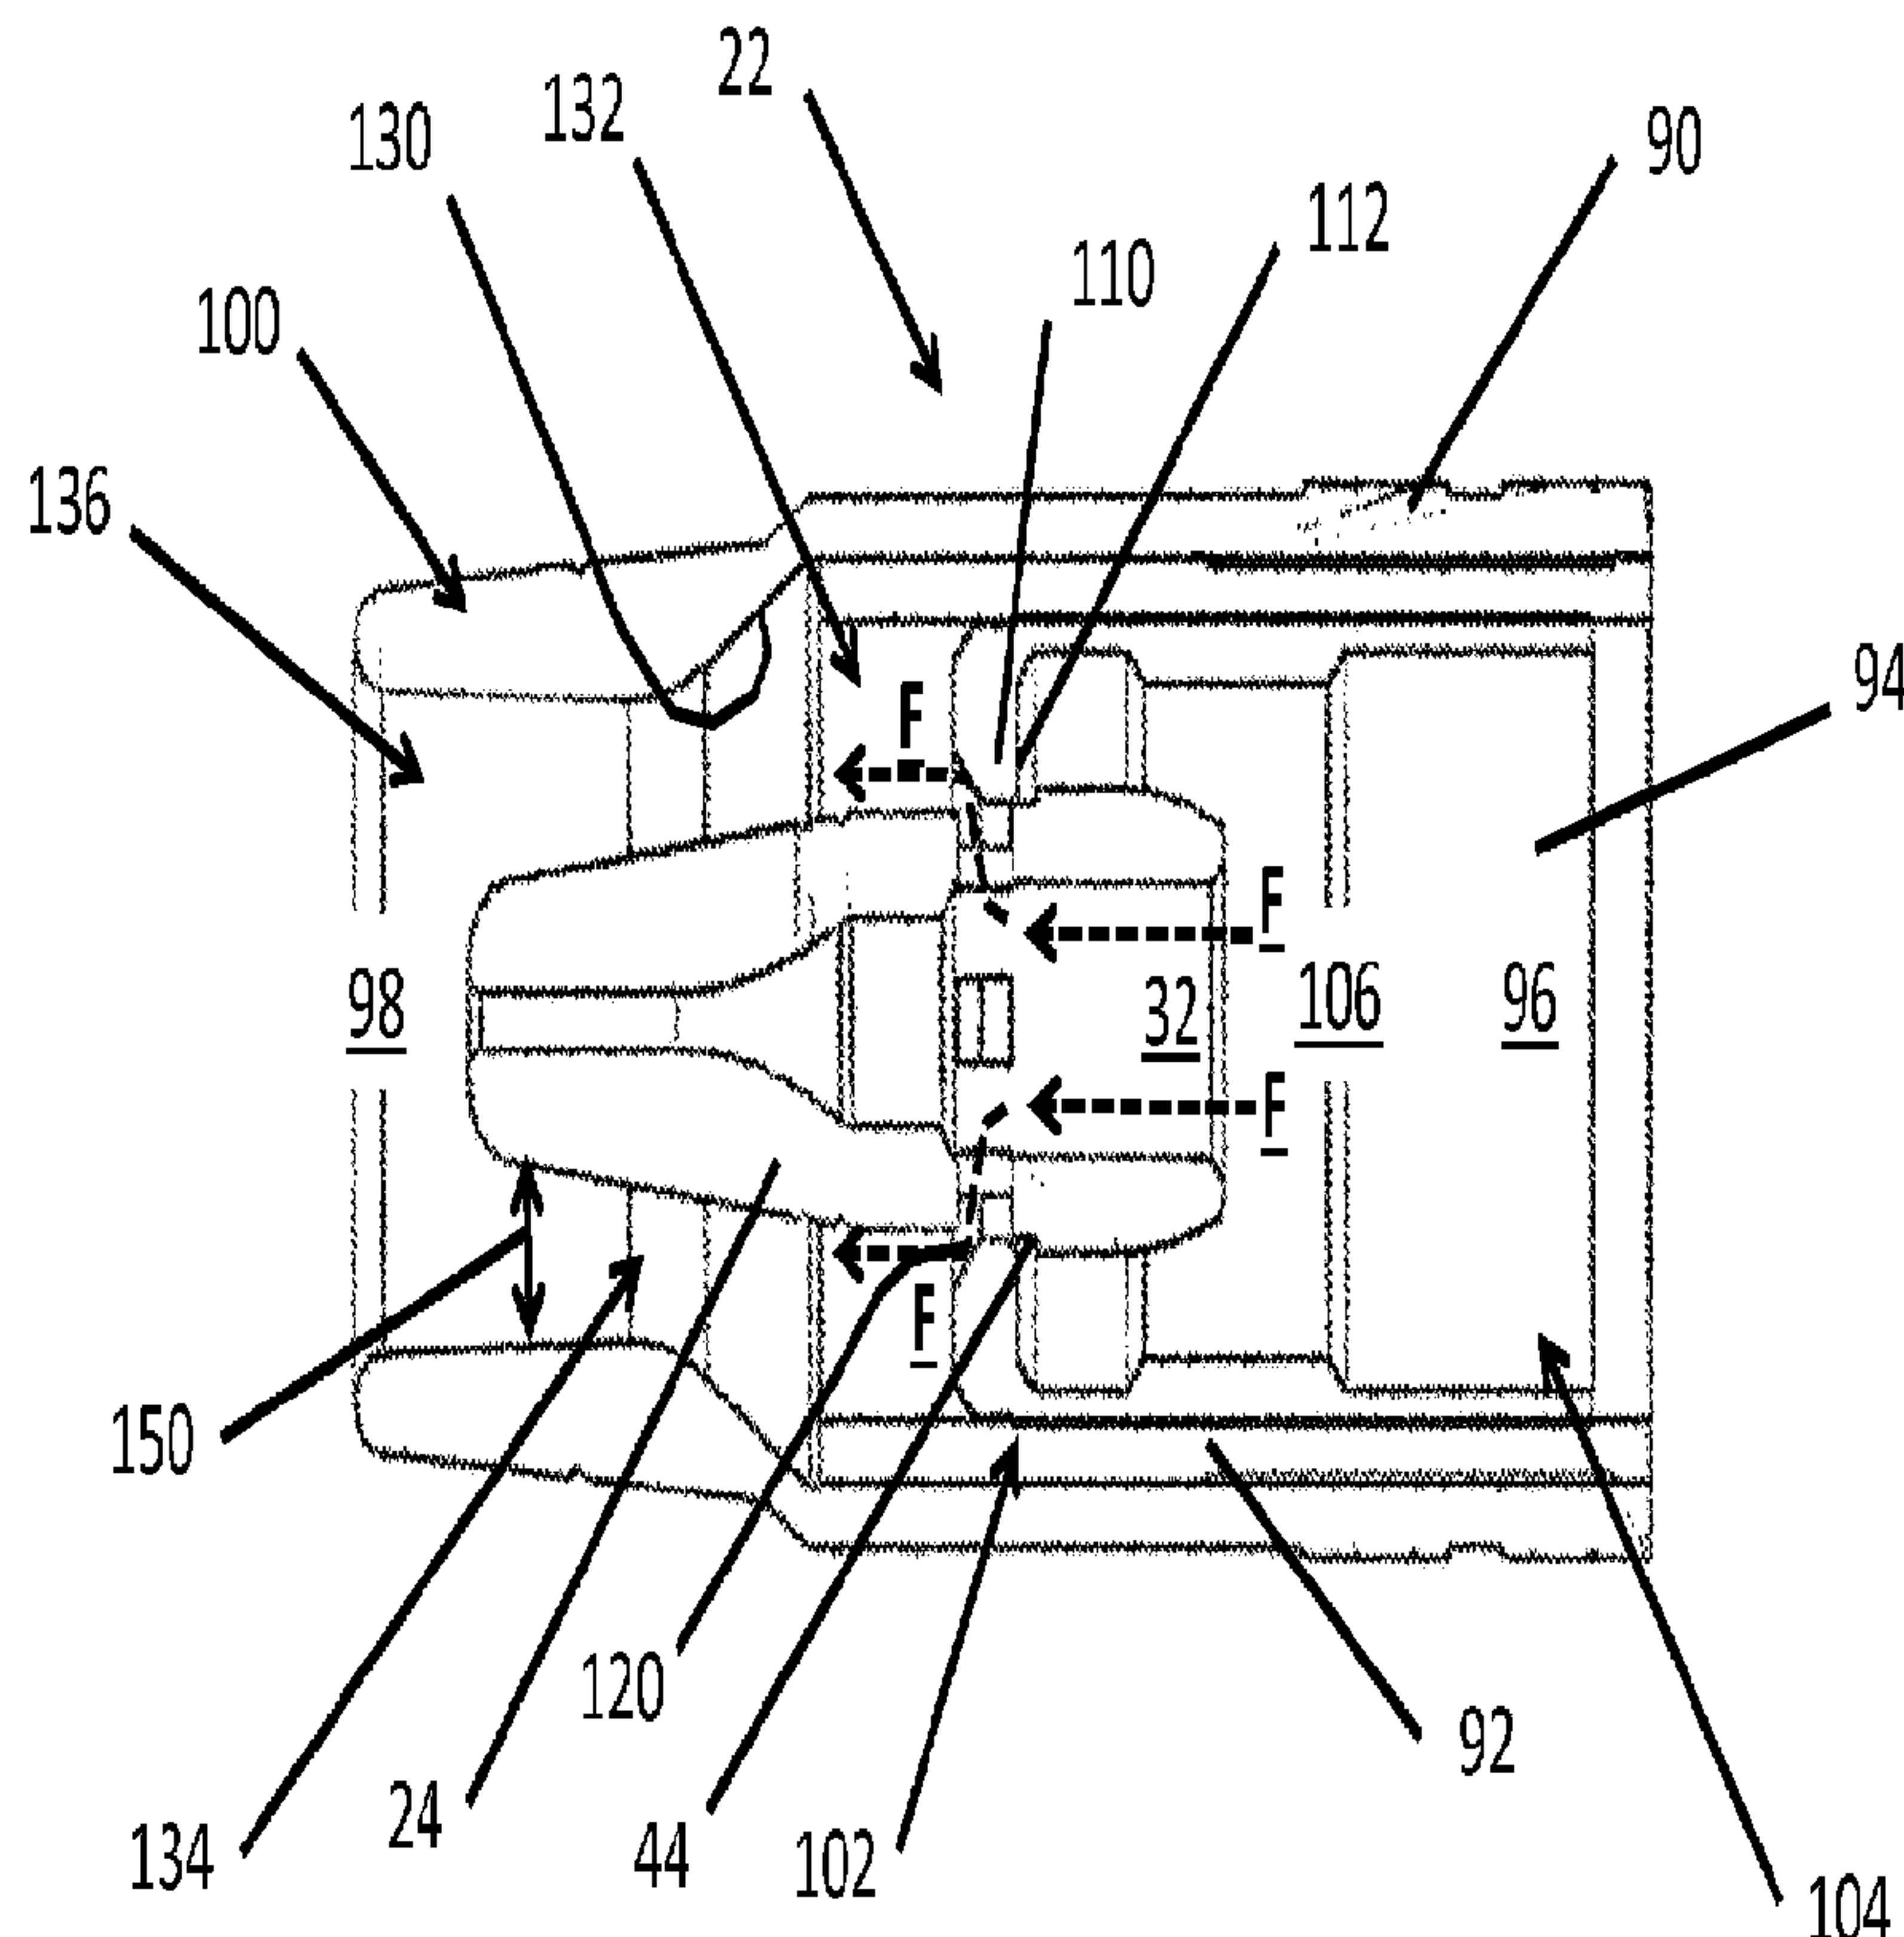

(57) Abrégé/Abstract:

A consumable assembly for use in an arc welding apparatus is provided that includes a nozzle assembly having a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator. The nozzle insert includes an internal

(57) Abrégé(suite)/Abstract(continued):

gas diverter. A contact tip is disposed within the nozzle assembly and includes at least one aperture extending from an exterior portion to an internal cavity, an exit orifice, a distal end face, and an exterior surface extending between the at least one aperture and the distal end portion of the contact tip. The internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip, and a principal distance from the at least one aperture to the distal end face is varied to adjust the flow of the shield gas for improved cooling.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
21 May 2015 (21.05.2015)



(10) International Publication Number
WO 2015/073692 A1

(51) International Patent Classification:

B23K 9/29 (2006.01) **B21D 41/02** (2006.01)
B21D 3/16 (2006.01)

(21) International Application Number:

PCT/US2014/065487

(22) International Filing Date:

13 November 2014 (13.11.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/903,950 13 November 2013 (13.11.2013) US
62/053,784 22 September 2014 (22.09.2014) US

(71) Applicant: **VICTOR EQUIPMENT COMPANY**
[US/US]; 2800 Airport Road, Denton, TX 76027 (US).

(72) Inventor: **HASSAN, Khalid**; 6209 Thoroughbread Trail,
Denton, TX 76210 (US).

(74) Agents: **CHAMBERLAIN, Jeffrey M.** et al.; Kacvinsky
Daisak Bluni PLLC, 3120 Princeton Pike, Suite 303,
Lawrenceville, NJ 08648 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: HIGH PERFORMANCE CONTACT TIP AND NOZZLE ASSEMBLY WITH IMPROVED COOLING FOR USE IN AN ARC WELDING APPARATUS

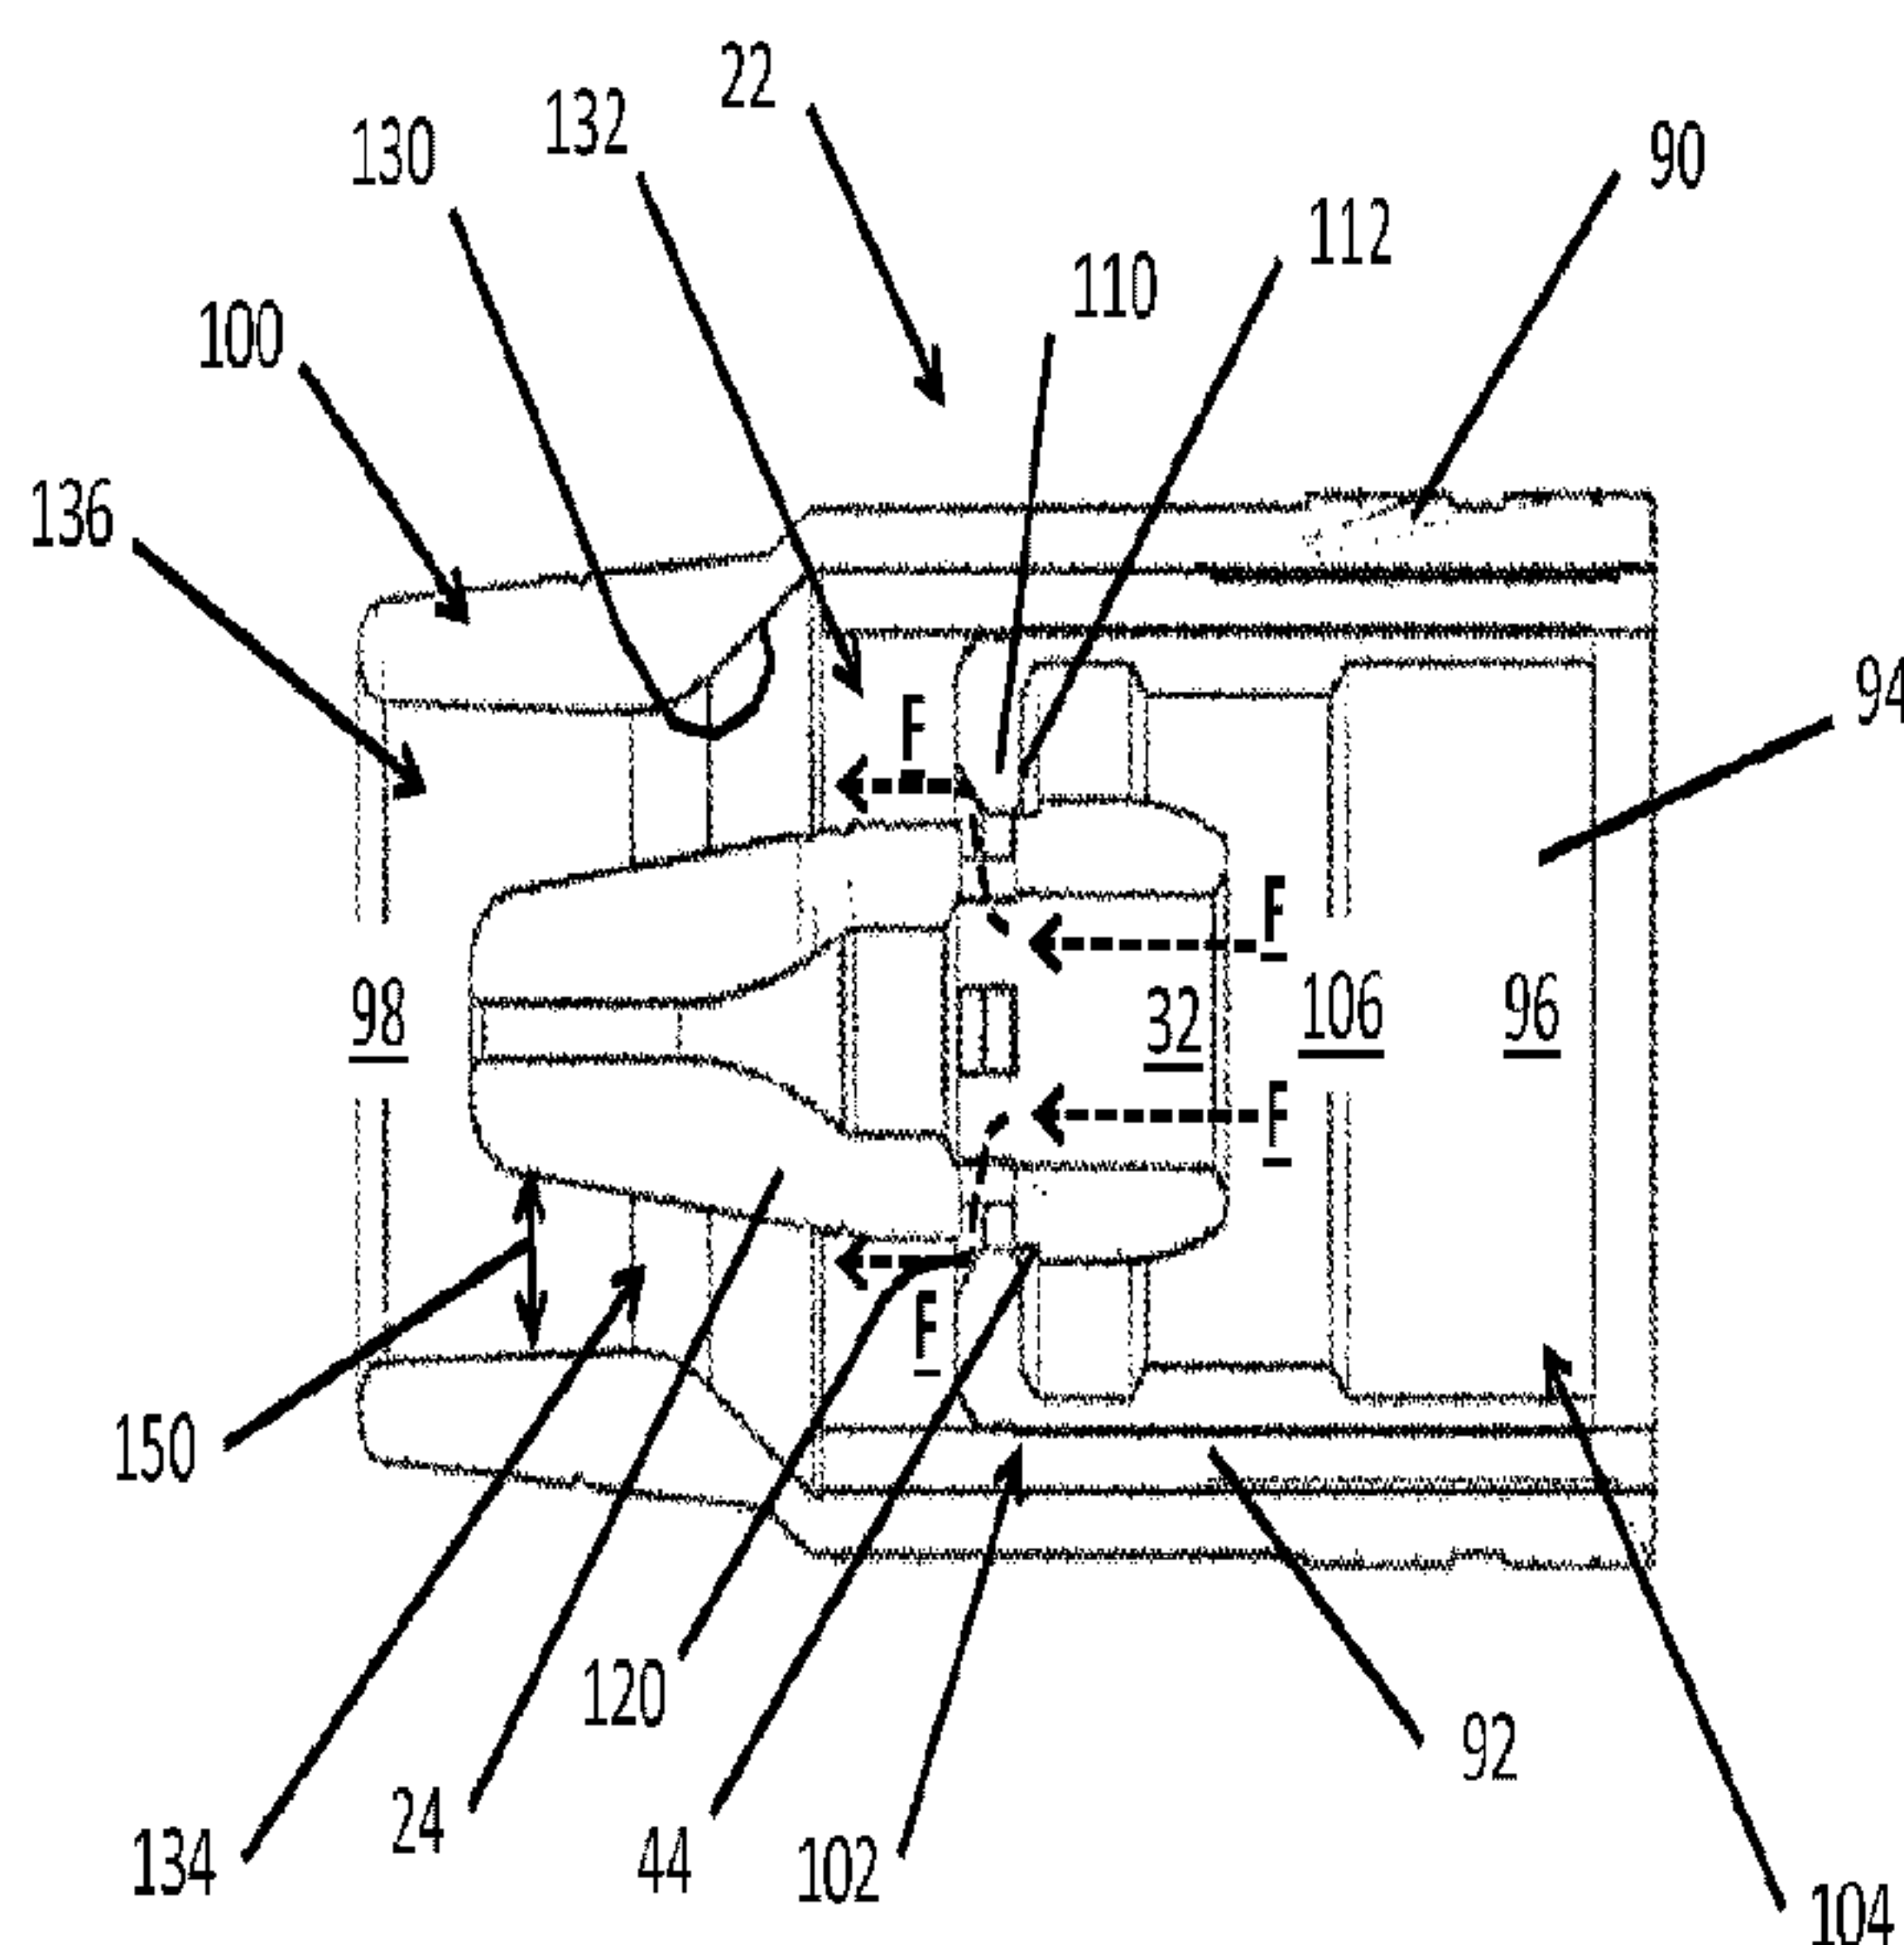


FIG. 6

(57) Abstract: A consumable assembly for use in an arc welding apparatus is provided that includes a nozzle assembly having a nozzle body (100), an insulator (92) disposed within the nozzle body (100), and a nozzle insert (94) disposed within the insulator (92). The nozzle insert (94) includes an internal gas diverter (110, 112). A contact tip (24) is disposed within the nozzle assembly and includes at least one aperture extending from an exterior portion to an internal cavity, an exit orifice, a distal end face, and an exterior surface extending between the at least one aperture and the distal end portion of the contact tip (24). The internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip (24), and a principal distance from the at least one aperture to the distal end face is varied to adjust the flow of the shield gas for improved cooling.

HIGH PERFORMANCE CONTACT TIP AND NOZZLE ASSEMBLY WITH IMPROVED COOLING FOR USE IN AN ARC WELDING APPARATUS

FIELD

[0001] The present disclosure relates generally to welding apparatuses, and more particularly to arc welding apparatuses such as Metal Inert Gas (MIG) or Gas Metal Arc Welding (GMAW) welding guns, including consumables for generating a welding arc and diffusing a shield gas.

BACKGROUND

[0002] The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

[0003] In an arc welding apparatus, such as Metal Inert Gas (MIG) or Gas Metal Arc Welding (GMAW) welding gun, a welding wire is fed through the welding gun to provide a molten metal pool to join metal workpieces together. An inert gas is directed through the front (distal) end of the welding gun to provide a surrounding layer or blanket of shield gas to protect the molten metal pool from atmospheric contamination. The inert gas is typically a combination of various gases such as argon or helium, among others.

[0004] A prior art MIG or GMAW welding gun typically includes a contact tip and a gas diffuser connected to the contact tip. The contact tip has a central bore to guide the welding wire to the workpieces. The contact tip transfers electrical current to the welding wire. The gas diffuser is typically threaded to the contact tip and defines gas passageways that direct the shield gas into a blanket of shield gas around the molten metal pool. The contact tip and gas diffuser are constantly subjected to high heat and are susceptible to wear due to high temperature operation.

SUMMARY

[0004a] Certain exemplary embodiments can provide a consumable assembly for use in an arc welding apparatus comprising: a nozzle assembly comprising a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator, the nozzle insert comprising an internal gas diverter and a seating surface; and a contact tip disposed within the nozzle assembly, the contact tip defining a shoulder that engages the seating surface of the nozzle insert, and the contact tip further comprising: a body defining an internal cavity extending from a proximal end portion to a distal end portion; at least one aperture extending from an exterior portion of the body to the internal cavity; an exit orifice extending through the distal end portion of the body; a distal end face; and an exterior surface extending between the at least one aperture and the distal end portion of the body, wherein the internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip.

[0004b] Other exemplary embodiments further provide a method of cooling a contact tip for use in an arc welding apparatus comprising: directing a flow of shield gas into an internal cavity of the contact tip from a proximal end portion to a distal end portion; directing the flow of shield gas through at least one aperture formed through a body of the contact tip; and diverting the flow of shield gas with a component adjacent to the contact tip along an exterior surface of the contact tip toward the distal end portion, wherein the flow of shield gas into the internal cavity through the at least one aperture and around the exterior surface of the contact tip improves the cooling of the contact tip.

[0004c] Other exemplary embodiments further provide an arc welding apparatus comprising: a handle; a conductor tube attached to the handle; a welding cable that carries welding current, shield gas, and a welding wire from a power source, the welding cable being connected to the handle; and a consumable assembly attached to the conductor tube, the consumable assembly comprising: a nozzle assembly comprising a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator, the nozzle insert comprising an internal gas diverter and a seating surface; and a contact tip disposed within the nozzle assembly, the contact tip defining a shoulder that engages the seating surface of the nozzle insert, and the contact tip further comprising: a body defining an internal cavity extending from a proximal end portion to a distal end portion; at least one aperture extending from an exterior portion of the body to the internal cavity; an exit orifice extending through the distal end portion of the body; a distal end face; and an exterior surface extending between the at least one aperture and the distal end portion of the body,

wherein the internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip.

[0005] The present disclosure generally provides a contact tip/diffuser configuration for an arc welding apparatus, such as an MIG or GMAW welding gun with an increased consumable life. The various forms of the present disclosure provide a simplified structure, more uniform heat distribution and improved cooling to increase consumable life, among other benefits.

[0006] In one form, a consumable assembly for use in an arc welding apparatus is provided that comprises a nozzle assembly having a nozzle body, an insulator

disposed within the nozzle body, and a nozzle insert disposed within the insulator. The nozzle insert comprises an internal gas diverter and a seating surface. A contact tip is disposed within the nozzle assembly and defines a shoulder that engages the seating surface of the nozzle insert. The contact tip further comprises a body defining an internal cavity extending from a proximal end portion to a distal end portion, at least one aperture extending from an exterior portion of the body to the internal cavity, an exit orifice extending through the distal end portion of the body, a distal end face, and an exterior surface extending between the at least one aperture and the distal end portion of the body. The internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip, and a principal distance from the at least one aperture to the distal end face is varied to adjust the flow of the shield gas for improved cooling.

[0007] In another form, a method of cooling a contact tip for use in an arc welding apparatus is provided that comprises directing a flow of shield gas into an internal cavity of the contact tip from a proximal end portion to a distal end portion, directing the flow of shield gas through at least one aperture formed through a body of the contact tip, and diverting the flow of shield gas with a component adjacent to the contact tip along an exterior surface of the contact tip toward the distal end portion. The flow of shield gas into the internal cavity through the at least one aperture and around the exterior surface of the contact tip improves the cooling of the contact tip, and a principal distance from the at least one aperture to a distal end face of the contact tip is varied to adjust the flow of the shield gas for improved cooling.

[0008] In yet another form, an arc welding apparatus is provided that comprises a handle, a conductor tube attached to the handle, a welding cable that carries welding current, shield gas, and a welding wire from a power source, the welding cable being connected to the handle, and a consumable assembly attached to the conductor tube. The consumable assembly comprises a nozzle assembly having a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator. The nozzle insert comprises an internal gas diverter and a seating surface. A contact tip is disposed within the nozzle assembly and defines a shoulder that engages the seating surface of the nozzle insert. The contact tip further comprises a body defining an internal cavity extending from a proximal end portion to a distal end portion, at least one aperture extending from an exterior portion of the body to the internal cavity, an exit orifice extending through the distal

end portion of the body, a distal end face, and an exterior surface extending between the at least one aperture and the distal end portion of the body. The internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip, and a principal distance from the at least one aperture to the distal end face is varied to adjust the flow of the shield gas for improved cooling.

[0009] Further areas of applicability will become apparent from the description provided herein. It should be understood that the description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.

DRAWINGS

[0010] The drawings described herein are for illustration purposes only and are not intended to limit the scope of the present disclosure in any way.

[0011] FIG. 1 is a perspective view of an arc welding apparatus constructed in accordance with the teachings of the present disclosure;

[0012] FIG. 2A is a front perspective view of a contact tip constructed in accordance with the teachings of the present disclosure;

[0013] FIG. 2B is a rear perspective view of a contact tip constructed in accordance with the teachings of the present disclosure;

[0014] FIG. 3 is a side view of various forms of the contact tip constructed in accordance with the teachings of the present disclosure;

[0015] FIG. 4A is a side cross-sectional view of the contact tip constructed in accordance with the teachings of the present disclosure;

[0016] FIG. 4B is an end cross-sectional view of the contact tip, taken along line A-A of FIG. 4A, and constructed in accordance with the teachings of the present disclosure

[0017] FIG. 5 is a partial perspective view of the contact tip disposed within a nozzle assembly constructed accordance with the teachings of the present disclosure;

[0018] FIG. 6 is a side cross-sectional view of the contact tip and nozzle assembly of FIG. 5;

[0019] FIG. 7 is a flow diagram illustrating a method according to the teachings of the present disclosure; and

[0020] FIG. 8 is a graph showing experimental test data for operating temperature vs. duty cycle for a standard welding contact tip (using 16 gauge welding wire) versus one form of the contact tip of the present disclosure.

DETAILED DESCRIPTION

[0021] The following description is merely exemplary in nature and is in no way intended to limit the present disclosure or its application or uses. It should be understood that throughout the description and drawings, corresponding reference numerals indicate like or corresponding parts and features. And although the term “MIG” or “GMAW” is used throughout the specification, it should be understood that the teachings of the present disclosure apply to any type of welding or cutting apparatus.

[0022] Referring to FIG. 1, an arc welding apparatus, such as a MIG or GMAW welding gun, is illustrated and generally indicated by reference numeral 10. The MIG welding gun 10 includes a handle 12, a conductor tube 14 attached to the handle 12, and a consumable assembly 16 attached to the conductor tube 14. The handle 12 is connected to a welding cable 18 that carries welding current, shield gas, and a welding wire 20 from a power source (not shown), a gas source (not shown), and a wire feeder (not shown) to the welding gun 10.

[0023] The consumable assembly 16 includes a plurality of consumable components including a nozzle assembly 22 and a contact tip 24 (contact tip 24 is shown in latter FIGS.). The structure and operation of an exemplary arc welding apparatus has been disclosed in U.S. Patent Nos. 5,491,321 and 5,338,917, which are commonly owned by the assignee of the present application, and the contents of which are incorporated herein by reference in their entirety.

[0024] The consumable assembly 16 is connected to a distal end portion 26 of the conductor tube 14. The nozzle assembly 22 is substantially cylindrical in one form and receives the distal end portion 26 of the conductor tube 14 therein. The contact tip 24 is coaxially disposed inside the nozzle insert 22 and may be secured therein as illustrated and described in copending U.S. application serial no. 13/674,829 titled “Hollow Contact Tip-Diffuser for GMAW Manual/Robotic Arc Welding MIG Guns,” which is commonly owned with the present application and hereby incorporated by reference in its entirety. Further construction and operation of an exemplary arc welding apparatus for which the teachings of present disclosure

may be applied are also described in greater detail in the aforementioned copending application.

[0025] Referring to FIGS. 2-4, various forms of the contact tip 24 according to the present disclosure are now illustrated and described in greater detail. The contact tip 24 has a body 30 that defines an internal cavity 32 extending from a proximal end portion 34 to a distal end portion 36. The contact tip 24 has a distal end face 38 and an exit orifice 39 that extends through the distal end portion 36 of the body 30 and the distal end face 38. Advantageously, the contact tip 24 is designed to function as both a contact tip for transferring electric current to the welding wire and a gas diffuser for diffusing shield gas around the molten metal pool, thus providing a dual function while eliminating an additional component (i.e., a separate gas diffuser) from the consumable assembly 16.

[0026] As shown in FIG. 3, the length and configuration of the contact tips 24 can vary depending on application parameters such as amperage, wire diameter, duration of a welding operation, operating temperature, among other parameters associated with the environmental and specific welding application and welding process such as, by way of example, short arc, globular, spray transfer, and pulse. In addition, the length and configuration of the contact tips 24 may provide for customizing and improving the flow of shield gas and cooling of the contact tip 24 along with the surrounding nozzle assembly 22 for a specific welding operation. As shown, a shorter contact tip 24 is used for example in a light duty application, the contact tip in the center 24' for a medium duty application, and the contact tip at the bottom 24'', for a heavy duty application. Typically, the duty cycle is determined by the duration of the weld operation and the amperage used during continuous operation of the welding gun. For example, a light duty application may be considered to be those welding operations that are rated and use approximately 250 amperes and below. A medium duty application may be considered to be welding operations with a range from approximately 250 amperes to approximately 350 amperes, and a heavy duty application is generally 350 amperes and above.

[0027] Referring now to FIG. 4A, the contact tip 24 according to one form of the present disclosure is further defined as having three sections, 40, 50, and 60. The first section 40 includes a spherical tapered end portion 42 for engaging a corresponding spherical tapered seat of a conductor tube (set forth above). Although a spherical taper geometry is shown, various other geometries may be

used such as tapered or polygonal configuration for the contact connection between the contact tip 24 and a corresponding component such as a conductor tube. The spherical tapered end 42 tapers outward from the proximal end 34 toward the distal end portion 36. The first section 40 also defines a shoulder 44 as shown. The second section 50 is generally cylindrical and in one form defines at least one aperture 52 that extends through the body 30 into the internal cavity 32. Although the aperture 52 is shown in a rectangular/slotted configuration, it should be understood that any geometrical shape, such as by way of example, round, oval, polygonal may be employed while remaining within the scope of the present disclosure. Additionally, the apertures 52 may be normal to an outer surface 25 of the contact tip 24 or the apertures 52 may be angled in order to introduce a swirling action to the shield gas while remaining within the scope of the present disclosure. Additional details and function of the apertures 52 are set forth in copending U.S. application serial no. 13/674,829 titled "Hollow Contact Tip-Diffuser for GMAW Manual/Robotic Arc Welding MIG Guns," which has been incorporated by reference herein above.

[0028] A third section 60 in one form is tapered, and more specifically, tapering at an angle inward towards the distal end face 38 as shown. The third section 60 in this form tapers distally at a taper angle 62 from the second section 50 to the distal end face 38. The third section 60 may further include variations to the taper angle 62 to accommodate application variables such as the diameter of the exit orifice 39 of the contact tip 24 or a diameter of welding wire. By way of example, in one form of the present disclosure, the taper angle 62 varies between approximately 0-10 degrees. It should be understood that the length and/or configuration of each section 40, 50, 60 of the contact tip 24 may vary according to the specific welding application, such as by way of example, an extended tapered section 60 for reach small/tight welding locations, or a constant diameter contact tip throughout the second and third sections, 50, 60.

[0029] As previously set forth, the contact tip 24 includes at least one aperture 52 that extends through the body 30 of the contact tip 24 into the internal cavity 32. The contact tip 24 is designed to direct the shield gas into the internal cavity 32 at the proximal end portion 34, and then out through the apertures 52 toward the distal end portion 36, along an exterior surface 25 of the contact tip 24. The flow

characteristics of the shield gas will vary with the shape and position of the apertures 52.

[0030] Referring more specifically to FIGS. 4A and 4B, in one form the contact tip 24 has four apertures 52 that are equally spaced as shown. The apertures 52 in this form are each generally rectangular shaped slots that are further defined by an arcuate cut-outs 70 into the body 30 of the contact tip 24. The arcuate cut-outs 70 form guiding surfaces 72 defined by a radius R1 on both sides of the aperture 52 that lead into the internal cavity 32. The arcuate shape of the guiding surfaces 72 direct the shield gas for a desired flow characteristic out of the aperture 52 of the contact tip 24. The apertures 52 may be any shape and the guiding surfaces 72 may further be adjusted and varied to change the flow characteristics of the shield gas for various applications. The number of apertures 52 and their spacing may be further modified to achieve a desired diffused flow of the shield gas. In one form, the total cross-sectional area of the apertures 52 is approximately equal to the total cross-sectional area of the gas input to the welding cable 18 at a power pin or plug holes (not shown). In this form, the apertures 52 are designed so that the total cross-sectional area does not restrict the flow of the shield gas beyond the restriction of the power pin or plug off of the gas supply (not shown). Additionally, the arcuate cut-outs 70 may be of various size radiuses R1. The size of the arcuate cut-outs 70 however, are generally sized to balance the desired conduction heat transfer properties between the sections of the contact tip 24 and the desired gas flow characteristics created by the guiding surfaces 72 as the shield gas exits the apertures 52. In the form illustrated, the radii R1 are approximately 5/32 inches.

[0031] Referring back to FIG. 4A, the flow of the shield gas through the apertures 52 can also be modified by varying the location of the apertures 52 along the body 30 of the contact tip 24. In one form the apertures 52 are located at a principal distance 80 measured from a distal edge 82 of the apertures 52 to the distal end face 38. The principal distance 80 can advantageously be varied to adjust the flow and cooling effect of the shield gas around the contact tip 24, along with flow characteristics of the shield gas exiting the nozzle assembly 22. The principal distance 80 between the apertures 52 to the distal end face 38 is at least a minimum distance to achieve the desired flow of the shield gas and the effectiveness of the shield gas to blanket the molten welding pool during the welding operation. The location of the apertures 52 in relation to the distal end face 38 allows for modifying

the desired flow characteristics for each contact tip 24, to adjust operational variables such as by way of example, a flow volume or flow pattern of the shield gas from the internal cavity 32. In one form, the principal distance 80 is at the minimum distance of approximately 0.8 inches for the shield gas to achieve laminar flow properties along the exterior surface 25 of the contact tip 24. It should be understood that the principal distance 80 varies and could be greater or less than this value for different operating conditions, such as size of the contact tip, flow volume and other parameters specific to the welding application.

[0032] The taper angle 62 may further be modified to achieve a desired wall thickness 27 of the contact tip 24, proximate the distal end portion 36. The contact tip 24 and the desired wall thickness 27 may vary based on the diameter of the exit orifice 39 or the gauge of the welding wire. The wall thickness 27 is germane for heat transfer through the contact tip 24 and in some instances may dictate the taper angle 62, for example, with a larger diameter exit orifice 39. An insufficient wall thickness 27 may lead to increased/excessive local temperatures near the distal end portion 36 and premature degradation/decreased life of the contact tip 24, and more specifically a fusing or binding of the welding wire within the contact tip 24. Therefore, to prevent premature degradation, the wall thickness 27 of the contact tip 24 defines a minimum thickness that is dependent on the duty cycle and ampere rating of the welding operation. For example, in one form, the contact tip 24 for the heavy duty application dictates the wall thickness 25 to be approximately 0.12 inches. In another form, the contact tip 24 for a medium duty application dictates the wall thickness 27 of approximately 0.08 inches. Additional modifications may include adjusting the length of the second section 59 and the third section 60 to maintain the desired wall thickness 27 for a given gauge of welding wire. For example, in an instance of using a large gauge welding wire, the exit orifice 39 must be larger and the standard taper angle 62 may result in a wall thickness 27 that is too thin. Therefore, the taper angle 62 can further be changed to maintain the desired wall thickness 27 of the contact tip 24.

[0033] Referring to FIGS. 5 and 6, the nozzle assembly 22 includes a nozzle body 90 that is in one form generally cylindrical, an insulator 92, and a nozzle insert 94. As shown, the nozzle body 90 extends from a proximal opening 96 to a distal opening 98. The nozzle body 90 may further include a nose portion 100 that may or may not narrow/extend inwardly to properly direct the shield gas for a given

application. The nozzle insert 94 has a proximal end portion 102 and a distal end portion 104 and includes a central bore 106 extending from the proximal end portion 102 towards the distal end portion 104. The nozzle insert 94 at its distal end portion 104 defines an internal gas diverter 110. The internal gas diverter 110 further defines a seating surface 112 toward the proximal end portion 102 of the nozzle insert 94. The seating surface 112 is chamfered in one form, for engaging the shoulder 44 of the contact tip 24. (The shoulder 44 of the contact tip 24 is shown spaced apart from the seating surface 112 in order to illustrate these features in detail). As further shown, the internal gas diverter 110 defines a profiled diverter orifice 120 that extends distally from the central bore 106.

[0034] The nozzle body 148 may further include an interior diverter surface 130 for further directing the shield gas exiting the apertures 52 of the contact tip 24. In this form, the shield gas flow is directed by the interior diverter surface 130 within a convergent section 132 into a throat 134, and then the shield gas enters a divergent section 136 of the nozzle body 148. In this form, the divergent section 136 has an increasing diameter from the throat 134 to a distal opening 98 of the nozzle body 90. The nozzle body 90 including both the convergent section 132 and the divergent section 136 results in flow characteristics that are more laminar when exiting the distal opening 98. In addition, the divergent section 136 directs the shield gas out the distal opening 98 to fan outward, widening the coverage of the shield gas over the weld pool during the operation of the welding gun 10. The convergent and divergent sections 132, 136 are designed to further improve and customize the flow characteristics of the shield gas for the specific welding operation. The lengths, diameters and interior geometry of the nozzle body 90 may include various permutations to allow for the shield gas to be optimized for a specific welding operation and environment. For example, the divergent section 136 may extend at a greater angle from the throat 134, further directing the shield gas into a larger fan outward of the distal opening 98. Alternately, the divergent section 136 may extend at or near the same diameter as the throat 134, thus directing the shield gas in a narrower fan exiting the distal opening 98.

[0035] As further shown, the design of the contact tip 24 and the third section 60 may further include various application specific designs to control a spacing 150 between the nozzle body 148 and the exterior surface 25 of the contact tip 24, in order to control flow of the shield gas therein. The spacing may be normal to the

exterior surface 25 of the contact 24 and may also be located at any position along the length of the contact tip 24.

[0036] As shown in FIGS. 5 and 6, the profiled diverter orifice 120 of the nozzle insert 94 extends around the apertures 52 of the contact tip 24. The gas flow, indicated by the dashed arrows F, is directed distally through the internal cavity 32 of the contact tip 24, and then radially outwards through the apertures 52. The profiled diverter orifice 120 then directs the gas flow exiting the apertures 52 distally around the exterior surface 25 of the contact tip 24 as shown. The profiled diverter orifice 120 may extend various lengths from a contact seat 160 and include a variety of geometries, in addition to the chamfered configurations as illustrated herein. Alternately, the profiled diverter orifice 120 may extend at any angle that will change the direction of the shield gas to improve the flow characteristics or cooling of the contact tip 24 and surrounding nozzle assembly 22. For example, such flow characteristics may include a laminar flow along the length of the contact tip 24.

[0037] Referring to FIG. 7, the present disclosure also includes a method for cooling the contact tip 24 includes a first step 200 of directing shield gas to flow into the internal cavity 32 of the contact tip 24. A second step 202 includes directing the shield gas flow from the internal cavity 32 through the at least one aperture 52 to the exterior surface 25 of the contact tip 24. A third step 204 provides cooling of the contact tip 24 by directing the flow of shield gas into and through the internal cavity 32 and around the exterior surface 25 of the contact tip 24. The cooling further includes both a conduction heat transfer and convection heat transfer to reduce the operating temperature of the contact tip 24 and the overall consumable assembly 16.

[0038] The method of cooling and the design of the contact tip 24 in combination with the nozzle assembly 22 may further reduce the temperature by changing the volume of gas flow, for example by having a different aperture shape or number of apertures 52. Another aspect to the cooling of the contact tip 24 involves the conductive heat transfer within the welding gun 10. Therefore, variations to the contact area between the contact tip 24 and the seat within the conductor tube may further provide cooling of the contact tip 24 by changing the conductive heat transfer to the conductor tube. Variations to the spherical taper end 42 and the spherical tapered seat of the conductor tube may further reduce the operating temperature and the thermal effects of the welding operation to improve the life of the contact tip 24 and the overall consumable assembly 16.

[0039] In testing various forms of the present disclosure, the operating temperature of the contact tip 24 has been reduced by more than 30%. This reduced operating temperature increases overall life and also reduces adhesion of weld splatter onto the contact tip 24.

[0040] Referring to FIG. 8, test results demonstrating lower operating temperature for the present disclosure are illustrated, which employed the following welding parameters in Table 1 below.

[0041] Table 1: Welding Parameters for Testing

Test Duration	10 Minutes
Wire Size	1/16" (16 gauge wire)
Current	360 Amperes
Voltage	26.2 Volts
Contact Tip to Work Distance (CTWD)	3/4"

[0042] The testing included a total of six (6) runs using the welding parameters above. Three (3) the runs used a conventional welding tip, and the operating temperatures for each of these three (3) runs are indicated by lines 224. The other three (3) runs employed the contact tip 24 and nozzle body assembly 22 according to the present disclosure, for a heavy duty application, and operating temperatures for each of these runs are indicated by lines 222. This testing demonstrated that the operating temperature of the contact tip 24 according to the teachings of the present disclosure was more than 300 °F cooler than a conventional contact tip, as shown Table 2 below.

[0043] Table 2: Average Maximum Temperature

Contact Tip >>	Heavy Duty Contact Tip 24	Conventional Welding Tip
Average Max. Temp (°F)	457.77	775.58
Temperature Difference (°F)	317.81	

[0044] The present disclosure is merely exemplary in nature and, thus, variations that do not depart from the spirit of the disclosure are intended to be within the scope of the present disclosure. Such variations are not to be regarded as a departure from the scope contemplated in the present disclosure.

CLAIMS

1. A consumable assembly for use in an arc welding apparatus comprising:
 - a nozzle assembly comprising a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator, the nozzle insert comprising an internal gas diverter and a seating surface; and
 - a contact tip disposed within the nozzle assembly, the contact tip defining a shoulder that engages the seating surface of the nozzle insert, and the contact tip further comprising:
 - a body defining an internal cavity extending from a proximal end portion to a distal end portion;
 - at least one aperture extending from an exterior portion of the body to the internal cavity;
 - an exit orifice extending through the distal end portion of the body;
 - a distal end face; and
 - an exterior surface extending between the at least one aperture and the distal end portion of the body,wherein the internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip.
2. The consumable assembly according to claim 1, wherein the internal gas diverter defines a profiled diverter orifice.
3. The consumable assembly according to claim 1, wherein the nozzle body further comprises an interior diverter surface to further direct the flow of shield gas.
4. The consumable assembly according to claim 1, wherein the nozzle body further comprises an internal divergent section along a nose portion thereof.

5. The consumable assembly according to claim 1, wherein a spacing is defined between the distal end portion of the contact tip and a nose portion of the nozzle body, and the spacing is adjusted to control the flow of shield gas.
6. The consumable assembly according to claim 1, wherein a wall thickness of the contact tip body proximate the distal end portion is a function of a welding wire diameter that extends through the exit orifice.
7. The consumable assembly according to claim 6, wherein the wall thickness is at least 0.08 inches.
8. The consumable assembly according to claim 6, wherein the wall thickness is at least 0.12 inches.
9. The consumable assembly according to claim 1, wherein a total cross-sectional area of the at least one aperture is equal to a total cross-sectional area of a gas input to a welding cable at a power pin or plug holes of the arc welding apparatus.
10. The consumable assembly according to claim 1, wherein a distance from the at least one aperture to the distal end face is at least 0.8 inches.
11. The consumable component according to claim 1, wherein the at least one aperture defines an arcuate cut-out having guiding surfaces, wherein the guiding surfaces direct the flow of shield gas for a desired flow characteristic out of the at least one aperture.
12. The consumable component according to claim 10, wherein a volume flow through the at least one aperture is a function of the distance.

13. A method of cooling a contact tip for use in an arc welding apparatus comprising:

- directing a flow of shield gas into an internal cavity of the contact tip from a proximal end portion to a distal end portion;
- directing the flow of shield gas through at least one aperture formed through a body of the contact tip; and
- diverting the flow of shield gas with a component adjacent to the contact tip along an exterior surface of the contact tip toward the distal end portion,

wherein the flow of shield gas into the internal cavity through the at least one aperture and around the exterior surface of the contact tip improves the cooling of the contact tip.

14. The method according to Claim 13 further comprising diverting the flow of shield gas with the adjacent component further downstream.

15. The method according to Claim 13 further comprising adjusting a spacing between the contact tip and the adjacent component to control the flow of shield gas.

16. The method according to Claim 13, wherein a total cross-sectional area of the at least one aperture is approximately equal to a total cross-sectional area of a gas input to a welding cable at a power pin or plug holes of the arc welding apparatus.

17. An arc welding apparatus comprising:

- a handle;
- a conductor tube attached to the handle;
- a welding cable that carries welding current, shield gas, and a welding wire from a power source, the welding cable being connected to the handle; and
- a consumable assembly attached to the conductor tube, the consumable assembly comprising:

a nozzle assembly comprising a nozzle body, an insulator disposed within the nozzle body, and a nozzle insert disposed within the insulator, the nozzle insert comprising an internal gas diverter and a seating surface; and

a contact tip disposed within the nozzle assembly, the contact tip defining a shoulder that engages the seating surface of the nozzle insert, and the contact tip further comprising:

a body defining an internal cavity extending from a proximal end portion to a distal end portion;

at least one aperture extending from an exterior portion of the body to the internal cavity;

an exit orifice extending through the distal end portion of the body;

a distal end face; and

an exterior surface extending between the at least one aperture and the distal end portion of the body,

wherein the internal gas diverter directs a flow of shield gas exiting the at least one aperture along the exterior surface of the contact tip.

18. The arc welding apparatus according to Claim 17, wherein the internal gas diverter defines a profiled diverter orifice.

19. The arc welding apparatus according to Claim 17, wherein a total cross-sectional area of the at least one aperture is approximately equal to a total cross-sectional area of a gas input to a welding cable at a power pin or plug holes of the arc welding apparatus.

20. The arc welding apparatus according to Claim 17, wherein a spacing is defined between the distal end portion of the contact tip and a nose portion of the nozzle body, and the spacing is adjusted to control the flow of shield gas.

1/8



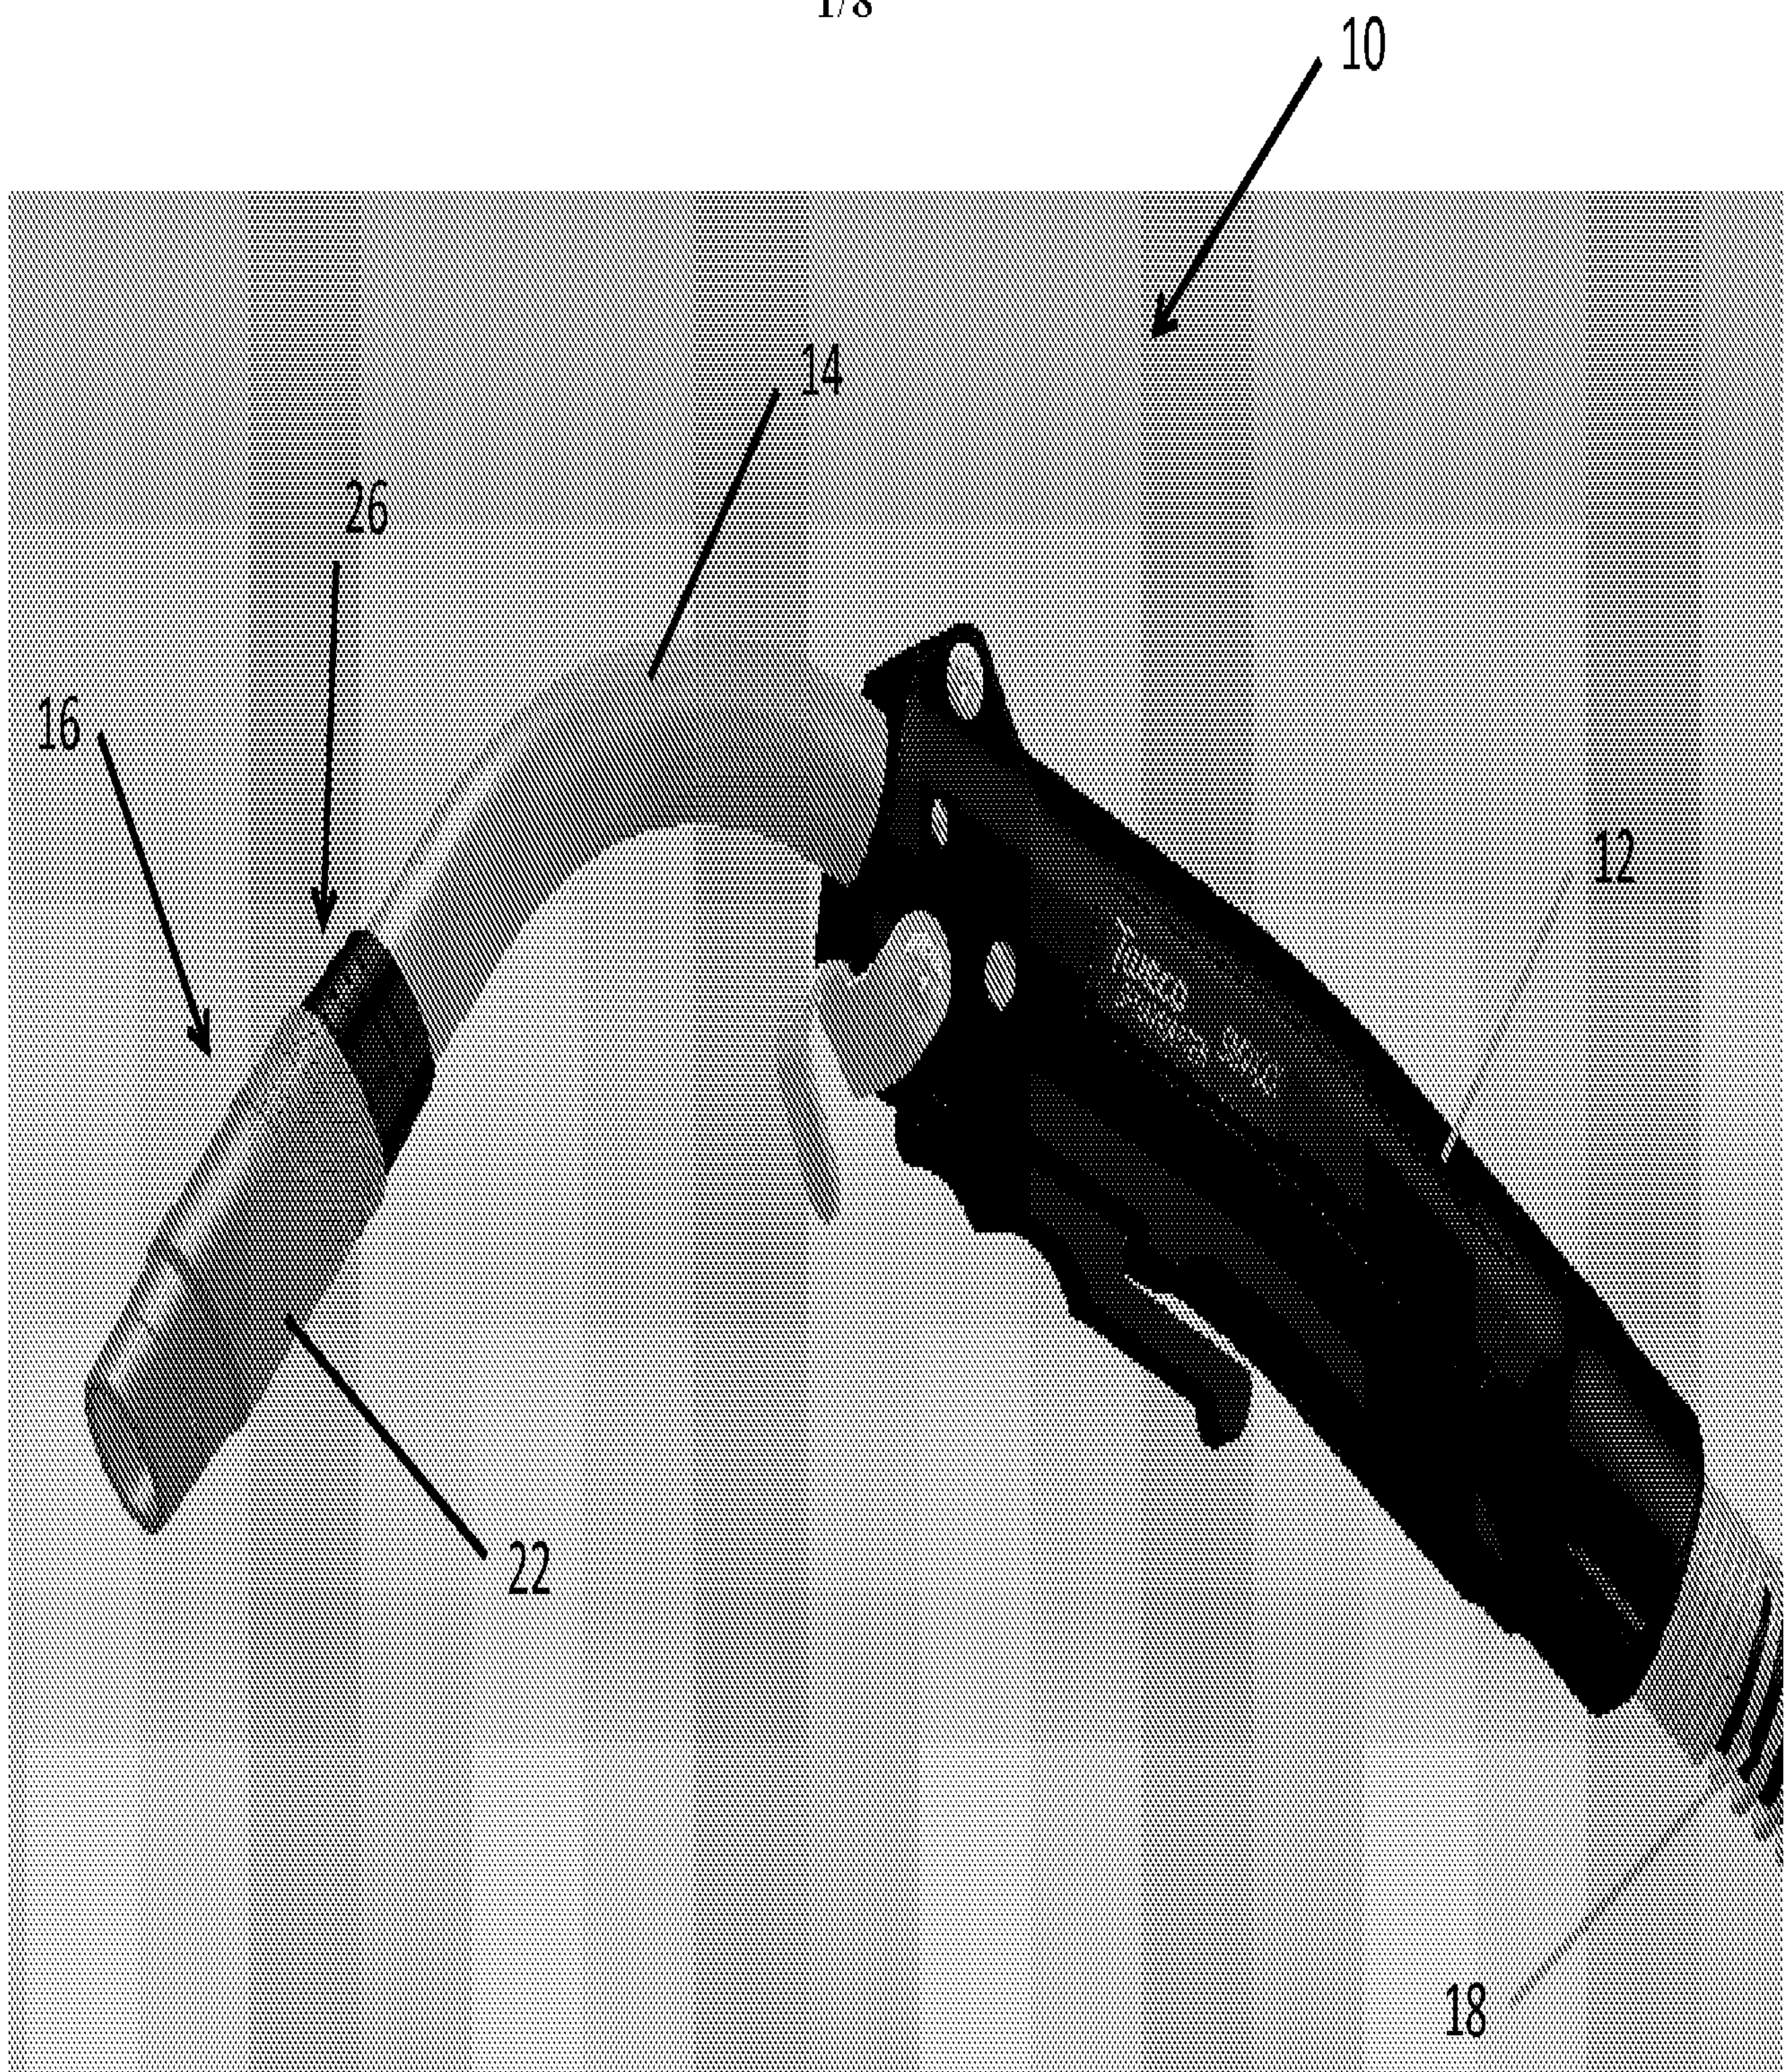


FIG. 1

2/8

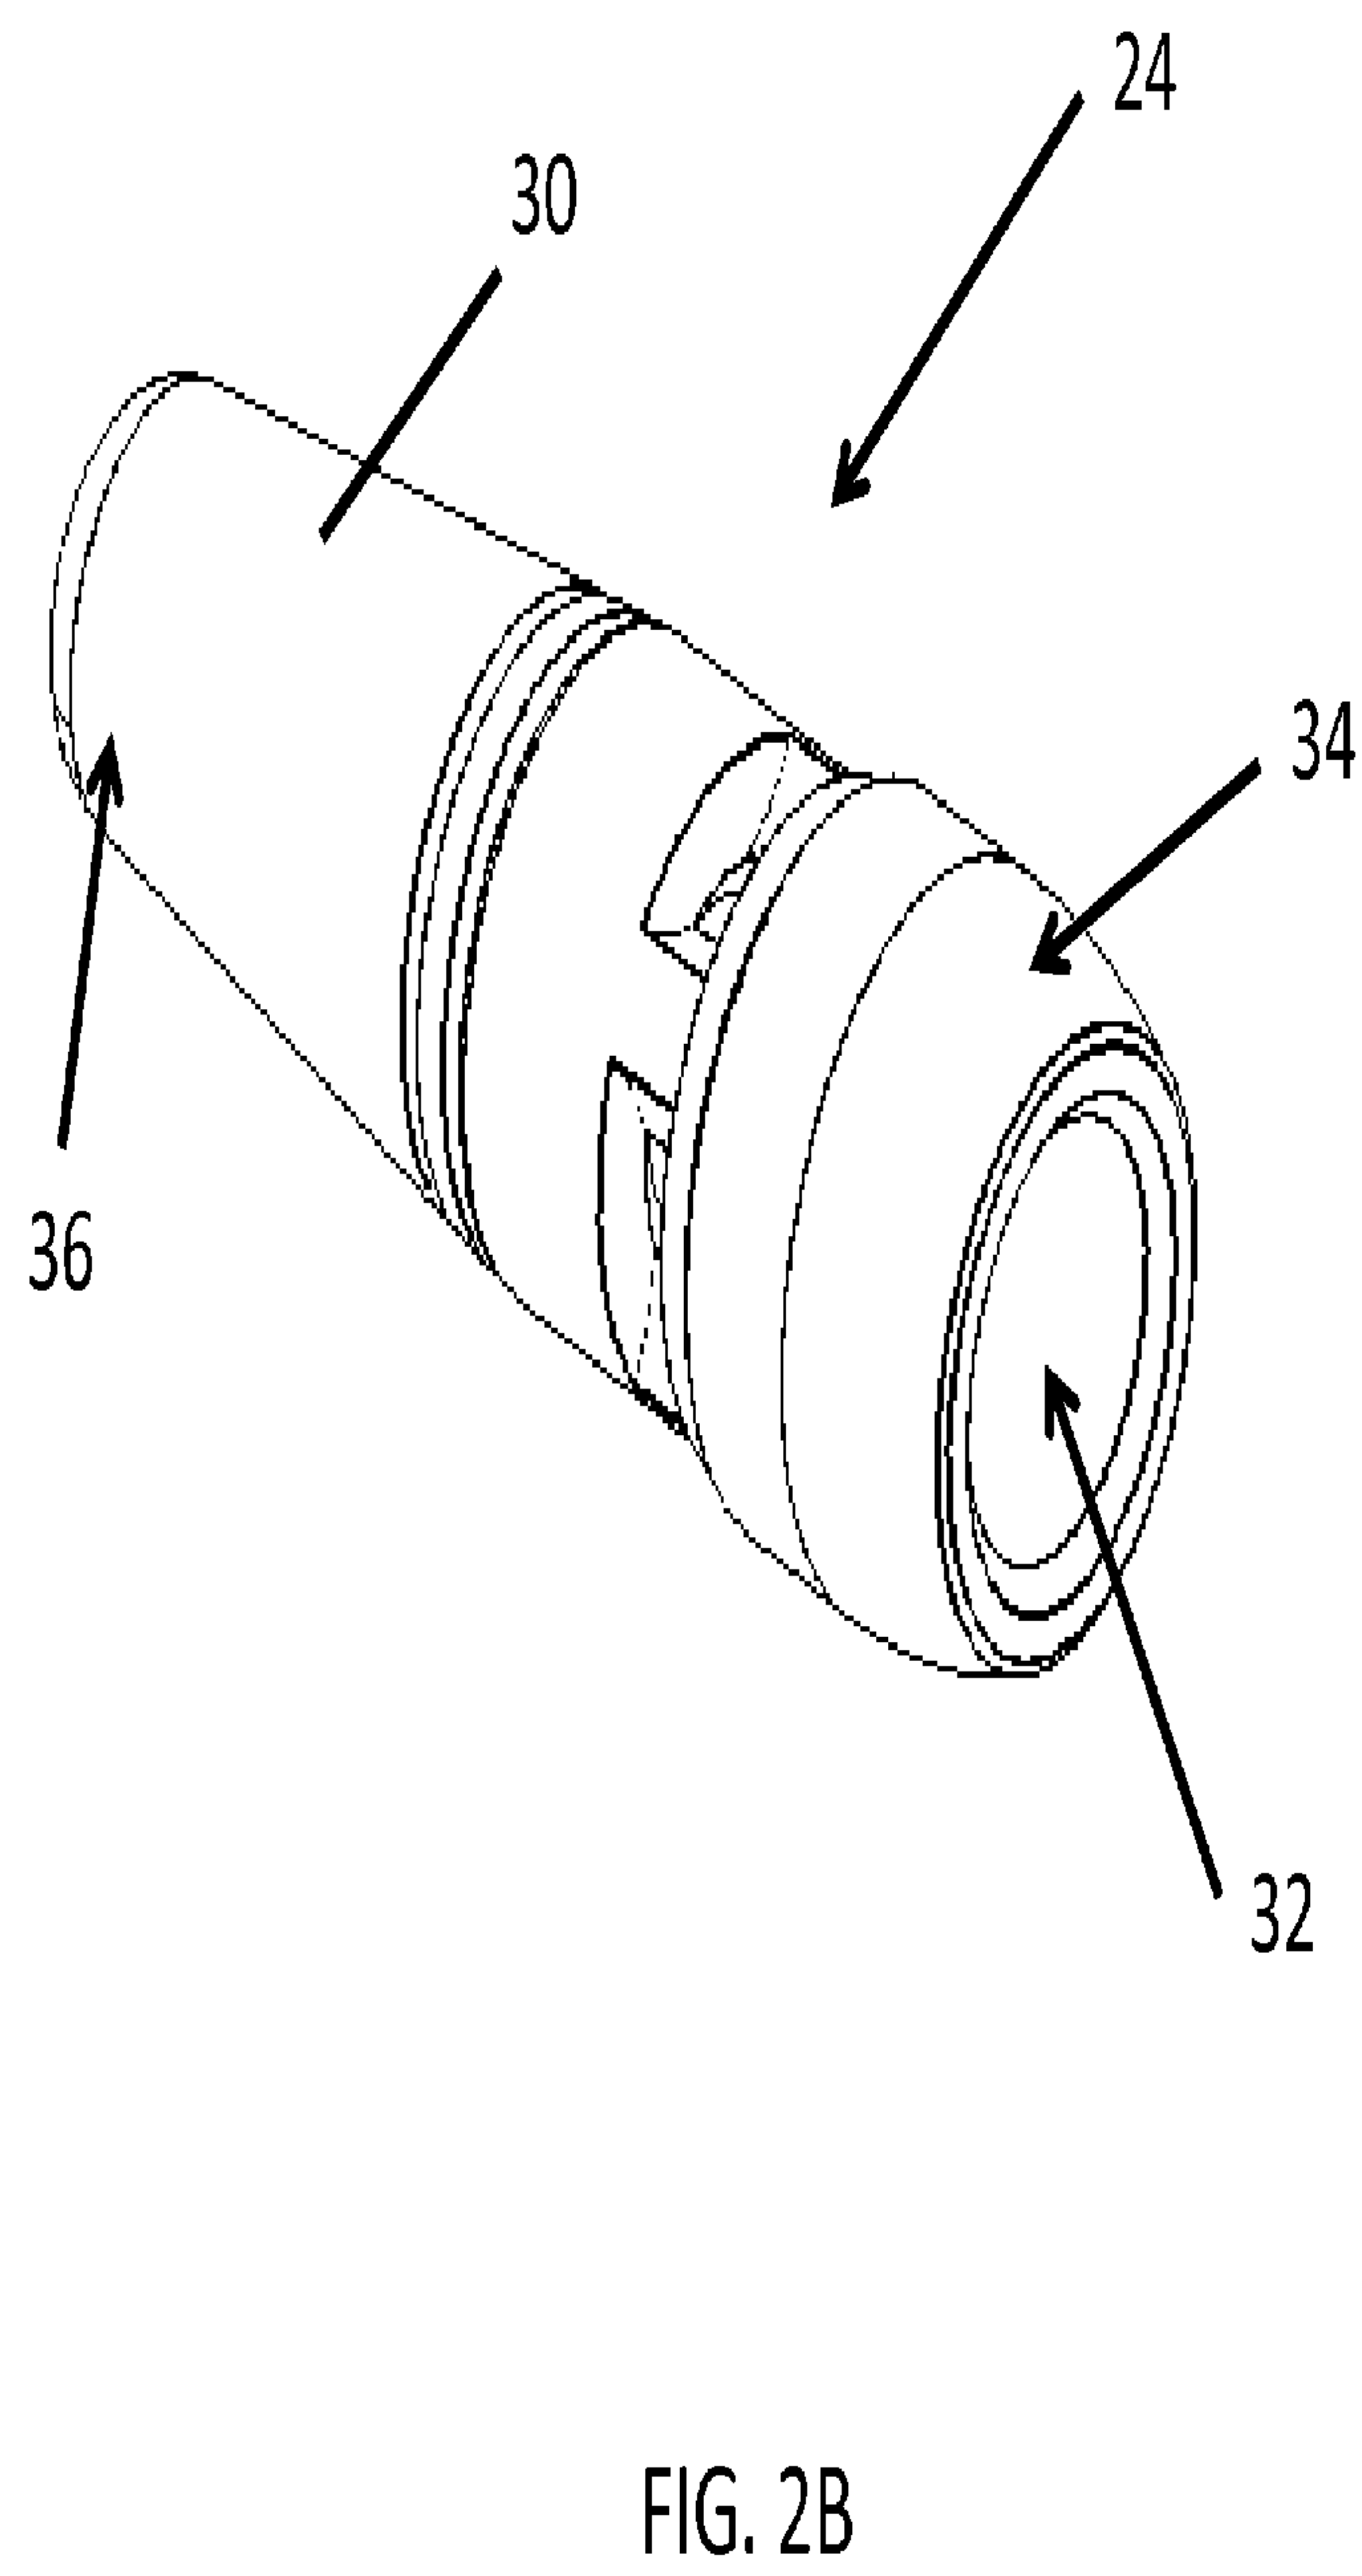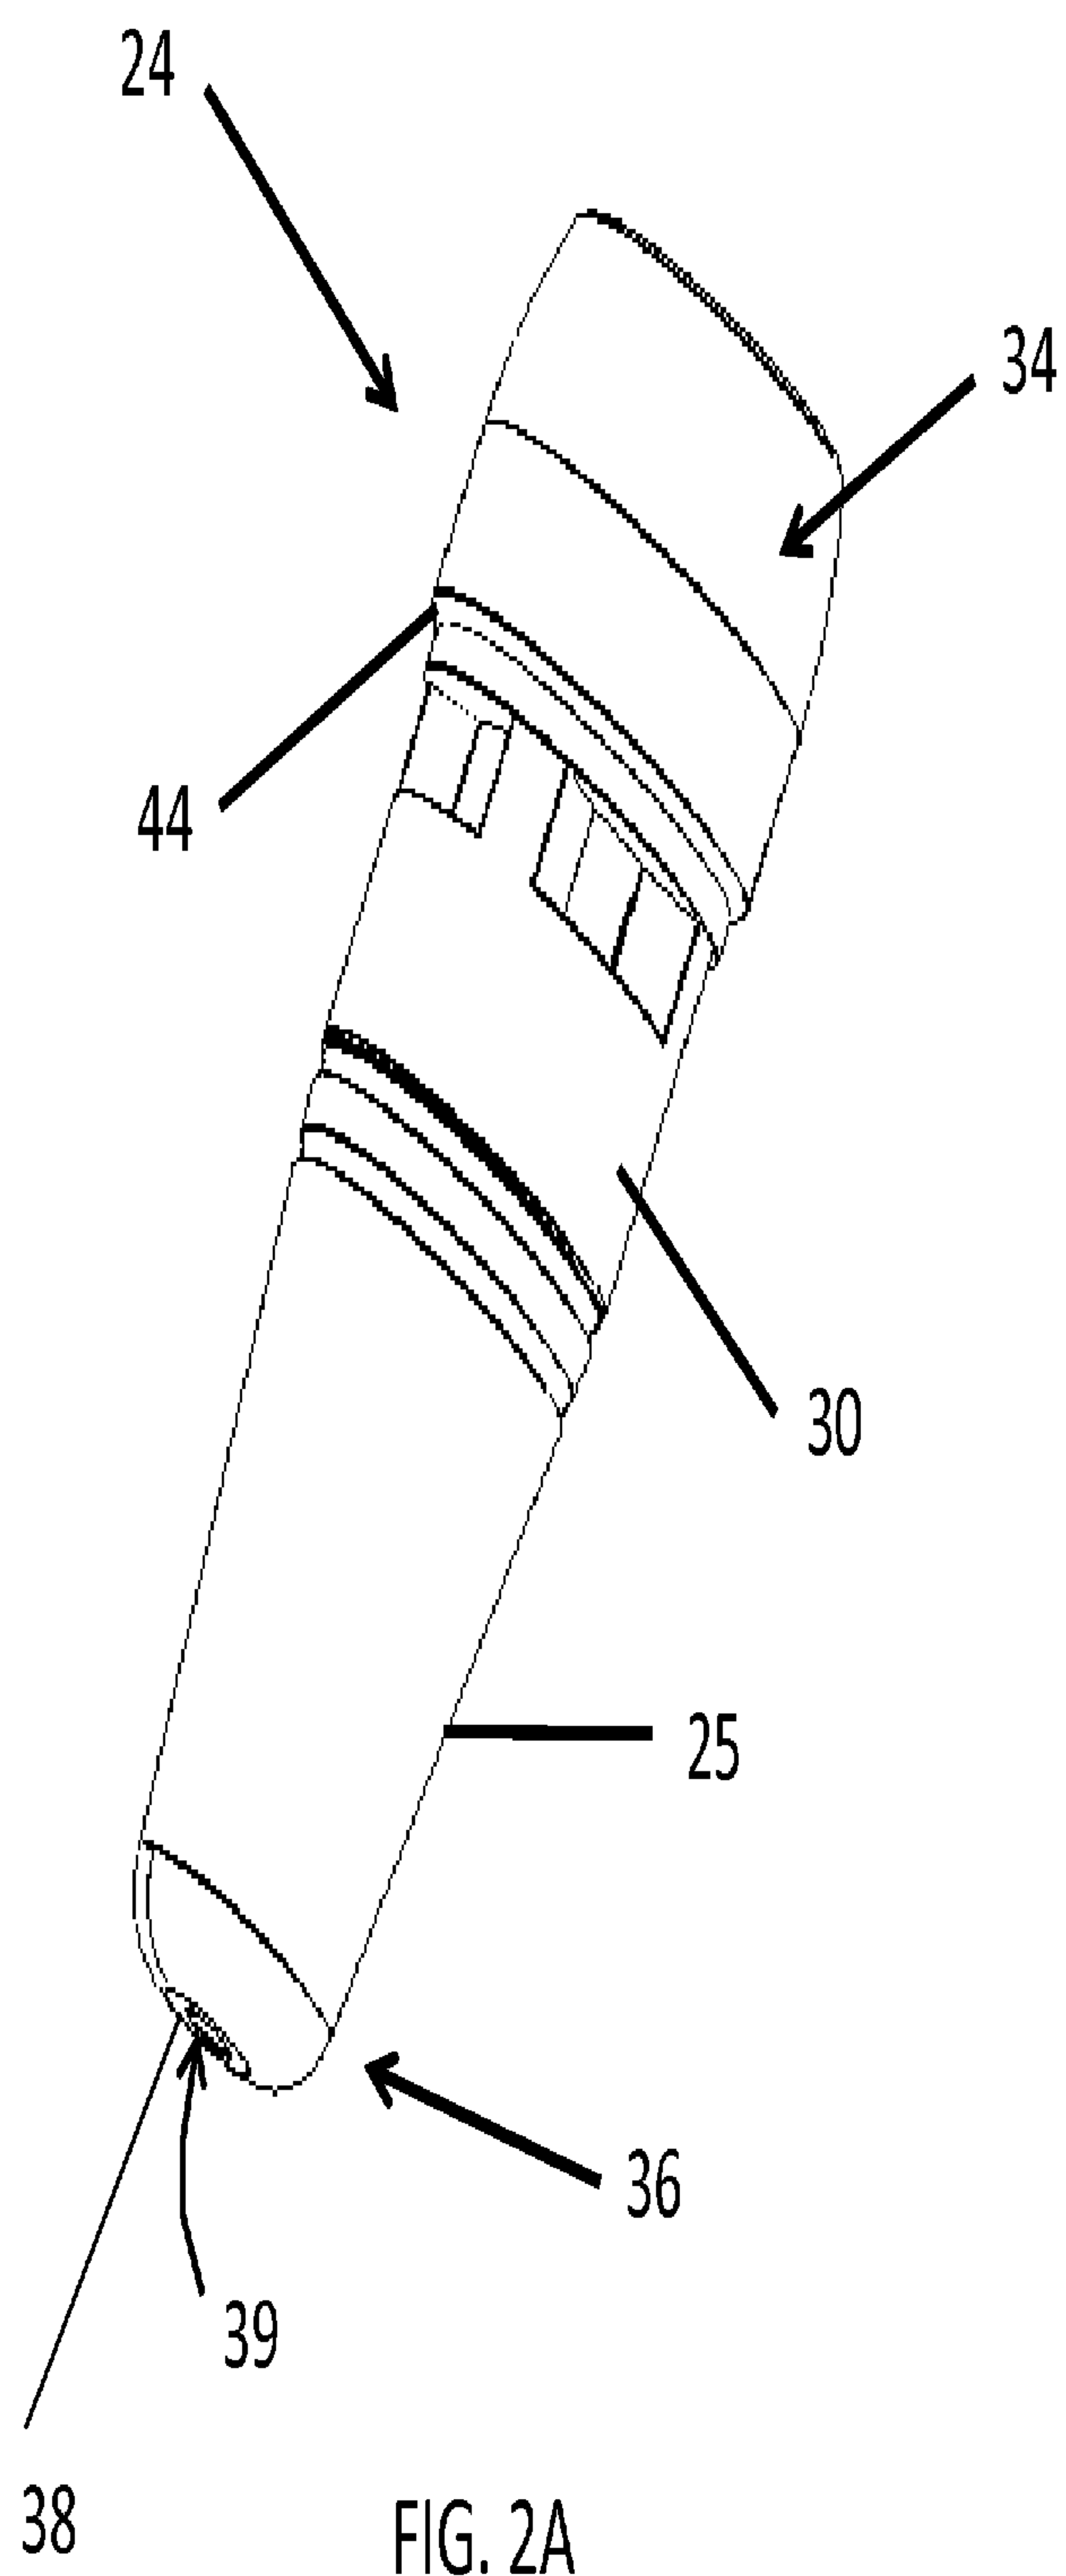

3/8

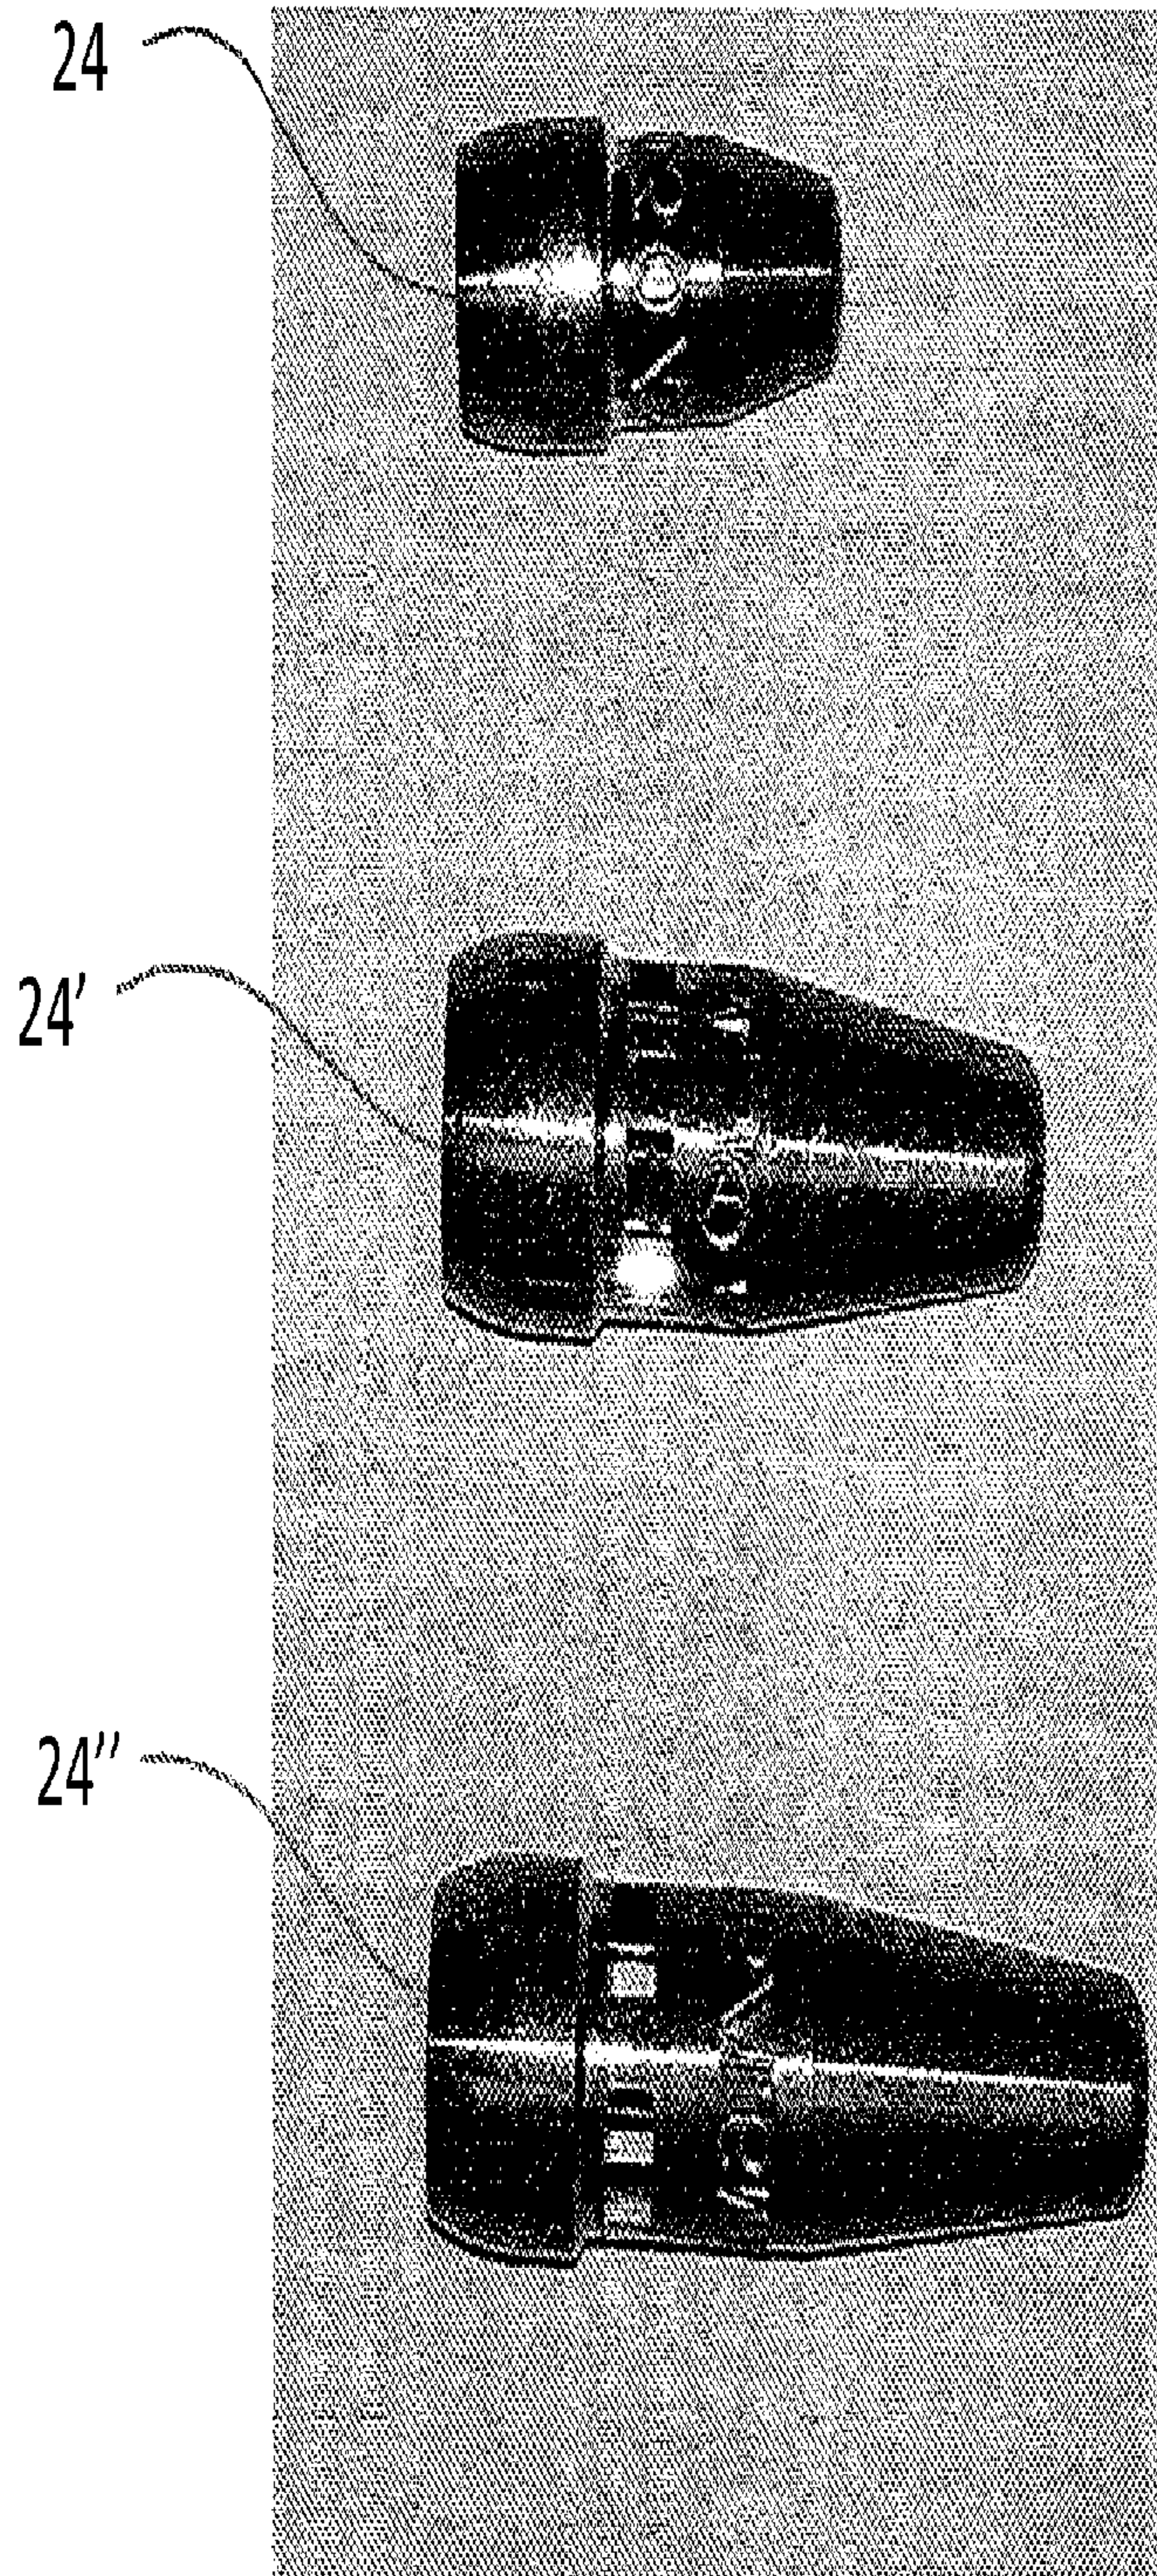


FIG. 3

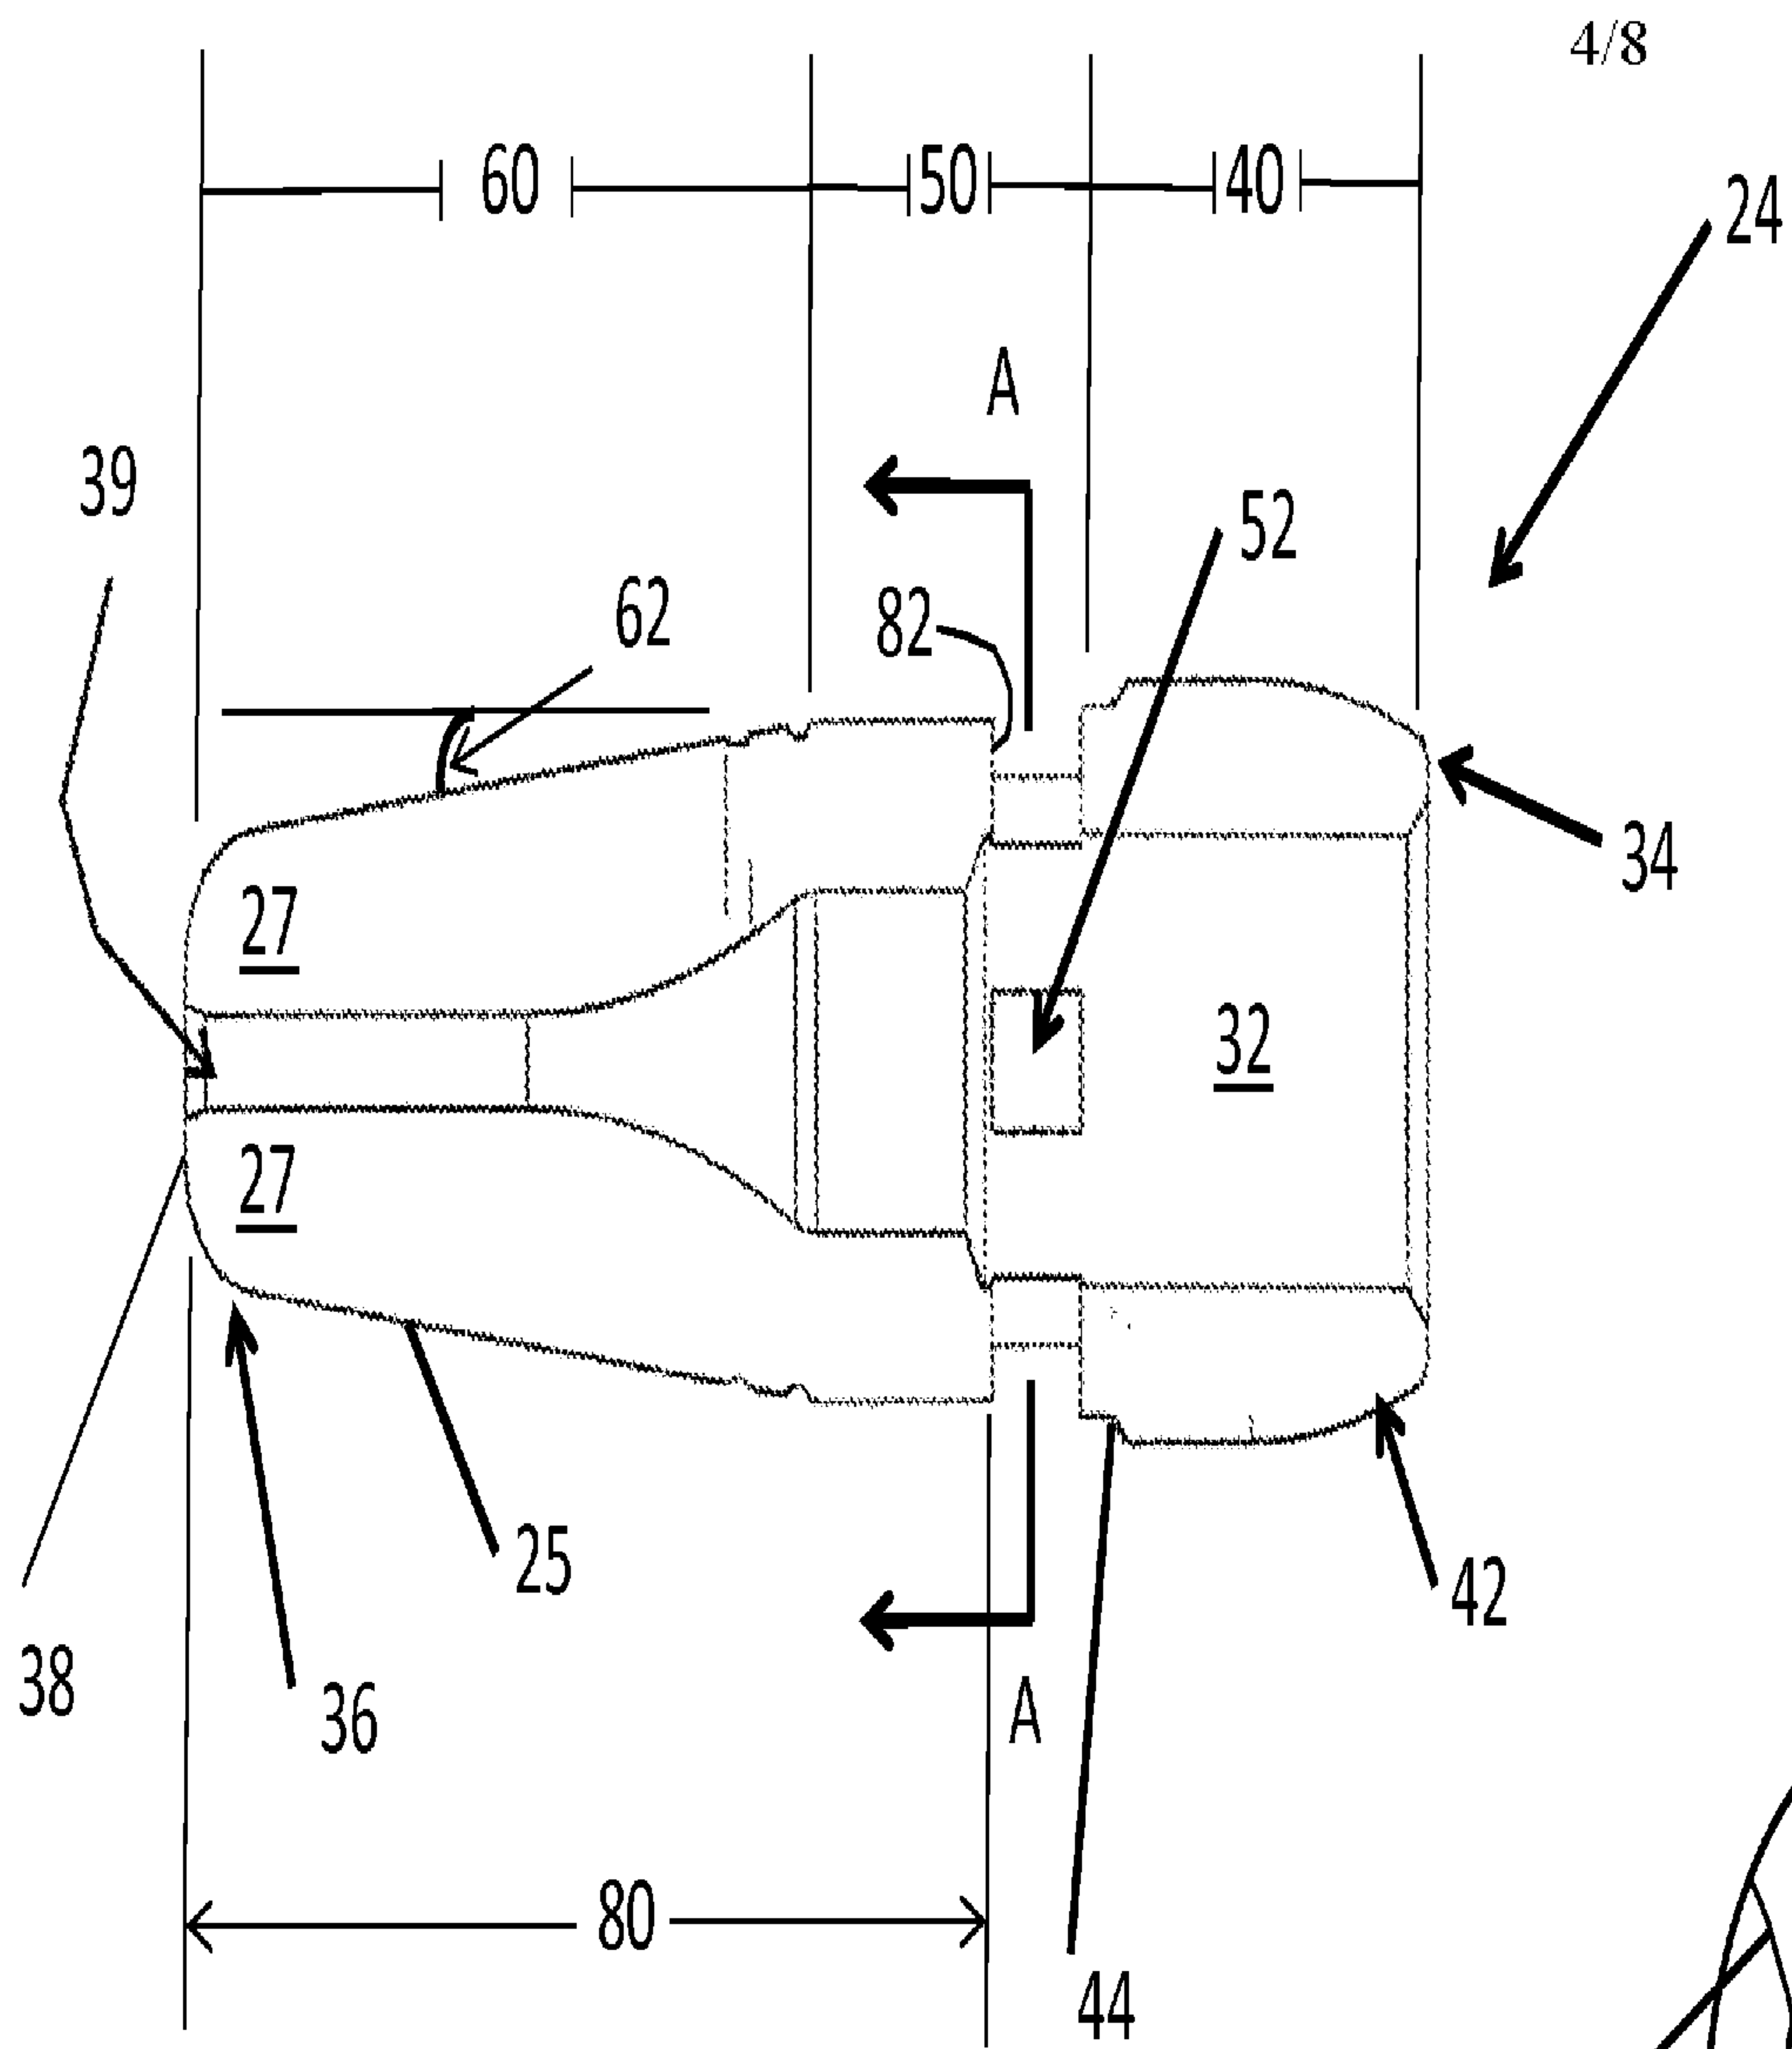


FIG. 4A

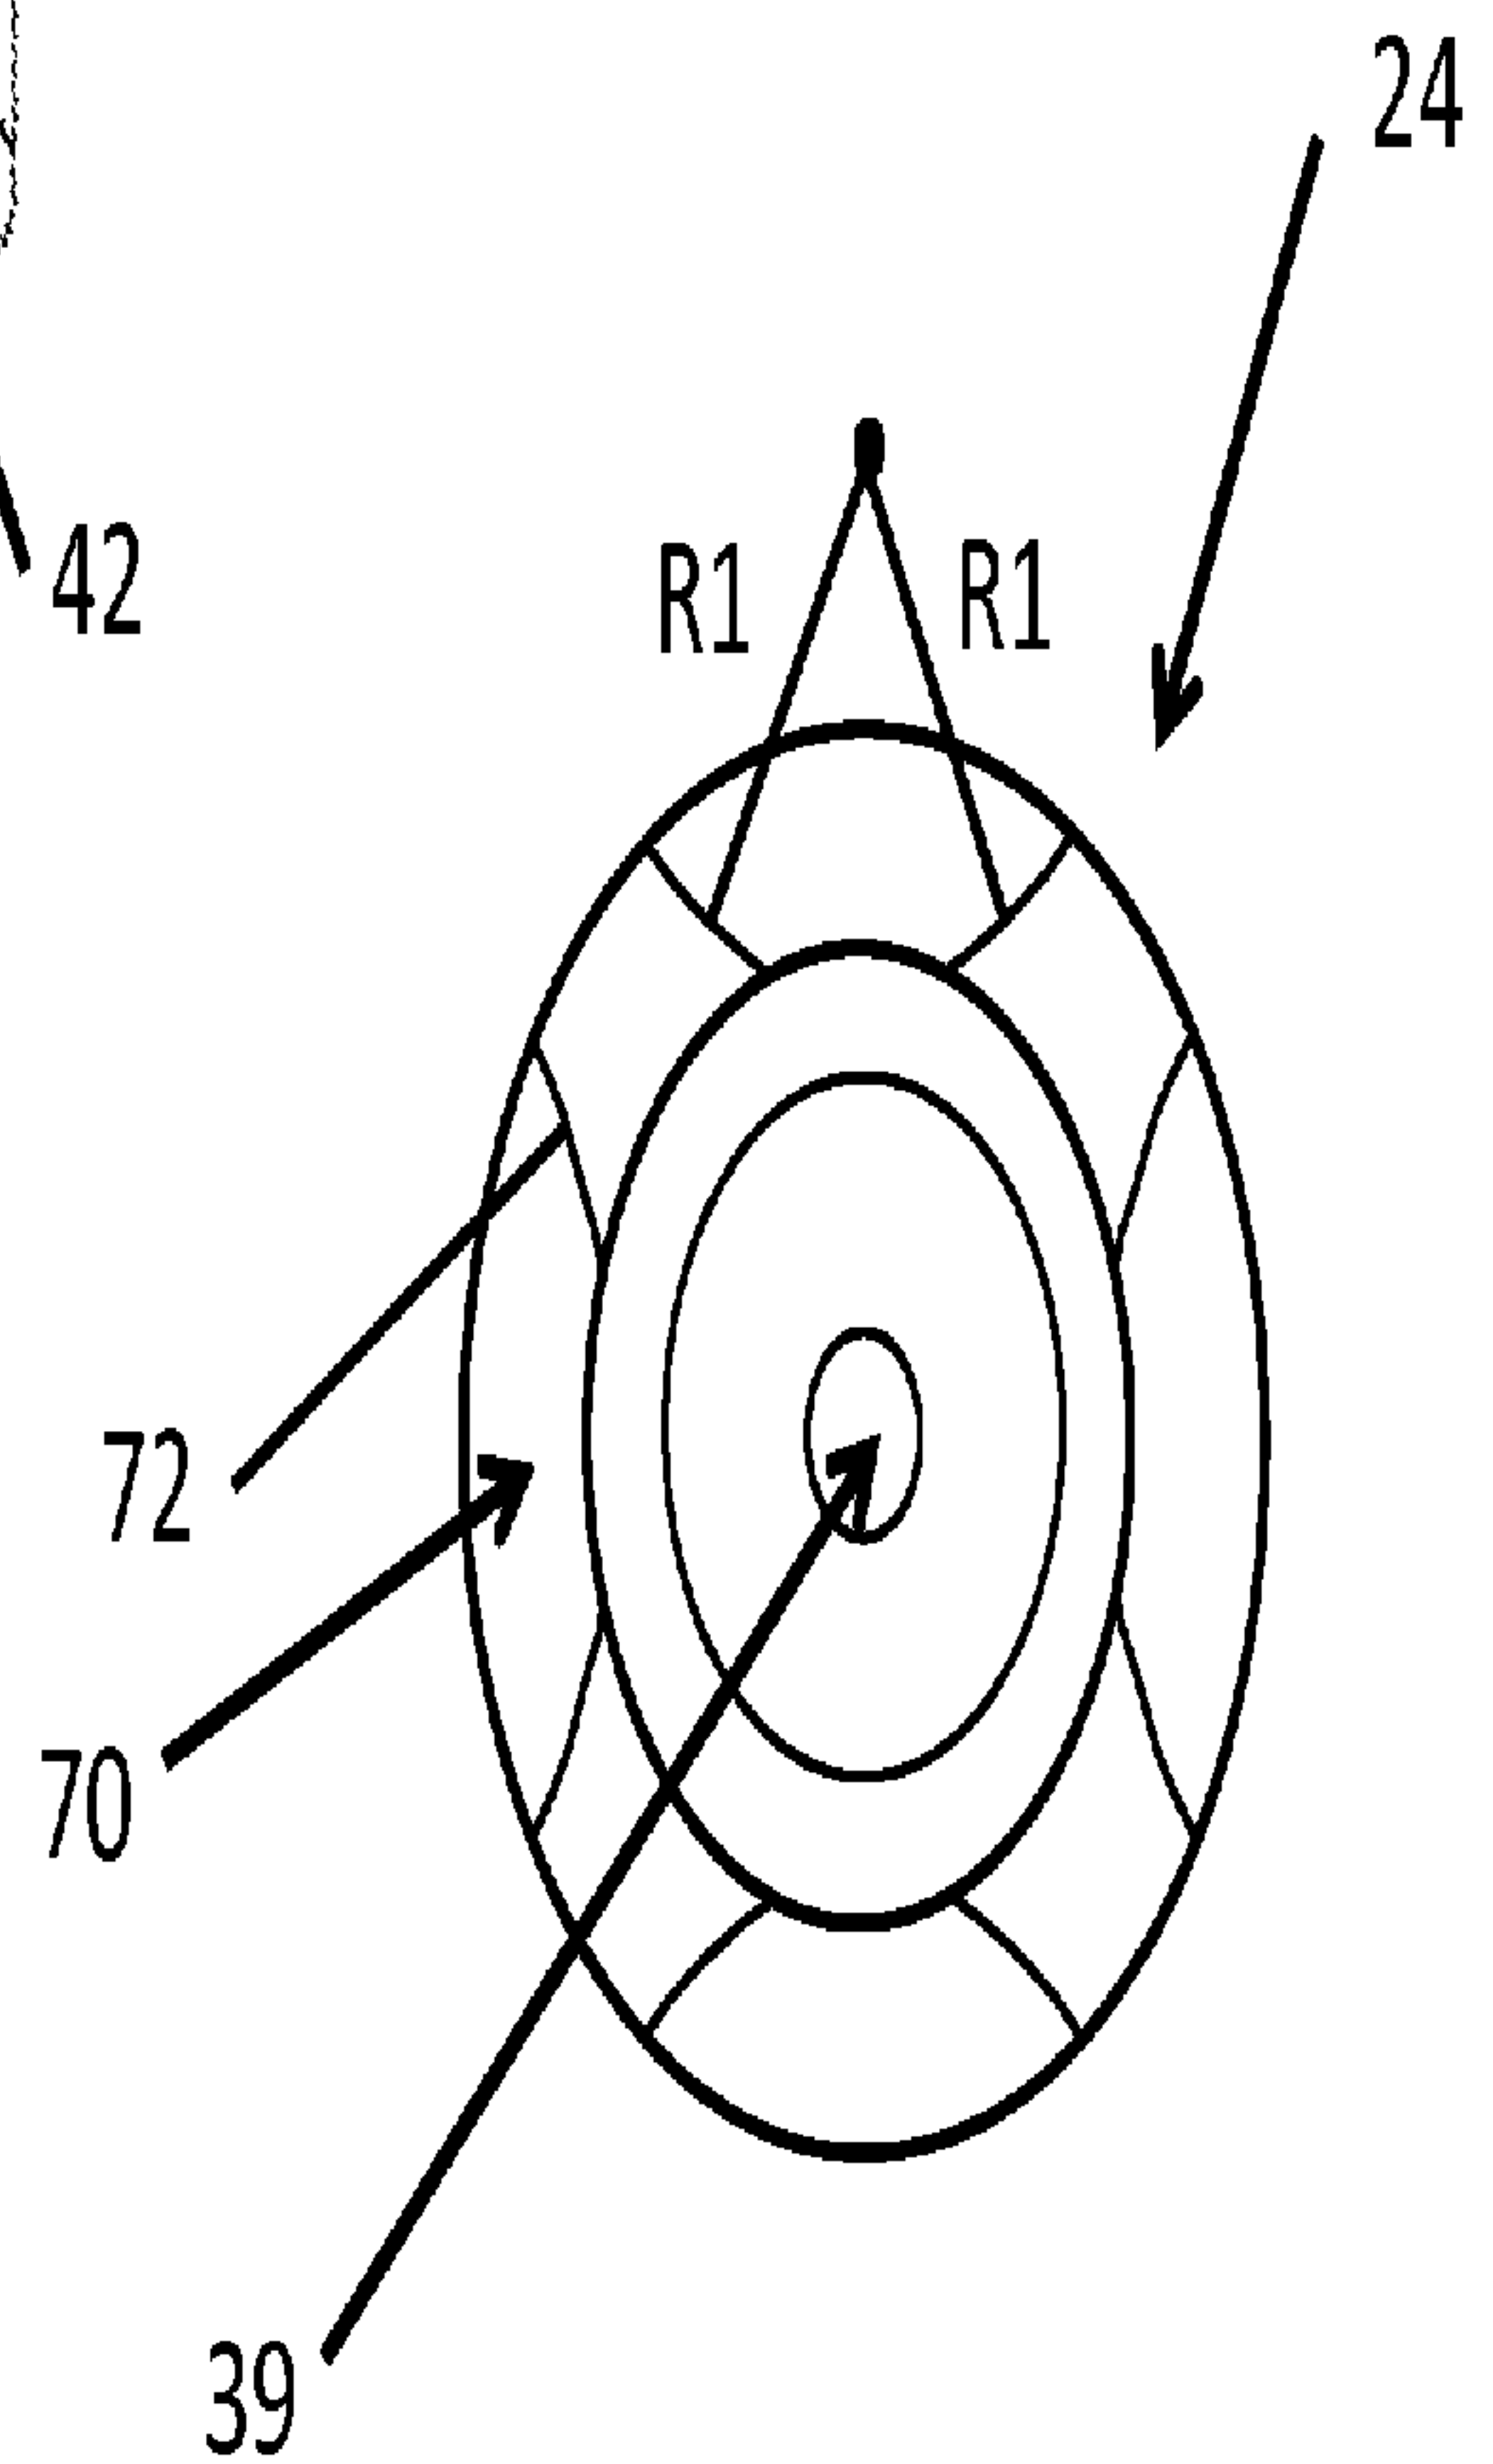


FIG. 4B

5/8

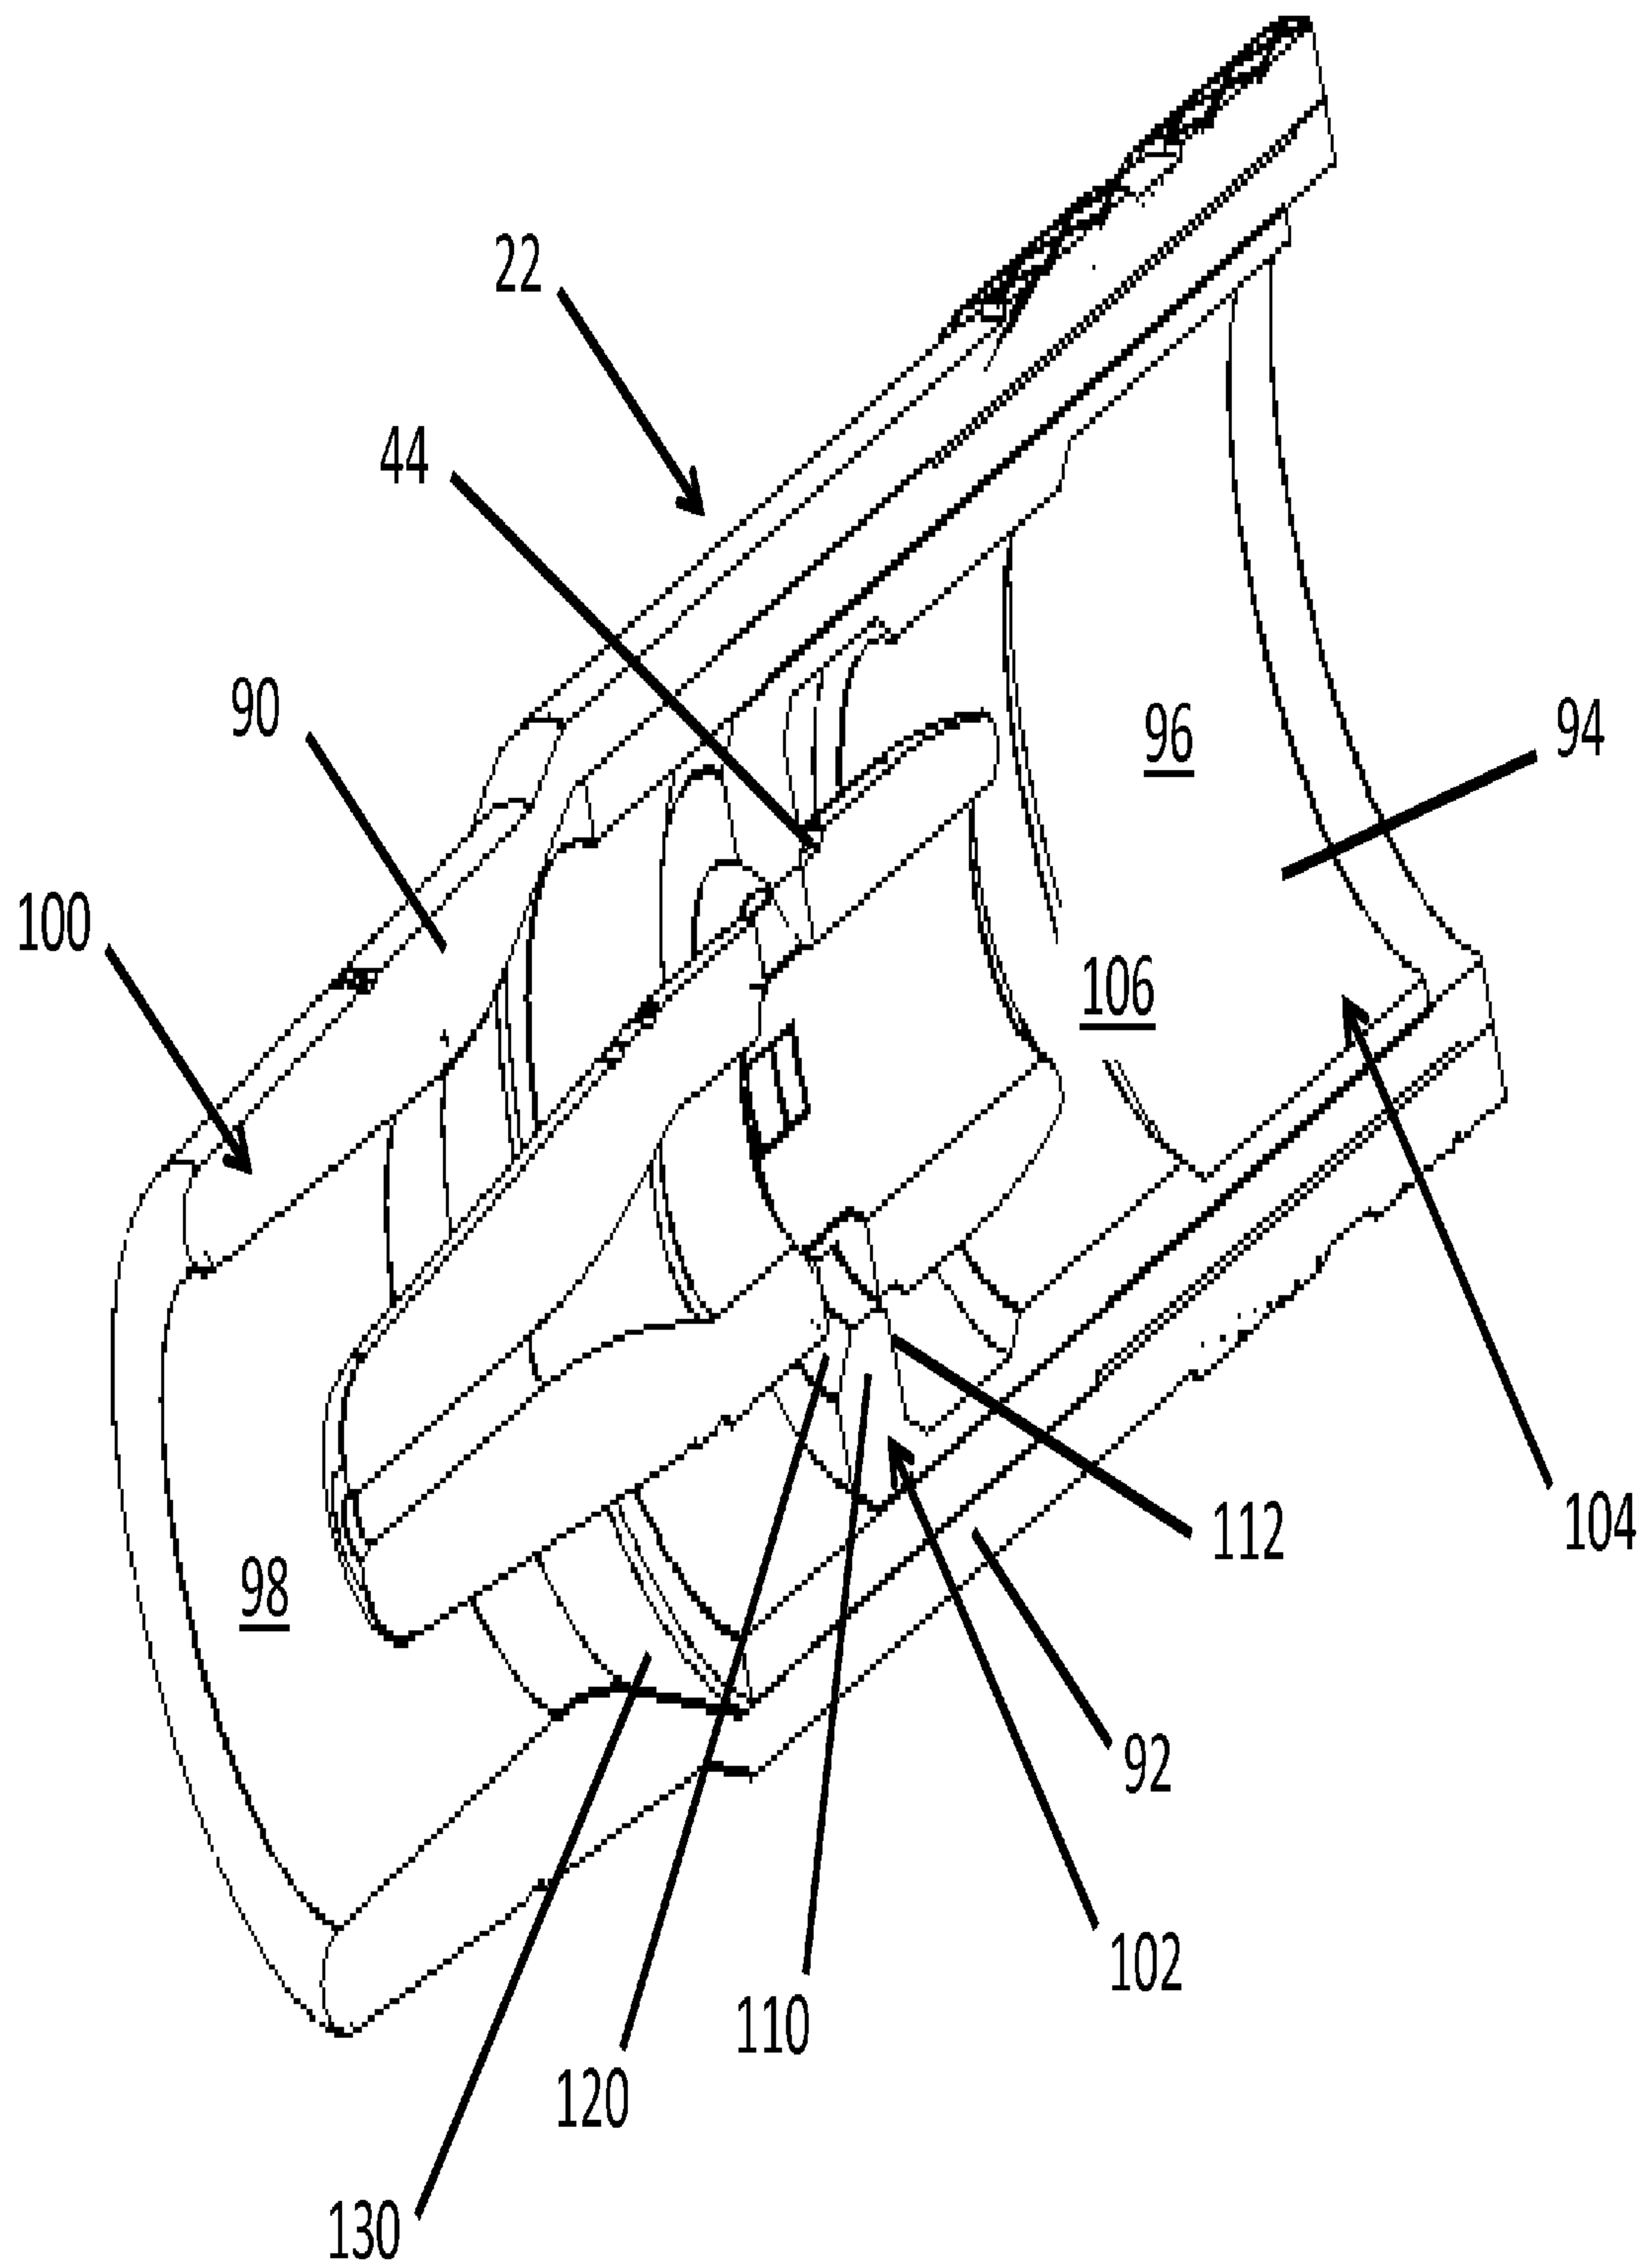


FIG. 5

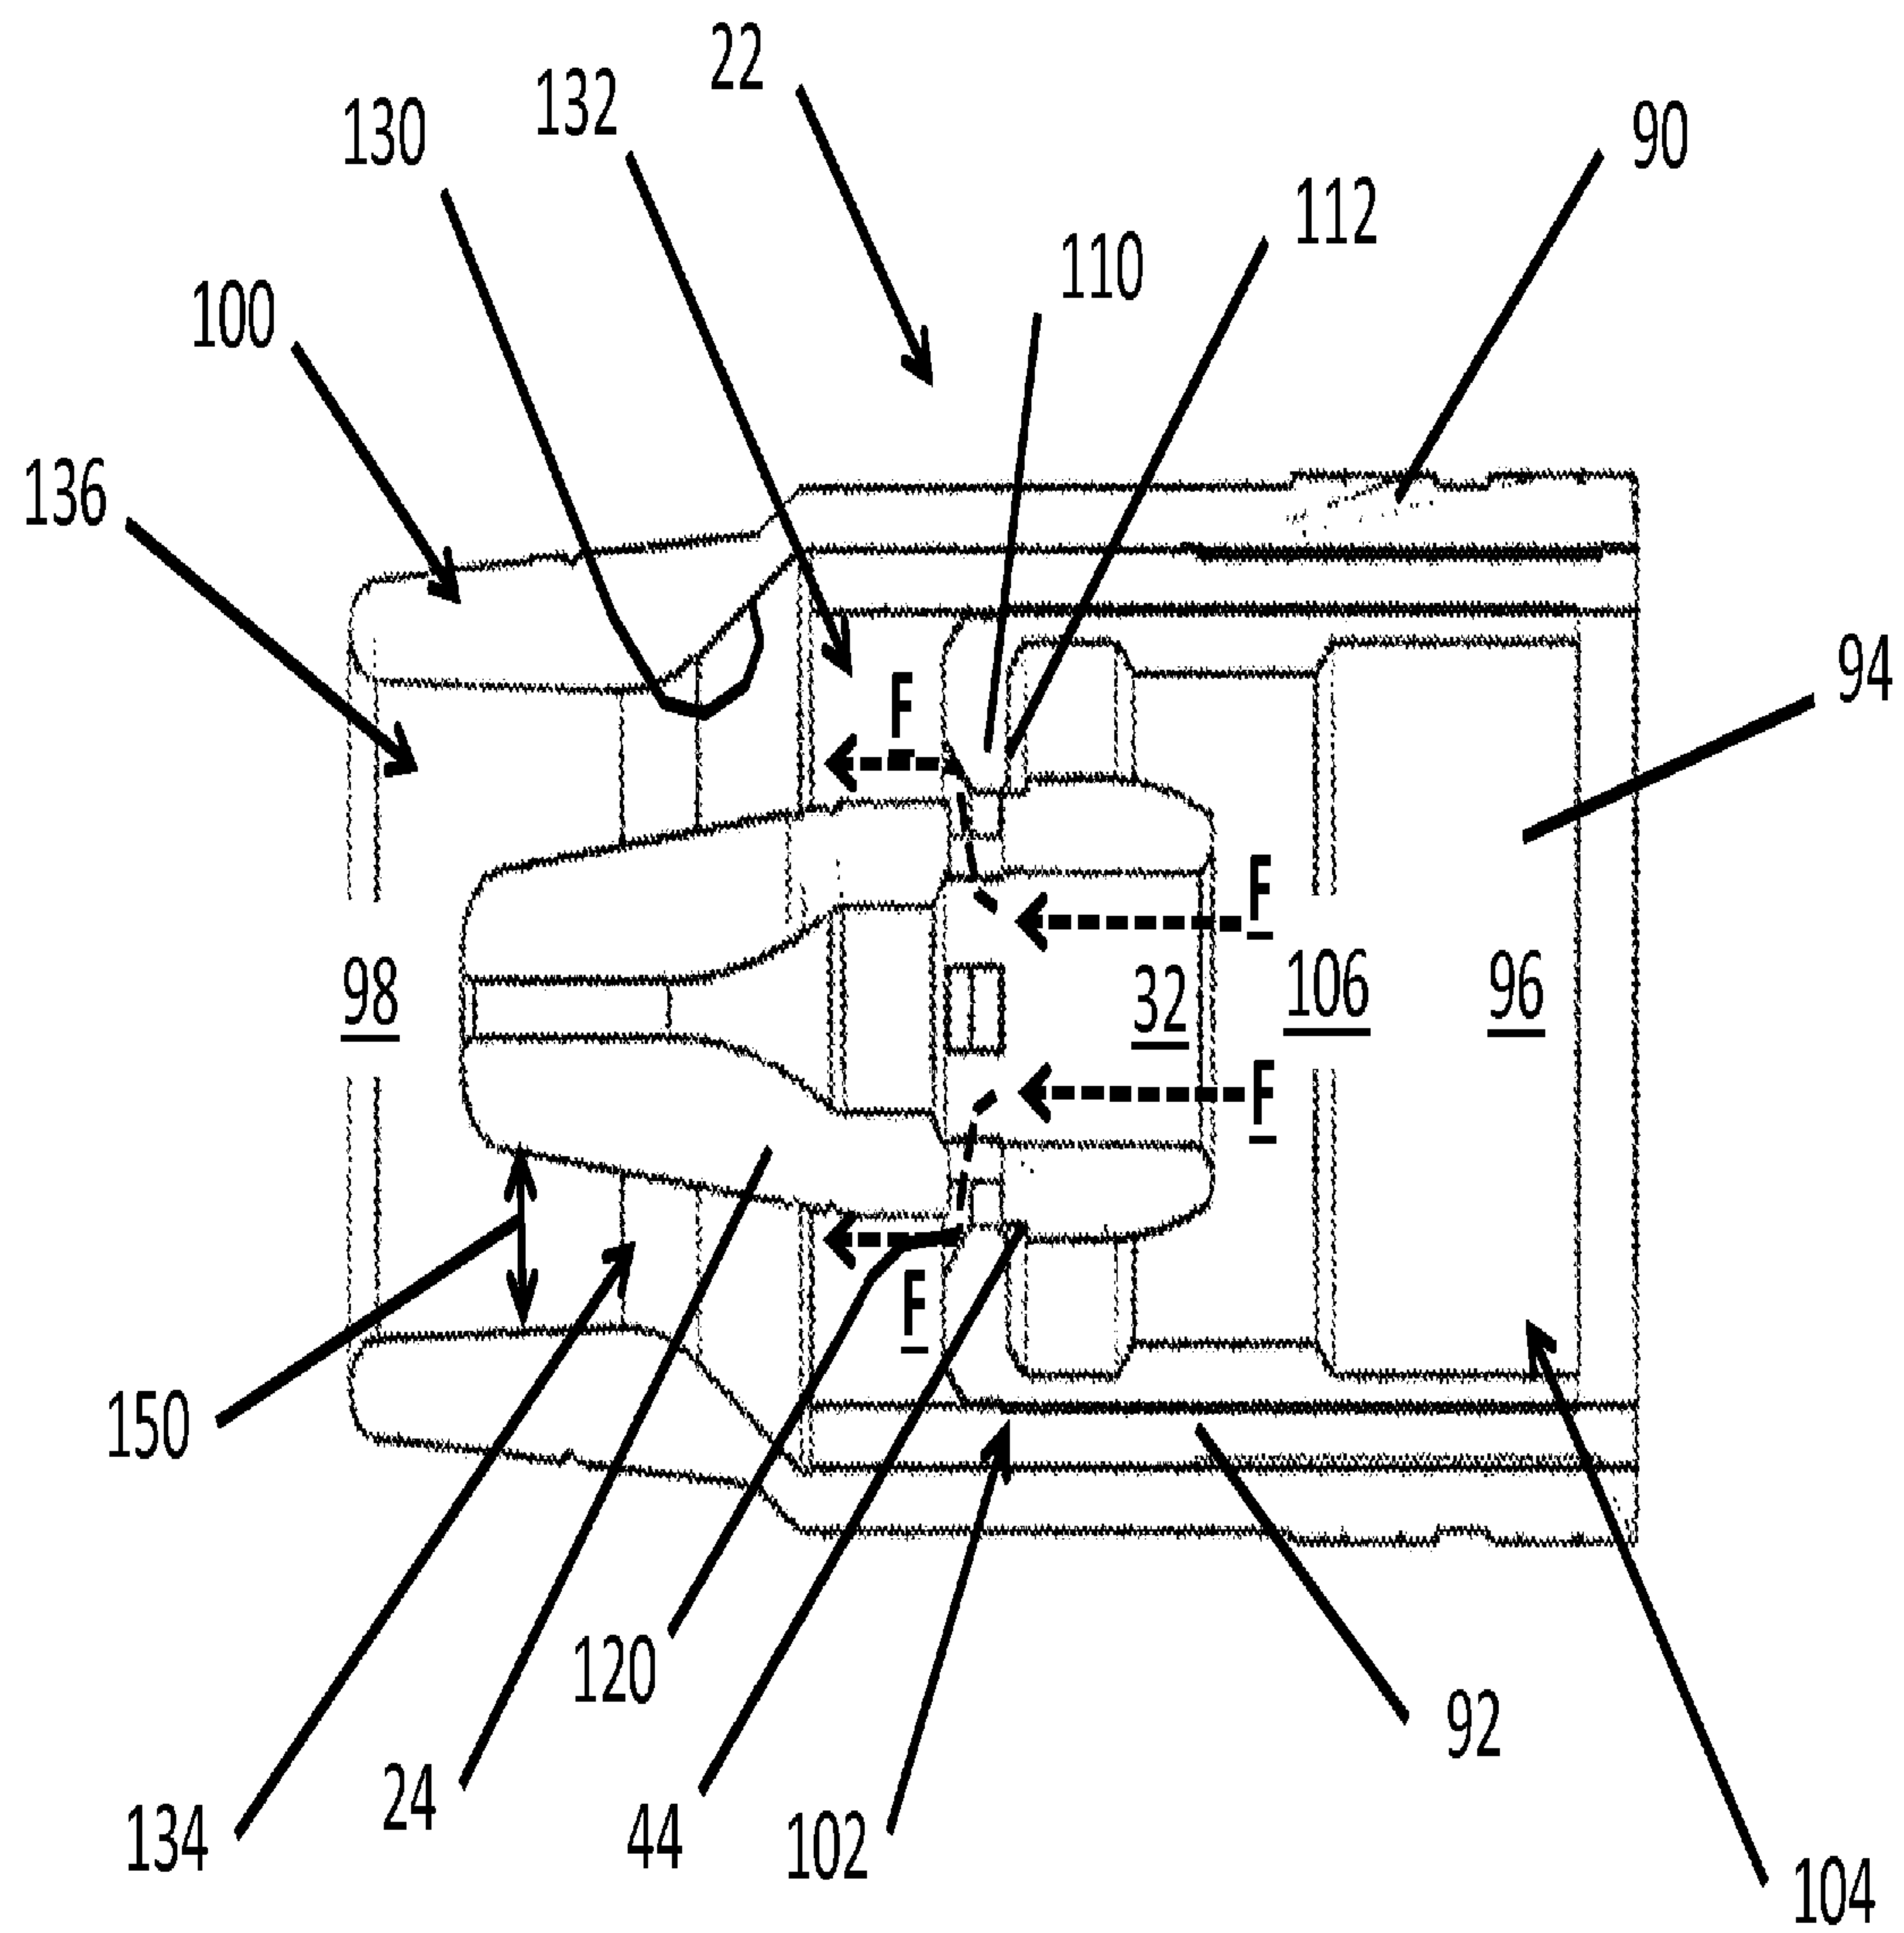


FIG. 6

7/8

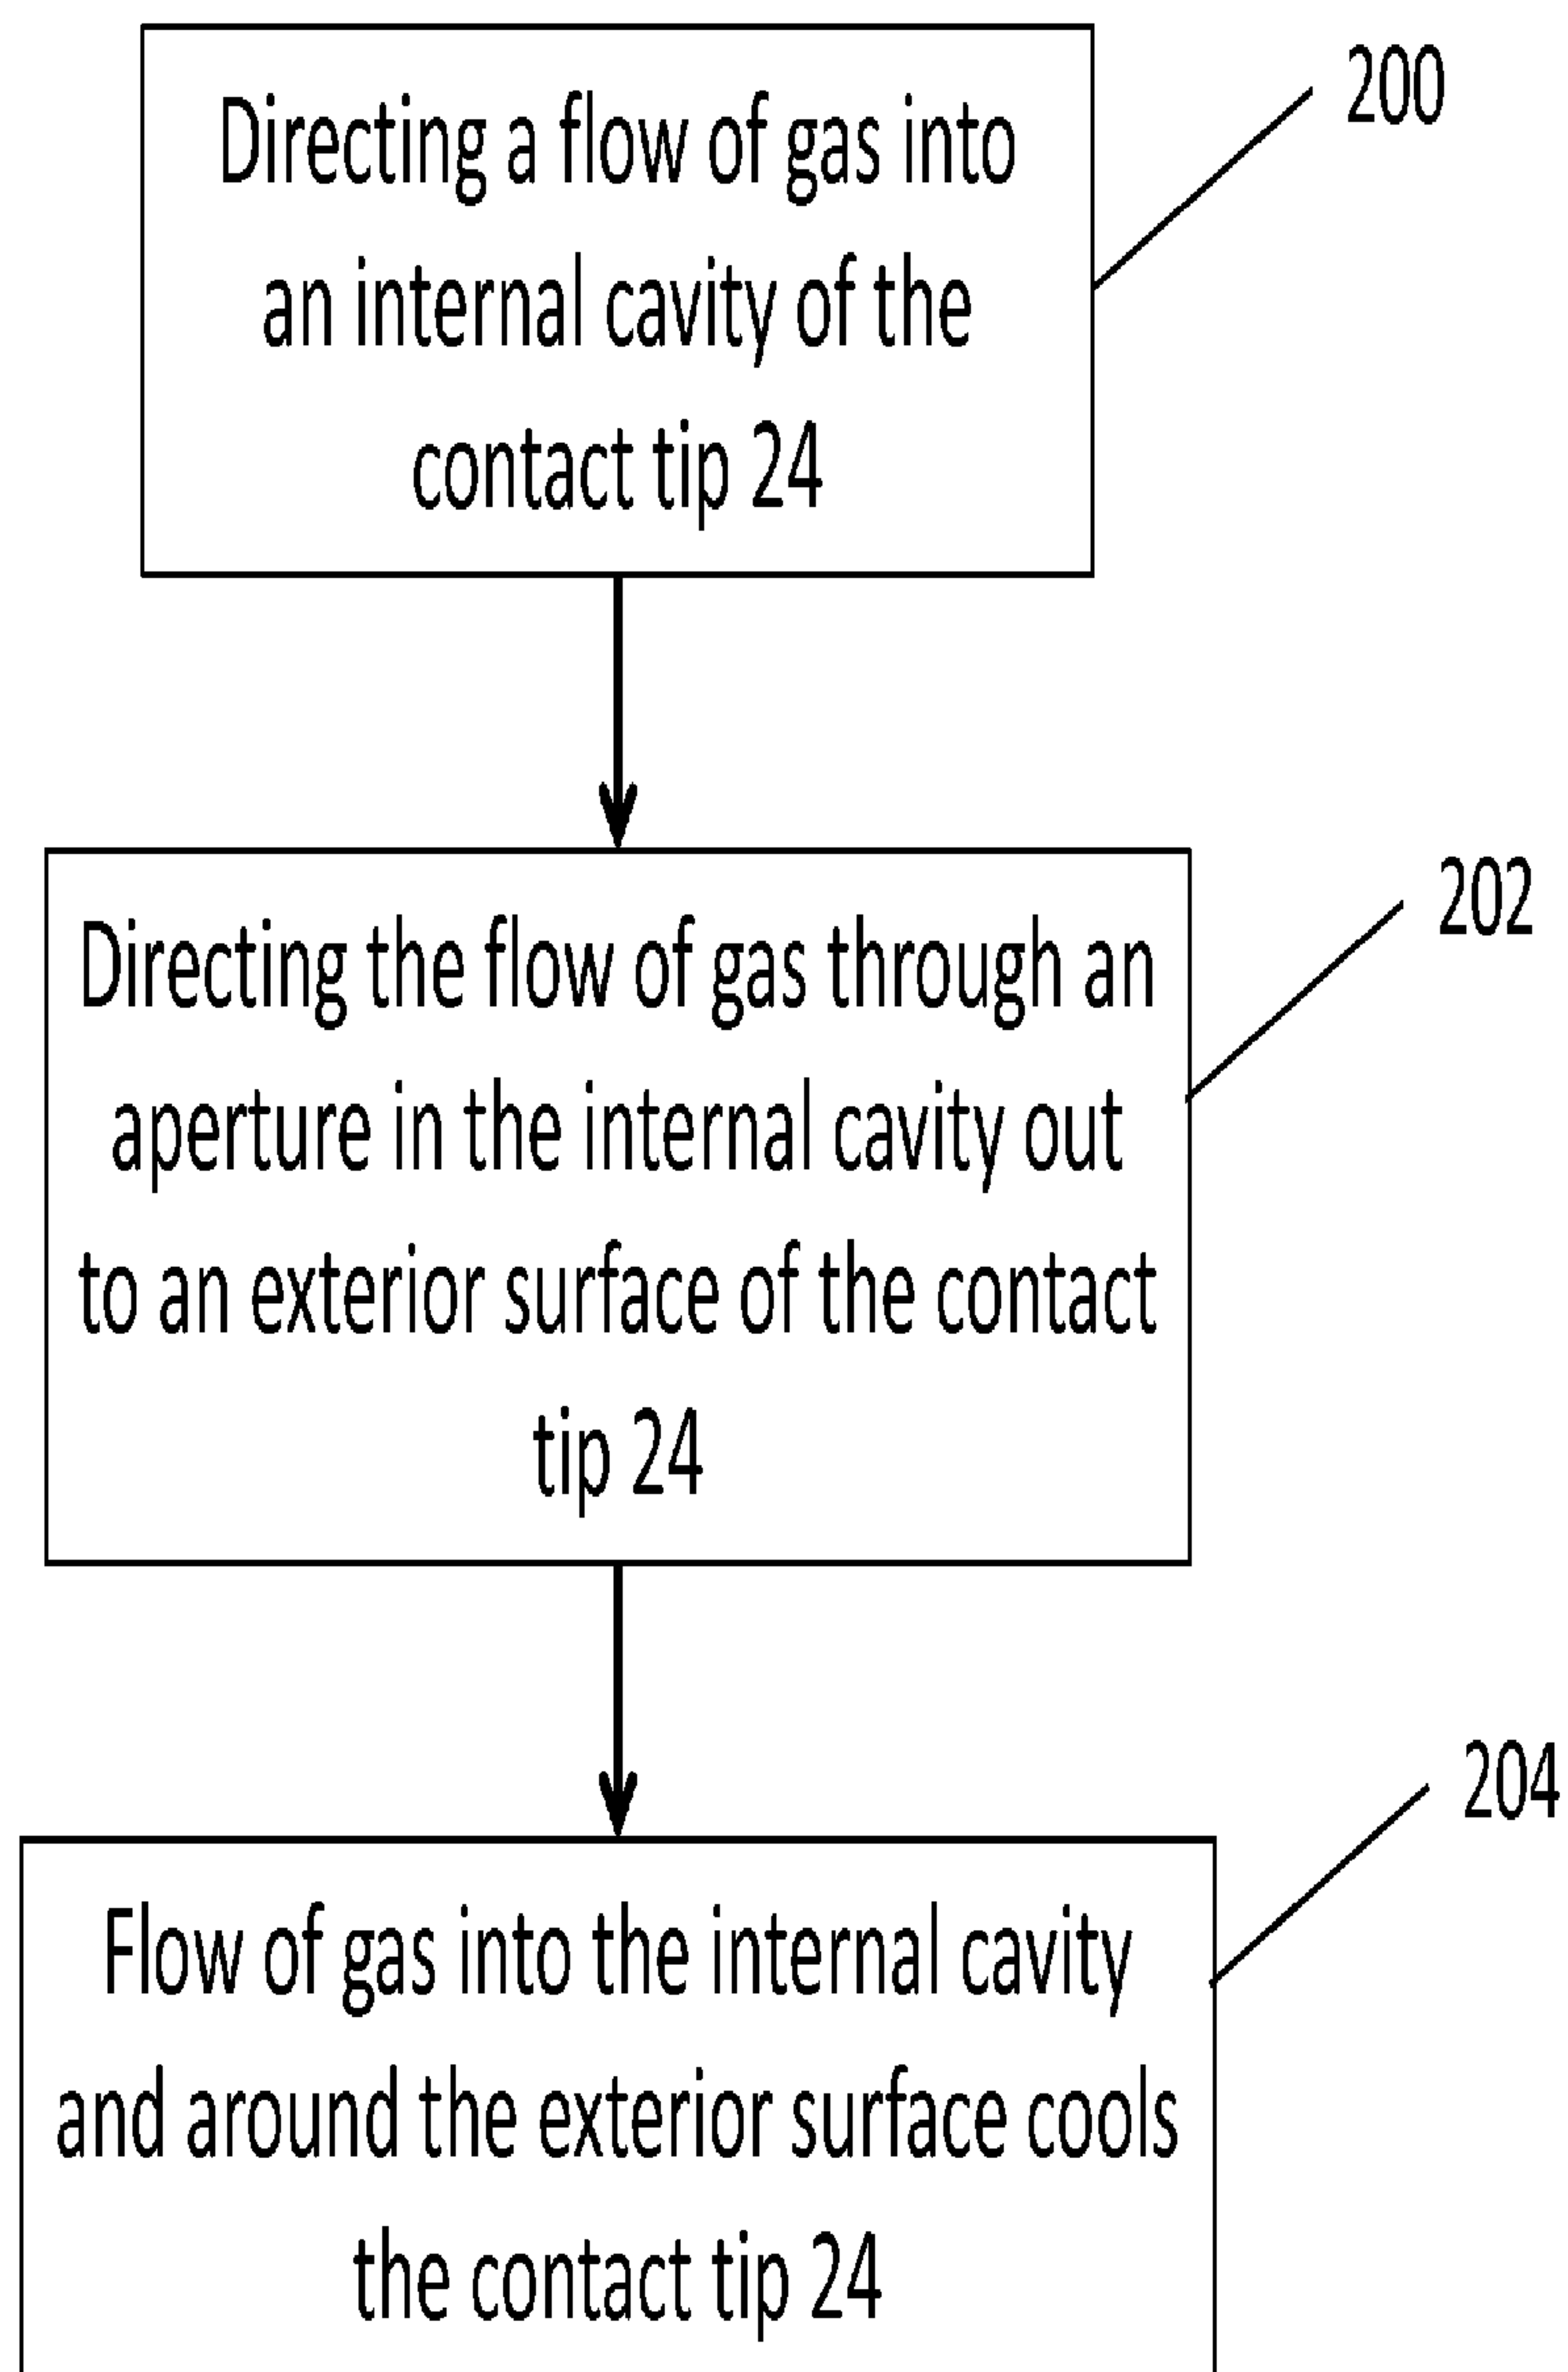


FIG. 7

8/8

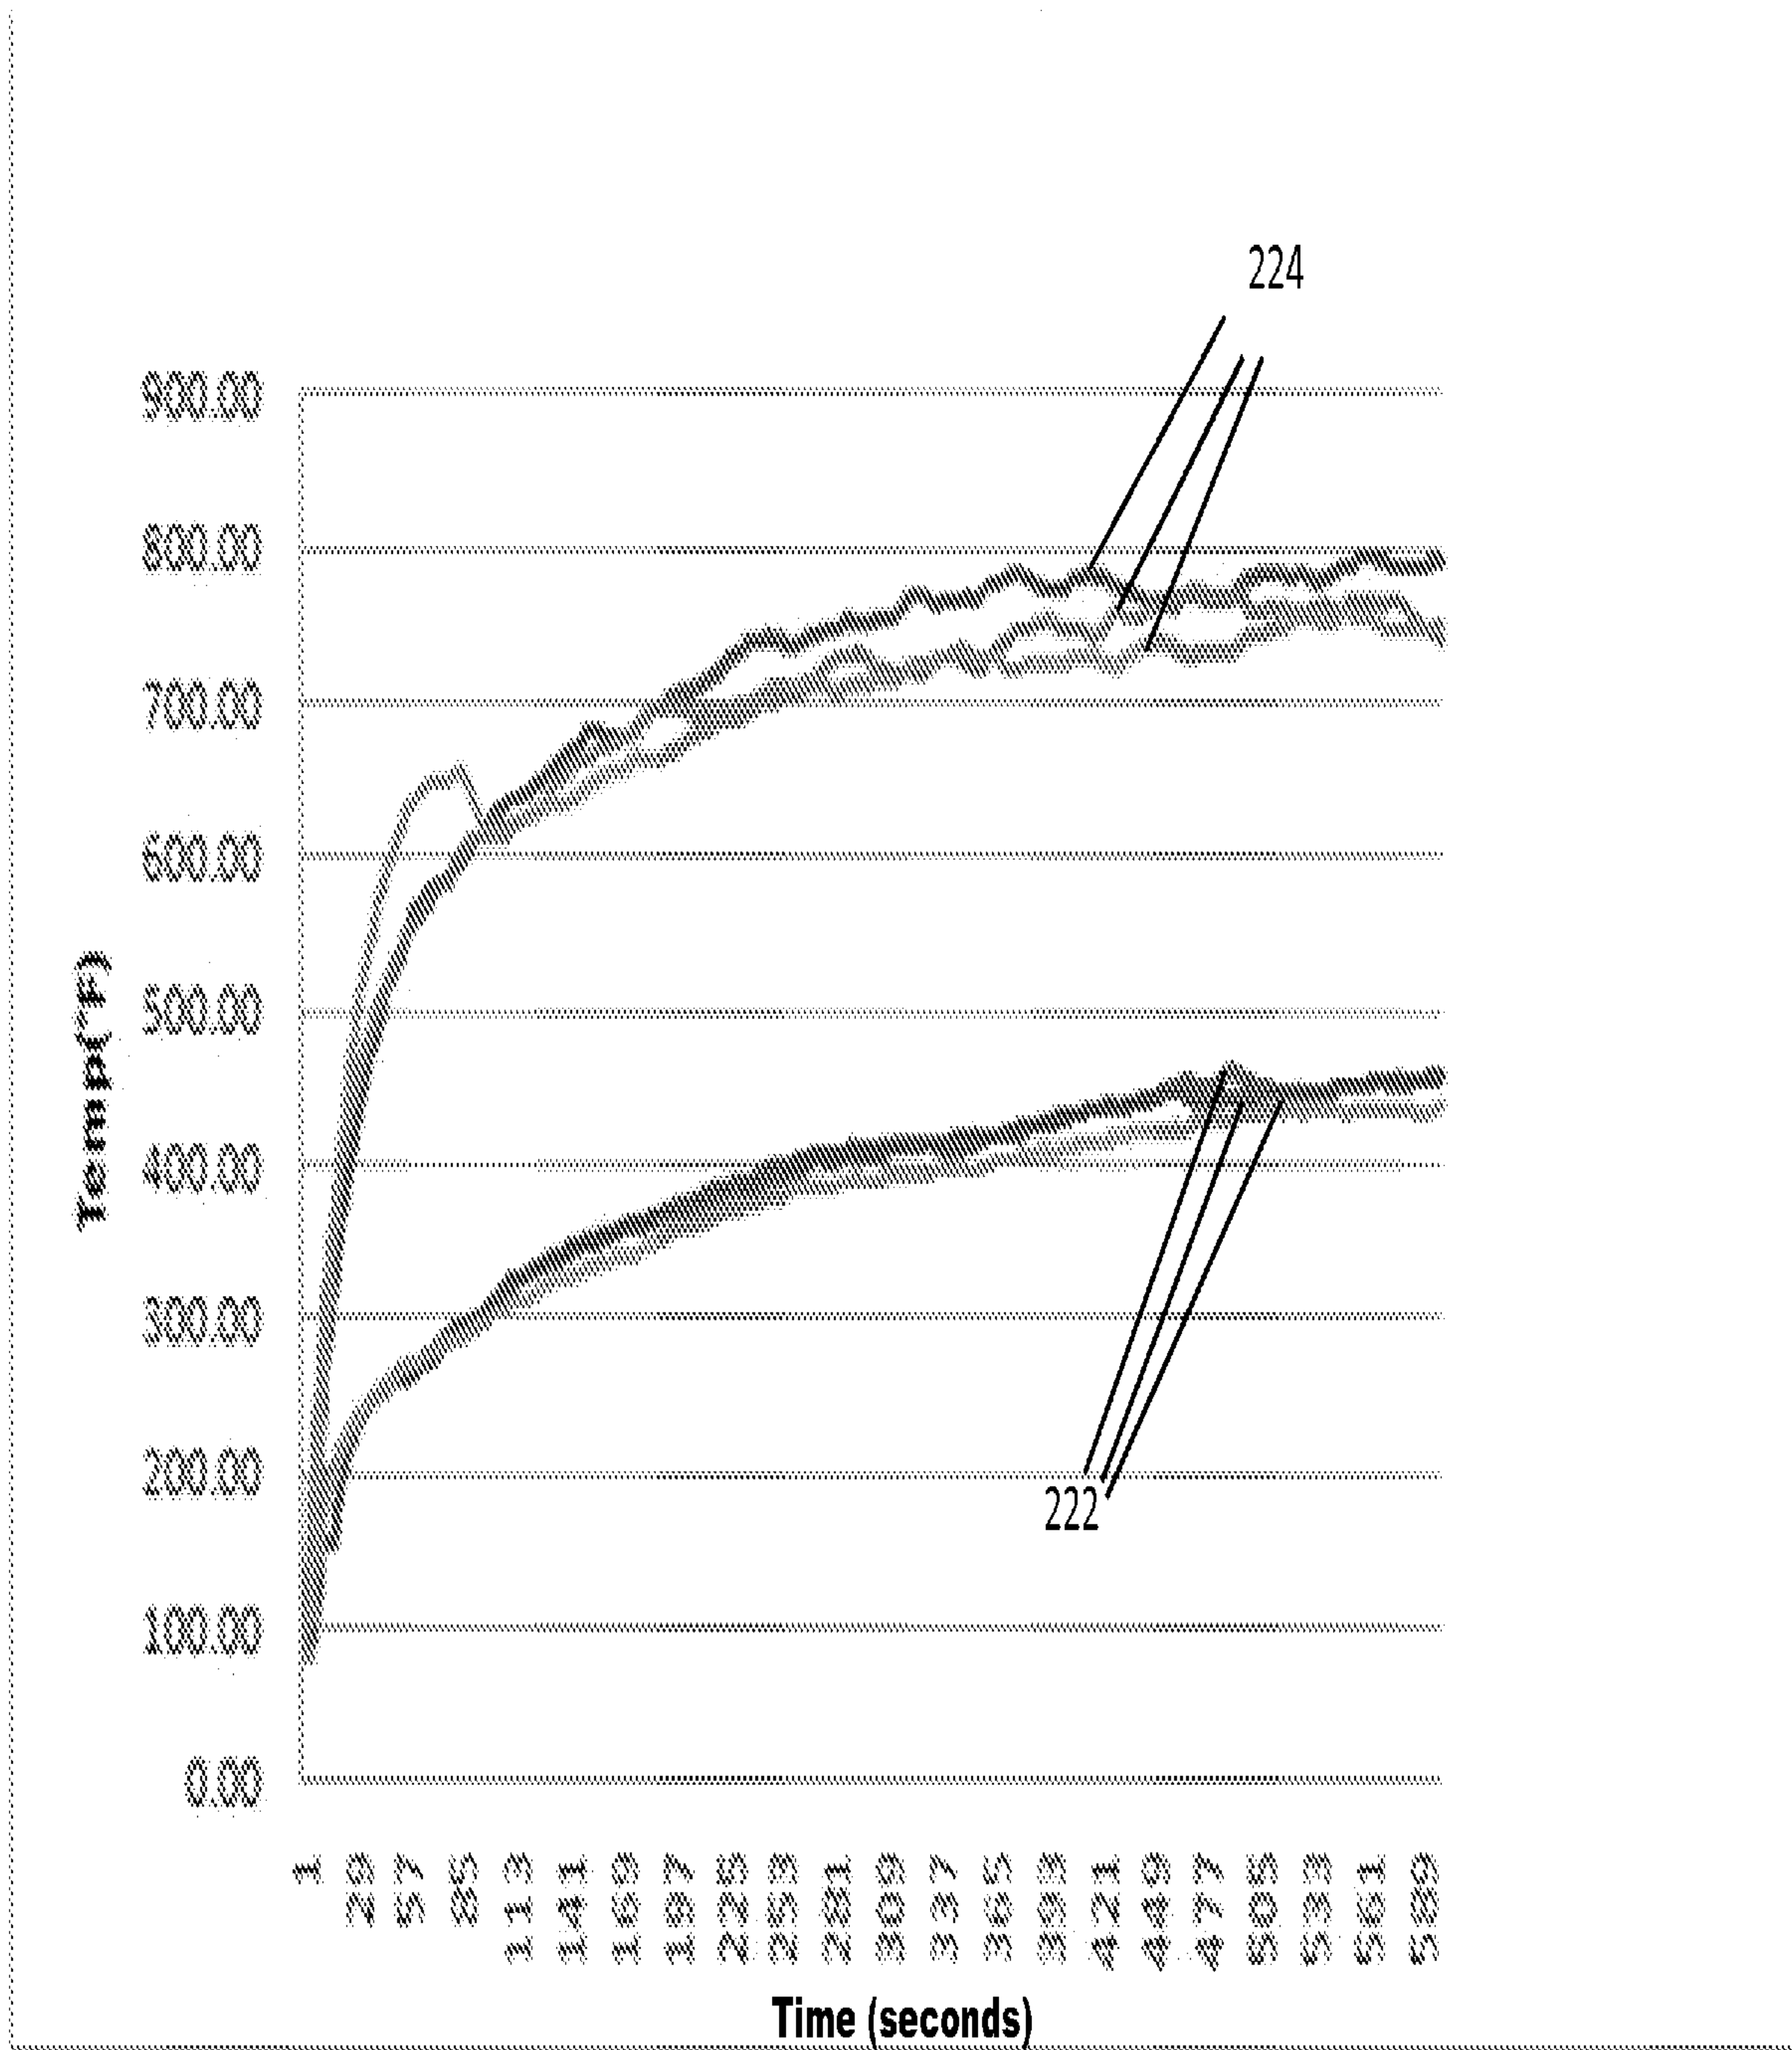


FIG. 8

