

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199870034 B2**
(10) Patent No. **748314**

(54) Title
Shopping cart mounted portable data collection device with tethered dataform reader

(51)⁶ International Patent Classification(s)
G06F 017/60

(21) Application No: 199870034 (22) Application Date: 1997 .11 .05

(87) WIPO No: W098/20440

(30) Priority Data

(31) Number	(32) Date	(33) Country
08/744109	1996 .11 .05	US

(43) Publication Date : 1998 .05 .29
(43) Publication Journal Date : 1998 .07 .23
(44) Accepted Journal Date : 2002 .05 .30

(71) Applicant(s)
Telxon Corporation

(72) Inventor(s)
Timothy P. O'Hagan; Calvin E. Lewis

(74) Agent/Attorney
DAVIES COLLISON CAVE,1 Little Collins Street,MELBOURNE VIC 3000

(56) Related Art
EP 170194
WO 89/03555
WO 93/04449

OPI DATE 29/05/98 APPLN. ID 70034/98
AOJP DATE 23/07/98 PCT NUMBER PCT/US97/20845



AU9870034


CT)

(51) International Patent Classification ⁶ : G06F 17/60		(11) International Publication Number: WO 98/20440
A1		(43) International Publication Date: 14 May 1998 (14.05.98)
(21) International Application Number: PCT/US97/20845		(81) Designated States: AU (Petty patent), CA, DE, DE (Utility model), GB, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 5 November 1997 (05.11.97)		
(30) Priority Data: 08/744,109 5 November 1996 (05.11.96) US		
(71) Applicant: TELXON CORPORATION [US/US]; 3330 West Market Street, Akron, OH 44333 (US).		
(72) Inventors: O'HAGAN, Timothy, P.; 31 White Bark Place, Woodlands, TX 77381 (US). LEWIS, Calvin, E.; 2191 Schubert Avenue, Cuyahoga Falls, OH 44221 (US).		
(74) Agent: AMIN, Himanshu, S.; Renner, Otto, Boisselle & Sklar P.L.L., 19th floor, 1621 Euclid Avenue, Cleveland, OH 44115 (US).		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: SHOPPING CART MOUNTED PORTABLE DATA COLLECTION DEVICE WITH TETHERED DATAFORM READER

(57) Abstract

A portable data collection device (10) adapted to be mounted to a shopping cart (18) is disclosed. The device includes a housing (12) having a clamping assembly (80, 82, 84 and 86) for releasably clamping the housing to a pushing bar (16) of a shopping cart (18). The housing (12) defines an interior region supporting device electronics. The device further includes an interactive touch sensitive visual display screen (110, 112) and a retractable, tethered dataform reader (22) releasably mounted on the housing (12). When mounted on the housing (12), an imaging assembly (42) and an illumination assembly (44) of the reader (22) are continuously actuated to read a dataform presented to the reader. When removed from the housing (12), the reader (22) is actuated by depressing a trigger (40) on the reader. The device also includes a magnetic stripe reading assembly (60), a printer (62) and communications circuitry (118) including a radio communicator module. A locator provides position information of the portable collection device (10) relative to a distribution facility via data interchange with a plurality of transceivers (166, 168). Information selectively obtained from the transceivers (166, 168) allows for selective retrieval and display of information on the visual display screen (110, 112) which is keyed to product type or location of the portable collection device (10).

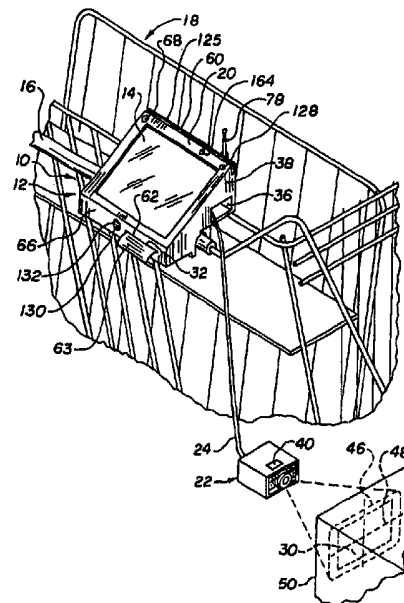

SHOPPING CART MOUNTED PORTABLE DATA COLLECTION DEVICE WITH TETHERED DATAFORM READER

Background of the Invention

In a retail store or grocery store, a customer will typically push a shopping cart through the aisles selecting items of merchandise. When the shopper is finished, he or she proceeds to a cash register/data terminal in a check-out area of the store. The cash register/data terminal typically includes a hand held and/or fix mounted dataform reading and decoding assembly ("dataform reader"). If a fix mounted dataform reader is being used, a store clerk presents each item's bar code dataform to the dataform reader, that is, the dataform is moved along an upper surface of a glass window under which the dataform reader is mounted. If a hand held dataform reader is being used, the clerk "aims" the reader at each item's dataform as the item moves past the terminal. In each case, a "good read and decode" signal will be actuated after each successful dataform read and decode to notify the clerk that the item's dataform was successfully read and decoded. The signal may be an audible tone or "beep". If no "beep" is heard, the clerk will repeat the reading process for the item until successful.



Each item's dataform includes a product identifier which is used to retrieve a product description and price of the item from a remote database. A visual display on the terminal displays the item's product description and price for each item upon reading and decoding the dataform. When all the items being purchased by a customer have been presented to the reader, the terminal provides a total price for all the customer's items and prints a register receipt listing a product description for each item and its price, a subtotal for all items, a tax amount and a total amount due. The amount tendered by the customer is input by the clerk using a terminal keypad. The amount tendered and change due are also printed on the register receipt. The clerk collects payment from the customer and dispenses any change.

A number of problems are associated with such a cash register/data terminal system including: (1) inconvenience for customers waiting in long check-out lines; (2) use of valuable floor space for the check-out area when a number of cash register/data terminals are utilized; (3) human resource costs for attending to the checkout procedure; and (4) product prices have to be either printed on labels affixed to each item or marked on shelving adjacent the item's shelf space so a customer knows the price of a selected item.

In one proposed alternative system, a customer is presented with a portable hand held data terminal including a hand held dataform reader when he or she enters the store. The customer uses the reader to read a bar code dataform on each item prior to or concurrently with placing the item into his or her shopping cart. A memory in the portable data terminal stores a retrieved product description and price for each selected item. At the check-out area, a store clerk merely prints a register receipt based on the data stored in the dataform reader and collects payment from the customer.

- 3 -

Summary of the Invention

In accordance with the present invention, there is provided a retail consumer product information display system, comprising:

a portable terminal accessible to a retail consumer at a retail outlet; and at
5 least one remotely located base unit,

wherein said terminal includes a user interface providing for the input by the retail consumer of requests for product information, a transceiver adapted for respectively transmitting to and receiving from said base unit said requests and said product information, a visual display for displaying said product information to the retail
10 consumer,

wherein said at least one remotely located base unit includes a database of product information and means for retrieving said product information from said database in response to said requests, and

wherein said terminal includes query means for generating a specific retail
15 consumer request based on given product information displayed, whereby further information relevant to said given product information can be requested by said terminal, and displayed to said retail consumer by said visual display.

In another aspect, there is provided a method of displaying retail consumer product information in a retail store comprising the steps of transmitting to and receiving
20 from a remote base unit retail customer requests for said product information, displaying said product information to said retail customer in a retail store, and retrieving said product information from a database in said remote base unit wherein, in response to given product information displayed by said terminal, further information relevant to said given product information can be requested by said terminal, retrieved from said database and displayed
25 to said retail consumer using said terminal.



- 4 -

An advantage of the present invention is the provision of a retail data tracking system which provides an easy to use source of relevant product and pricing information to the consumer at a point of product selection.

A further advantage of the present invention is the provision of a data
5 acquisition and tracking system which minimizes human resource requirements at a retail establishment.

Yet a further advantage of the present system is the provision of a retail data acquisition and tracking system which is compact, durable, and inexpensive.

Preferably, the portable data apparatus takes the form of a portable data
10 terminal such as a hand-held or cart-supported device.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2

Yet a further advantage of the present invention is the provision of a product data acquisition and tracking system which allows for ease in data upgrades and maintenance by storing most relevant data at a single, centrally-disposed database.

Still other advantages and benefits of the invention will become apparent to those skilled in the art upon a reading and understanding of the following detailed description.

Brief Description of the Drawings

The invention may take physical form in certain parts and arrangements of parts, a preferred embodiment and method of which will be described in detail in this specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

Figure 1 is a perspective view of a portion of a retail store utilizing the customer information system in accordance with this invention;

Figure 2 is a perspective view of the customer information terminal as mounted on the shopping cart with the dataform reader of the device being employed in a presentation mode;

Figure 3 is a view, partly in section and partly in elevation, of the customer information terminal of Figure 2;

Figure 4 is a view, partly in section and partly in top plan, of the retractable, tethered dataform reader of the customer information terminal of Figure 2;

Figure 5 is a schematic representation of selected electronic modules and circuitry of the customer information terminal of Figure 2;

Figure 6 is a flowchart representing processing steps of the customer information terminal of Figure 2 in connection with a shopping session at a retail store using the device;

Figure 7 is a representative introducing HTML page displayed on a touch sensitive display screen of the customer information terminal of Figure 2;

Figure 8 is a table of programs and data stored at the host computer of Figure 1;

Figure 9 is a flowchart representing processing steps of the host computer of Figure 1 in connection with verifying the validity of a customer ID and PIN;

Figure 10 is a flowchart representing processing steps at the host computer of Figure 1 in connection with the customer information terminal reading a bar code;

Figure 11 is a main menu HTML page displayed on the touch sensitive display screen of the portable data collection device of Figure 2 in connection with a shopping session;

Figure 12 is a representative generic confirmation HTML page displayed on the touch sensitive display screen of the portable data collection device of Figure 2 after an item's bar code dataform has been read;

Figure 13 is a flowchart representing processing steps of the portable data collection device of Figure 1 in connection with a help routine for aiding a customer find a desired item;

Figure 14 is a representative HTML page displayed on the touch sensitive display screen of the customer information terminal of Figure 2 in connection with a routine for providing a recipe using a selected food item;

Figure 15 is a flowchart representing processing steps of the host computer device of Figure 1 in connection with a routine for providing a recipe using a selected food item;

Figure 16 is a representative HTML page displayed on the touch sensitive display screen of the customer information terminal of Figure 2 in connection with a routine for checking out items selected for purchase;

Figure 17 is a representative HTML page displayed on the touch sensitive display screen of the customer information terminal of Figure 2 in connection with a help routine for aiding a customer find a desired item;

Figure 18 is a representative screen layout displayed on the touch sensitive display screen of the customer information terminal of Figure 2 in connection with a routine for permitting a customer to order a prepared item during a shopping session;

Figure 19 is a flowchart representing processing steps of the customer information terminal of Figure 2 in connection with a routine for checking out items selected for purchase; and

Figure 20 is a flowchart representing processing steps of the host computer of Figure 1 in connection with a routine for adding or removing an item from the customer's electronic receipt.

Detailed Description of the Preferred Embodiment

Referring now to the drawings wherein the showings are for the purposes of illustrating the preferred embodiment of the invention only and not for purposes of limiting same, the customer information terminal system of this invention is represented in Figure 1. The system generally comprises a customer information terminal 10 mounted on a shopping cart 18. The terminal is communicatively linked to a host computer by a wireless LAN 88. A transceiver in the terminal communicates with an transceiver in one of a plurality of access points 54 and 56, which, in turn, communicates with the host 58 via a hard wired network topology and network operating system ("NOS") suitably implemented on an Ethernet or token ring local area network ("LAN") 78. In the preferred embodiment, data communication between the shopping cart 18 and the LAN 88 is

accomplished through a radio frequency (RF) link. However, it will be readily appreciated that any medium to short distance data communication scheme, such as infrared ("IR"), are suitably employed.

The customer terminal 10 generally functions as a TCP/IP web browser which alternatively link requests data at web sites stored at the host computer 58 and, after receiving the data, displays hyper-text mark-up language ("HTML") web pages to the customer on display 14. Using a HTML browser format advantageously provides flexibility on the particular hardware implemented in the customer terminal 10. For example, powerful HTML browsers exist under UNIX, WINDOWS, OS/2, and MACINTOSH environments. Thus, there is no need to engage in a costly design of a property hardware system.

Web pages displayable on the terminal 10 advantageously provided, include information pertinent to the customer's shopping experience. The customer terminal 10 generates the link requests based on at least one of: (a) the current web page displayed to the customer, (b) a product identification code as read by bar code reader 22, (c) customer manual data input via interactive touch display screen 14, and (d) location in the store as determined a transceiver 164. Although, as with the transceiver noted above, any suitable data transmission format may be used, the preferred embodiment employs an infrared IR receiver 164 detecting a unique signature data pattern transmitted by IR transceivers or transmitters 166 and 168 located at fixed locations in the store. Each of these systems will be discussed in more detail.

The customer terminal 10 also includes a high capacity battery 70 which is mounted in a case disposed on a bottom rack 72 of the shopping cart 18. The battery 70 preferably uses lead-acid technology because of its low cost, high energy capacity and lack of memory effect. The weight

associated with a lead-acid battery is not a concern because it is mounted on the cart 18. A typical 6 volt, three cell lead-acid battery, such as the type used on a motorcycle, has an energy capacity sufficient to power the device 10 for a time period in excess of 24 hours. A power lead 74 connects the battery 70 to power circuitry 76 (shown schematically in Figure 5) in the housing 12 which controls converting battery power to appropriate electrical parameters for operating the various components of terminal 10. The power circuitry 76 also includes charging circuitry and an external power supply port for connecting an external power supply for charging the battery. It will be appreciated that other suitable power systems, such as a photovoltaic system or hybridized power system may also advantageously be employed. Further, alternative shopping carts, such as those motor-drive carts for the physically impaired, will have their own power plant which can be utilized to supply sufficient power for the customer terminal 10.

The dataform reading assembly 22 is refractively tethered or attached to the housing 12 with an electrical cable 24. The dataform reader 22 is adapted to operate in at least two modes: a) a hand held mode; and b) a presentation mode. The hand held mode of operation is represented in Figure 2, wherein the reader 22 is removed by the customer from an opening 36 in a side 38 of the housing 12. When supported in the opening 36, the reader 22 extends slightly beyond the side 38 so that the customer can easily grasp a front portion of the reader and slide it out of the opening. The customer moves the reader 22 to, a dataform 30 of an item so desired to be purchases or priced by the customer. The customer activates a suitable selector, such as by depressing a trigger 40, to actuate an imaging assembly 42 and an illumination assembly 44 of the reader 22. The illumination assembly 44 advantageously provides a uniform illumination pattern that substantially corresponds to an imaging area or field of view 46 of the imaging assembly 42 and additionally generates at more

intense cross hair illumination pattern 48 to aid the customer in positioning the reader 22 so that the dataform 30 of an item 50 is properly within the imaging area of the reader. The uniform illumination pattern and cross hair aiming pattern are rapidly alternated between off and on states, such that one is off while the other is on. This alternation of illumination pattern avoids the difficulty of having to decode a captured dataform image which has an intense cross hair illumination pattern imposed thereon. The alternation of the illumination and cross hair patterns is rapid enough that it appears to the customer that the cross hair aiming pattern is continuously on.

While keeping the trigger 40 depressed, the customer aims the cross hair pattern 48 at a center of the dataform 30. The customer moves the reader 22 toward the item 50 until an audible tone or "beep" is emitted by a speaker 130 indicating that the dataform 30 has been successfully read and decoded. The item's price and product name or description and product size will appear on the display 14 (this functionality will be discussed in more detail later). After the "beep" is heard, the reader 22 is returned to the opening 36 and slid into the housing 12.

In the presentation mode of operation shown in Figure 1 and 4, the reader 22 is disposed in the housing opening 36 and the customer reads a dataform 30 affixed to an item 50 by moving the item to the reader 22. While the reader 22 remains in the housing opening 36, a magnetic switch 158 enclosed in a back portion of a reader module housing 142 of the reader 22 is turned on by a magnet 160 positioned in the opening 36 when the reader is positioned in the opening. Actuation of the magnetic switch 158 causes the imaging assembly 42 and the illumination assembly 44 to be actuated. Thus, the reader 22 is continuously ready to read a dataform when it is disposed in the opening 36. When a "beep" is heard, the customer knows that the dataform 30 has been successfully imaged and decoded. In this presentation mode, the illumination pattern is continuously

on and the cross hair illumination pattern is deactivated since properly "aiming" the reader 22 is not a concern. The hand held mode is advantageously used when an item on a shelf is too large or too clumsy to move from the shelf or if the customer just wishes to check a price without removing the item from the shelf. The presentation mode is advantageously employed when a selected item is smaller and more easily handled.

Figure 4 is a cut-away view of the reader 22 and a portion of the device 10 in the region of the opening 36 showing details of a recoil or cable retraction mechanism 138 of the dataform reader 22. The reader module housing 142 is a modular unit that includes a top half and a mating bottom half. Only the bottom half of the reader housing is shown in Figure 4 so that the internal components of the reader 22 are visible in the figure. The reader 22 is connected to the housing 12 with the cable 24. The cable 24 includes the plurality of conductors 140 for: a) coupling operating power 26 to the reader 22; b) coupling the data signal 28 from the reader 22 to the processor 32; and c) coupling control signals from a processor 32 on control board 33 (Figure 3) to the reader 22. The cable 24 is secured to the module housing 142 of the reader with a clamping grommet 144 to prevent the reader 22 from being physically separated from the cable 24. To further secure the reader 22 to the cable 24, a knot (not shown) may be tied in the cable just inside the reader housing 142. The plurality of conductors 140 are electrically coupled to a printed circuit board 146 within the reader housing 142 by a connector 148.

The housing 12 is advantageously weather-proofed to accommodate its being periodically exposed to the elements during periods of exposure, such as while in a parking lot. Within the housing 12, the cable 24 is wrapped around a recoil spool 150. The recoil spool 150 spins about a center pin 152 of the spool. The pin 152 is a hollow cylinder such that the cable 24

may be threaded through the pin 152 and connected to circuitry within the housing 12. A spirally wound bias spring 154 is secured to the pin 152 at the center of the recoil spool 150 and to the spring tab 156 at that perimeter of the recoil spool 150 to bias the spool in a counter clockwise direction (as viewed in Figure 4). This arrangement keeps the cable 24 under tension when the reader 22 is removed from the housing opening 20. The edge formed by the housing wall 162 and the side wall 38 is rounded to avoid wearing an outer surface of the cable 24.

The reader 22 preferably utilizes a two-dimensional imaging assembly. The imaging assembly 42 includes a two-dimensional photo sensor array 170 and an optic assembly supported in a lens housing or shroud 172 for focusing an image of the dataform 30 in the field of view 46 onto the photo sensor array 170. Conventionally available circuitry on printed circuit boards 174, 176, and 146 operate to sequentially read out charges accumulating on photosensors of the photo sensor array 170, generate an analog composite video signal, store a digital representation of a captured image, and decode the captured image to generate the decoded data signal 28. At least a portion of this image capture, image processing, and decoding circuitry may be implemented in code executed by processor 120 on the printed circuit board 146.

The illumination assembly 44 of the reader 22 includes four sets of four illumination light emitting diodes ("LEDs") 180, which are surface mounted in the preferred embodiment and positioned on a printed circuit board 182 (only two sets of the four sets of four illumination LEDs are seen in Figure 4). The illumination LEDs direct illumination through corresponding aligned lens portions 181 of a lens array 184 towards the imaging field of view 46. Two targeting LEDs 186, 188 operate to direct illumination through aligned apertures in board 182 and through aligned lens portion 189 in the lens array 184 and generate the cross hair illumination pattern in the field of view

46 to assist the operator in relatively positioning the reader 22 and the dataform 30. As noted above, the cross hair illumination pattern is only generated when the reader 22 is used in the hand held mode. A more detailed description of the components of a suitable two dimensional imaging assembly for a hand held dataform reader and its operation can be found in U.S. Patent Application Serial No. 08/609,344, filed March 1, 1996, and entitled PORTABLE DATA COLLECTION DEVICE WITH LED TARGETING AND ILLUMINATION ASSEMBLY, the contents of which are incorporated herein in the entirety by reference.

Referring to Figure 3, a magnetic stripe reader 60 is suitably molded into an upper surface 125 of the housing 12. The stripe reader 60 includes a slotted opening 61a in the upper surface and includes a stripe sensor and reader 61b disposed along the opening. Appropriate magnetic stripe decoding circuitry is mounted on the control board 33. Magnetic stripe sensors and decoding circuitry are commonly available.

A printing assembly 62, comprised of a thermal printer in the preferred embodiment, which functions to print out a paper receipt 63 for the customer at the completion of shopping session or a recipe for an item. The printing assembly 62 discharges the receipt or recipe printout through a slot shaped opening 32 in an upright front surface 66 of the housing 12. The thermal printer assembly 62 includes a thermal printhead 90 and an opposing platen 92 to position the paper 63 against the printhead 90. A motor 94 drives a feed roller 96. The feed roller 96 operates in conjunction with an idler roller 98 to draw paper 63 from a paper roll 100 past the printhead 90 and feed the receipt or recipe printout 63 out of the slot shaped opening 64 in the housing 12. Printer driver circuitry 101 for operating the printer assembly components is mounted on the control and decoder printed circuit board 33 disposed in the housing 12. At least a portion of the circuitry 101

is suitably embodied in code stored in a memory 106 represented by a memory chip on the control printed circuit board 33 and executed by the processor 32, both on printed circuitry board 33 thermal printing assemblies including these components are commonly available. It should be appreciated that the cost of the printer could be saved by placing common printers at chosen locations within the store. The terminal 10 would transmit data via the RF network 78 to a chosen common printer. The common printer will typically be chosen based on the location of the terminal within the store as determined by the location detection system.

The user interactive display screen 14 suitably includes a liquid crystal display ("LCD") display panel 110 and an overlying touch sensitive resistive contact panel 112. However, it will be appreciated that any variety of video display terminals, such as thin film transistor (active or passive), may suitably be used. Circuitry for operating the display panel 110 and the contact panel 112 includes LCD driver circuitry 114 and contact panel driver circuitry 116. Additionally, the circuitry 114, 116 for operating the LCD display and contact panels 110, 112 may, at least in part, be implemented in software stored in the memory 106 and executed by the processor 32.

The housing 12 also supports the speaker 130 which is mounted behind a grated opening 132 in the housing 12. The speaker 130 is driven by audio indicator driver circuitry 134 mounted on the control and decoder board 33 and provides audio feedback suitably in the form of a 1/2 second "beep" to the customer to indicate a successful bar code dataform read and decode. The terminal 10 is secured to the shopping cart handle 16 by a clamping assembly which clamps the housing 12 to the cart pushing handle 16. The clamping assembly includes adjustable clamp 80 and an accurate clamping surface 82 of the housing 12. Two sets of two threaded bolts 84, 86 (only one set of two threaded bolts can be seen in Figure 3) suitably extend between the clamp 80 and threaded

openings in the housing 12 to secure the adjustable clamp 82 to the housing 12. When the two sets of threaded bolts 84, 86 are tightened, the housing 12 secured to the pushing handle 16 of the cart 18.

Referring again to Figure 1, in the preferred embodiment the customer terminal 10 includes an RF transceiver for communication with a host computer 58 via a wireless local area network. Each access point 54 and 56, includes an RF transceiver for wireless communication with a customer terminal 10 located within the cell. An appropriate access point is the Aironet 640 and appropriate RF circuitry for customer terminal 10 includes the Aironet 025, both available from Aironet Wireless Communications, Inc. of Akron, Ohio. Other acceptable wireless networks include any spread spectrum networks operating in accordance with IEEE 802.11 Standard.

10 Referring to Figure 3, the spread spectrum radio communications circuitry 118 may be embodied in one or more IC chips mounted on the printed circuit board 33. Alternatively, the spread spectrum communications circuitry 18 may be implemented on a separate printed circuit board with a PCMCIA interface and secured to the printed circuit board 33 through a PCMCIA standard slot interface. An antenna lead 122 connects the communications circuitry to an antenna
15 mast 124 extending through an opening in the upper surface 125 of the housing 12. Alternatively, the antenna mast is suitably disposed inside the housing.

Referring yet again to Figure 1, an infrared receiver 164 is located on the top portion of the upper surface of the customer information terminal 10. The receiver detects the signature illumination pattern generated by each of a plurality of infrared transmitters 166 and 168 positioned
20 throughout the store. It is anticipated that these transmitters 166 and 168 will be placed on top shelving or in the ceiling such that the signature pattern is detectable only within a predetermined area of the store 174 and 176. Detection of a particular signature pattern indicates that the terminal

is within the predetermined zone of the store. Each emitter continually modulates the IR illumination source on and off in a distinctive 1/0 pattern. The infrared receiver includes a photo detector which generates an analog waveform in accordance with the distinctive illumination pattern which, based on thresholding, can easily be decoded into the signature pattern of ones and zeros in the IR receiver driver 165. Alternatively, any position locator, such as a transponder based system, may suitably be substituted for the above-detailed zone-based system and still accomplish the position detection.

Operation of the Terminal Unit

Referring to Figure 6, the terminal operates as a TCP/IP web browser. When the shopping cart terminal 10 is first powered, a default page 302 (Figure 7) is requested from the host and, after received from the host is displayed on the screen at step 318. Typically the default page will be a welcome form page 302 and will graphically appear as Figure 7.

This page includes fields 304 and 306, virtual button 308 and 12 other buttons labeled 0-9, left arrow and right arrow, indicated generally at 310. By including executable code in the HTML form page (using Sun Micro Systems Java programming code for example), each of these buttons, when activated by the user, functions as a virtual keypad for manually entering a customer ID number. Alternatively, the operator may enter his or her customer ID number by swiping the magnetic stripe on an ID card. The magnetic strip reader circuitry decodes the strip and enters it into field using typical keyboard wedge emulation routines. Alternatively, the bar code reader may be used to read a bar code on an ID card, decode it, and enter is into the field using keyboard wedge emulation routines. The customer's PIN number is entered through the virtual keypad. Activating

the enter button 308 calls a link defined in the HTML page at step 320, Figure 6. For security, the transmission of the customer ID number and the PIN number may be encrypted using standard public key encryption techniques. The link is a TCP/IP data packet addressed to the host, and when received by the host, causes the server to launch a customer verification program stored on the server. The program verifies the customer ID number and PIN in fields 304 and 306. In response to the link request, the terminal will receive a new HTML page selected by the customer verification program on the server at 322. The returning HTML page may be one of either an invalid ID page or the main menu page. The invalid ID page will typically include HTML code to self generate a link request for the welcome page 302 after a predetermined period of time. A typical main menu HTML page is shown in Figure 11. It includes a plurality of labeled buttons 208-214 which, if user activated, generates a link request for a selected sub menu page corresponding to the selected button at 320. Each of the sub menu pages which, could be received at 322 will be discussed in more detail later.

At step 324 the system determines whether a bar code has been read. The bar code reading system typically will be connected to the processor through a data connection, such as a serial port which generates a software interrupt when a bar code has been successfully decoded. The interrupt triggers the processor to transmit a link request to the server at step 326. The link request is a TCP/IP data packet which includes the decoded data and instructions to the server to launch a program to return an HTML confirmation page associated with the product. Step 322 represents receipt of the page. Typically the return page will be a generic page which enables the customer to verify his or her desire to purchase the product. Alternatively, the merchant may wish to use verification pages which include advertisements for promotional products when the bar code for

particular products are read. These are referred to as product specific verification pages. A typical generic verification page appears in Figure 12. The page includes field 222 which displays the product description and price. The page also includes buttons 224, 226, and 228 which, if activated, cause the HTML page to transmit a link request at 320 which launches a host program to either add the product to the customer purchase list, remove the product from the customer purchase list or to return to the main menu ignoring the read, respectively. Additionally, the page includes virtual buttons 232, 234, 236, and 238 which, if activated, cause the page to generate a link request to a sub menu page.

At step 328, the system determines whether the terminal has moved to a new location in the store. The infrared receiver will typically be connected to the processor through a serial port which generates a software interrupt when the infrared receiver detects that it has moved to a new zone. The interrupt triggers the processor to transmit a link request at step 330. The request is a TCP/IP packet addressed to the server which includes the new location and instructions to launch a program on the server which determines whether to transmit a new HTML page to the terminal or whether to return the same page as currently displayed (customer sees no change). Step 322 represents receipt. Typically a new page will be an advertisement page which is associated with a product near the location of the terminal.

Alternatively, the location detection system may be an RF system wherein a radio transceiver in a terminal interrogates and detects return signals from passive short range RF ID tags.

Step 332 represents checking whether the session has ended which typically would only be represented by shutdown of the terminal to end the flowchart at 334. If the session has not ended at 332, the system merely loops back to 320 to continue the iterative process of sending link requests and receiving HTML web pages.

It should be appreciated that the checkout routine does not end the system, but is merely a link request from the main menu at step 320. Furthermore, after a customer has successfully checked out, return to the introductory page for the next customer is also merely a link request at 320.

Server Operation

Figure 8 is a table of a suitable setup of the server. The server includes storage of HTML Web pages, databases and programs launchable by customer terminal link requests. If the server receives a link request from a client for a specific page, the server merely returns the requested page. Alternatively, if the link request launches a program, the server executes the program and returns an page as required by the program.

As can be seen from the foregoing, the terminal basically generates link requests and receives return data. All programs associated with the system for interacting with the customer are stored and run on the server. These programs will be discussed with reference to the flowcharts shown in Figures 9, 10, 13, 15, 19, and 20.

Figure 9 is a flowchart showing operation of the customer verification program at the server. As previously discussed with reference to Figure 7, activation of virtual button 308 causes the terminal to send a link request to the host computer which includes the customer ID number, the

PIN number and instructions to launch the customer verification program. The program starts at 190 which represents receipt of the link request from the customer terminal. At step 192, the server looks up the customer ID number in the database and, at 194, checks whether the ID number and PIN combination is valid. If it is valid, the server returns the menu page to the terminal, Figure 11, at 196. Alternatively, if the number is invalid, the server returns the invalid ID to the terminal page at 198. The program ends at 200.

As previously discussed, the customer can use the bar code reader to read a bar code which, in turn, causes the terminal to transmit a link request to launch a bar code read program at the host. Figure 10 is a flowchart showing operation of the bar code read program. The program starts at 290 which represents receipt of link request from the customer terminal. At 292, the system looks up the price and description corresponding to the UPC code in the price and description databases. At 294, the system determines whether the confirmation page to be associated with the particular product is generic or custom. Typically this will include looking up the UPC code in a list of products to associate with a custom confirmation page. If a generic page is used, the price and description are inserted into the appropriate fields of the generic page and the page is returned to the customer terminal at 296. Alternatively, if a custom page is to be used, it is returned to the customer terminal at 298 and the system ends at 300.

Figure 12 shows a sample of a generic confirmation page 120. The page includes message field 222 which includes a description of the product and its price. Message field 230 may be used to display other information about the product. For example, if the product is a tobacco product, the message field 230 may display the Surgeon General's warning. The page 220 includes two virtual buttons 224 and 226, which if activated, cause the terminal to transmit a link requests to

the host which will launch the running total program at the server. The running total program will add or remove the item from the customer's running receipt as required by the link request. Virtual button 228 causes the terminal to transmit a link request for the main menu HTML page. The page 220 also includes virtual buttons 232, 234, and 236, which if activated, cause the terminal to transmit a link request to the host or a particular HTML page associated with a product coupon, product information, or alternate product information, respectively. Virtual button 238, if activated, causes the terminal to transmit a link request which launches the recipe search program on the host. A custom confirmation page would typically include the same virtual buttons, but may additionally include custom graphics related to the scanned product.

Figure 20 is a flowchart representing the processing steps at the host computer which add or remove the item from the customer's running total. The program starts at step 380 which represents receipt of the link request form the customer terminal. The link request is a TCP/IP data packet addressed to the host which includes instructions to launch the running total program and a data field indicating whether the item is to be added or removed from the customer's running total. Step 382 represents the server determining based on the data field whether to add or remove the item from the customer's running total. If the item is to be added, the host adds the item to the running receipt at 384 and returns a main menu page to the customer at 388 with updated running receipt totals in the appropriate fields. Alternatively, if the item is to be removed at step 382, the host removes the item at 386 and returns an updated main menu page at 388. The program ends at 390.

When the customer has finished shopping, the customer activates the checkout button on the main menu. Activation of the button causes the terminal to generate a link request for the checkout form page which is graphically shown at 250 in Figure 16.

The checkout form page 250 includes a visual representation of the customer's receipt in field 252. Virtual buttons with arrows 254 and 256 are used by the customer to scroll the receipt for viewing. The page includes virtual button 258 which, if activated by the customer, aborts the checkout routine by causing the terminal to generate a link request for the main menu page. Virtual button 260 is activated by the customer to indicate the customer's desire to pay cash which causes the terminal to transmit a link request to the host to launch the cash checkout program. Virtual buttons 262 and 264 are activated by the customer to indicate the customer's desire to pay with a debit or credit card, respectively. Activation of these buttons cause the terminal to transmit a link request to the host to launch the debit/credit checkout program.

Figure 19a is a flowchart representing the cash checkout program on the server. The program starts at step 400 which represents receipt of the link request from the customer terminal. At step 402 the server returns a page to the customer terminal which instructs the customer to proceed to the cashier. Step 404 represents receipt of confirmation from the cashier that the sale is complete. The cashier will typically have a cashier's terminal communicatively coupled to the host via the network. After receipt of the cashier's confirmation, the server will send an HTML page with a thank you message to the customer at 406 and the program ends at 408. Typically the thank you page will include a timer to generate a link request for the welcome page after a predetermined period of time. This positions the terminal for the next customer.

Figure 19b is a flowchart representing the debit/credit checkout program on the server. The program starts at step 410 which represents receipt of the link request from the customer terminal. At step 412 the server returns an HTML page with instructions to the customer to swipe the magnetic strip on his or her credit or debit card. Step 414 represents receipt of the credit or debit

card number from the customer terminal. At step 416 the program sends a confirmation page to the customer terminal. The confirmation page includes virtual buttons for verifying the amount of the sale and entering a PIN number as appropriate for a debit card. Step 418 represents receipt of a data packet from the customer terminal which includes the PIN number and the customer's confirmation. Step 420 represents obtaining card authorization from the appropriate card issuing authority. After authorization is obtained, receipt data is transmitted to the customer terminal along with a thank you message. The program ends at 424.

As previously discussed, various customer assistance routines can be requested by the customer which include a recipe search routine, a location assistance routine and order of specially prepared items.

Figure 15 is a flowchart of operation of the recipe search program on the server. The customer terminal can be activated to generate a link request to launch this program from either of the main menu page 202 (Figure 11) or the confirmation page 220 (Figure 12). The program starts at step 336 which represents receipt of the link request. Step 338 represents return of the recipe search form page to the customer information terminal. Figure 14 shows a sample recipe search form page 360 for obtaining search terms. The page 360 includes a plurality of virtual buttons A-Z plus "space" (designated generally at 362) which are supported by executable code such as Sun Microsystems Java which, when activated, operate to enter the designated letter into field 364. The operator uses the virtual buttons to enter a search term. It should be appreciated that if the search program is requested from the confirmation page (220 or Figure 12), the product description may be automatically placed in field 364 and the virtual buttons are used for editing.

After entering the appropriate search term, the user activates either of virtual button 366 or 368 to generate a link request. The link request is a TCP/IP packet which includes the search term, instructions to launch the search and a field indicating whether the search is by title or ingredient. Step 340 represents determining whether the search is for an ingredient search or a title search. If an ingredient search, the host searches the recipe database at step 342 and returns the recipe search page with a list of matching recipes in scrollable field 370 at step 346. Alternatively, if a title word search, the host searches the recipe database at step 344 and returns the recipe search page with the list of matching recipes in scrollable field 370 at step 346.

Referring again to Figure 14, the customer uses the arrow keys 372 and 374 to move a highlight bar 378 to highlight the desired recipe in the scrollable field. Virtual button 378, if activated, causes the terminal to generate a link request for the HTML page with the recipe printed thereon.

Referring again to Figure 15, step 348 represents receipt of the link request from the terminal for a specific recipe. Step 350 represents sending the recipe from the database to the customer terminal. The host program then ends at 352.

The HTML page which includes the recipe will typically include a virtual button which, if activated, causes the printer to print a hard copy of the recipe for the customer. Furthermore, the page will include a virtual button which, if activated, causes the terminal to make a link request to the main menu page or the confirmation page which was originally used to initiate the recipe search.

Figure 13 is a flowchart which represents processing steps at the host computer when the customer elects the location assistance routine by activating virtual button 208 from the main menu 202 of Figure 11. The program starts at step 426 which represents receipt of the link request from the customer terminal. Step 128 represents return of the search initiation page to the customer terminal.

Figure 17 shows a representation of the search initiation page 270. The page 270 includes field 284 into which the customer enters the name of the desired product. The customer uses virtual buttons 280 to enter the product name. Simultaneously, all of the products available in the store are listed in scroll box 272. A highlight bar 278 will be positioned over the first item in the list which matches the letters entered by the customer. The customer in addition to entering the product name via the virtual keyboard 280 can also move the highlight bar 278 over the list by using virtual buttons 274 and 276. When the customer has positioned highlight bar 278 over the desired item, virtual button 282 can be activated to initiate a link request for an HTML page which shows the items location in the store.

Returning to Figure 13, step 430 represents receipt of a link request which includes the selected item at the host. At step 432, the host looks up the items location in a database and at step 434, selects an page which includes a map of the portion of the store that includes the desired product. Step 36 represents transmission of the map page to the customer terminal and the program ends at step 438.

As previously indicated, virtual button 212 of the main menu 202 of Figure 11, may be activated by the customer to initiate programs for ordering prepared items. Activation of button 212 will generate a link request for a sub menu page which will list the types of item which may be

ordered. It is anticipated that such items may include floral products, butcher shop products, bakery products or deli products. Each sub routine will typically include a series of HTML pages which interact with the customer to order a selected item.

The invention has been described with reference to the preferred embodiment. Obviously, modifications and alterations will occur to others upon a reading and understanding of this specification. It is intended to include all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A retail consumer product information display system, comprising:
a portable terminal accessible to a retail consumer at a retail outlet; and at least one
5 remotely located base unit,
wherein said terminal includes a user interface providing for the input by the retail consumer of requests for product information, a transceiver adapted for respectively transmitting to and receiving from said base unit said requests and said product information, a visual display for displaying said product information to the retail
10 consumer,
wherein said at least one remotely located base unit includes a database of product information and means for retrieving said product information from said database in response to said requests, and
wherein said terminal includes query means for generating a specific retail
15 consumer request based on given product information displayed, whereby further information relevant to said given product information can be requested by said terminal, and displayed to said retail consumer by said visual display.
2. A retail consumer product information display system according to claim 1,
wherein said query means includes a computer program which is run when activated by
20 said retail consumer.
3. A retail consumer product information display system according to claim 2,
wherein said query means includes a touch panel or a bar code reader for activation by said retail consumer whereby said requests for said further information can be entered by said retail customer.
- 25 4. A retail consumer product information display system according to any one of claims 1, 2 or 3, wherein said means for generating display of web pages is a web browser.
5. A retail consumer product information display system according to any one of claims 1 to 4, wherein said terminal is portable.



- 28 -

6. A retail consumer product information display system according to claim 5, wherein said terminal is affixed to a shopping cart.

7. A retail consumer product information display system according to any one of the preceding claims, wherein said database includes any one of the following product
5 information: UPC; price; description; recipes; store locations; and purchase history log.

8. A retail consumer product information display system according to any one of the preceding claims, wherein said database includes any one of the following HTML pages: introductory; invalid I.D.; main menu; generic confirmation purchase; customer
confirmation purchase; location based advertisement; recipe selection sub-menu; recipe
10 form; store map; check-out; and prepared order item sub-menu.

9. A retail consumer product information display system according to any one of the preceding claims, wherein said remotely located base unit is operative for running one or more programs in response to said specific retail consumer request generated by said query means.

15 10. A retail consumer product information display system according to claim 9, wherein said one or more programs facilitate one or more of the following operations in response to said specific retail consumer requests: customer verification; bar code read; location search; recipe search; running total; check-out; and customer location.

11. A retail consumer product information display system according to any one of the preceding claims, wherein said terminal includes a retractable dataform reading assembly
20 operative to be removed from said terminal and presented to a product by the retail consumer in a hand held mode, and operative to remain in said terminal for presentation of a product thereto in a presentation mode.

12. A retail consumer product information display system according to claim 10,
25 wherein said terminal comprises a magnetic stripe reader for providing for check-out of said retail customer in co-operation with said check-out program.



- 29 -

13. A retail consumer product information display system according to any one of the preceding claims, wherein a printer for printing recipes is provided in the terminal.

14. A retail consumer product information display system according to any one of the preceding claims wherein said web pages are hyper-text mark-up language (HTML) web
5 pages.

15. A method of displaying retail consumer product information in a retail store comprising the steps of transmitting to and receiving from a remote base unit retail customer requests for said product information, displaying said product information to said retail customer in a retail store, and retrieving said product information from a database in
10 said remote base unit wherein, in response to given product information displayed by said terminal, further information relevant to said given product information can be requested by said terminal, retrieved from said database and displayed to said retail consumer using said terminal.

16. A display system, substantially as hereinbefore described with reference to the
15 drawings.

DATED this 28th day of March, 2002

TELXON CORPORATION

By DAVIES COLLISON CAVE
Patent Attorneys for the applicant



1/15

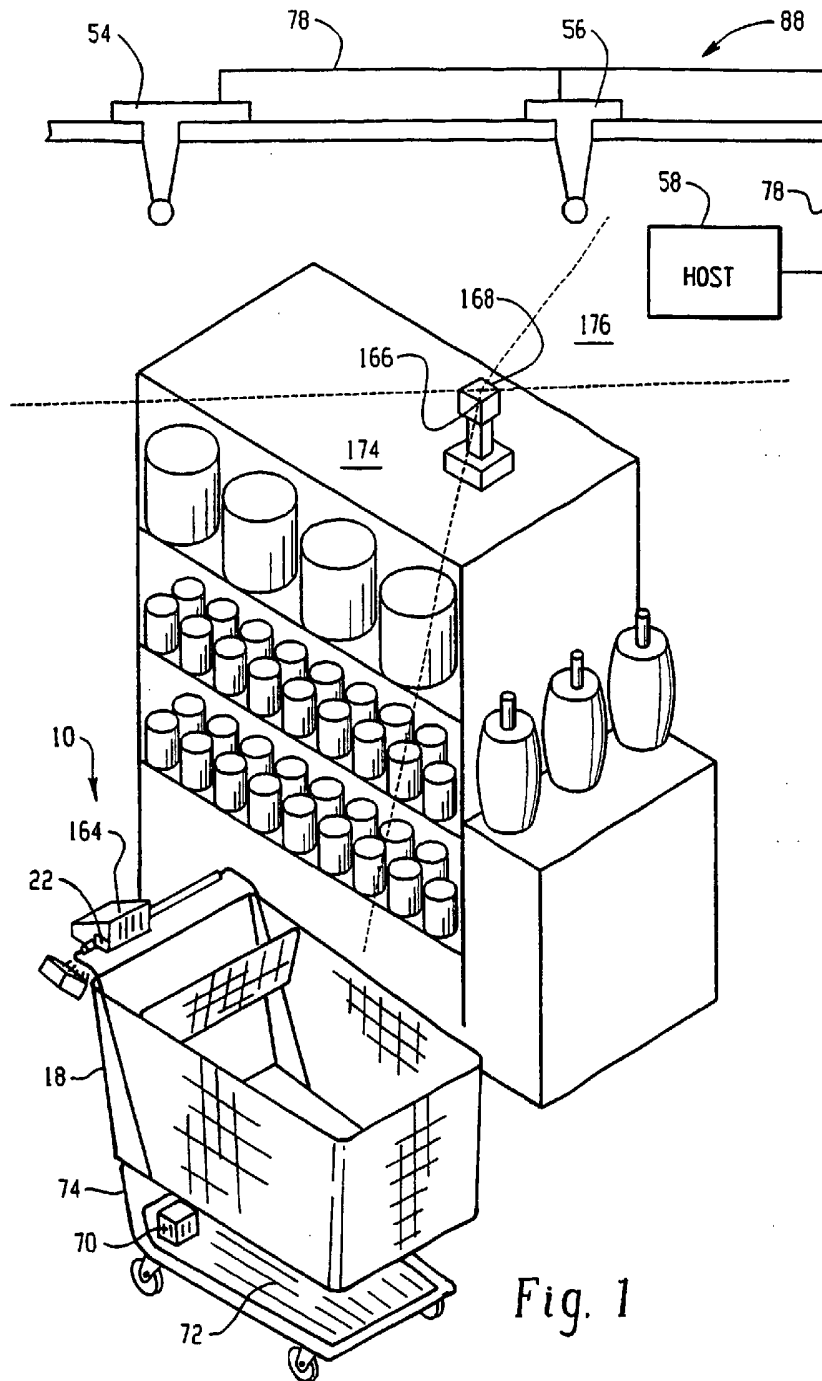


Fig. 1

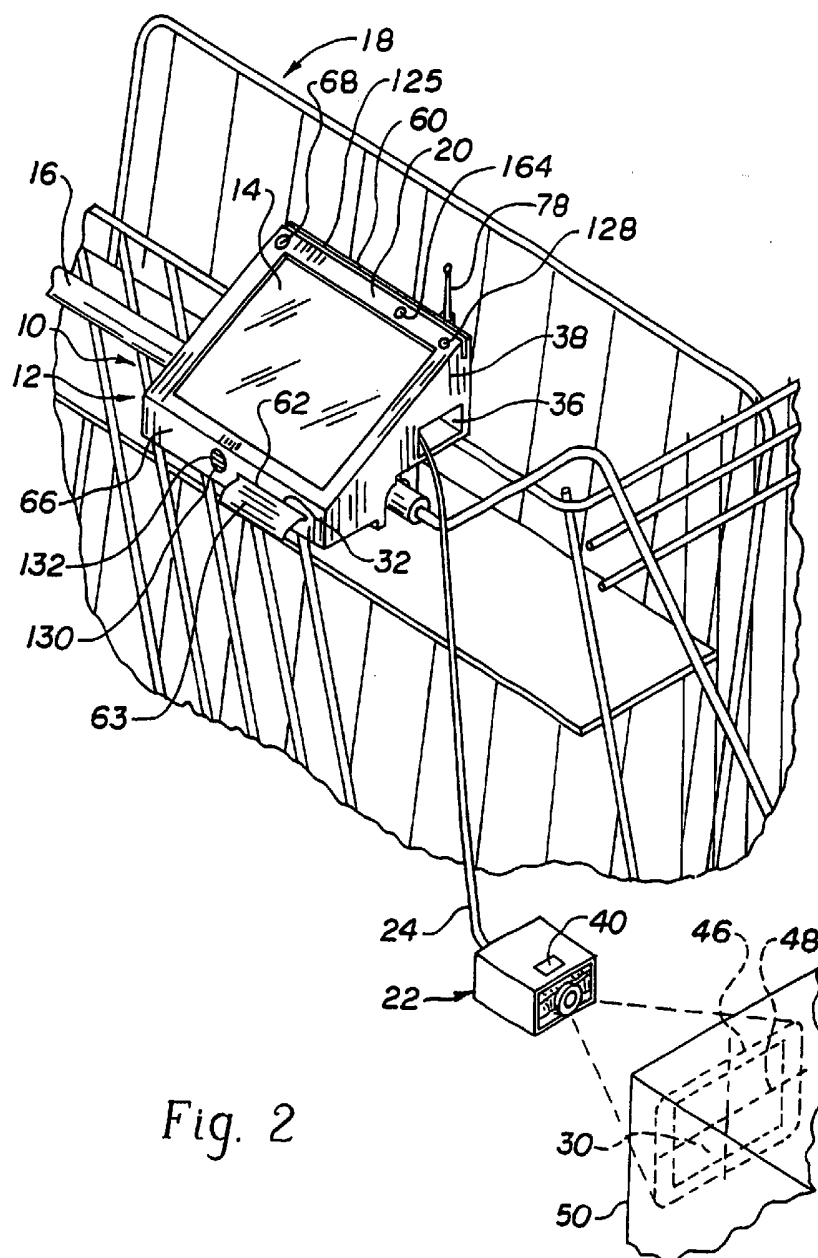


Fig. 2

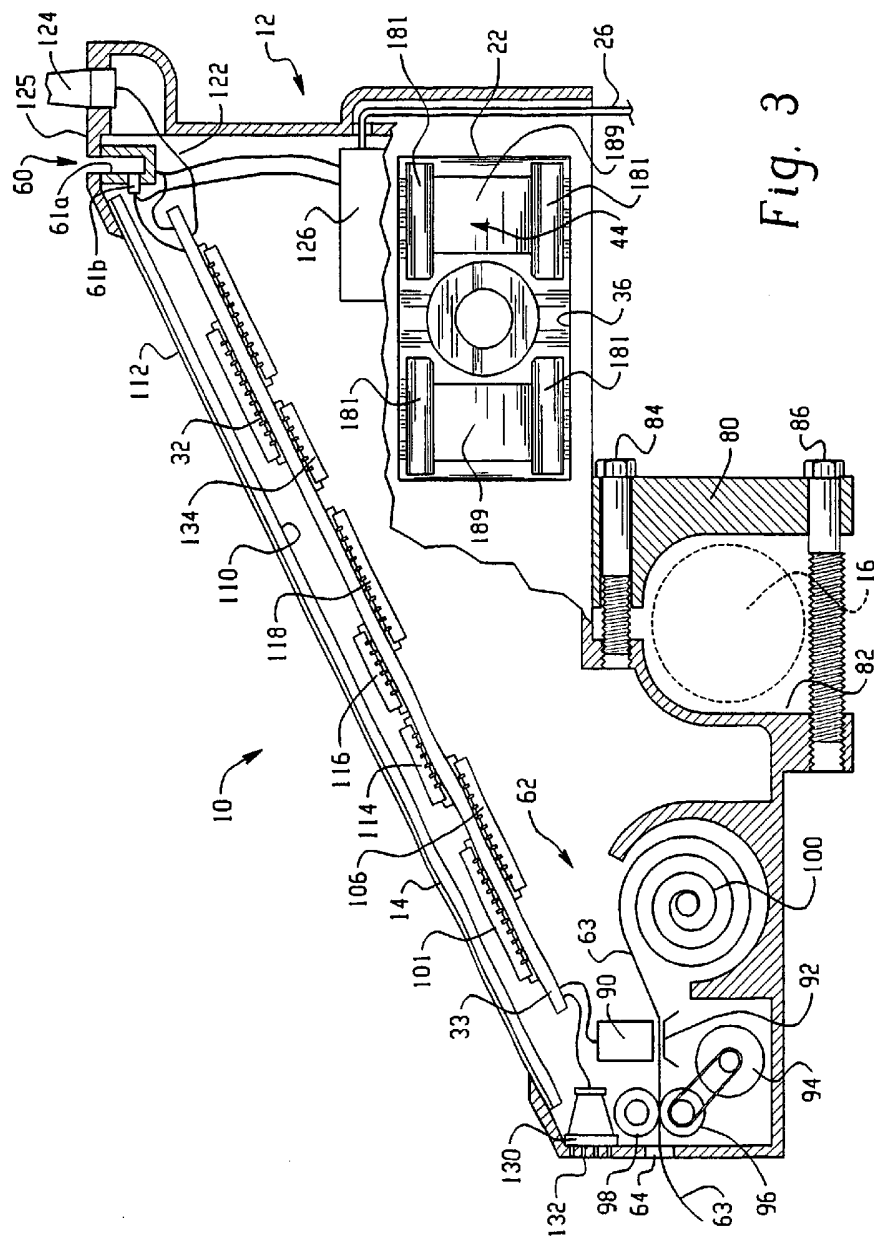


Fig. 3

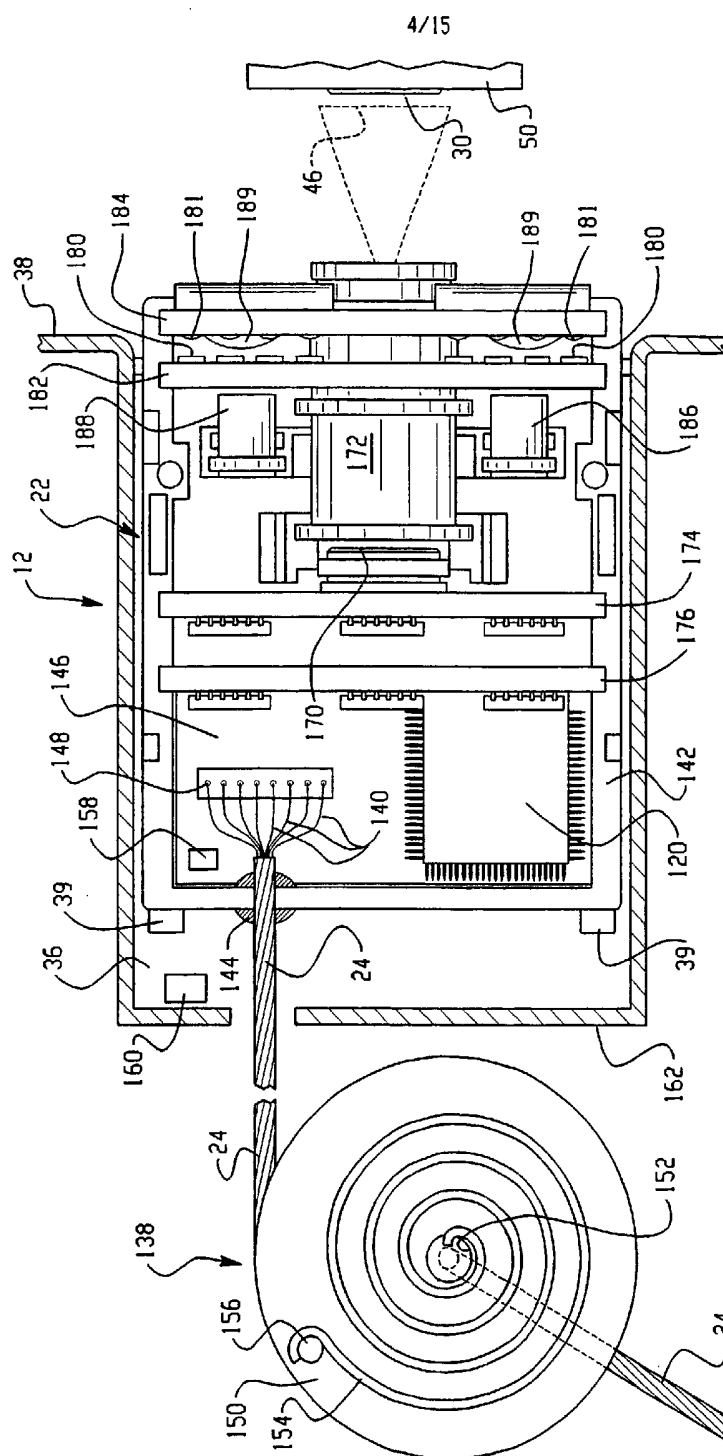


Fig. 4

SUBSTITUTE SHEET (RULE 26)

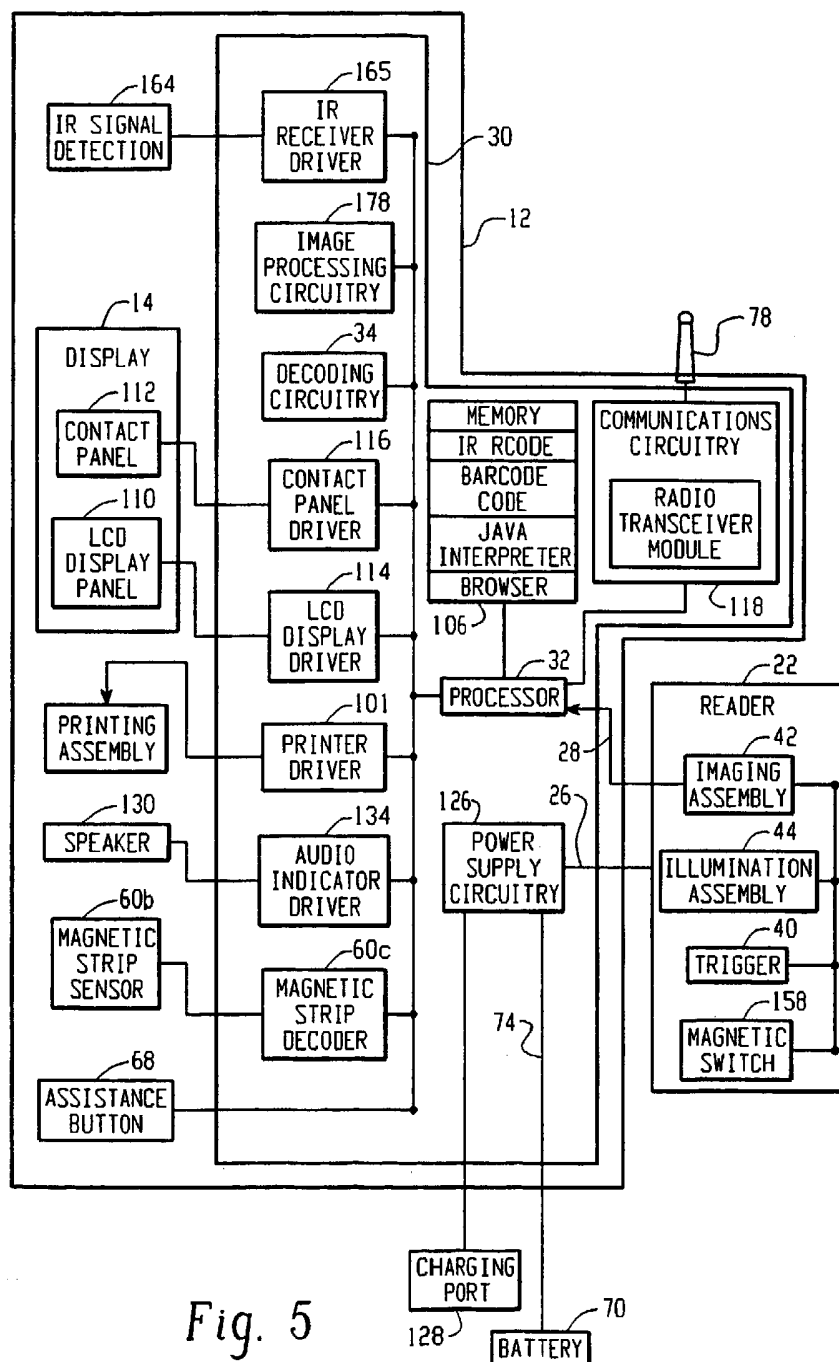
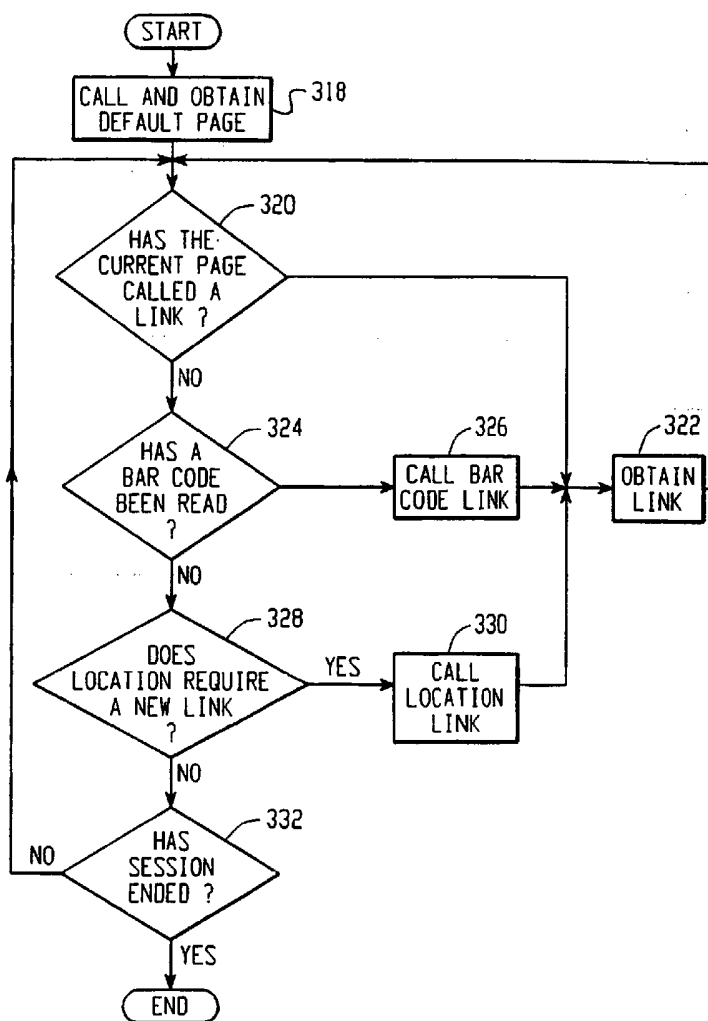


Fig. 5

SUBSTITUTE SHEET (RULE 26)

*Fig. 6*

7/15

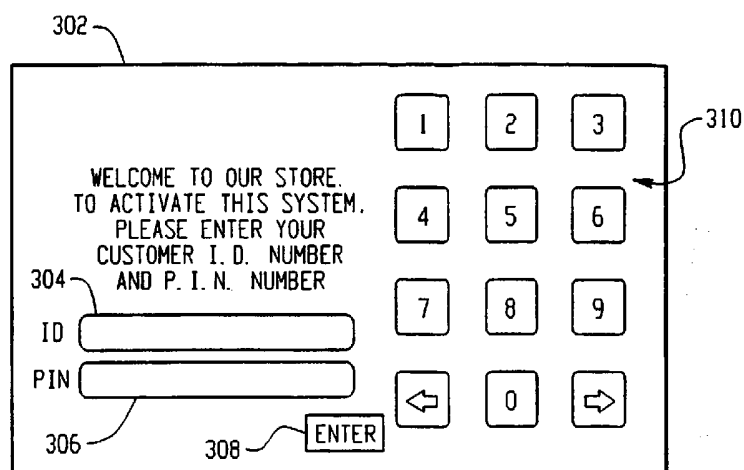


Fig. 7

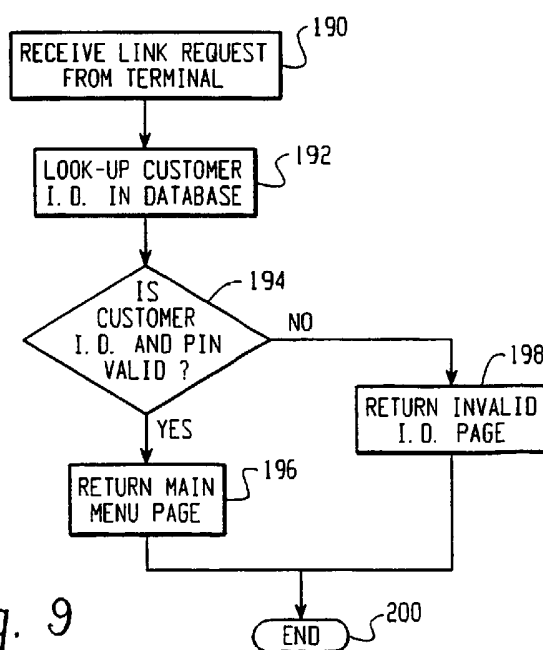


Fig. 9

8/15

SERVER		
HTML PAGE STORAGE	DATA BASE STORAGE	PROGRAMS
INTRODUCTORY PAGE	UPC	CUSTOMER VERIFICATION PROGRAM
INVALID I. D. PAGE	PRICE	BAR CODE READ PROGRAM
MAIN MENU PAGE	DESCRIPTION	LOCATION SEARCH PROGRAM
GENERIC CONFIRM PURCHASE PAGE	RECIPES	RECIPE SEARCH PROGRAM
CUSTOM CONFIRM PURCHASE PAGES	STORE LOCATIONS	RUNNING TOTAL PROGRAM
LOCATION BASED ADVERTISEMENT PAGES	PURCHASE HISTORY LOG	CHECK-OUT PROGRAM
RECIPE SELECTION SUB-MENU PAGE		CUSTOMER LOCATION PROGRAM
RECIPE FORM PAGE		
STORE MAP PAGE		
CHECK-OUT PAGE		
PREPARED ORDER ITEM SUB-MENU PAGE		

Fig. 8

9/15

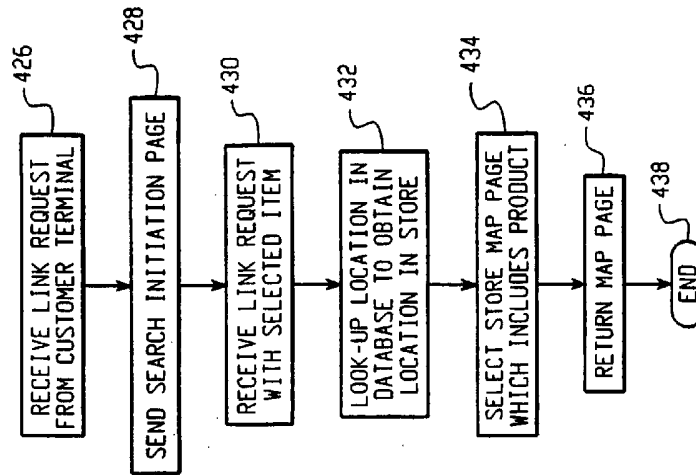


Fig. 13

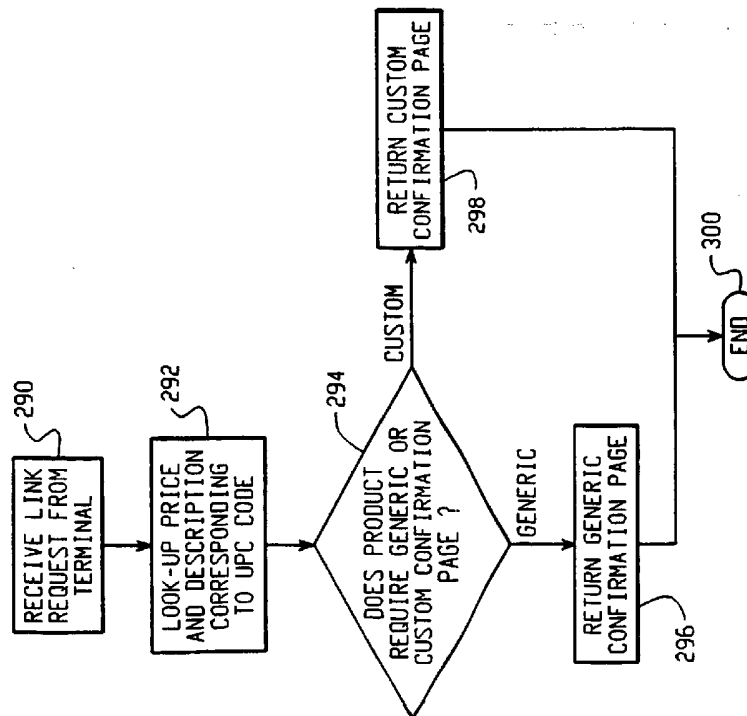


Fig. 10

10/15

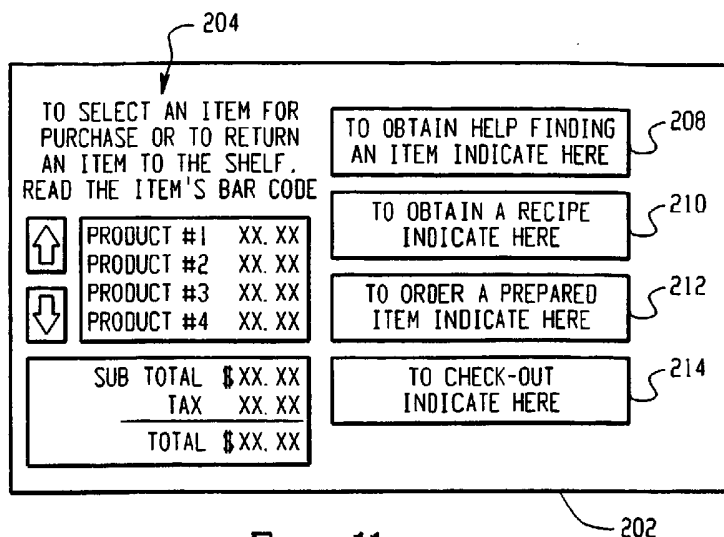


Fig. 11

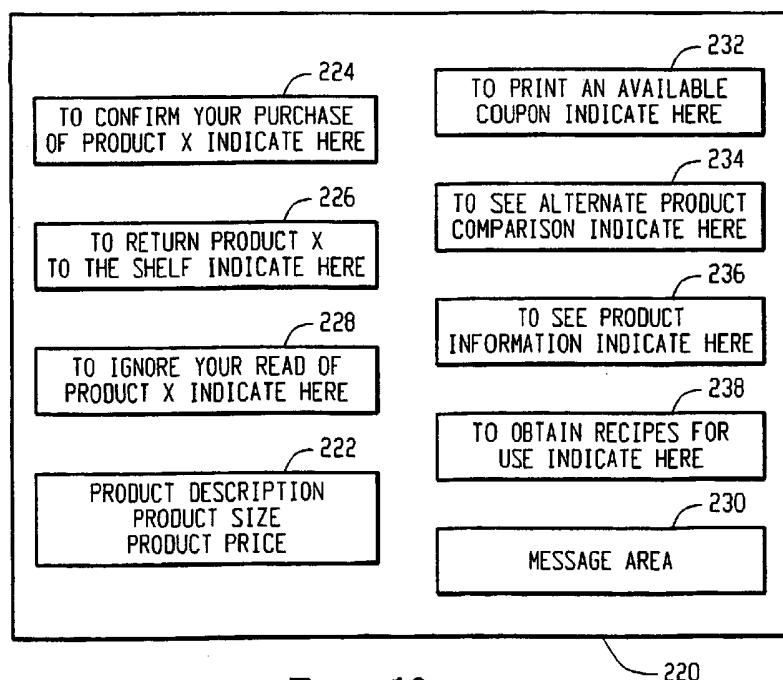
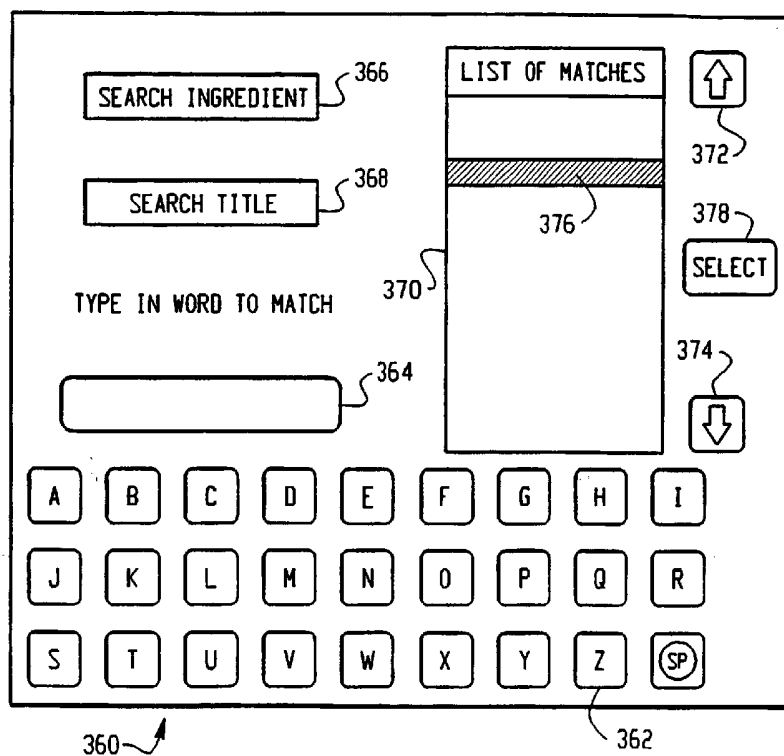


Fig. 12

11/15

*Fig. 14*

12/15

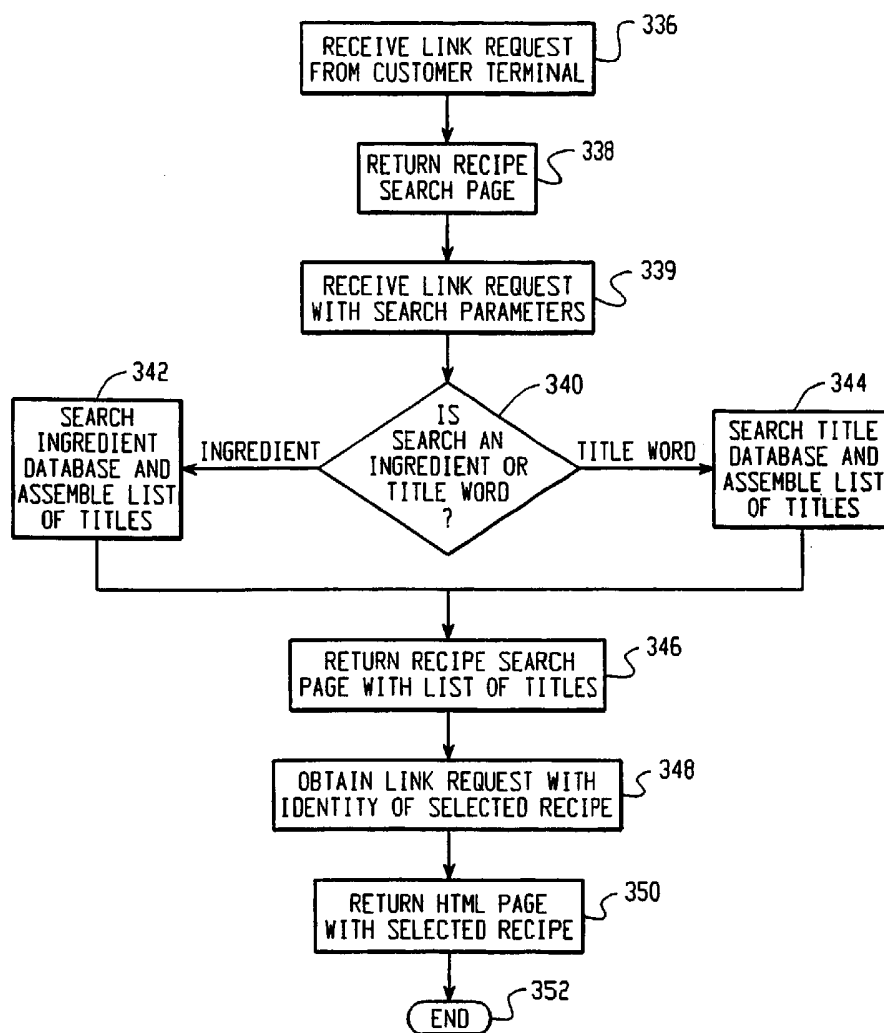


Fig. 15

13/15

PRODUCT #1	\$ 1.00
PRODUCT #2	\$ 1.50
PRODUCT #3	\$ 1.75
PRODUCT #4	\$ 1.80
PRODUCT #5	\$ 1.90
PRODUCT #6	\$ 1.95
PRODUCT #7	\$ 2.00
PRODUCT #8	\$ 1.00
SUBTOTAL	\$12.90
TAX	\$ 6.50
TOTAL	\$19.40

Navigation arrows: 254 (up), 256 (down)

Buttons: 258 (RETURN TO MAIN MENU), 260 (PAY CASH), 262 (DEBIT CARD), 264 (CREDIT CARD)

250

Fig. 16

SELECT ITEM FROM
BROWSE SCREEN OR
TYPE IN PRODUCT NAME

Input field: 284

Item list (272):

- BROWSE
- APPLE JUICE
- BARLEY
- BEER (highlighted)
- CANDY
- CHOCOLATE COOKIES
- CHOCOLATE CHIPS
- DOG FOOD
- FLOUR
- GARBAGE BAGS
- GRAHAM CRACKERS
- HOT CHOCOLATE
- ICE CREAM
- KETCHUP

Navigation arrows: 274 (up), 276 (down)

Buttons: 282 (SELECT)

Keypad (280):


A	B	C	D	E	F	G	H	I
J	K	L	M	N	O	P	Q	R
S	T	U	V	W	X	Y	Z	(SP)

270

Fig. 17

280

14/15

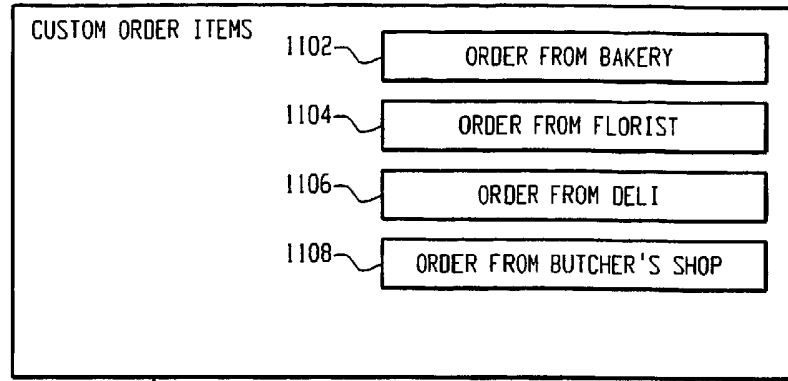

1100 *Fig. 18*

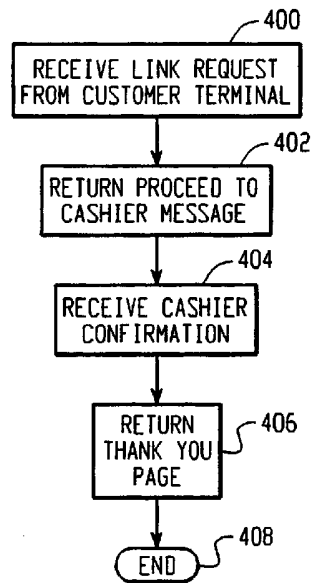


Fig. 19a

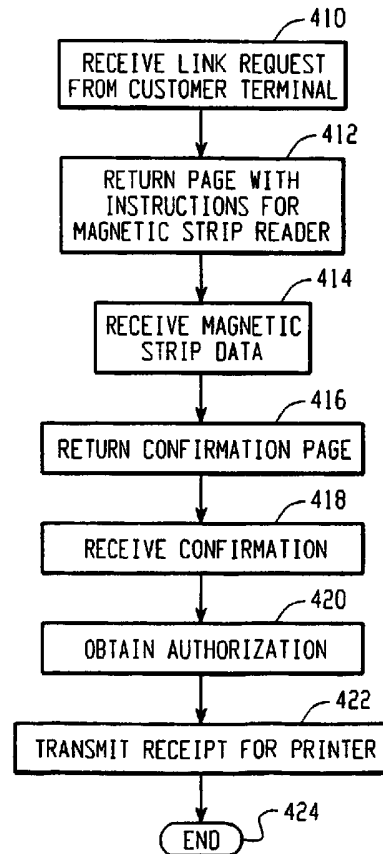
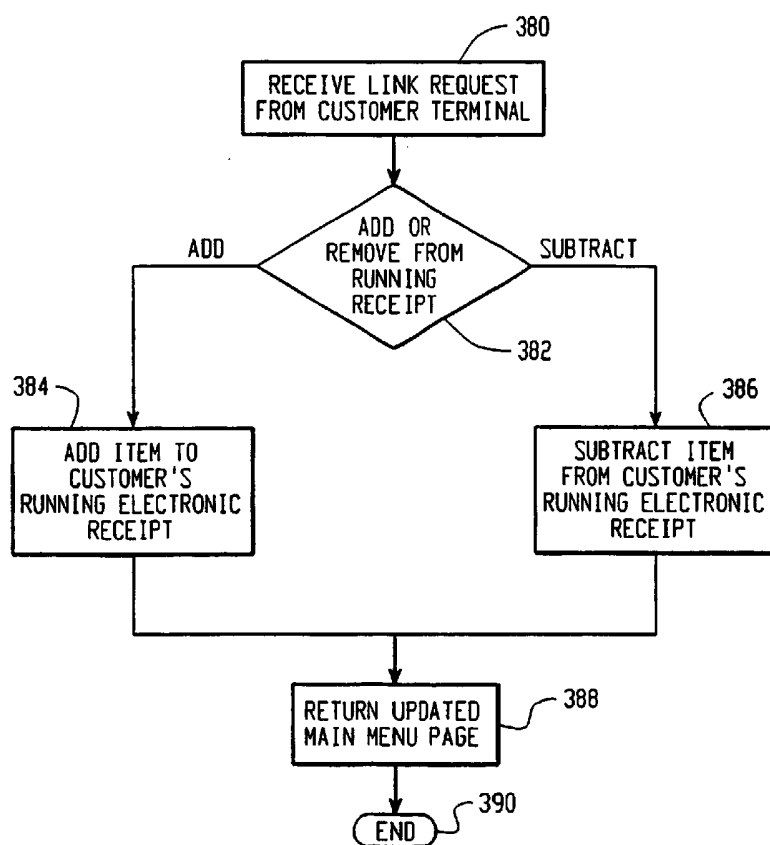


Fig. 19b

*Fig. 20*