

(22) Date de dépôt/Filing Date: 2002/11/05

(41) Mise à la disp. pub./Open to Public Insp.: 2003/06/20

(45) Date de délivrance/Issue Date: 2010/03/09

(30) **Priorité/Priority:** 2001/12/20 (NL1019625)

(51) Cl.Int./Int.Cl. *A01J 5/00* (2006.01),
A01J 5/007 (2006.01), *A01J 5/08* (2006.01),
A01J 7/02 (2006.01)


(72) Inventeurs/Inventors:
VEENSTRA, AALZE, NL;
FRANSEN, RENATUS IGNATIUS JOSEPHUS, NL

(73) Propriétaire/Owner:
LELY ENTERPRISES AG, CH

(74) **Agent:** FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF ET Gobelet-trayeur utilise pour la traite des animaux

(54) Title: A DEVICE AND A TEAT CUP FOR MILKING ANIMALS

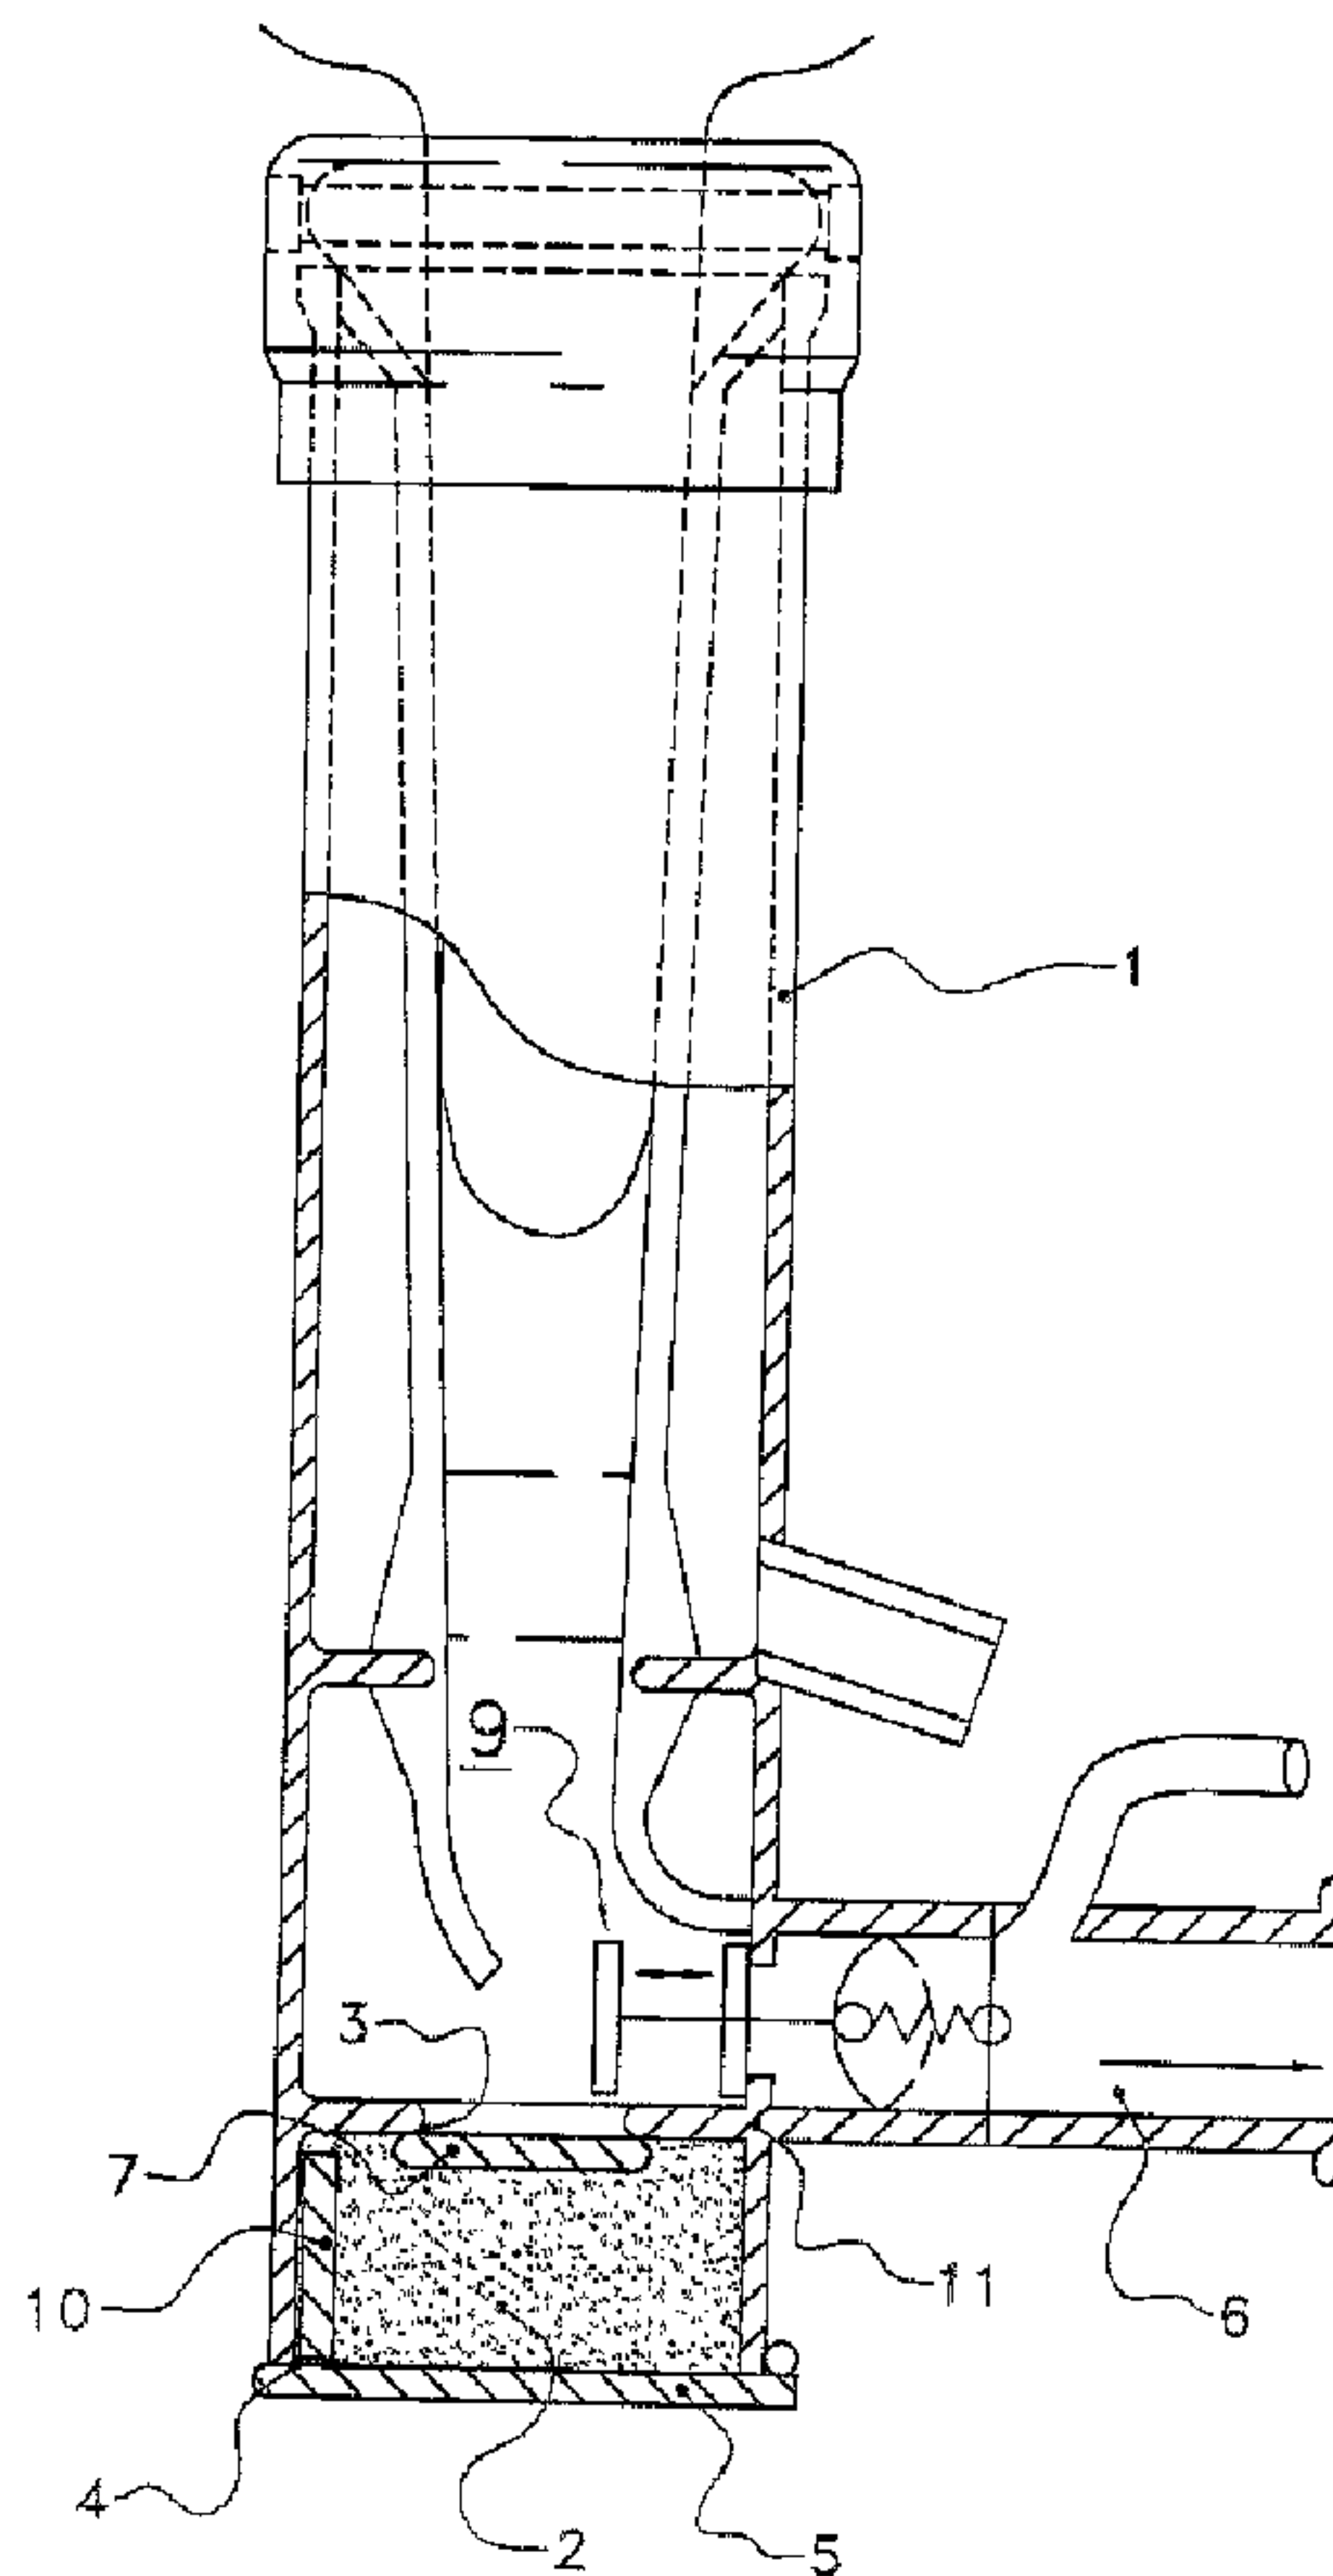

(57) **Abrégé/Abstract:**

A device for milking animals, such as cows, includes at least one teat cup and a foremilk reservoir for containing a certain amount of foremilk, obtained at the beginning of the milking process. The foremilk reservoir is provided with an inlet and an outlet. The

(57) **Abrégé(suite)/Abstract(continued):**

outlet has an outlet-closing means for the foremilk. The device is provided with a milk container for containing milk obtained, and with at least one milk line connecting the teat cup to the milk container. The foremilk reservoir is integrated in the teat cup. The integration of the foremilk reservoir into the teat cup allows the teat cup to be cleaned separately in a simple manner.

24268-466

ABSTRACT**A DEVICE AND A TEAT CUP FOR MILKING ANIMALS**

A device for milking animals, such as cows, includes at least one teat cup and a foremilk reservoir for containing a certain amount of foremilk, obtained at the beginning of the milking process. The foremilk reservoir is provided with an inlet and an outlet. The outlet has an outlet-closing means for the foremilk. The device is provided with a milk container for containing milk obtained, and with at least one milk line connecting the teat cup to the milk container. The foremilk reservoir is integrated in the teat cup. The integration of the foremilk reservoir into the teat cup allows the teat cup to be cleaned separately in a simple manner.

24268-466

1

A DEVICE AND A TEAT CUP FOR MILKING ANIMALS

The invention relates to a device for milking animals.

The invention also relates to a teat cup for milking animals.

Such a device and teat cup are known from Dutch patent 1004196.

5 The teat cup is usually cleaned after each milking run, and the milk line and, if desired, other components are cleaned after a certain number of milking runs. Although the known device functions properly, it has been found that the construction can be improved with a view to a more efficient cleaning and/or rinsing of the teat cup and the milk line.

10 According to an aspect of the invention, there is a device for milking animals comprising: at least one teat cup, a foremilk reservoir for containing a certain amount of foremilk, substantially obtained at the beginning of a milking process, said foremilk reservoir being provided with an inlet and an outlet with an outlet-closing means for the foremilk, a milk container for containing milk obtained,
15 and at least one milk line connecting the teat cup to the milk container, wherein the foremilk reservoir is integrated in the teat cup.

Just because of the fact that, according to the invention, the foremilk reservoir is integrated in the teat cup and is not separated therefrom, like it is in the state of the art, it is made possible in a simple manner to clean the teat cup
20 separately as well as to clean the teat cup and the milk line and, if desired, other components.

In an embodiment of a device according to the invention, the inlet of the foremilk reservoir is provided with an inlet-closing means. When milking animals it is of importance that the foremilk is separated from the further milk,
25 because the foremilk is often somewhat infected and/or of a different quality. With the aid of the inlet-closing means it is possible to close the foremilk reservoir, in particular the inlet thereof, when the foremilk reservoir is completely filled with foremilk. The inlet-closing means is preferably constituted by a float.

24268-466

1a

In a preferred embodiment according to the invention, the float is designed as a ball. Just because of

the geometric shape of the ball there is created a correct closing of the inlet.

In a preferred embodiment according to the invention, the float is made of synthetic material or rubber.
5 A float made of such material has a long useful life without the quality of the milk being adversely affected by the material.

According to another embodiment of the invention, the teat cup is provided with a milk-line-closing means for
10 closing the connection between the teat cup and the milk line, the milk-line-closing means being a controllable closing means. This makes it possible to prevent cleaning or rinsing liquid from entering the milk line during cleaning of the teat cup.

15 In a further embodiment of a device according to the invention, the controllable milk-line-closing means is suitable for operating under the control of a milk level sensor, such as for example a milk conductivity sensor or an optical or an acoustic sensor. This makes it possible for the
20 device to function to a high degree of automation, both during milking of an animal and during cleaning of the teat cup and/or the teat cup and the milk line and, if desired, other components.

The sensor is preferably disposed in the foremilk
25 reservoir, so that there can be made for example a correct separation between foremilk and the further milk obtained from the animal.

Alternatively or additionally, there is obtained a correct separation between foremilk and further milk if the
30 controllable milk-line-closing means is suitable for operating under the control of a sensor for detecting the closing of the inlet.

The controllable milk-line-closing means is preferably computer-controlled. In particular in the latter

24268-466

3

case, it is extremely advantageous if the outlet-closing means is also computer-controlled.

For the purpose of discharging the milk received in the foremilk reservoir, the outlet-closing means releases the outlet, for example when after milking the teat cup comes into open connection with the outside air, or when the teat cup is included in a rinsing line system for cleaning only the teat cup or when the teat cup is included in a rinsing line system and rinsing of the teat cup and the milk line system connected thereto is finished. In other words, as soon as an animal has been milked out and the vacuum in said teat cup and the milk line connected thereto is removed, a relevant teat cup is disconnected and the outlet of the relevant foremilk reservoir is released, so that the milk present in the foremilk reservoir can flow away. However, also when the teat cups and, if desired, the milk line system have to be cleaned and a rinsing liquid is brought into the teat cup and the milk line connected thereto in the usual way with the aid of a rinsing element that is connected to a teat cup, then, because of the fact that the foremilk reservoir fills with rinsing liquid, it will be necessary to discharge said rinsing liquid, in particular as soon as the teat cup is disconnected from the rinsing element.

The invention may in particular be applied if the device is provided with a milking parlour with a milking robot for automatically connecting the at least one teat cup to a respective teat of an animal to be milked.

24268-466

3a

The invention also relates to a teat cup for milking animals, wherein the teat cup is provided with a foremilk reservoir for containing a certain amount of foremilk, substantially obtained at the beginning of a milking process, said foremilk reservoir being provided with an inlet and an outlet with an outlet-closing means
5 for the foremilk.

The invention will now be explained in greater detail with reference to the accompanying drawing, in which:

Figure 1 shows diagrammatically a first embodiment
5 of a part of a device according to the invention, and

Figure 2 shows diagrammatically a second embodiment of a part of a device according to the invention.

Of the teat cups to be connected automatically to
10 the teats of an animal to be milked by means of a not further shown milking robot, only one teat cup 1 is shown in Figure 1. Like the other teat cups, said teat cup 1 can be connected, via a milk line 6, to a (non-shown) milk container.

15 A foremilk reservoir 2 for containing a certain amount of foremilk, substantially obtained at the beginning of the milking process, is integrated in the teat cup 1. According to the invention, by 'integrated' is meant that, during the use of the teat cup, the teat cup and the foremilk
20 reservoir constitute an integral whole. Therefore, it is possible for the teat cup and the foremilk reservoir to be separate components that can be interconnected, or to be designed as one single component.

The foremilk reservoir 2 is provided with an inlet
25 3 and an outlet 4 with an outlet-closing means 5 for the foremilk. In the embodiment shown, the inlet 3 is disposed in a partition that separates the foremilk reservoir from the teat cup space.

The inlet 3 of the foremilk reservoir 2 is provided
30 with an inlet-closing means 7 which, in the embodiments shown in Figures 1 and 2, is constituted by a float that is capable of floating on the milk that comes into the foremilk reservoir. If the inlet 3 is circular, the float is preferably designed as a ball 8, as shown in Figure 2. Thus
35 there is created a proper closing. Alternatively, the float

may also be designed as a disc-shaped element, as shown diagrammatically in Figure 1. In this case the float is made in particular of synthetic material or rubber.

It will be obvious that, when the foremilk reservoir 2 is filled with milk, the float closes the inlet 3, so that further milk cannot enter the foremilk reservoir 2, but can be discharged to the milk container via the milk line 6.

Via a connection 11, the teat cup 1, in particular the teat cup space, is connected to the milk line 6. In order to prevent that, undesirably, foremilk still enters the milk line 6, in the embodiment shown in Figure 1, the teat cup 1 is provided with a controllable milk-line-closing means 9. By correct control, in particular by a (non-shown) computer, the connection 11 can be closed during filling of the foremilk reservoir 2.

The control of the controllable milk-line-closing means 9 may also take place by means of a milk level sensor 10, such as for example a milk conductivity sensor or an optical or an acoustic sensor. This sensor 10 is preferably disposed in the foremilk reservoir 2. When this sensor detects that the level comes above a certain threshold value, the sensor can emit a signal ensuring that the milk-line-closing means 9 releases the connection 11.

Alternatively or additionally, the controllable milk-line-closing means 9 may be controlled by a sensor (for example a contact sensor) for detecting the closing of the inlet.

The foremilk reservoir 2 is provided with an outlet 4 that can be closed by an outlet-closing means 5. This outlet-closing means 5 is preferably designed such that at the moment when a vacuum is applied to the teat cup 1, the foremilk reservoir 2 is closed. Consequently, for this purpose all sorts of closing means can be used, such as an

outlet-closing means that is operated in an electromagnetic, hydraulic or pneumatic way.

The milk obtained with the aid of the teat cups after the foremilk, in particular after the inlet of the foremilk reservoir has been closed, will not flow to the
5 foremilk reservoir 2, but will flow via the milk line 6 to the milk container.

When only the teat cup 1 has to be cleaned, then the teat cup 1 is connected in the usual way to a (non-shown)
10 rinsing element by means of which a rinsing liquid is passed into the teat cup 1 and, if desired, also over the edge of the teat cup 1. By causing the milk-line-closing means 9 to close the connection 11, said rinsing liquid cannot enter the milk line 6. Before cleaning, the foremilk can be discharged
15 by operating the outlet-closing means. The discharge of the foremilk can also take place simultaneously with the cleaning. It is pointed out that in the embodiment shown in Figure 2 no milk-line-closing means is depicted. The closing of the milk line can take place in this case by a further
20 valve or the like disposed in the milk line.

When both the teat cup and the milk line system have to be cleaned, then the teat cup is connected again in the usual way to a rinsing element. The control of the closing means can then be such that first the foremilk
25 reservoir 2 is cleaned and subsequently the milk line and, if desired, other components. In this way the teat cups and the lines connected thereto including other components, if desired, are cleaned by rinsing in an accurate and simple manner.

24268-466

7

CLAIMS:

1. A device for milking animals comprising: at least one teat cup, a foremilk reservoir for containing a certain amount of foremilk, substantially obtained at the beginning of a milking process, said foremilk reservoir being
5 provided with an inlet and an outlet with an outlet-closing means for the foremilk, a milk container for containing milk obtained, and at least one milk line connecting the teat cup to the milk container, wherein the foremilk reservoir is integrated in the teat cup.
2. A device as claimed in claim 1, wherein the milking animals are
10 cows.
3. A device as claimed in claim 1, wherein the inlet of the foremilk reservoir is provided with an inlet-closing means.
4. A device as claimed in claim 3, wherein the inlet-closing means is constituted by a float.
- 15 5. A device as claimed in claim 4, wherein the float is designed as a ball.
6. A device as claimed in claim 4 or 5, wherein the float is made of synthetic material or rubber.
7. A device as claimed in any one of claims 1 to 6, wherein the teat cup
20 is provided with a milk-line-closing means for closing the connection between the teat cup and the milk line, the milk-line-closing means being a controllable closing means.
8. A device as claimed in claim 7, wherein the controllable milk-line-closing means is suitable for operating under the control of a milk level sensor.
- 25 9. A device as claimed in claim 8, wherein the milk level sensor is one of a milk conductivity sensor, an optical sensor and an acoustic sensor.
10. A device as claimed in claim 8 or 9, wherein the sensor is disposed in the foremilk reservoir.

24268-466

8

11. A device as claimed in claim 3, wherein the teat cup is provided with a milk-line-closing means for closing the connection between the teat cup and the milk line, the milk-line-closing means being a controllable closing means and wherein the controllable milk-line-closing means is suitable for operating under the control of a sensor for detecting the closing of the inlet.

12. A device as claimed in any one of claims 7 to 11, wherein the controllable milk-line-closing means is computer-controlled.

13. A device as claimed in any one of claims 1 to 12, wherein the outlet-closing means is computer-controlled.

14. A device as claimed in any one of claims 1 to 13, wherein the device is provided with a milking parlour with a milking robot for automatically connecting the at least one teat cup to a respective teat of an animal to be milked.

15. A teat cup for milking animals, wherein the teat cup is provided with a foremilk reservoir for containing a certain amount of foremilk, substantially obtained at the beginning of a milking process, said foremilk reservoir being provided with an inlet and an outlet with an outlet-closing means for the foremilk.

16. A teat cup as claimed in claim 15, wherein the milking animals are cows.

17. A teat cup as claimed in claim 15 or 16, wherein the inlet of the foremilk reservoir is provided with an inlet-closing means.

18. A teat cup as claimed in claim 17, wherein the inlet-closing means is constituted by a float.

19. A teat cup as claimed in claim 18, wherein the float is designed as a ball.

20. A teat cup as claimed in claim 18 or 19, wherein the float is made of synthetic material or rubber.

21. A teat cup as claimed in any one of claims 15 to 20, wherein the teat cup is provided with a connection for a milk line, and with a milk-line-closing

24268-466

9

means for closing the connection between the teat cup and the milk line, the milk-line-closing means being a controllable closing means.

22. A teat cup as claimed in claim 21, wherein the controllable milk-line-closing means is suitable for operating under the control of a milk level sensor.

5 23. A teat cup as claimed in claim 22, wherein the milk level sensor is one of a milk conductivity sensor, an optical sensor and an acoustic sensor.

24. A teat cup as claimed in claim 22 or 23, wherein the sensor is disposed in the foremilk reservoir.

10 25. A teat cup as claimed in claim 17, wherein the teat cup is provided with a connection for a milk line, and with a milk-line-closing means for closing the connection between the teat cup and the milk line, the milk-line-closing means being a controllable closing means and wherein the controllable milk-line-closing means is suitable for operating under the control of a sensor for detecting the closing of the inlet.

15 26. A teat cup as claimed in any one of claims 21 to 25, wherein the controllable milk-line-closing means is computer-controlled.

27. A teat cup as claimed in any one of claims 15 to 26, wherein the outlet-closing means is computer-controlled.


FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS

1/2

FIG. 1

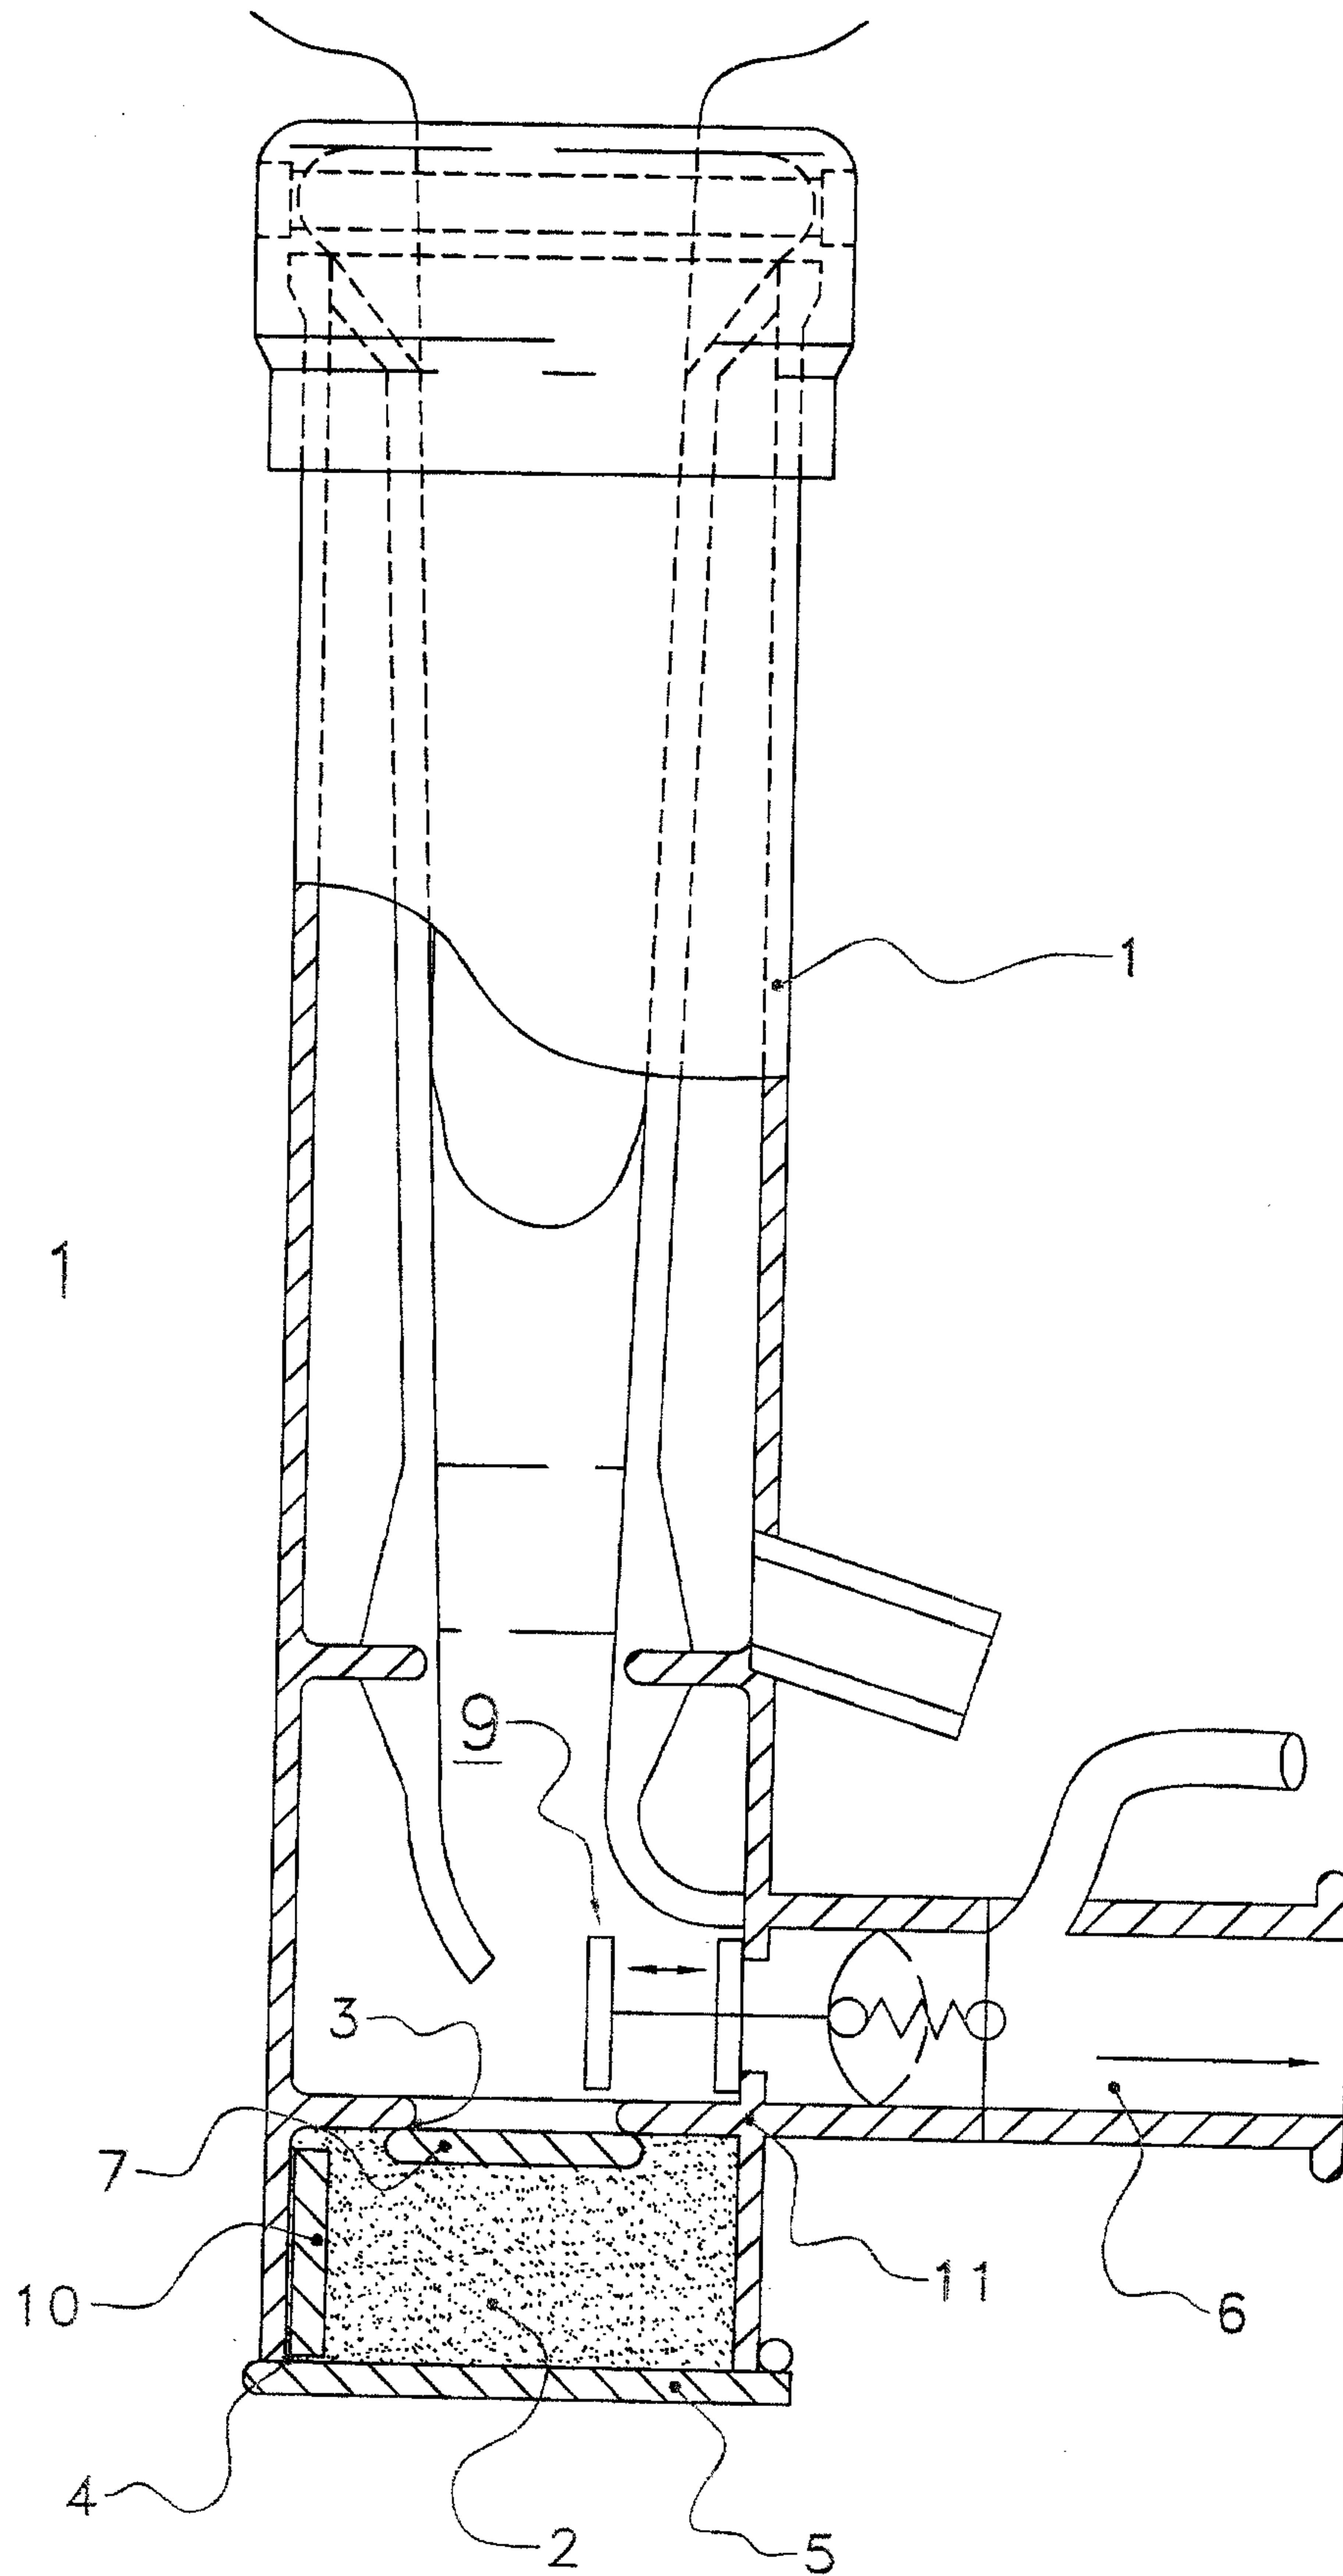

2/2

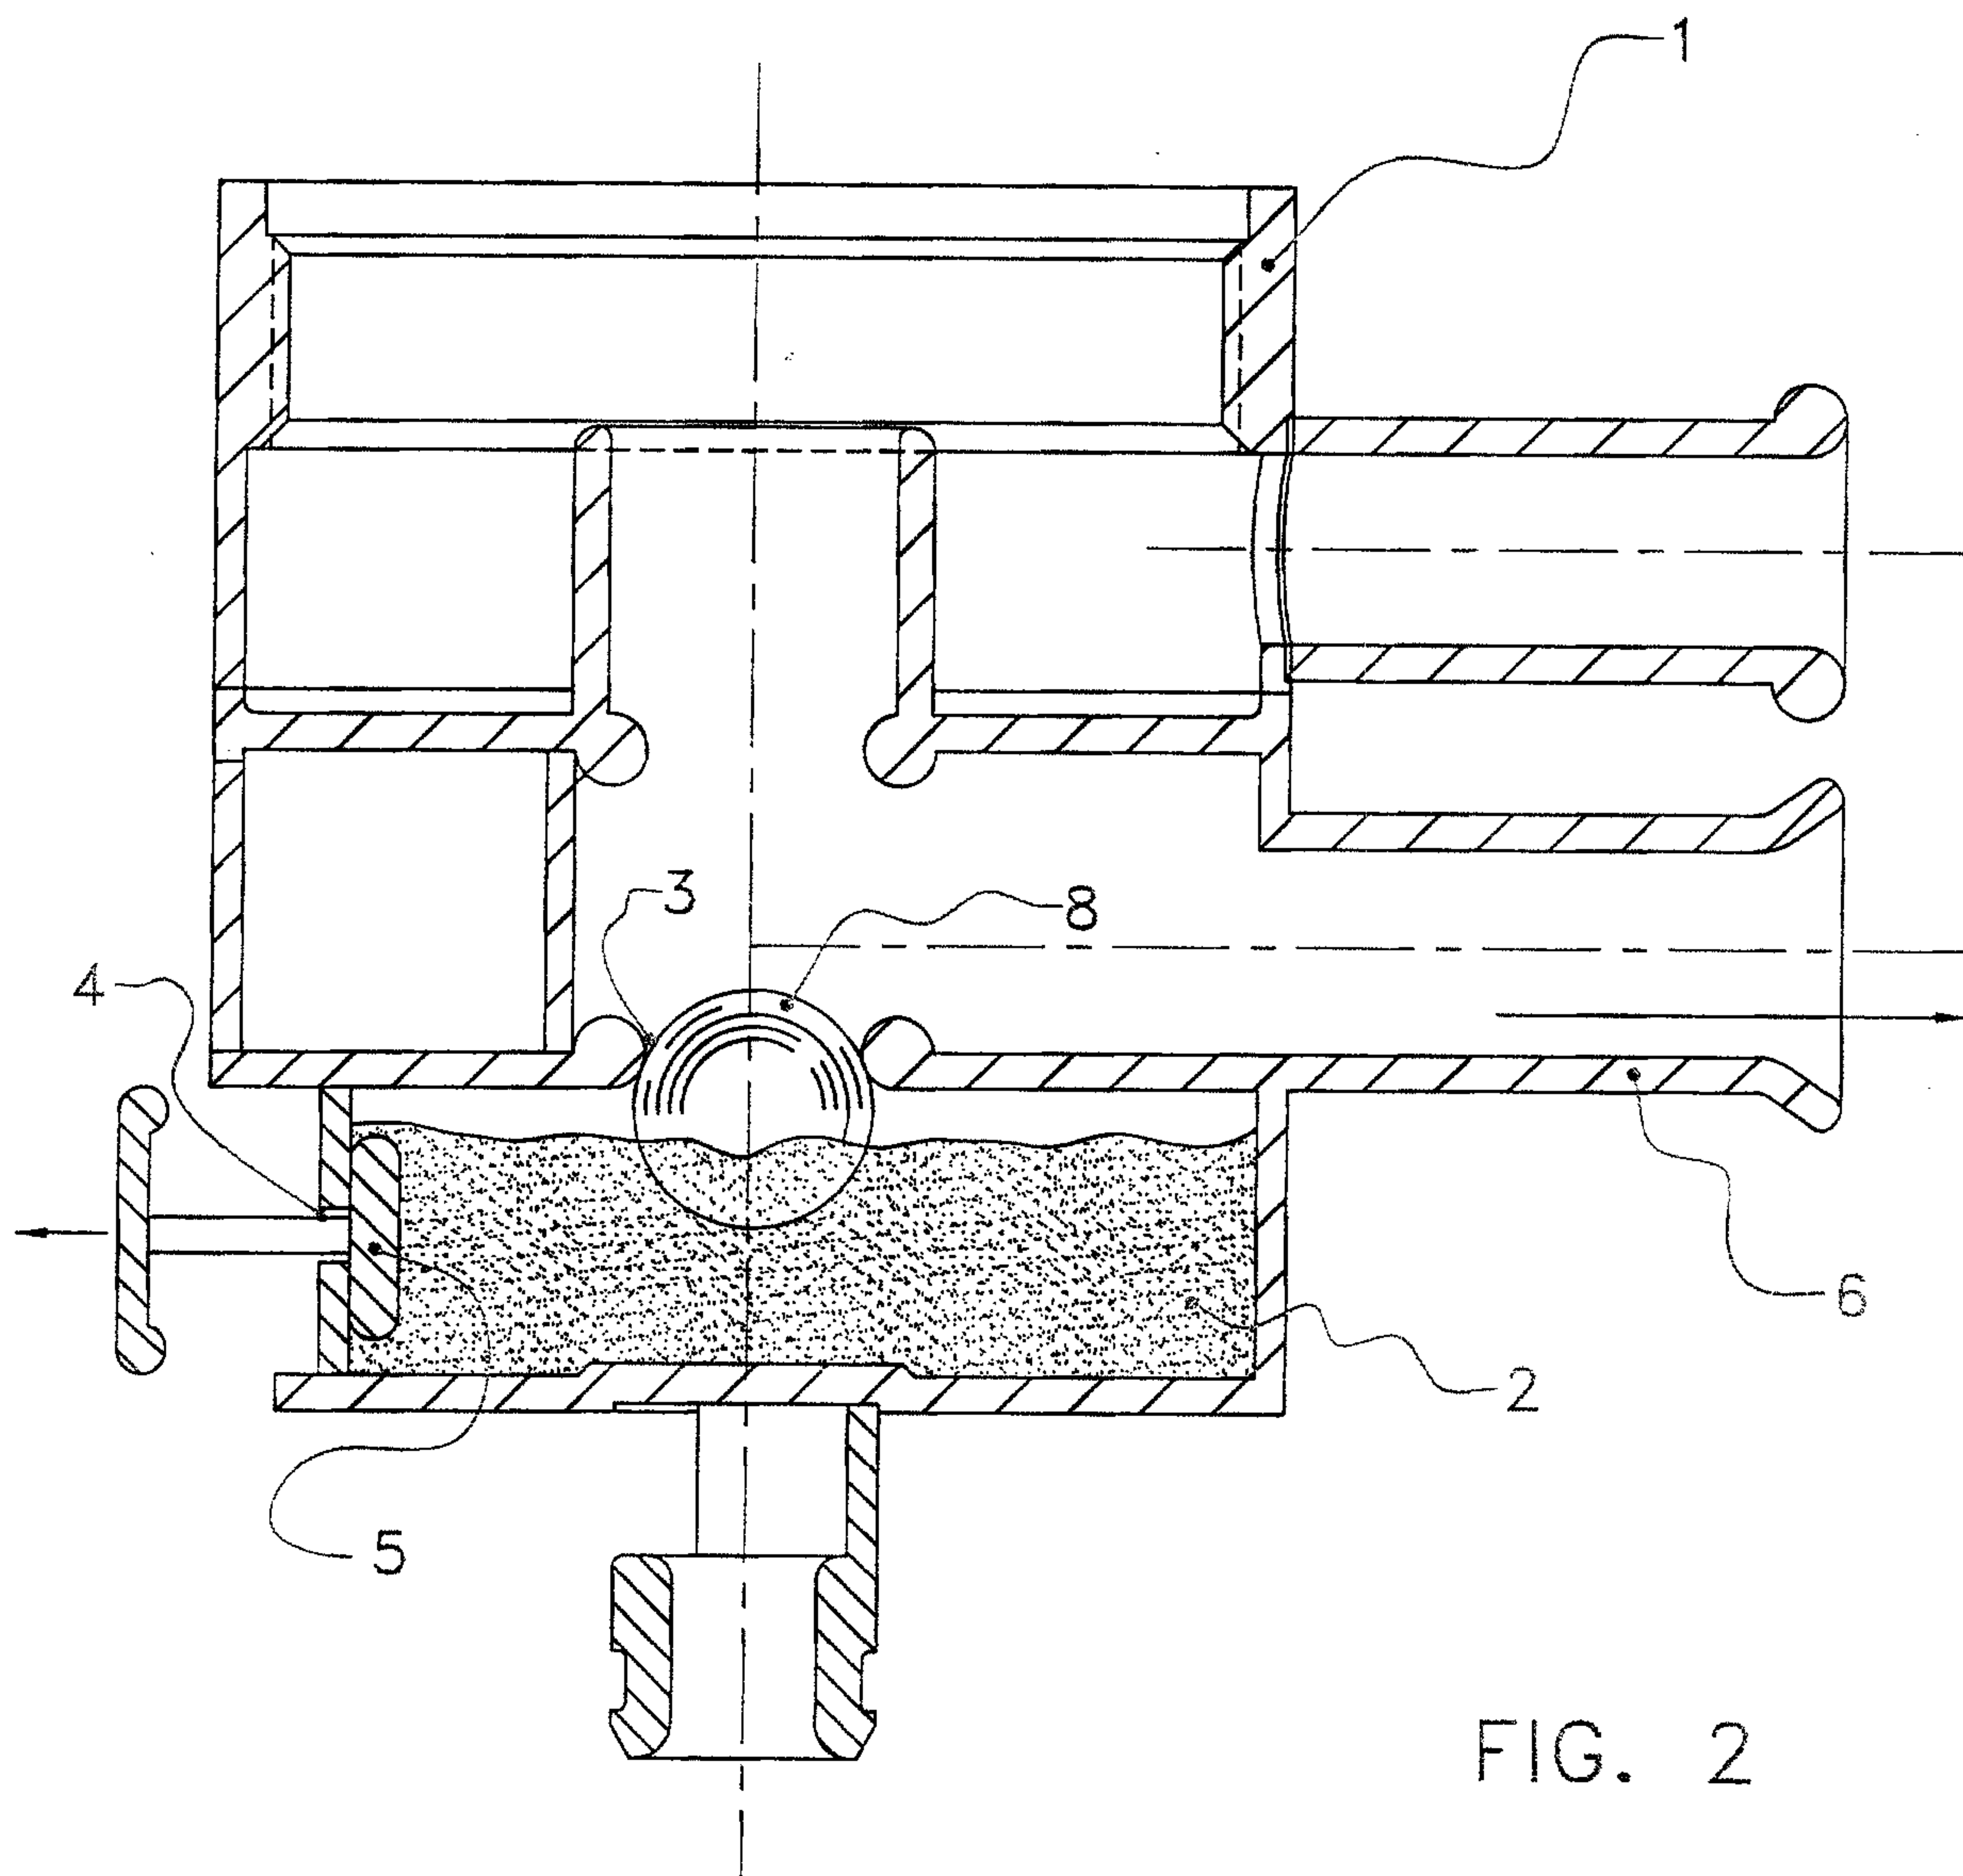


FIG. 2

