

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100588 A1

(51) International Patent Classification⁷: **H04Q 7/38**

[JP/JP]; 6-2-803, Hikarinooka, Yokosuka-shi., Kanagawa, 239-0847 (JP).

(21) International Application Number:

PCT/EP2004/002537

(22) International Filing Date: 11 March 2004 (11.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

03010598.5

12 May 2003 (12.05.2003) EP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(74) Agent: **KUHL, Dietmar**; Grünecker, Kinkeldey, Stockmair & Schwanhäuser Anwaltssozietät, Maximilianstrasse 58, 80538 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **PETROVIC, Dragan** [YU/DE]; Am Kaiserschlag 15, 64295 Darmstadt (DE). **SEIDEL, Eiko** [DE/DE]; Moosbergstrasse 97 a-b, 64285 Darmstadt (DE). **GOLITSCHKE EDLER VON ELBWART, Alexander** [DE/DE]; Wilhelminenstr. 32, 64285 Darmstadt (DE). **SUZUKI, Hidetoshi**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR PERFORMING INTER-FREQUENCY MEASUREMENTS

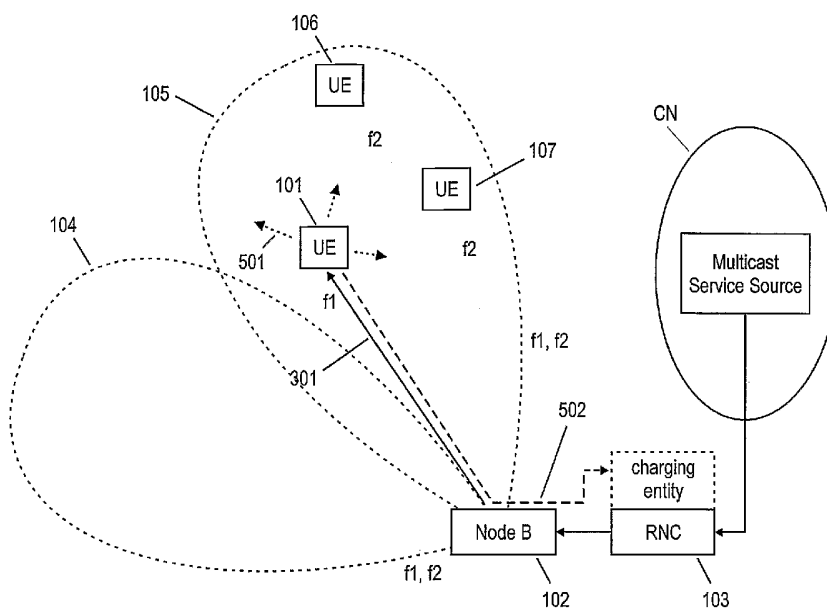

(57) Abstract: The present invention relates to a mobile terminal and a communication method in a wireless system comprising a radio access network and a plurality of mobile terminals. To save processing time at the mobile terminal in order to perform inter-frequency measurements the mobile terminal receives data of a scalable data service from the radio access network, wherein the received data comprises a plurality of importance layers, receives a notification from the radio access network to perform inter-frequency measurements, and processes a subset of the importance layers of the received transmission data.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

METHOD AND APPARATUS FOR PERFORMING INTER-FREQUENCY MEASUREMENTS

The present invention relates to a communication method, a mobile terminal and a communication system performing inter-frequency measurements while participating in a scalable data service.

- 5 The Third Generation Partnership Project (3GPP) specification group has defined the Universal Mobile Telecommunication Standard (UMTS) in recent years. Release 5 of March 2002 introduced advanced features such as a multi-rate wideband voice codec, IP-based multimedia services (IMS) and high speed downlink packet access (HSDPA).

10 The UMTS network architecture defines a core network (CN) and a terrestrial radio access network (UTRAN). The UTRAN has been designed to efficiently handle voice and data as well as real-time and non-real-time services over the same air interface, i.e. same carrier. Several radio interface modes have been defined in this framework. Essentially, the definition distinguishes between two modes of operation: frequency division duplex (UTRAN FDD) for operation in paired frequency bands and time division
15 duplex (UTRAN TDD) for operation in unpaired frequency bands, allowing alternative chip rates and bandwidths to be implemented.

For example, the UTRAN FDD mode employs Wideband CDMA (W-CDMA) as an access technology. W-CDMA uses direct sequence CDMA and allows bit rates up to 384 kbit/s (2.048 Mbit/s in a pico cell). These high data rates on the wireless link facilitate the
20 introduction of scalable multimedia services to UMTS. In this respect point-to-multipoint services or broadcast services are of interest especially in the field of video and audio streaming.

Point-to-multipoint services allow data from a single source entity to be transmitted to multiple endpoints. These services are expected to be used extensively over wireless
25 networks and therefore public land mobile networks (PLMN) should to efficiently support them. In this respect, Multimedia Multicast / Broadcast Service (MBMS) is intended provide this capability for such broadcast/multicast services provided by the home environment and other value added service providers (VASP).

The MBMS is an unidirectional point-to-multipoint bearer service in which data is
30 transmitted from a single source entity to multiple recipients. It is anticipated that other

services will use these bearer capabilities. The 3GPP has defined two modes of operation for MBMS: the broadcast mode and the multicast mode. The main motivation for providing services in terms of multicast / broadcast transmissions is the efficient utilization of radio resources when transmitting the same content to several users simultaneously.

The multicast/broadcast mode is a unidirectional point-to-multipoint transmission of multimedia data (e.g. text, audio, picture, video) from a single source entity to all users in a multicast/broadcast service area. The multicast/broadcast mode is intended to efficiently use radio/network resources e.g. data is transmitted over a single logical channel. Data is transmitted in the multicast/broadcast service area as defined by the network (Home environment). In the multicast mode the network may selectively transmit to cells within the multicast service area which contain members of a multicast group.

MBMS data transmission adapts to different radio access network (RAN) capabilities or different radio resource availability, e.g. by reducing the bitrate of the MBMS data. The selection and description of an appropriate mechanism is subject to MBMS stage 2.

The transmission of MBMS data is carried out on point-to-multipoint logical channel MTCH (MBMS Traffic Channel) while the transmission of MBMS control information is carried out on point-to-multipoint logical channel MCCH (MBMS Control Channel). If the only information to be transmitted on MBMS Control Channel is related to notifications, this channel could be called NCCH (Notification Control Channel). Depending on certain criteria (e.g. system load), these logical channels may be mapped on dedicated transport channels (DCH – Dedicated Channel) or common transport channels (e.g. FACH – Forward Access Channel).

Scalable data services, such as scalable MBMS, are based upon the assumption that the data to be transmitted can be separated into distinct layer data streams, also referred to as importance layers. Practically, those are categorized into a Base Layer and one or more Enhanced Layers. By definition, the Base Layer contains data that is required for the service (e.g. video streaming) to be received with a lowest acceptable quality and provides a basic quality of service of the MBMS data stream. The Enhanced Layer(s) contain(s) only supplementary data whose reception and subsequent processing improve the quality of service experienced by end users relative to the quality offered by the Base Layer.

In a radio network e.g. UMTS UTRAN, a service in the cell can be provided on several frequency carriers. These new cells, separated by different frequencies, usually have the same coverage and form a multi layered geographically collocated cell structure. Inter-frequency handovers, i.e. an inter-frequency cell changes are executed for the purpose of balancing the load between frequency carriers and is therefore possible to have a number of users on each frequency carrier. Inter-frequency handovers are controlled by RRC (Radio Resource Control) entities which are located in a radio network controller (RNC).

An inter-frequency cell change can be executed with or without inter-frequency measurements carried out by user equipment (UE) or mobile terminal. In the former case, the network first orders to UE to perform inter-frequency measurements. Finally the radio access network (RAN) makes decision whether to execute an inter-frequency handover or not based on measurement results or the decision is left to the UE.

In Tdoc R2-022110 "Power Usage for MBMS" by Lucent Technologies (available from 3GPP), it has been shown that 66% of the sector total power has to be allocated to a single 64kbps MBMS if full cell coverage is required for data transmissions on a common transport channel, such as a FACH. An example of usage of scalable MBMS transmissions would be to relax the power requirements by transmitting only the Base Layer of the importance layers to those users which are located close to the cell edge and gradually increase the number of enhanced layers for users located closer to the radio access network's Node B transmitting the data. This technique is illustrated in Figure 11.

So far the scalability in MBMS has not been discussed in relevant standardization bodies of the 3GPP and it is not clear if it should be supported in the RAN. In further considerations it will be assumed that adequate knowledge to support scalable MBMS transmissions is available in the RAN. If scalability is supported in RAN, there could be more than one logical channel (MTCH) supporting transmissions of different importance layers. MBMS-specific function for handling of logical channels is currently located in medium access control MAC c/sh/m entity in RNC.

Compressed mode measurements (see for example 3GPP TS 25.215: "Physical layer – Measurements (FDD)" for more details) are usually executed when making measurements on other transmission frequencies in a CDMA system without a full dual receiver terminal. This mode can be considered as an example of how transmitted bits

can be manipulated to enable a UE to carry out measurements without imposing significant additional requirements on the processing time.

The term "compressed mode" means that transmission and reception at the UE are halted for short time intervals in order to perform measurements on the other
5 frequencies. In these intervals, gaps within frames received by the UE are introduced by the RAN to allow the UE to perform the measurements. Transmission gaps are created by compressing the data that should be transmitted in the time domain, i.e. within a time frame.

There are three ways of frame compression: First, increasing the available data rate by
10 reducing the spreading factor. The decrease of spreading factor is often compensated by increasing transmission power in the frame. Second, reducing the data rate by puncturing on physical layer. Since puncturing processes some practical limits, this is limited to creating rather short transmission gaps. And third, lowering the data rate delivered to physical layer by the scheduling in higher layer.

15 Figure 9 shows the transmission of a physical channel on the frame level in the compressed measurement mode where the decrease of the spreading factor is compensated by increasing the transmission power in the frame. Figure 10 illustrates the transmission of a physical channel on the frame level in the compressed mode where transmission gaps are realized by higher layer scheduling.

20 On command from the UTRAN, a UE monitors cells on other frequencies and cells on other modes and radio access technologies that are supported by the UE. To allow the UE to perform inter-frequency measurements, the UTRAN instructs the UE to enter into "compressed mode" for inter-frequency measurements.

MBMS supports the mobility between the cells controlled by different base stations
25 (Node Bs). If there is more than one W-CDMA carrier per base station, these are usually used for balancing load or improving coverage. It is clear that MBMS content does not have to be transmitted on the same carriers in geographically neighboring cells. Due to mobility of users between cells controlled by different Node Bs, it may happen that there are sets of users belonging to the same MBMS group but receiving MBMS contents
30 through different frequency carriers. For the sake of radio efficiency, it is therefore desirable to transmit MBMS content on a single W-CDMA carrier. Thus, the RAN may wish to move all users belonging to a same MBMS group to a single frequency carrier.

For this decision to be more accurate, a mechanism for inter-frequency measurements is needed.

It is therefore the object of the present invention to save processing time at the mobile terminal in order to perform inter-frequency measurements.

- 5 The object of the invention is solved by the independent claims. Further embodiments are subject matter to their dependent claims.

The present invention provides a communication method in a wireless system comprising a radio access network and a plurality of mobile terminals. A mobile terminal of the system receives data of a scalable data service from the radio access network,
10 wherein the received data comprises a plurality of importance layers, further receives a notification from the radio access network to perform inter-frequency measurements, and processes by a subset of the importance layers of the received transmission data to reduce the processing load at the terminal for inter-frequency measurements.

In an embodiment of the invention the subset of the importance layers is demultiplexed
15 from the physical channels. By only demultiplexing the data from the physical channels that should be further processed at the lowest layer the amount of data to be processed can be significantly decreased, which saves processing time that may be used for inter-frequency measurements.

The method described above may be applied to data of the scalable data service
20 received via a common transport channel or a dedicated transport channel in another embodiment. This embodiment relates to broadcast transmissions that usually use common transport channels for transmission. As the data on the common transport channel may be received by a plurality of mobile terminals, it is more effective to reduce the data rate in the mobile terminal for enabling inter-frequency measurements. This is
25 because a reduction of the data rate by scheduling at the radio access network would decrease the quality of service of the transmitted scalable service data for all mobile terminals receiving the data stream.

Further, the mobile terminal performs inter-frequency measurements in the time gained by processing only a subset of the importance layers of the transmission data, and
30 transmits indicators derived from the inter-frequency measurement results to the radio access network.

In case the radio access network decides to move the mobile terminal to another carrier frequency to more effectively utilize the system resources, the mobile terminal receives from the radio access network an instruction to change the carrier frequency for data of the scalable data service, and changes the carrier frequency for data of the scalable data
5 service to the instructed frequency.

A non access stratum in the wireless network may be notified about the selective processing of the subset of importance layers using indication primitives. For the definitions of indication primitives it is referred to the document 3GPP TS 25.301 "Radio Interface Protocol Architecture".. This may be desirable, if the delivery of the scalable
10 service is charged based on the quality of service provided to the mobile terminal.

The notification from the radio access network to perform inter-frequency measurements may be received on a MBMS control channel or a notification control channel.

The scalable data services may be a multimedia broadcast/multicast service (MBMS). Further, the scalable data service may comprise multicast and/or broadcast data
15 transmissions.

Further, the present invention provides a mobile terminal in a wireless system comprising a radio access network and at least the mobile terminal. The mobile terminal comprises receiving means for receiving data of a scalable data service from the radio access network, wherein the received data comprises a plurality of importance layers. Further,
20 the receiving means is adapted to receive a notification from the radio access network to perform inter-frequency measurements.

The terminal may further include processing means for reducing the time to process the transmission data of the scalable data service, wherein the processing means is adapted to process a subset of the importance layers of the received transmission data.

25 Further the mobile terminal may comprise demultiplexing means for demultiplexing the subset of the importance layers from the physical channel.

In another embodiment of the invention, the receiving means is adapted to receive the data of the scalable data service via a common transport channel.

The mobile terminal may further comprise measurement means for performing inter-
30 frequency measurements in the time gained by only processing a subset of the

importance layers of the received transmission data, and transmission means for transmitting inter-frequency measurement results to the radio access network.

5 In order to enable the assignment of a new carrier frequency to the terminal, the receiving means of the mobile terminal may be adapted to receive an instruction from the radio access network to change the carrier frequency for data of the scalable data service, and the transmission means is adapted to change the carrier frequency for data of the scalable data service to the instructed frequency.

10 As scalable data services such as MBMS are commonly charged based on the received quality of service, it may be desirable that the mobile terminal may further comprise notification means for notifying a non access stratum in the wireless network about the selective processing of the subset of importance layers. This enables the mobile terminal to notify a non access stratum, which may include a charging entity, about the fact that it receives a lower quality of service when performing inter-frequency measurements, which may considered when charging the user for the scalable data service.

15 In another embodiment, the receiving means is adapted to receive the notification from the radio access network to perform inter-frequency measurements a control channel of the scalable data service or a notification control channel.

20 Moreover, the present invention relates to a communication system comprising at least one mobile terminal according as described above and a radio access network for providing a transmission data of a scalable data service to the at least one mobile terminal.

25 In the following the present invention is described in more detail in reference to the attached figures and drawings showing advantageous embodiments of the invention. Similar or corresponding details in the figures are marked with the same reference numerals.

Figure 1 shows a radio access network, wherein a mobile terminal joins a multicast group,

Figure 2 shows the radio access network, wherein scalable service data are provided from the core network to the mobile terminal via the radio access network,

30 **Figure 3** shows the radio access network, wherein the mobile terminal joins a new cell and receives the scalable service data from the core network,

Figure 4 shows the radio access network, wherein the mobile terminal performs inter-frequency measurements after joining a new cell of the radio access network,

5 **Figure 5** shows the radio access network, wherein the mobile terminal performs inter-frequency measurements and reports on a decreased quality of service of the scalable data service to a charging entity in the radio access network,

Figure 6 shows the radio access network, wherein the mobile terminal reports the measurement results to the radio access network,

10 **Figure 7** shows the radio access network assigning a new transmission frequency to the mobile terminal for the reception of the scalable service data, and

Figure 8 shows the radio access network, wherein the mobile terminal receives the scalable service data at the assigned reception frequency.

Figure 9 shows a compressed mode data transmission by reducing the spreading factor, and

15 **Figure 10** shows a compressed mode data transmission by higher layer scheduling.

Figure 11 shows an example of a scalable MBMS transmission, and

Figure 12 shows the multiplexing of importance layers of the transmission data on physical channels, and

Figure 13 shows MAC c/sh/m structure at the mobile terminal.

20 Figures 1 through Figure 9 are intended to exemplify a scenario for an inter-frequency cell change of a mobile terminal (UE 101).

Figure 1 shows a radio access network (RAN) comprising a Node B 102 and a radio network controller (RNC) 103. Though the figures show that the source cell 104 and target cell 105 are under control of the same Node B 102, it pointed out that the cells
25 may be also controlled by two different Node Bs . In the example of an inter-frequency cell change of UE 101 as shown in the figures, it is should be noted that the carrier frequency in the source cell 104 (source frequency) and the carrier frequency in the target cell 105 (target frequency) play a major role and not the entity controlling the cells.

In general, RNC 103 may implement the medium access control (MAC) entity, the radio link control (RLC) entity, radio resource control (RRC) entity, broadcast/multicast control (BMC) entity and the packet data convergence protocol (PDCP) in the RAN. The RRC of the RNC is responsible for handovers between different carrier frequencies.

- 5 The RNC 103 may be further connected to the core network CN. In this illustrative example it is further assumed that in each cell 104, 105 of the Node B 102 the two W-CDMA carrier frequencies f1 and f2 are employed for transmission. It is clear that other access schemes may be also employed.

- 10 The user equipments 101, 106, 107 in source cell 104 and target cell 105 participate in a scalable data service, such as scalable MBMS. Transmissions of the service data may be performed on a point-to-point basis for multicast transmissions using a dedicated transport channel or on a point-to-multipoint basis for broadcast transmissions using a common transport channel.

- 15 The UEs 106 and 107 reside in target cell 105 and receive scalable service data (MBMS data) at carrier frequency f2. The RNC 103 of the RAN may announce the services, e.g. broadcast services available at the source cell 104 and target cell 105 on a known common channel, e.g. the MCCH or NCCH. The announcements may inform the UEs 101, 106, 107 about the available services and their carrier frequencies. It is also possible that the same service is delivered within the same cell at two different carrier
20 frequencies, which significantly reduces the available radio resources.

After receiving the announcements from the RAN, the UE 101 receives the transmission data of the scalable data service, i.e. the broadcast service from a sending source. The sending source may be located within the core network CN as illustrated in Figure 2 or in a PLMN to which the core network CN may be further attached.

- 25 Figure 2 illustrates the data delivery of the broadcast service (201, 202) to the UE 101. As indicated, the RAN employs the carrier frequency f1 for transmitting the transmission data from the Node B 102 to the UE 101.

- In Figure 3, UE 101 has moved from the source cell 104 to the target cell 105, i.e. a handover has been performed. After moving from source cell 104 to target cell 105, the
30 UE 101 still receives (301) the broadcast data at the carrier frequency f1.

The other UEs 106 and 107 located in the target cell 105, which have also subscribed to the broadcast service of UE 101, receive the transmission data of the broadcast service at carrier frequency f2.

As suggested above, the RNC 103 may inform UE 101 about the structure of scalable data transmissions and announces available scalable MBMS services available in the target cell 105 via the MCCH or NCCH or another control channel. Further, the UE 101 may be notified by the RNC 103 about the type of channels used for delivering MBMS or scalable services within target cell 105. Common traffic channels may be used for broadcast transmissions and dedicated channels or common traffic channels may be used for multicast transmissions.

As mentioned earlier, the transmission of scalable service data as MBMS service data consumes most of the sector's total available transmission power on a carrier frequency. However, UEs 101, 106, 107 receiving the same MBMS service do not necessarily use the same carrier frequency within a cell, as illustrated in Figure 3. Hence, the RAN may wish to move all UEs 101, 106, 107 to a single carrier frequency.

Figure 4 shows the radio access network transmitting a notification to the mobile terminal 101 in order to instruct the UE 101 to perform inter-frequency measurements after joining the target 105 cell of the radio access network. Based on the results of these measurements, the RAN will decide whether the UE 101 should be moved to carrier frequency f2 for a further reception of the broadcast service. The RNC 103 may send (401) a notification message via Node B 102 to the UE 101. This message instructs the mobile terminal 101 to perform inter-frequency measurement.

The measurement relies on the quantities obtained from observing the common pilot channel (CPICH). So far, three types of quantities have been defined for the measurement procedure (see, e.g. 3GPP TS 25.215, "Physical Layer – Measurements (FDD)");

- Received Signal Code Power (RSCP), which is the received power on one code after despreading, defined on the pilot symbols.
- Received Signal Strength Indicator (RSSI), which is the wideband received power within the channel bandwidth.

- E_c/N_o , defined as the received signal code power divided by the total received power in the channel bandwidth, i.e. RSCP/RSSI.

Referring now to Figure 5, the UE 101 may now perform inter-frequency measurements 501. In order to relieve the processing load on the UE 101 for performing the measurements, the UE 101 selectively processes only a subset of the importance layer of received broadcast service data.

Figure 12 illustrates how the different layers of the transmission data are mapped to the physical channel at the RAN. For broadcast transmissions of a scalable service a base layer and one or more enhanced layers may be multiplexed onto the physical channels such that there are usually no time gaps in the transmission format that could be used by the UE 101 for inter-frequency measurements.

Therefore, the UE 101 only processes a subset of the received importance layers to save processing time that can be used for the measurements. For example, the UE 101 may not process the enhanced layers of the broadcast data stream received but only the base layer. This would provide a processing free time corresponding to the frame lengths of the enhanced layers, which could be used for the inter-frequency measurements.

In another embodiment of the present invention the selection of the importance layers to be processed is made in at the demultiplexing level in the UE 101. The UE 101 only demultiplexes the importance layers that will be further processed from the data stream received on the physical channels. The data of importance layers, in this case enhanced layers, that are not processed may be deleted at the UE 101.

The saving of processing time is achieved at the expense of decreased quality of service. For the purposes of charging, etc. it may be desirable that UE 101 notifies Non Access Stratum - serving as a charging entity - of the system when selectively processing importance layers of the broadcast stream during inter-frequency measurements. E.g. a primitive such as a MBMS Measurements Indication may be transmitted from an entity responsible for scalable MBMS transmissions, e.g. MAC c/sh/m entity on the UE side to RRC or higher layer of the RAN for this purpose.

An exemplary architecture of MAC c/sh/m entity is shown in the Figure 13. It is assumed that MBMS contents is transmitted over MBMS common transport channel FACH. Said indication primitive can be transferred through MAC Control service access point to higher layers. The primitive may contain information useful to evaluate relative decrease

in received QoS (e.g. number of omitted enhanced layers etc.). Users belonging to one MBMS group are identified by an MBMS identifier (ID). The block TCTF DEMUX may be applicable if the transport channels are multiplexed.

When the UE 101 has finished the inter-frequency measurements, it may report 601 the results to the RAN as illustrated in Figure 6. The UE 101 may inform the RAN about the measurement results directly, by sending the results themselves or may use special indicators which inform the RAN about whether certain quality criteria are fulfilled or not. When being reported the measurement results, the RAN may then decide whether certain quality criteria are fulfilled which allow the RAN to move the UE 101 to another carrier frequency for receiving the multicast data.

In case indicators for reporting the inter-frequency measurement results are used by UE 101, the RAN may decide directly from the signaled information on whether to initiate a cell change of the UE 101. The quality criteria are based on the inter-frequency measurements carried out by the UE 101, i.e. the measurement result values as outlined above.

If the quality criteria are fulfilled and the RNC 103 decides to move UE 101 to another carrier frequency for the reception/transmission of multicast data, the RNC 103 informs the UE 101 to switch 701 to the new carrier frequency f_2 . This process is illustrated in Figure 7.

Finally, as shown in Figure 8, the UE 101 receives the scalable service data at the new carrier frequency f_2 , which is used by all UEs in the target cell 105 to receive the multicast service. Hence, by the communication method described above, the present invention allows the RAN to move all UE 101, 106, 107 that receive a scalable data service to a single carrier frequency 102. Therefore, the radio link efficiency can be significantly increased within a cell, as the available transmission power within a cell has not to be used for the transmission of scalable data services.

The basic principles of inter-frequency measurements for scalable MBMS have been explained in this report relying on general MBMS principles. It should be clear to those skilled in the art that the exposed principles can be applied in a straightforward manner to different architectures and channels of MBMS or other services allowing a scalable transmission of their service data.

The transmission format in this description is especially suited for time multiplexing of importance layers on WCDMA radio interface. It should be clear to those skilled in the art that the idea is generally applicable to different types of multiplexing, e.g. code multiplexing for WCDMA radio interface or sub-carrier-wise multiplexing for OFDM radio interface.

5

CLAIMS

1. A communication method in a wireless system comprising a radio access network and a plurality of mobile terminals, the method comprising the following step performed by a mobile terminal:

receiving a notification from the radio access network to perform inter-frequency measurements,

the method being **characterized by** further comprising the following steps performed by said mobile terminal:

receiving data of a scalable data service from the radio access network, wherein the received data comprises a plurality of distinct layer data streams, and

processing a subset of the distinct layer data streams of the received transmission data.
2. The communication method according to claim 1, wherein processing the subset of the distinct layer data streams comprises demultiplexing the subset of the distinct layer data streams from the physical channel.
3. The communication method according to claim 1 or 2, wherein the data of the scalable data service is received via a common or dedicated transport channel.
4. The communication method according to one of claims 1 to 3, further comprising the steps of:

performing inter-frequency measurements in the time gained by processing a subset of the importance layers of the received transmission data, and

transmitting indicators derived from the inter-frequency measurement results to the radio access network.
5. The communication method according to one of claims 1 to 4, further comprising the steps of:

receiving from the radio access network an instruction to change the carrier frequency for data of the scalable data service, and

changing the carrier frequency for data of the scalable data service to the instructed frequency.

6. The communication method according to one of claims 1 to 5, further comprising the step of notifying a non access stratum in the wireless network about the processing of the subset of distinct layer data streams by means of an indication primitive.
7. The communication method according to one of claims 1 to 6, wherein the notification from the radio access network to perform inter-frequency measurements is received on a MBMS control channel or a notification control channel.
8. The communication method according to one of claims 1 to 7, wherein the scalable data service is a multimedia broadcast/multicast service (MBMS).
9. The communication method according to one of claims 1 to 8, wherein the scalable data service comprises multicast and/or broadcast data transmissions.
10. A mobile terminal in a wireless system comprising a radio access network and at least the mobile terminal, the mobile terminal comprising:

receiving means for receiving a notification from the radio access network to perform inter-frequency measurements,

characterized in that

the receiving means is adapted to receive data of a scalable data service from the radio access network, wherein the received data comprises a plurality of distinct layer data streams, and

by further comprising processing means for processing a subset of the distinct layer data streams of the received transmission data.

11. The mobile terminal according to claim 10, further comprising demultiplexing means for demultiplexing the subset of the distinct layer data streams from the physical channel.
12. The mobile terminal according to claim 10 or 11, wherein the receiving means is adapted to receive the data of the scalable data service via a common transport channel.
13. The mobile terminal according to one of claims 10 to 12, further comprising:

inter-frequency measurement means for performing inter-frequency measurements in the time gained by processing a subset of the importance layers of the received transmission data, and

transmission means for transmitting indicators derived from the inter-frequency measurement results to the radio access network.
14. The mobile terminal according to one of claims 10 to 13, wherein the receiving means is adapted to receive an instruction from the radio access network to change the carrier frequency for data of the scalable data service, and

the transmission means is adapted to change the carrier frequency for data of the scalable data service to the instructed frequency.
15. The mobile terminal according to one of claims 10 to 14, further comprising notification means for notifying a non access stratum in the wireless network about the processing of the subset of distinct layer data streams.
16. The mobile terminal according to one of claims 10 to 16, wherein the receiving means is adapted to receive the notification via MBMS control channel or a notification control channel from the radio access network to perform inter-frequency measurements.
17. The mobile terminal according to one of claims 10 to 17, wherein the scalable service is a multimedia broadcast/multicast service (MBMS).
18. A communication system comprising at least one mobile terminal according to one of claims 10 to 17 and a radio access network for providing a transmission data of a scalable data service to the at least one mobile terminal.

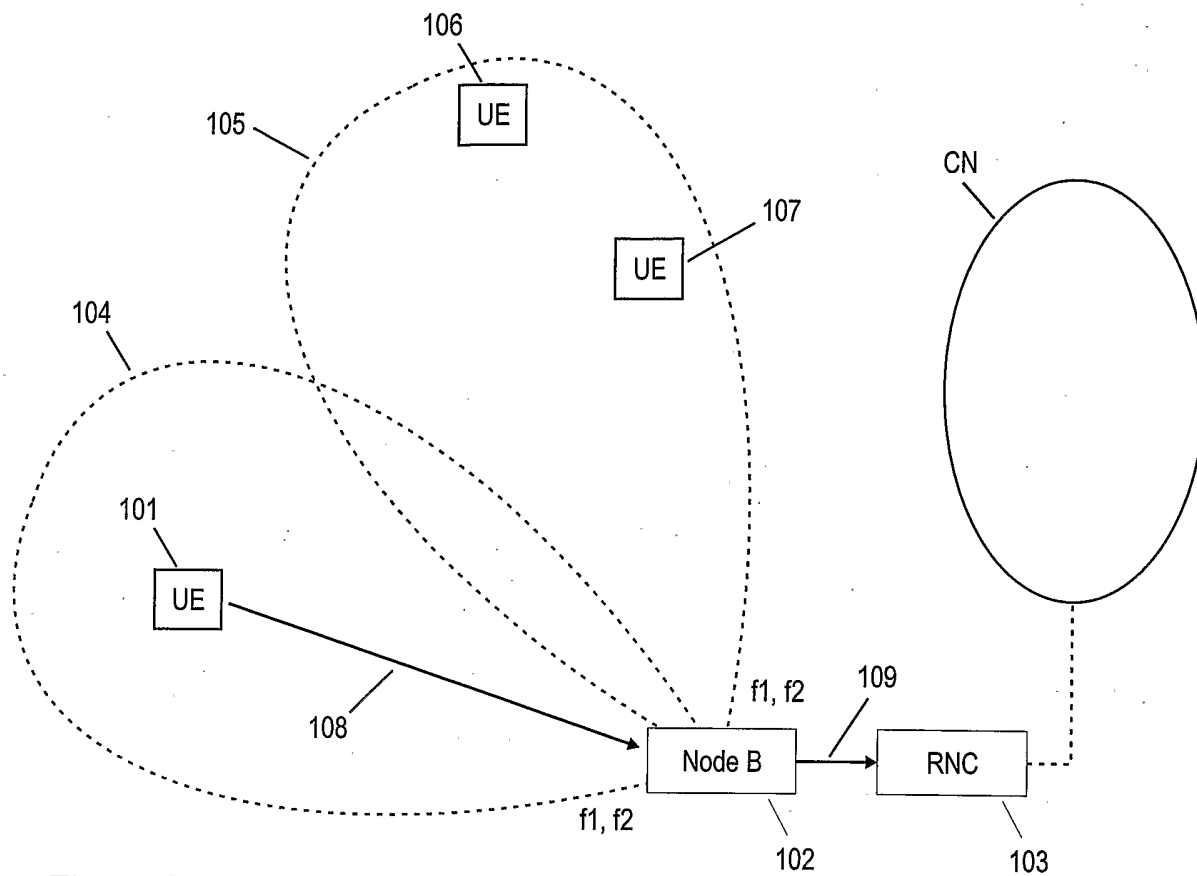


Figure 1

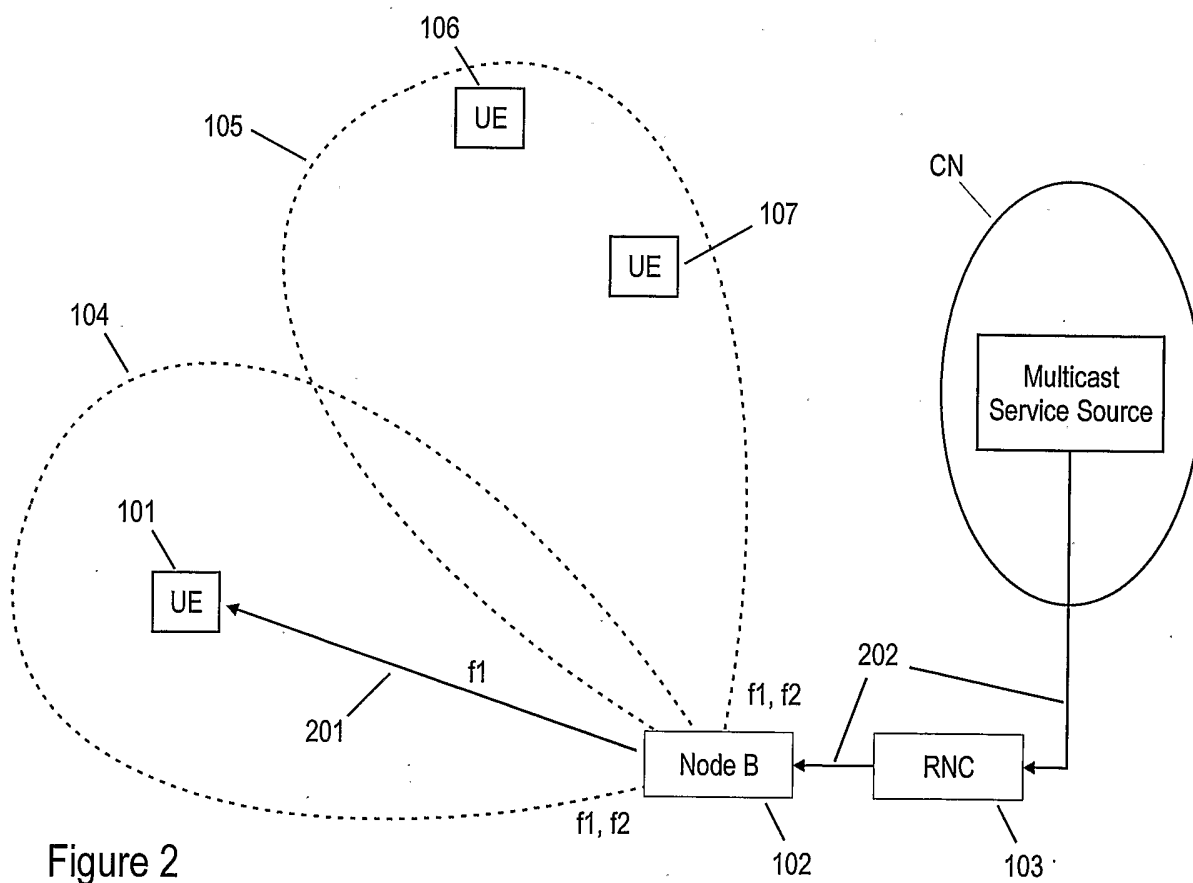


Figure 2

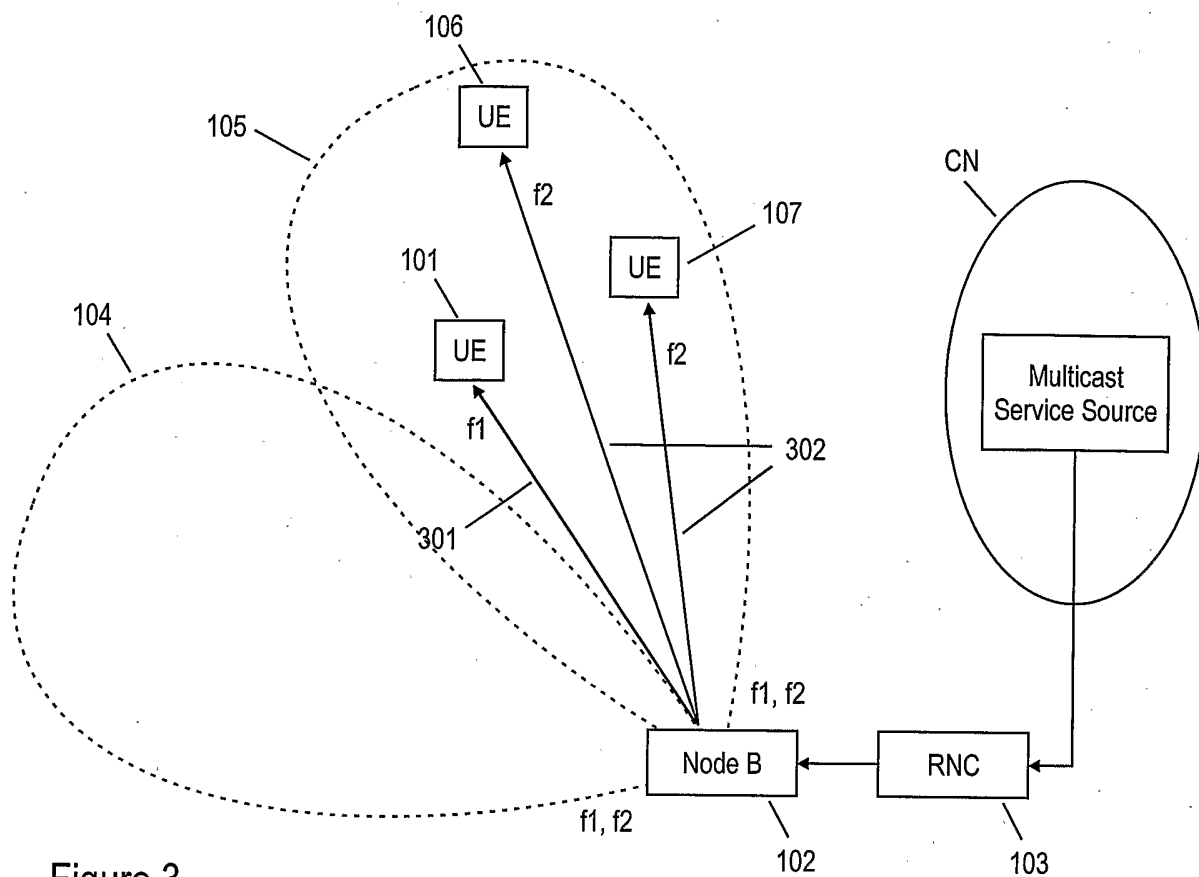


Figure 3

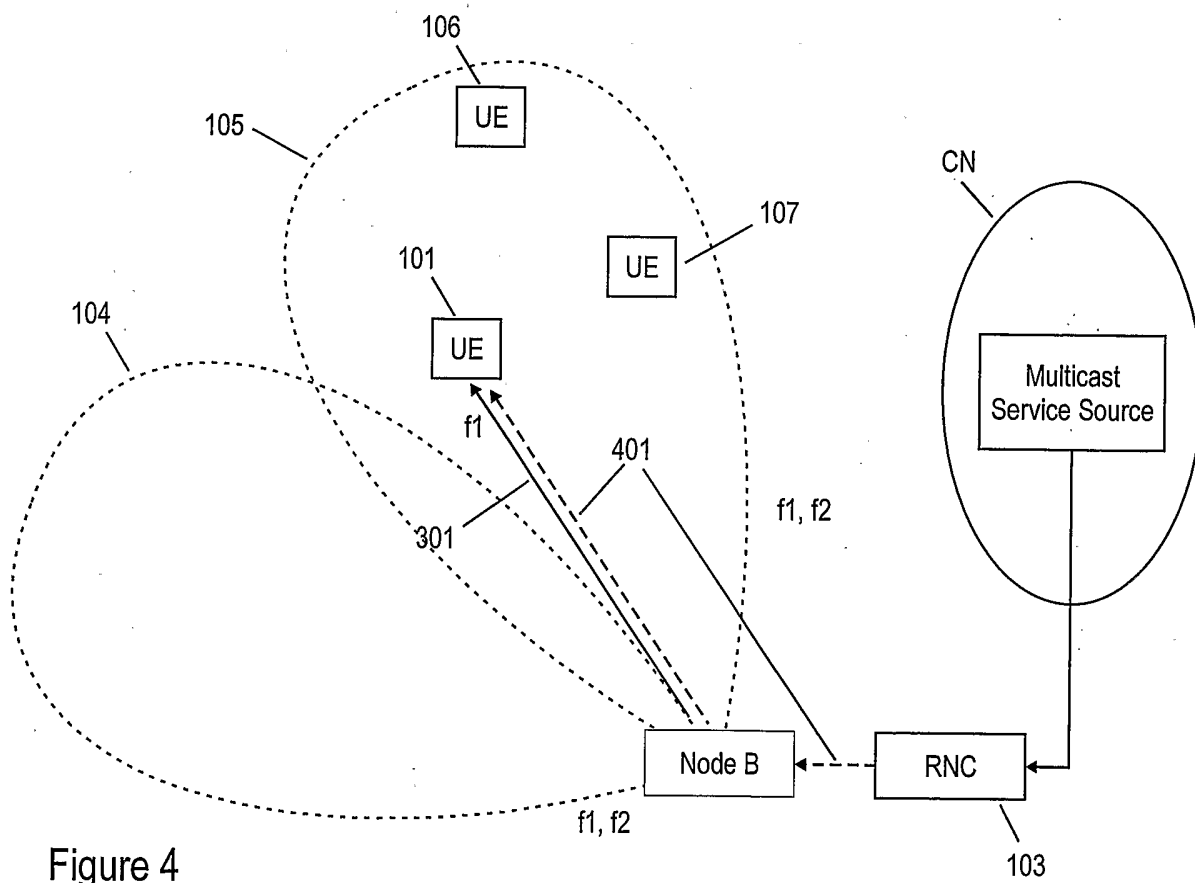


Figure 4

3/7

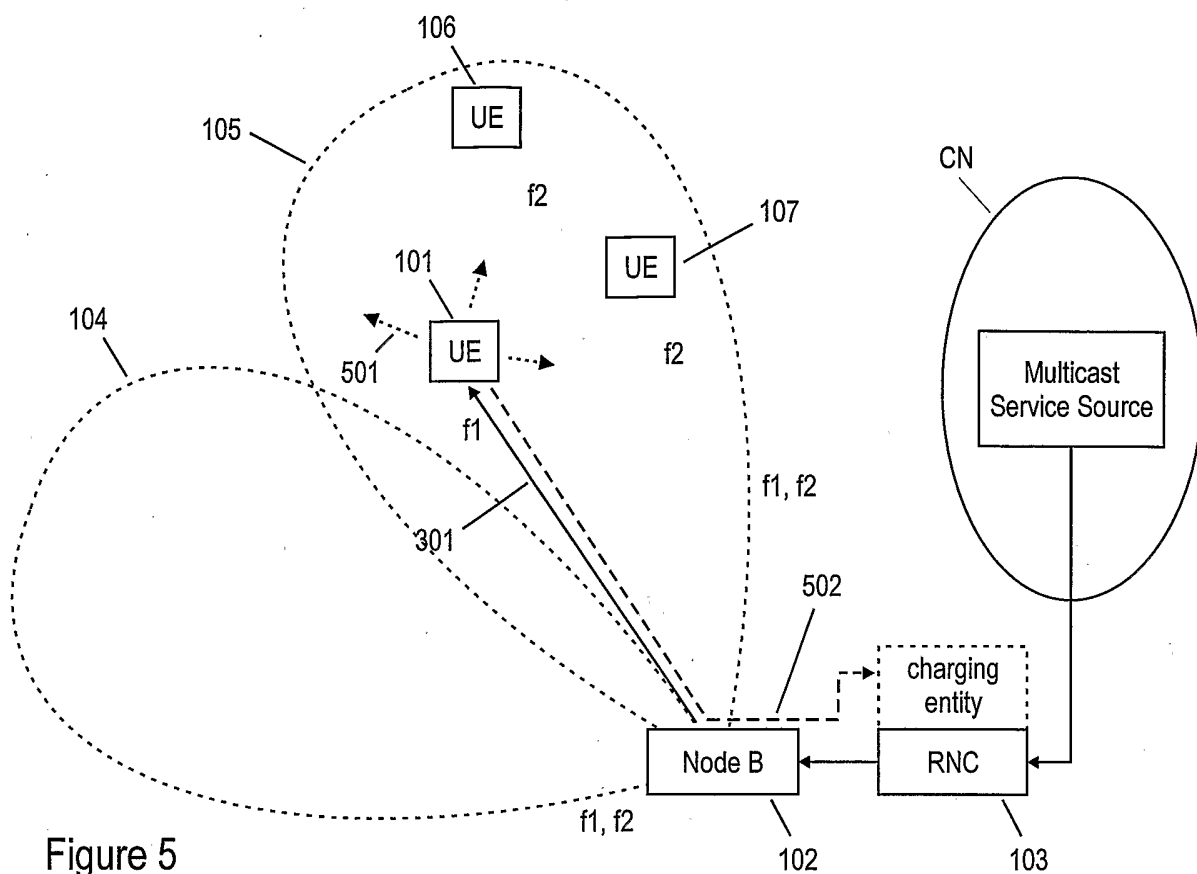


Figure 5

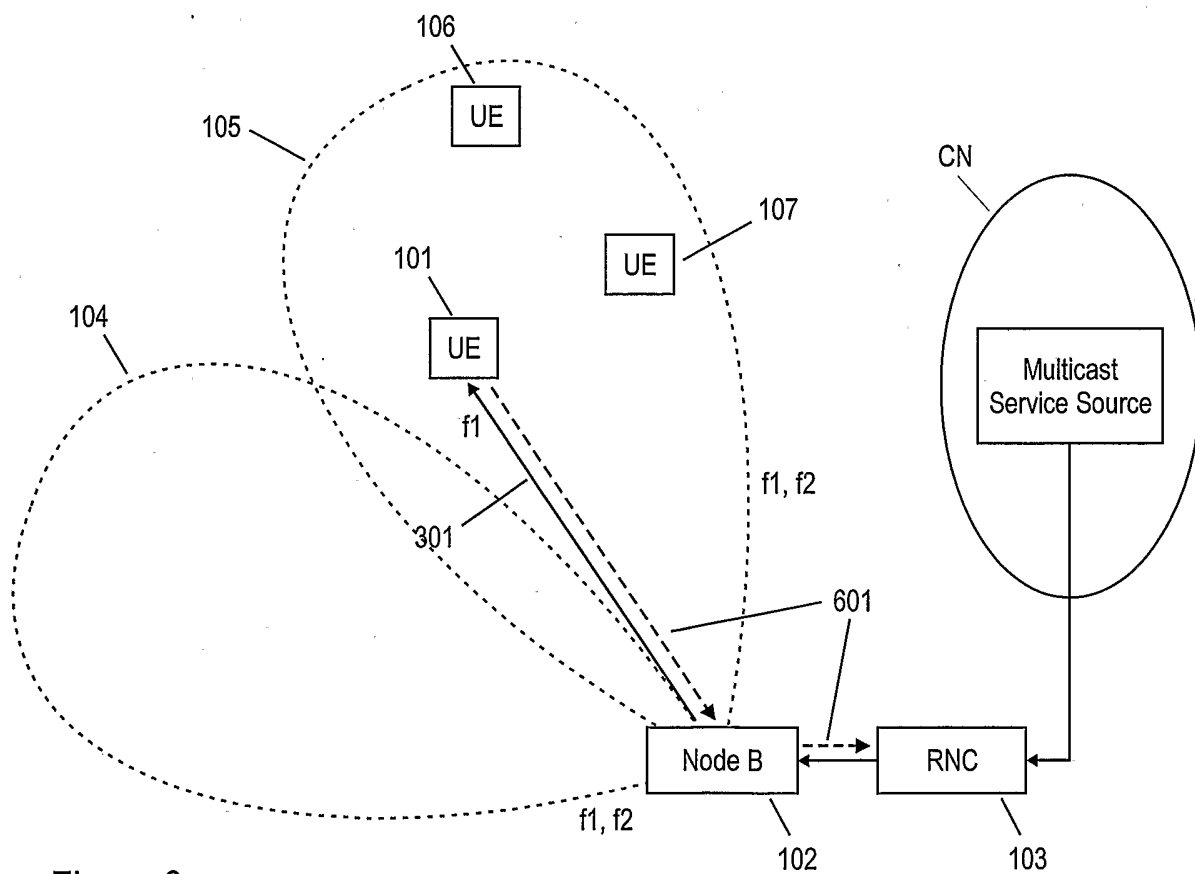


Figure 6

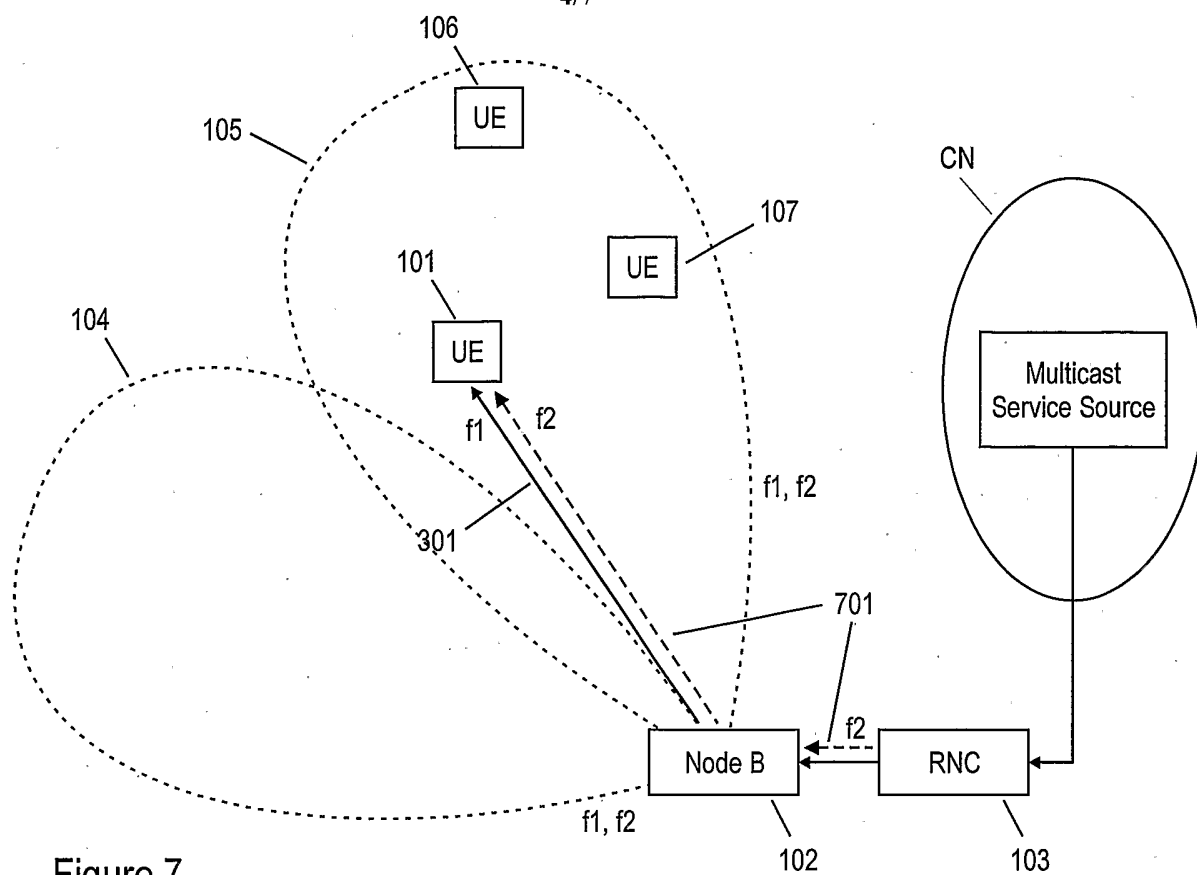


Figure 7

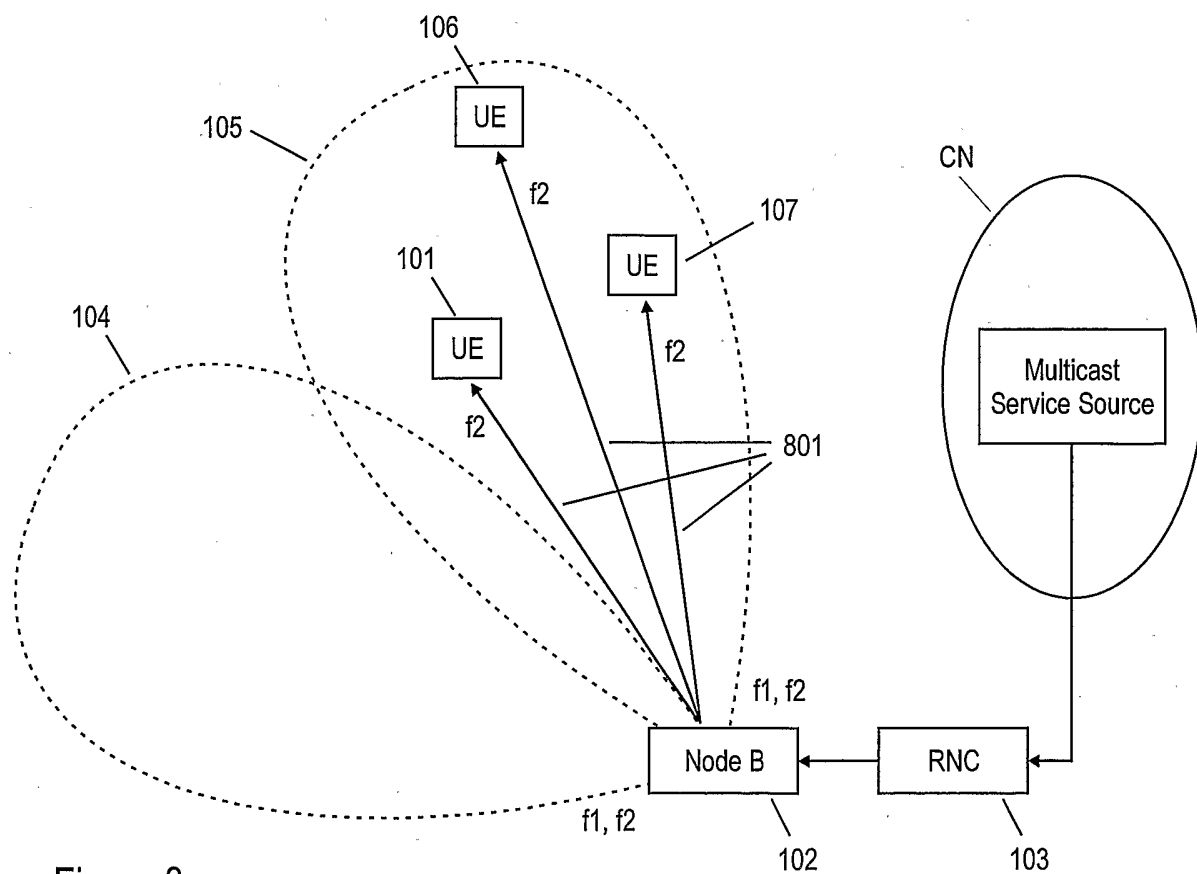


Figure 8

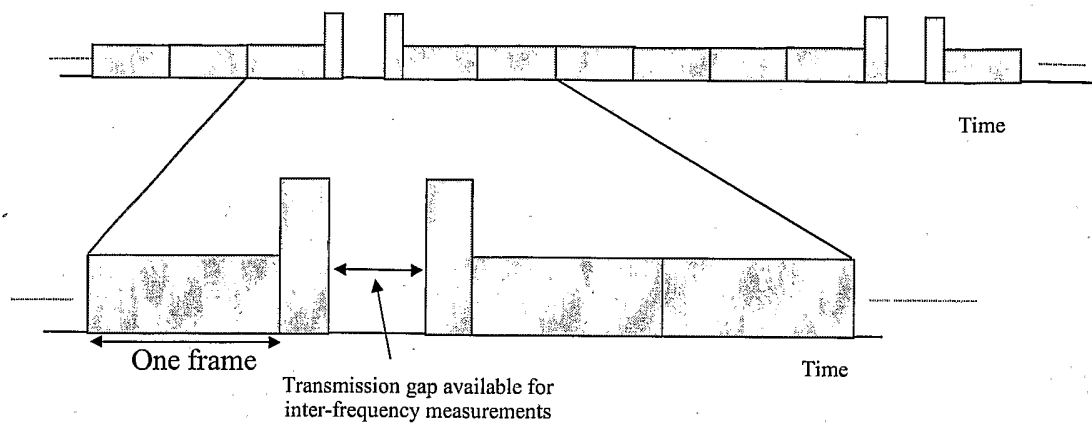


Figure 9

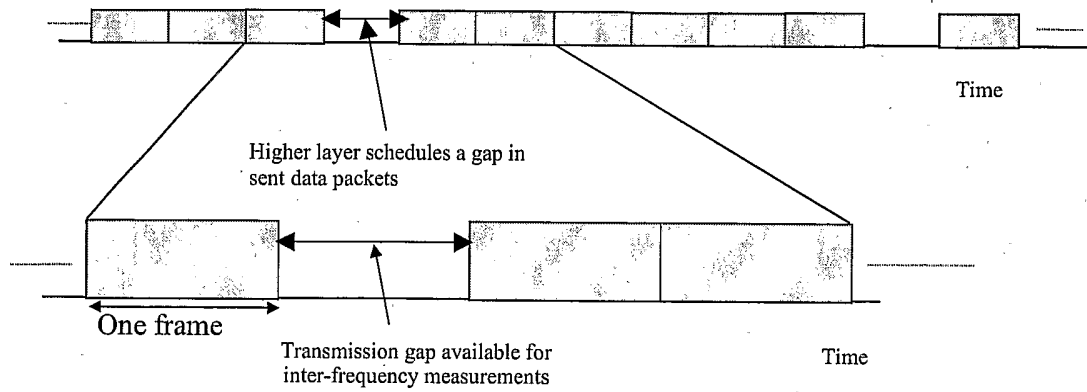


Figure 10

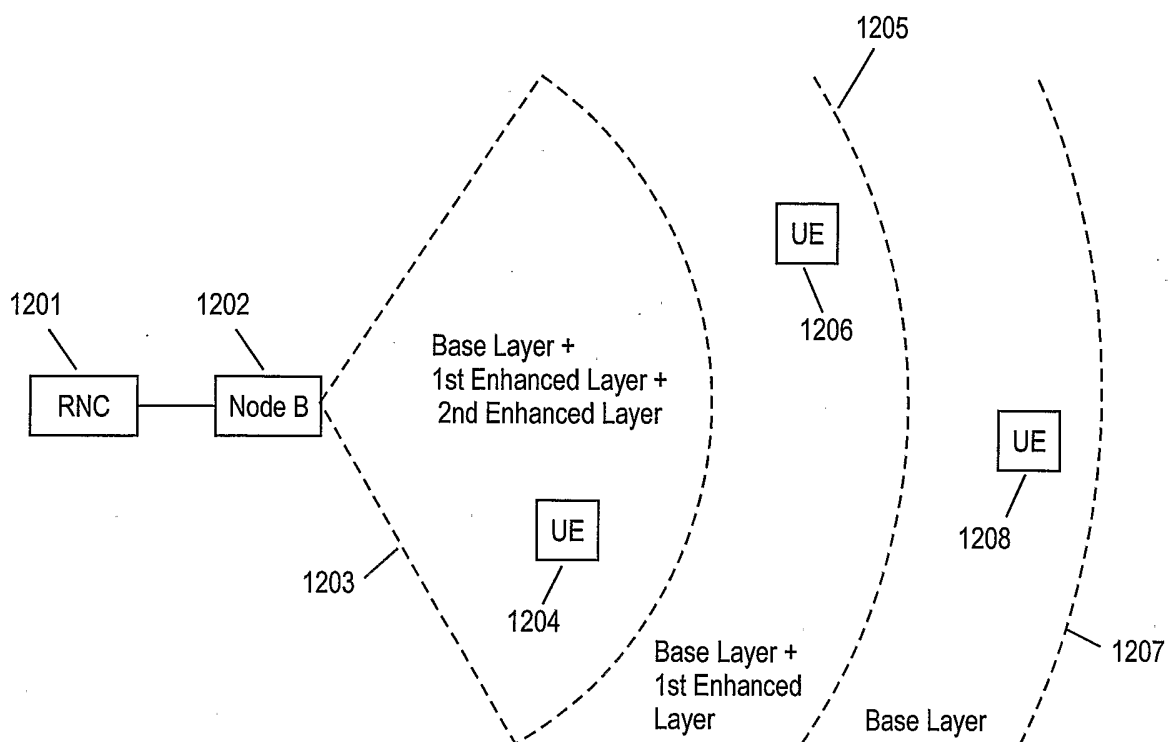


Figure 11

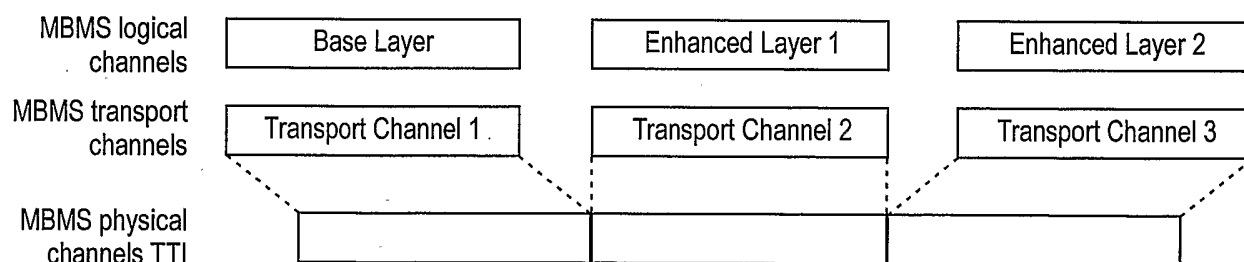


Figure 12

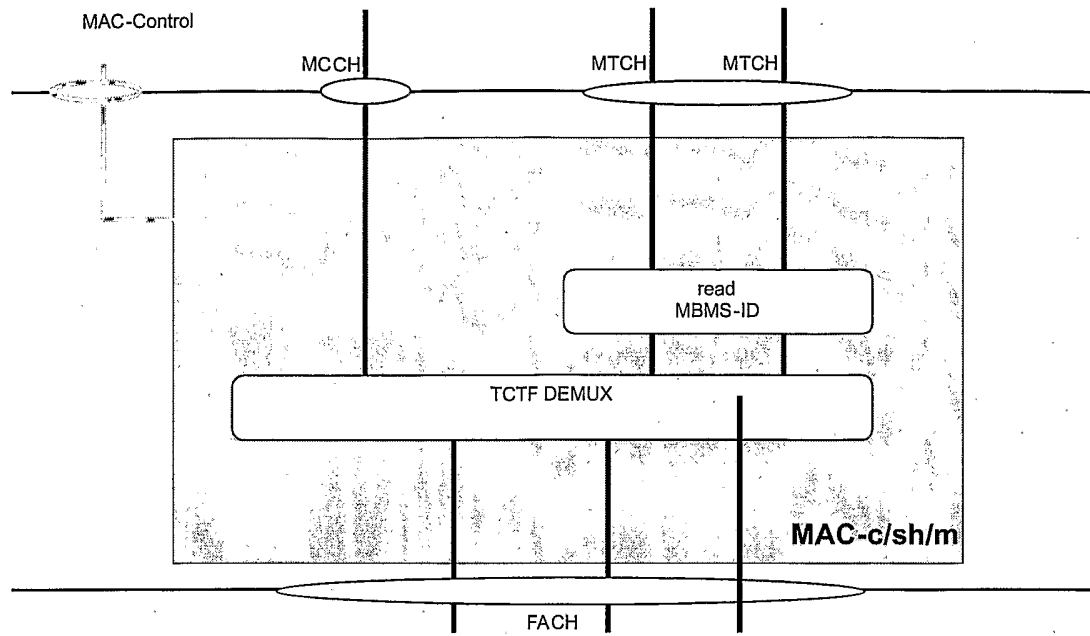


Figure 13

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/002537

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WEE S J ET AL: "Secure scalable video streaming for wireless networks" 2001 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING. PROCEEDINGS. (ICASSP). SALT LAKE CITY, UT, MAY 7 - 11, 2001, IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING (ICASSP), NEW YORK, NY : IEEE, US, vol. VOL. 4 OF 6, 7 May 2001 (2001-05-07), pages 1-4, XP002235689 ISBN: 0-7803-7041-4 the whole document ----- -/--	1-3, 5-12, 14-18



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

14 June 2004

Date of mailing of the international search report

29/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pérez, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/002537

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/65855 A (KONINKL PHILIPS ELECTRONICS NV) 7 September 2001 (2001-09-07) page 1, line 1 - page 2, line 21 page 11, lines 9-29 claim 1 -----	1-18
A	EP 1 081 979 A (ERICSSON TELEFON AB L M) 7 March 2001 (2001-03-07) paragraph '0015! paragraphs '0049! - '0055! -----	1-18
A	US 6 212 368 B1 (BOTTOMLEY GREGORY E ET AL) 3 April 2001 (2001-04-03) column 1, lines 7-34 column 10, line 33 - column 11, line 34 column 11, line 62 - column 12, line 18 claims 1,32 figures 4,8 -----	1-18
A	US 6 459 689 B1 (JORRI SAKARI ET AL) 1 October 2002 (2002-10-01) column 1, lines 1-56 column 2, line 34 - column 3, line 7 column 5, line 45 - column 8, line 67 claim 1 figures 3-5 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/002537

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0165855	A	07-09-2001	CN 1381139 T	20-11-2002
			WO 0165855 A2	07-09-2001
			EP 1183871 A2	06-03-2002
			JP 2003525547 T	26-08-2003
			TW 520606 B	11-02-2003
EP 1081979	A	07-03-2001	EP 1081979 A1	07-03-2001
			AT 239344 T	15-05-2003
			AU 766725 B2	23-10-2003
			AU 6572000 A	26-03-2001
			CN 1371585 T	25-09-2002
			DE 60002479 D1	05-06-2003
			DE 60002479 T2	18-03-2004
			WO 0117307 A1	08-03-2001
			EP 1208712 A1	29-05-2002
			JP 2003508991 T	04-03-2003
			TW 521532 B	21-02-2003
			ZA 200200739 A	28-01-2003
US 6212368	B1	03-04-2001	AU 755771 B2	19-12-2002
			AU 3787399 A	13-12-1999
			CN 1311927 T	05-09-2001
			EP 1082824 A2	14-03-2001
			JP 2002517126 T	11-06-2002
			WO 9962203 A2	02-12-1999
US 6459689	B1	01-10-2002	US 6078570 A	20-06-2000
			BR 9803172 A	03-11-1999