

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 006 316 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.10.2002 Bulletin 2002/41

(51) Int Cl.7: **F23N 1/02**, F23K 5/04,
F23N 5/24

(21) Application number: **98309796.5**

(22) Date of filing: **30.11.1998**

(54) **Oil fuel burner systems**

Ölbrenneranlage

Systèmes de brûleurs à mazout

(84) Designated Contracting States:
DE FR GB IT

(43) Date of publication of application:
07.06.2000 Bulletin 2000/23

(73) Proprietor: **HAMWORTHY COMBUSTION
ENGINEERING LIMITED**
Dorset BH17 0LA (GB)

(72) Inventors:
• **Foster, Brian**
Broadstone, Dorset BH18 9HA (GB)
• **Herbert, Lee**
Shirley, Southampton SO15 5FR (GB)

(74) Representative: **Gura, Henry Alan et al**
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(56) References cited:
EP-A- 0 614 048 **EP-A- 0 623 785**
EP-A- 0 764 817

- **PATENT ABSTRACTS OF JAPAN** vol. 015, no. 105 (M-1092), 13 March 1991 & JP 03 001012 A (WALBRO FAR EAST INC), 7 January 1991
- **PATENT ABSTRACTS OF JAPAN** vol. 017, no. 558 (M-1493), 7 October 1993 & JP 05 157059 A (MITSUBISHI HEAVY IND LTD), 22 June 1993

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 006 316 B1

Description

[0001] This invention relates to atomising oil fuel burner systems and is concerned with the regulation of the fuel supply in such systems.

[0002] In known oil fuel burner systems the oil supply, which may be drawn from a ring main feeding a number of such systems in parallel, is driven at pressure by a pump through a flow control arrangement where, according to the demand in the appliance in which the burner is employed, the required rate of flow of fuel is delivered to the burner and surplus flow from the burner is returned to the ring main, or other supply source upstream of the pump.

[0003] Although this known arrangement has been proved to operate satisfactorily, the control of the fuel flow requires relatively complicated mechanism, particularly if it is required to be insensitive to variations in the viscosity of the fuel oil, with consequent disadvantages in terms of costs and maintenance. Also, since the oil pump must deliver fuel at a sufficient rate to satisfy the maximum rated demand, independently of the varying actual demand, there are considerable power losses.

[0004] It is known from EP 0614048 A1 to provide a burner system having a variable speed fuel pump, an air blower and a control arrangement that monitors and controls the fuel pump and air blower to maintain the correct fuel/air mixture.

[0005] According to the present invention, there is provided an atomising oil fuel burner system comprising a positive displacement pump for delivering fuel to an atomising device and a forced draft air supply means for delivering combustion air to the atomised fuel oil, a control arrangement for regulating the fuel and air supply for combustion, the fuel pump being driven by a variable speed motor regulated by said control arrangement to vary the pump speed in order to regulate the rate of fuel delivery to the atomising device wherein a speed sensor monitors the operation of the fuel pump and the control arrangement is responsive to the output from said sensor and wherein the speed sensor signal is arranged to initiate shut-down of the burner system in the event of a predetermined pump speed not being attained during start of operation of the burner system.

[0006] The speed of the fuel pump is monitored and the monitoring signal is employed in the control of the burner system. For example, the signal can provide confirmation of fuel flow without which start-up is inhibited. The signal also provides a convenient input for monitoring the fuel-air mixture ratio with burner system.

[0007] Conveniently, the control arrangement regulates the rate of rotation of the fuel delivery pump and the rate of combustion air flow to the atomising device in conjunction with each other, in order to match the fuel and air flow rates.

[0008] An embodiment of the invention will be described by way of example with reference to the accompanying schematic drawings, in which:

Fig. 1 is a diagram of the oil and air metering assembly for a rotary cup burner,

Fig. 2 is a simplified block diagram of the control arrangement of the assembly of Fig. 1, and

Fig. 3 is a flow diagram illustrating some of the functions of the control assembly.

[0009] Referring to Fig. 1, fuel oil from a ring main 2 flows through separate branch circuits to a plurality of rotary cup atomisers, only one such branch circuit with its atomiser 4 being shown in Fig. 1. The fuel supply for the atomiser 4 is drawn from the ring main 2 by a positive displacement rotary pump 6 driven by a motor 8. The fuel delivery line 10 from the pump leads to a three-way oil valve assembly comprising two normally closed ports 12,14 arranged in series through which the fuel oil must flow to reach the atomiser 4, and a normally open return port 16 leading back to the ring main 2 through a return line 18 non-return valve 18. The valve assembly 12,14,16 is controlled by a burner management system 20 (Fig. 2) which is not shown or described in detail as it can be generally conventional.

[0010] A fan (not shown) drives air under pressure through a delivery duct 22 to the atomiser 4. The rate of flow through the duct may be controlled by regulating the speed of the fan, but in the illustrated arrangement a motorised cam adjusts the positions of dampers 24 in the duct 22 for this purpose.

[0011] The rate of flow of fuel and air while the burner is operating are regulated by a fuel management unit comprising a modulation controller 28 which may be of known form and therefore does not need to be described in detail. The controller 28 has an input from a thermostat 30 responding to the medium heated by the burner 4, eg. boiler water, and outputs signals for controlling the speed of the fuel pump 6 and the position of the air dampers 24 accordingly. Thus, during the operation of the burner the controller 28 responds to the heat demand signalled by the boiler thermostat 30 to increase or decrease the flows of fuel and air. It is possible to actuate the controller from other controlling parameters, of course, such as boiler pressure.

[0012] The control output signals from the controller are received by an actuator 34 driving the motorised cam 36 which operates the air duct dampers 24. The damper actuator 34, also transmits an input signal, proportional to the output signal driving the cam 36, through an inverter 38, to a pump actuator controlling the oil pump motor 8. The pump delivery rate is proportional to the speed of rotation and that speed is monitored by a sensor 40. The signal from the sensor is fed to a comparator 42 which receives a second input corresponding to the input signal to the pump motor actuator, and which is thus proportional to the air flow. A comparator output derived from the difference of these signals is transmitted through line 44 to the burner management system 20 which can shut down the fuel supply system if the indicated rate of rotation of the pump shows that the rate

of fuel delivery differs from that intended by more than a permitted margin.

[0013] The speed sensor signal is also sensed by the burner management system to be employed during start-up of combustion. The normally closed ports 12, 14 cannot be opened by the burner management system until the sensor indicates the oil pump has reached a sufficient minimum speed.

[0014] A back pressure valve assembly 52 connected between the three-way valve 12, 14, 16 and the atomiser 4 is able to balance variations in the feed pressure to maintain a pressure difference across the pump. A further back pressure valve assembly 54 connected across the pump operates as an overpressure relief valve.

[0015] Combustion start-up is under the control of the burner management system 20, which is able to initiate the start-up of the burner in a sequence which includes the ignition of a pilot burner (not shown). The burner management system has a cam timer to time out the start-up sequence, whereupon an actuating signal is sent from the burner management system to the modulation controller 28. The modulation controller 28 then starts up the combustion air fan and holds the dampers 22 at a medium setting in order to purge the passages leading from the burner in known manner. The signal from the modulation controller also acts, through the damper actuator 34, to start up the fuel pump motor 8, but the burner management system 20 leaves the inlet ports 12, 14 closed at this stage and the flow from the pump 6 is returned to the ring main through the normally open port 16.

[0016] The air purge is ended by a further timing signal from the burner management system 20 which starts the rotation of the cup atomiser 4 and operates the modulation controller 28 to adjust the dampers 22 and the pump motor 8 to give low rates of flow of fuel and air. In this operation, the comparator 42 proves the air-fuel ratio by comparing the speed sensor signal with the air damper setting signal, to allow the burner management system 20 to switch the three-way valve and so open the ports 12, 14 and close the port 16. The modulation controller 28 now takes over control of the damper setting and pump motor speed, in accordance with demand signal from the thermostat 30, or other demand sensor. The firing rate and instantaneous oil flow are thus continually updated during the operation of the burner.

[0017] Because the fuel delivery rate is determined solely by the rate of rotation of the pump, the system is not sensitive to changes in the viscosity of the oil.

[0018] It is of course possible within the scope of the invention to connect a plurality of atomising burners in parallel to the same positive displacement pump, the rate of flow to each of the burners then being dictated by varying the pump speed.

[0019] Fig. 3 illustrates further features of the start-up sequence of the burner control arrangement in the embodiment of Figs 1 and 2. Initially, when the burner switch is moved to the "on position", if a dense fuel such

as residual fuel oil is being used, the pump motor is started while isolated from the atomiser and a checkstat 62 connected to the burner management system 20 monitors its rate of rotation so that it can run at half speed to warm the oil in the branch from the ring main.

[0020] With lighter grades of fuel, this initial step is omitted and the burner start procedure is initiated in response to the heat demand sensed by means (not shown), in the manner already described.

[0021] If the air fuel ratio is detected by the respective sensors to move outside a pre-set band, the control burner management system 20 will shut down the burner in known manner.

[0022] Although the illustrated example in Fig. 1 shows all the pumped flow being directed to the atomiser 4 when the valve ports 12, 14 are open, it may be preferred to bleed a part of that flow into the return line 18 to the ring main as one way of ensuring that the temperature of the return line does not drop below a satisfactory level. If this is done, the bleed flow is taken in a manner that maintains a relationship between the pump speed and the rate of fuel delivery to the cup burner, and preferably the bleed flow is maintained substantially constant independently of the pump output rate to give a direct relationship between change of pump speed and the rate of fuel delivery to the atomiser.

Claims

1. An atomising oil fuel burner system comprising a positive displacement pump for delivering fuel to an atomising device and a forced draft air supply means for delivering combustion air to the atomised fuel oil, a control arrangement for regulating the fuel and air supply for combustion, the fuel pump being driven by a variable speed motor regulated by said control arrangement to vary the pump speed in order to regulate the rate of fuel delivery to the atomising device wherein a speed sensor monitors the operation of the fuel pump and the control arrangement is responsive to the output from said sensor, **characterised in that** the speed sensor signal is arranged to initiate shut-down of the burner system in the event of a predetermined pump speed not being attained during start of operation of the burner system.
2. A burner system according to claim 1 wherein the control arrangement also regulates the rate of delivery of combustion air through said forced flow system and monitors the fuel and air flow control settings in dependence upon each other to maintain a fuel-air mixture within predetermined limits.
3. A burner system according to claim 2 wherein said air flow control comprises a variable speed fan and/or an adjustable damper in the air flow path.

4. A burner system according to any one of the preceding claims wherein the control arrangement is arranged to compare a signal from the pump speed sensor with a setting for the combustion air supply to the burner to monitor the fuel-air mixture ratio.
5. A burner system according to any one of the preceding claims wherein a plurality of atomising devices are connected in parallel to the pump delivery.



Patentansprüche

1. Ölzerstäubungsbrennersystem, umfassend eine Verdrängerpumpe zum Abgeben von Brennstoff an eine Zerstäubungsvorrichtung und eine Gebläseluft-Zufuhreinrichtung zum Zuführen von Verbrennungsluft zum zerstäubten Ölbrennstoff, eine Steuerungsanordnung zum Regeln der Brennstoff- und der Luftzufuhr für die Verbrennung, wobei die Brennstoffpumpe von einem Motor mit regelbarer Drehzahl angetrieben wird, der von der Steuerungsanordnung geregelt wird, um die Pumpgeschwindigkeit zu variieren, um die Menge der Brennstoffabgabe an die Zerstäubungsvorrichtung zu regeln, wobei ein Geschwindigkeitssensor den Betrieb der Brennstoffpumpe überwacht und die Steuerungsanordnung auf den Sensor-Ausgang anspricht, **dadurch gekennzeichnet, dass** das Geschwindigkeitssensorsignal so ausgebildet ist, dass es das Abschalten des Brennersystems für den Fall veranlasst, dass während der Aufnahme des Betriebs des Brennersystems eine vorbestimmte Pumpgeschwindigkeit nicht erreicht wird.
2. Brennersystem nach Anspruch 1, worin die Steuerungsanordnung auch die Zufuhrmenge von Verbrennungsluft durch das Gebläsesystem regelt und die Brennstoff- und Luftströmungs-Steuereinstellungen in Abhängigkeit voneinander überwacht, um ein Brennstoff-Luft-Gemisch innerhalb vorbestimmter Grenzen aufrechtzuerhalten.
3. Brennersystem nach Anspruch 2, worin die Luftströmungssteuerung einen Ventilator mit variabler Drehzahl und/oder einen einstellbaren Dämpfer im Luftströmungsweg umfasst.
4. Brennersystem nach einem der vorangegangenen Ansprüche, worin die Steuerungsanordnung so angeordnet ist, dass sie ein Signal vom Pumpgeschwindigkeitssensor mit einer Einstellung für die Verbrennungsluftzufuhr zum Brenner vergleicht, um das Brennstoff-Luft-Mischungsverhältnis zu überwachen.
5. Brennersystem nach einem der vorangegangenen Ansprüche, worin eine Vielzahl von Zerstäubungs-

vorrichtungen parallel mit der Pumpenzufuhr geschaltet sind.

Revendications

1. Système de brûleur à atomiseur de mazout comprenant une pompe à déplacement positif pour transmettre le mazout à un dispositif atomiseur et un moyen d'amenée d'air à tirage forcé pour transmettre de l'air de combustion au mazout atomisé, un agencement de commande pour régler l'amenée de mazout et d'air pour la combustion, la pompe à mazout étant entraînée par un moteur à vitesse variable réglé par ledit agencement de commande pour faire varier la vitesse de la pompe afin de régler le débit de transmission de mazout au dispositif atomiseur, où un détecteur de vitesse surveille le fonctionnement de la pompe à mazout, et l'agencement de commande réagit à la sortie dudit détecteur, **caractérisé en ce que** le signal du détecteur de vitesse est agencé pour initier une fermeture du système de brûleur dans le cas où une vitesse de pompe prédéterminée n'est pas atteinte pendant le démarrage du fonctionnement du système de brûleur.
2. Système de brûleur selon la revendication 1, où l'agencement de commande règle également le débit de transmission de l'air de combustion à travers ledit système à écoulement forcé et surveille les réglages de commande de mazout et d'écoulement d'air l'un en fonction de l'autre pour maintenir un mélange de mazout et d'air dans des limites prédéterminées.
3. Système de brûleur selon la revendication 2, où ladite commande d'écoulement d'air comprend un ventilateur à vitesse variable et/ou un amortisseur ajustable dans le chemin d'écoulement d'air.
4. Système de brûleur selon l'une des revendications précédentes, où l'agencement de commande est agencé pour comparer un signal du détecteur de la vitesse de pompe avec un réglage de l'amenée d'air de combustion au brûleur pour surveiller le rapport de mélange mazout/air.
5. Système de brûleur selon l'une des revendications précédentes, où plusieurs dispositifs atomiseurs sont connectés en parallèle au débit de la pompe.

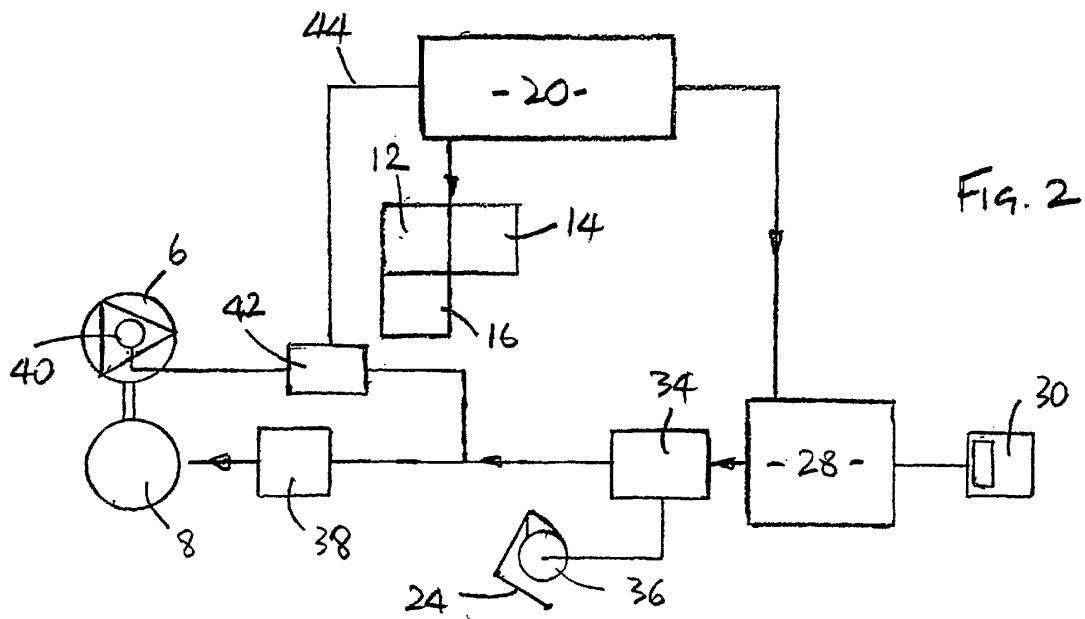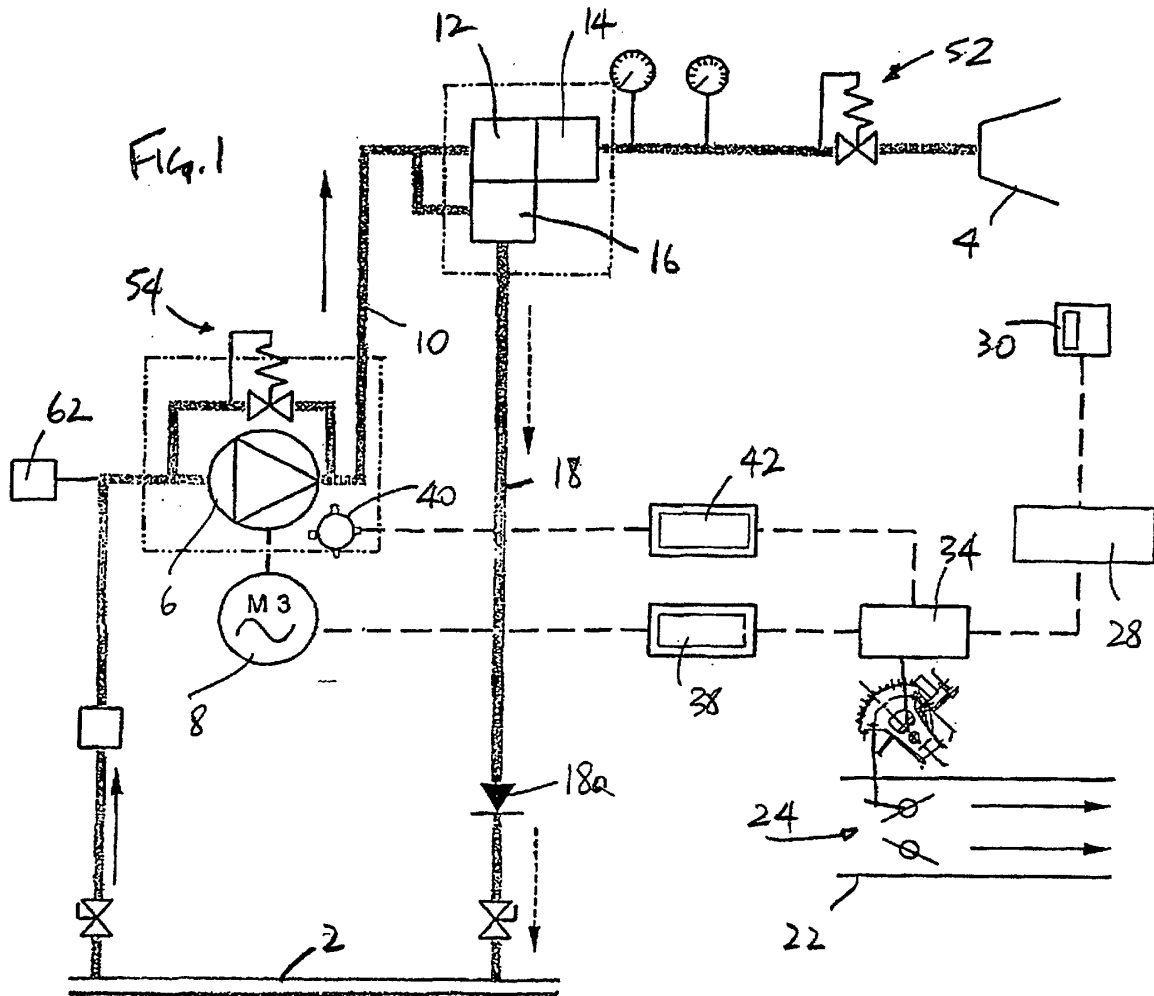

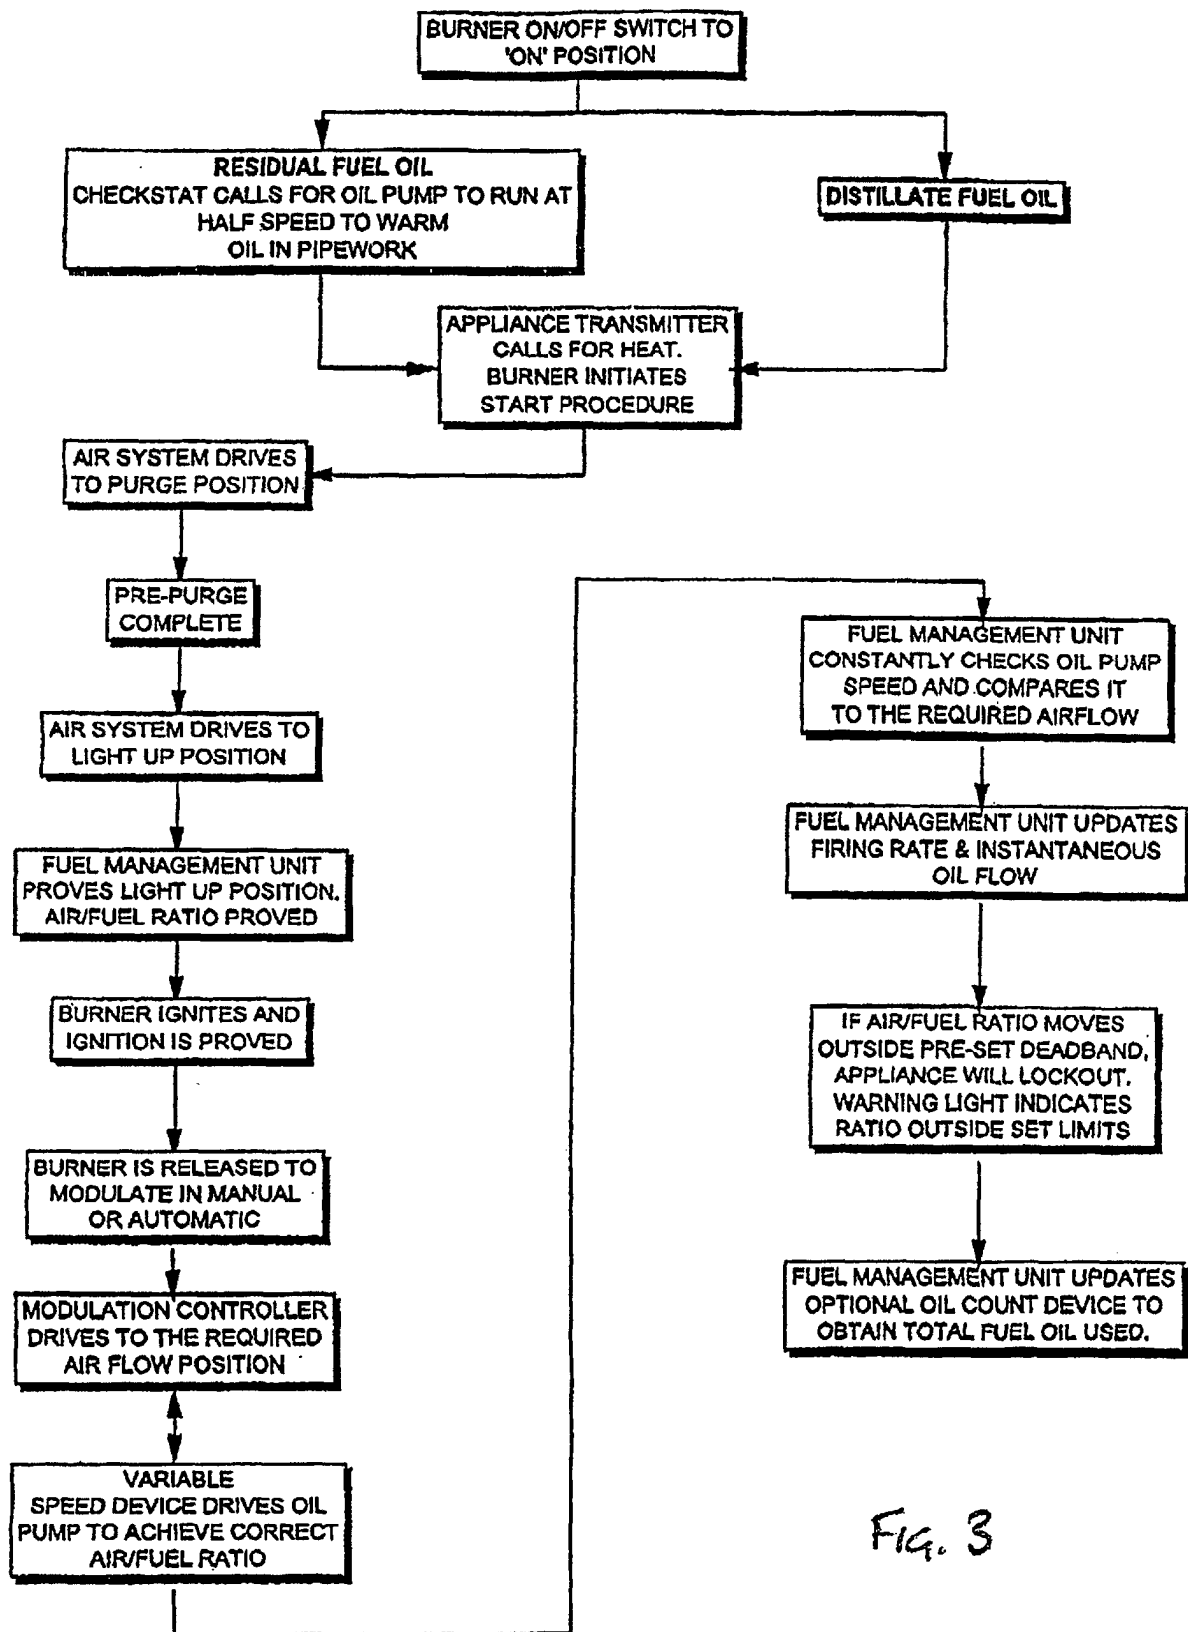


FIG. 3