




(86) Date de dépôt PCT/PCT Filing Date: 2005/03/17
 (87) Date publication PCT/PCT Publication Date: 2005/09/29
 (45) Date de délivrance/Issue Date: 2012/10/23
 (85) Entrée phase nationale/National Entry: 2006/08/31
 (86) N° demande PCT/PCT Application No.: SE 2005/000388
 (87) N° publication PCT/PCT Publication No.: 2005/090673
 (30) Priorité/Priority: 2004/03/22 (SE0400717-5)

(51) Cl.Int./Int.Cl. *D21F 1/00* (2006.01),
D21F 9/00 (2006.01)
 (72) Inventeur/Inventor:
LOEVGREN, HANS, SE
 (73) Propriétaire/Owner:
METSO PAPER, INC., FI
 (74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : PRESSE DOUBLE TOILE
 (54) Title: TWIN-WIRE PRESS

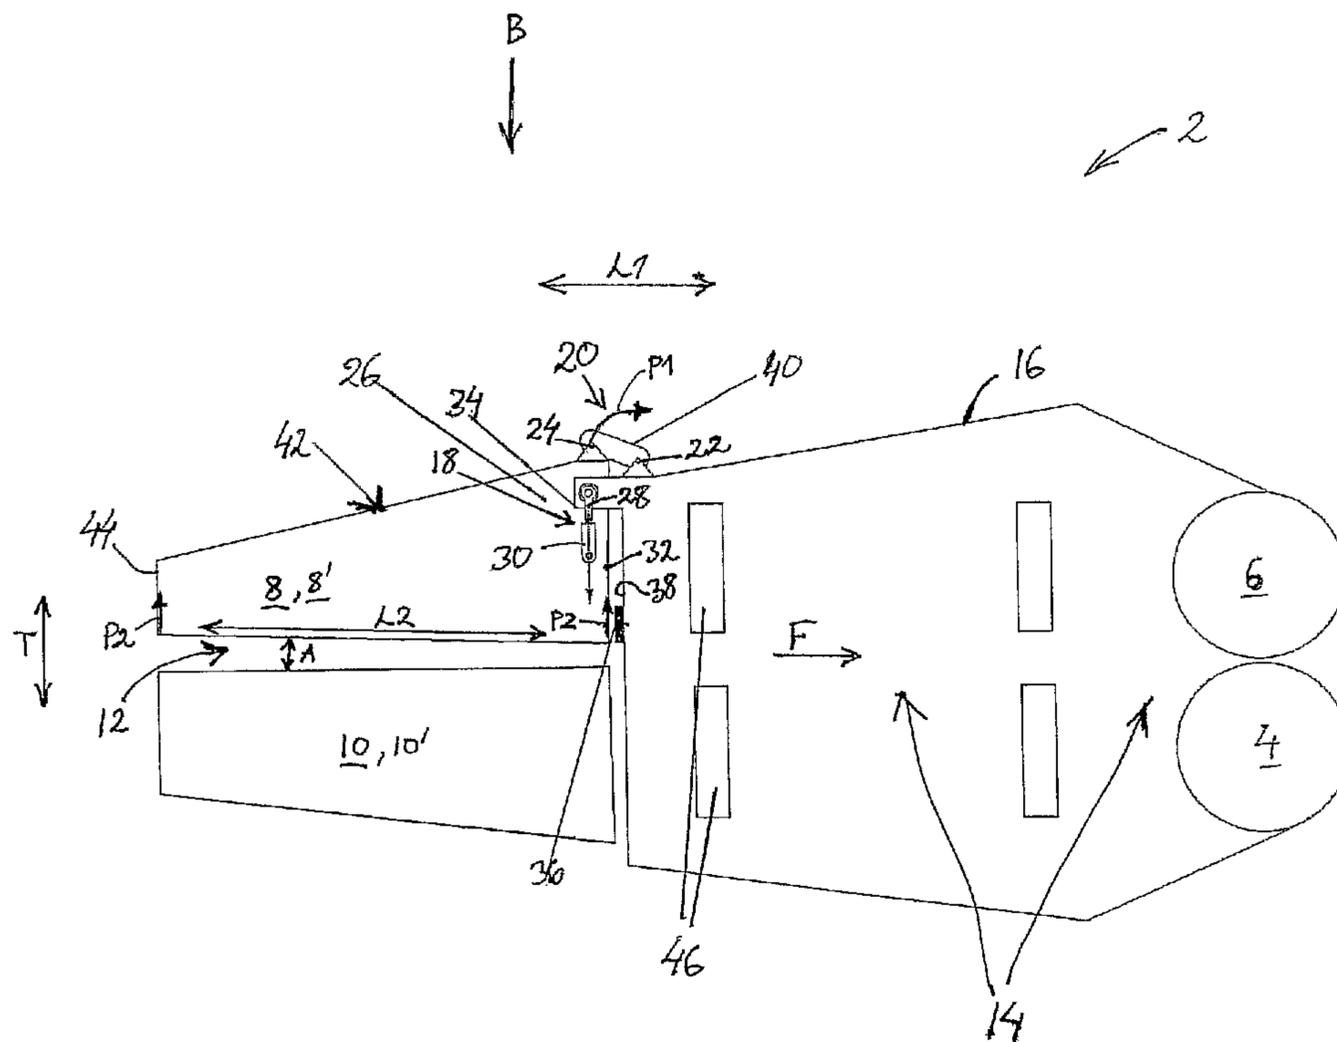

(57) **Abrégé/Abstract:**

The present invention relates to a twin-wire press (2) for dewatering of a fibre suspension. A link system (20) is arranged in one end with a joint (22) at a press frame (16) and in another end arranged with a joint (24) at an upper section (26) of a first dewatering table (8, 8'), whereby the first dewatering table (8, 8') along its whole longitudinal extension (L2) can be moved in direction (T) from and against a second dewatering table by movement by means of the press and lift arrangement (18). This simplifies maintenance and exchange of the wire, as well as cleaning of a twin-wire press, without the need for prolonged stoppage of production.



Abstract

The present invention relates to a twin-wire press (2) for dewatering of a fibre suspension. A link system (20) is arranged in one end with a joint (22) at a press frame (16) and in another end arranged with a joint (24) at an upper section
5 (26) of a first dewatering table (8, 8'), whereby the first dewatering table (8, 8') along its whole longitudinal extension (L2) can be moved in direction (T) from and against a second dewatering table by movement by means of the press and lift arrangement (18). This simplifies maintenance and exchange of the wire, as well as cleaning of a twin-wire press, without the need for prolonged stoppage of production.

TWIN-WIRE PRESS

The present invention relates to a twin-wire press for dewatering of a fibre suspension.

5

Twin-wire presses for dewatering of a fibre suspension and forming of a continuous web thereof are previously known. Dewatering of the pulp is usually done from an inlet pulp concentration of 3-8 percentages by weight to an outlet
10 pulp concentration of 30-50 percentages by weight. According to the state of the art, such twin-wire presses comprises lower rolls, an endless lower wire running in a path around the lower rolls, upper rolls, and an endless upper wire running in a path around the upper rolls. The
15 two wires co-operate with each other along sections of said paths that run substantially in parallel with each other for dewatering of the fibre suspension between the wires during displacement thereof. An inlet box provides for supply of the fibre suspension to a wedge-shaped
20 dewatering space between the wires. The twin-wire press further comprises two dewatering tables supporting the respective wire in said sections of the path and forming the wedge-shaped dewatering space between the wires for initially pressing and dewatering the fibre suspension,
25 whereby a web is formed between the wires, and a roll arrangement situated after the dewatering tables in said sections of the paths, as seen in the direction of movement of the wires, for finally pressing and dewatering the web between the wires, so that the web will get a
30 desired dryness.

It is often necessary in a simple way and as quickly as possible at maintenance, exchange of wire and cleaning of the twin-wire press, without prolonged stoppage of

23038-203

2

production, to be able to reach the dewatering space between the upper and lower dewatering tables. An apparatus for lifting of the upper table in twin-wire presses is known, which is a lifting apparatus integrated in the press that is arranged to lift up the side of the upper dewatering table, hereinafter denoted the front edge, that is adjacent the roll arrangement. A rear edge of the dewatering table remains in the original position. The known lifting apparatus only permits a limited lifting of the upper dewatering table, and only of its front edge, which means that the accessibility to those areas of the dewatering space that are situated in vicinity of the rear edge of the upper and lower dewatering tables still are restricted, whereby maintenance, exchange of wire and cleaning is time-consuming and circumstantial.

An object of some embodiments of the present invention is to achieve an easier, more effective and improved twin-wire press where the whole dewatering space is easily accessible for maintenance, exchange of wire and cleaning if required, and where at least those drawbacks that are associated with previously known state of the art can be partially eliminated. Yet an object is to provide a twin-wire press where maintenance, exchange of wire and cleaning of the press can be carried out cost efficiently and in a work saving way.

In some embodiments, these objects may be achieved with the twin-wire press for dewatering of a fibre suspension according to the present invention. The twin-wire press comprises lower rolls, an endless lower wire that runs in a path around the lower rolls, upper rolls and an endless upper wire that runs in a path around the upper rolls. Further the twin-wire press comprises a first and a second dewatering table, respectively, which supports the respective upper and lower wires, which dewatering tables being present at substantially the same longitudinal location of said press and forming a wedge-shaped dewatering space between the wires in the longitudinal direction of the twin-wire press for initial pressing and dewatering of the fibre suspension. In that respect a fibre web can be formed between the wires, and a

23038-203

3

roll arrangement is provided and positioned after the dewatering tables, as seen in the direction of movement of the wires, for finally pressing and dewatering of the fibre web between the wires. The roll arrangement is provided in a press frame. A press and lift arrangement is arranged to the first dewatering table for vertically adjusting
5 the first dewatering table. The twin-wire press has a link system is arranged in one end with a joint at the press frame and in a second end arranged with a joint at an upper section of the first dewatering table. In that respect the first dewatering table can be moved along its whole longitudinal extension in direction from and against the second dewatering table by movement by means of the press and lift arrangement
10 such that a rear edge of said first dewatering table is vertically adjusted substantially equally as much as a front edge of the first dewatering table, wherein the first dewatering table is vertically adjusted along its entire longitudinal extension.

Some embodiments of the present invention make it possible that work with maintenance, exchange of wire and cleaning of the twin-wire press can be carried out
15 efficiently whereby the operation of the press only need to be interrupted for a short period than what has been required previously. Hence, time and cost savings are obtained thanks to that the whole first dewatering table can be lifted or lowered along its whole longitudinal extension, in the twin-wire press according to the present invention, such that desired accessibility to the dewatering space can be provided
20 between the whole longitudinal extension of the first dewatering table and the whole longitudinal extension of the second dewatering table.

According to some embodiments of the present invention, an end section of the press and lift arrangement is fixed to the press frame and a second end section of the press and lift arrangement is arranged to the first dewatering table. In that respect the
25 press and lift arrangement is suitably arranged in vicinity of a front edge of the first dewatering table. Preferably the press and lift arrangement is arranged at a projecting section of the press frame, at a position on distance from the dewatering

23038-203

4

space in connection to an upper section of the first dewatering table. The press and lift arrangement is preferably a hydraulic cylinder. The link system may suitably comprise a link arm that in one end is pivotally arranged in the first dewatering table, and in a second end is pivotally arranged in said joint at the press frame. Preferably
5 the first dewatering table is composed of an upper dewatering table and the second dewatering table of a lower dewatering table.

Embodiments of the present invention will now be described in more detail by embodiments, with reference to accompanying drawings, without restricted interpretation of the invention thereof, where

10 fig. 1 schematically shows in an overview a longitudinal cross-section through a twin-wire press according to an embodiment of the present invention.

A twin-wire press 2 for dewatering of a fibre suspension is shown in fig. 1. The twin-wire press comprises lower rolls 4 (in the figure is only shown one of the lower rolls), an endless lower wire (not shown) that runs in a path around the lower rolls, upper
15 rolls 6 (in the figure

is only shown one of the upper rolls) and an endless upper wire (not shown) that runs in a path around the upper rolls. Further the twin-wire press 2 comprises a first dewatering table, here shown as an upper dewatering table 8, respectively a second dewatering table, here shown as a lower dewatering table 10, which supports the respective upper and lower wires, which dewatering tables 8, 10 forms a wedge-shaped dewatering space 12 between the wires in the longitudinal direction L1 of the twin-wire press for initial pressing and dewatering of the fibre suspension, whereby a fibre web can be formed between the wires. A roll arrangement 14 (only pair of rolls 4, 6 is shown in fig. 1) is arranged after the dewatering tables 8, 10, seen in the direction of movement (F) of the wires, for final pressing and dewatering of the fibre web between the wires. The roll arrangement 14 is provided in a press frame 16. A press and lift arrangement 18 is arranged to the upper dewatering table 8 for vertically adjusting the upper dewatering table. A link system 20 is arranged in one end with a joint 22 at the press frame 16 and in another end arranged with a joint 24 at an upper section 26 of the upper dewatering table 8. The upper dewatering table 8 can be moved along its whole longitudinal extension L2 in a vertical direction T from and against the longitudinal direction L1 of the lower dewatering table 10 by movement by means of the press and lift arrangement 18. The twin-wire press may preferably comprise a corresponding link system and a press and lift arrangement as described herein, according to the present invention, on each side of the twin-wire press (in fig. 1 is only shown one side of the twin-wire press).

By reference to fig. 1 is described that the first dewatering table is an upper dewatering table 8 and the

second dewatering table is a lower dewatering table 10. However, the situation can be the opposite according to an alternative embodiment. If the whole twin-wire press as shown in fig. 1 is viewed upside-down (from a direction B according to arrow in fig. 1), said first dewatering table is composed of a lower dewatering table 8' and said second dewatering table is composed of an upper dewatering table 10'. Thus, according to this embodiment is the press and lift arrangement 18 and the link system 20 arranged to the lower dewatering table 8'. Hence, a vertical adjustment is instead achieved of the lower dewatering table 8'.

Different kinds of press and lift arrangements 18 that can be used in the present invention are possible. The press and lift arrangement can, for example, as shown in fig. 1, preferably be a hydraulic cylinder, that has a piston 28 with a certain cylinder stroke arranged in a liquid filled, such as oil filled, cylinder 30.

An end section of the press and lift arrangement 18 can suitably be fixed to the press frame 16 according to the embodiment shown in fig. 1, such as an outer end of the piston 28 of said preferred hydraulic cylinder. A corresponding second end section of the press and lift arrangement, such as the outer end section of the cylinder portion 30 of the preferred hydraulic cylinder, can be arranged to the upper dewatering table 8. As is evident from fig. 1, the press and lift arrangement 18 can be arranged in the vicinity of a front edge 32 of the upper dewatering table 8. One end of the press and lift arrangement may suitably be connected to a projecting section 34 of the press frame, situated in connection to an upper section 26 of the upper dewatering table 8 on distance from the dewatering space 12. The other end of

the press and lift arrangement is connected to the upper dewatering table, suitably in a position in vicinity of the front edge of the dewatering table. Further, the press frame may comprise a stop member 36 arranged on a surface 5 38 of the press frame in the space between the press frame and the front edge of the upper table, which stop member 36 prevents movement of the upper dewatering table 8 in the longitudinal direction L1 of the twin-wire press at vertical adjustment of the upper dewatering table. The 10 stop member 36, that is suitably of a durable material having low friction, can be shaped as a projecting section with a supporting surface directed against the front edge 32 of the upper dewatering table. At vertical adjustment in direction T of the upper dewatering table 8 the front 15 edge 32 of the upper dewatering table can slide along the supporting surface of the stop member 36.

Further, the link system 20 according to the present invention can comprise a link arm 40 that in one end is 20 pivotally arranged in said joint 24 at the upper dewatering table 8, suitably to the upper side 42 of the upper dewatering table 8 in immediate connection to the front edge 32 of the upper dewatering table, and in a second end pivotally arranged in said joint 22 at the 25 press frame 16, such as is shown in fig. 1.

When the press and lift arrangement 18 is actuated, for example at a reduced cylinder stroke when using a preferred hydraulic cylinder, for a desired raise of the 30 upper dewatering table 8, the dewatering table 8 is raised along its whole longitudinal extension L2 by a simultaneous turning of the link arm 20 around joints 24 and 22 of the link system 20 (see arrow P1 in figure). A rear edge 44 of the upper dewatering table 8 is raised

substantially equally as much as the front edge 32 (see
arrow P2 in figure). The front edge 32 slides during the
vertical movement of the dewatering table against the stop
member 36 that simultaneously prevents that no substantial
5 motion of the dewatering table 8 along the longitudinal
direction L1 of the twin-wire press occurs. An increased
distance A between the lower and upper dewatering tables
may accordingly be achieved, along the whole longitudinal
extension L2 of the dewatering space, in order to
10 facilitate desired accessibility for maintenance, exchange
of wire and cleaning when necessary.

Fig. 1 also shows schematically the position for an
apparatus 46 for elevation of the upper table in twin-wire
15 presses according to the prior art, which is an integrated
lifting device in the press that is arranged to raise up
the front side of the upper dewatering table, that is
faced to the roll arrangement. The known lifting device
only permits a limited elevation of the front side of the
20 upper dewatering table.

23038-203

9

CLAIMS:

1. Twin-wire press for dewatering of a fibre suspension, the twin-wire press comprising:

lower rolls, an endless lower wire that runs around the lower rolls, upper
5 rolls and an endless upper wire that runs around the upper rolls, a first and a second dewatering table, respectively, which supports the respective upper and lower wires, which dewatering tables being present at substantially the same longitudinal location of said press and forming a wedge-shaped dewatering space between the wires in
10 the longitudinal direction of the twin-wire press for initial pressing and dewatering of the fibre suspension, for formation of a fibre web between the wires, and a roll arrangement positioned after the dewatering tables, seen in the direction of movement of the wires, for final pressing and dewatering of the fibre web between the wires, the roll arrangement is provided in a press frame, and that a press and lift arrangement is arranged to the first dewatering table for vertically adjusting the first
15 dewatering table, a link system arranged in one end with a joint at the press frame and in another end arranged with a joint at an upper section of the first dewatering table, wherein the first dewatering table along its whole longitudinal extension can be moved in direction from and against the second dewatering table by movement by means of the press and lift arrangement such that a rear edge of said first dewatering
20 table is vertically adjusted substantially equally as much as a front edge of the first dewatering table, wherein the first dewatering table is vertically adjusted along its entire longitudinal extension.

2. The twin-wire press according to claim 1, wherein an end section of the press and lift arrangement is fixed to the press frame and a second end section of the
25 press and lift arrangement is arranged to the first dewatering table.

3. The twin-wire press according to claim 2, wherein the press and lift arrangement is arranged in the vicinity of a front edge of the first dewatering table.

23038-203

10

4. The twin-wire press according to claim 2 or 3, wherein the press and lift arrangement is connected to a projecting section of the press frame, in connection to an upper section of the first dewatering table on distance from the dewatering space.
5. The twin-wire press according to any one of claims 1-4, wherein the press frame comprises a stop member arranged on a surface of the press frame in the space between the press frame and the front edge of the upper table, opposite the upper table.
6. The twin-wire press according to any one of claims 1-5, wherein the press and lift arrangement is a hydraulic cylinder.
- 10 7. The twin-wire press according to any one of claims 1-6, wherein the link system comprises a link arm that in one end is pivotally arranged in said joint at the first dewatering table, and in a second end pivotally arranged in said joint at the press frame.
8. The twin-wire press according to any one of claims 1-7, wherein the twin-wire press comprises said link system and press and lift arrangement on each side of the twin-wire press.
- 15 9. The twin-wire press according to any one of claims 1-8, wherein the first dewatering table is an upper dewatering table and the second dewatering table is a lower dewatering table.

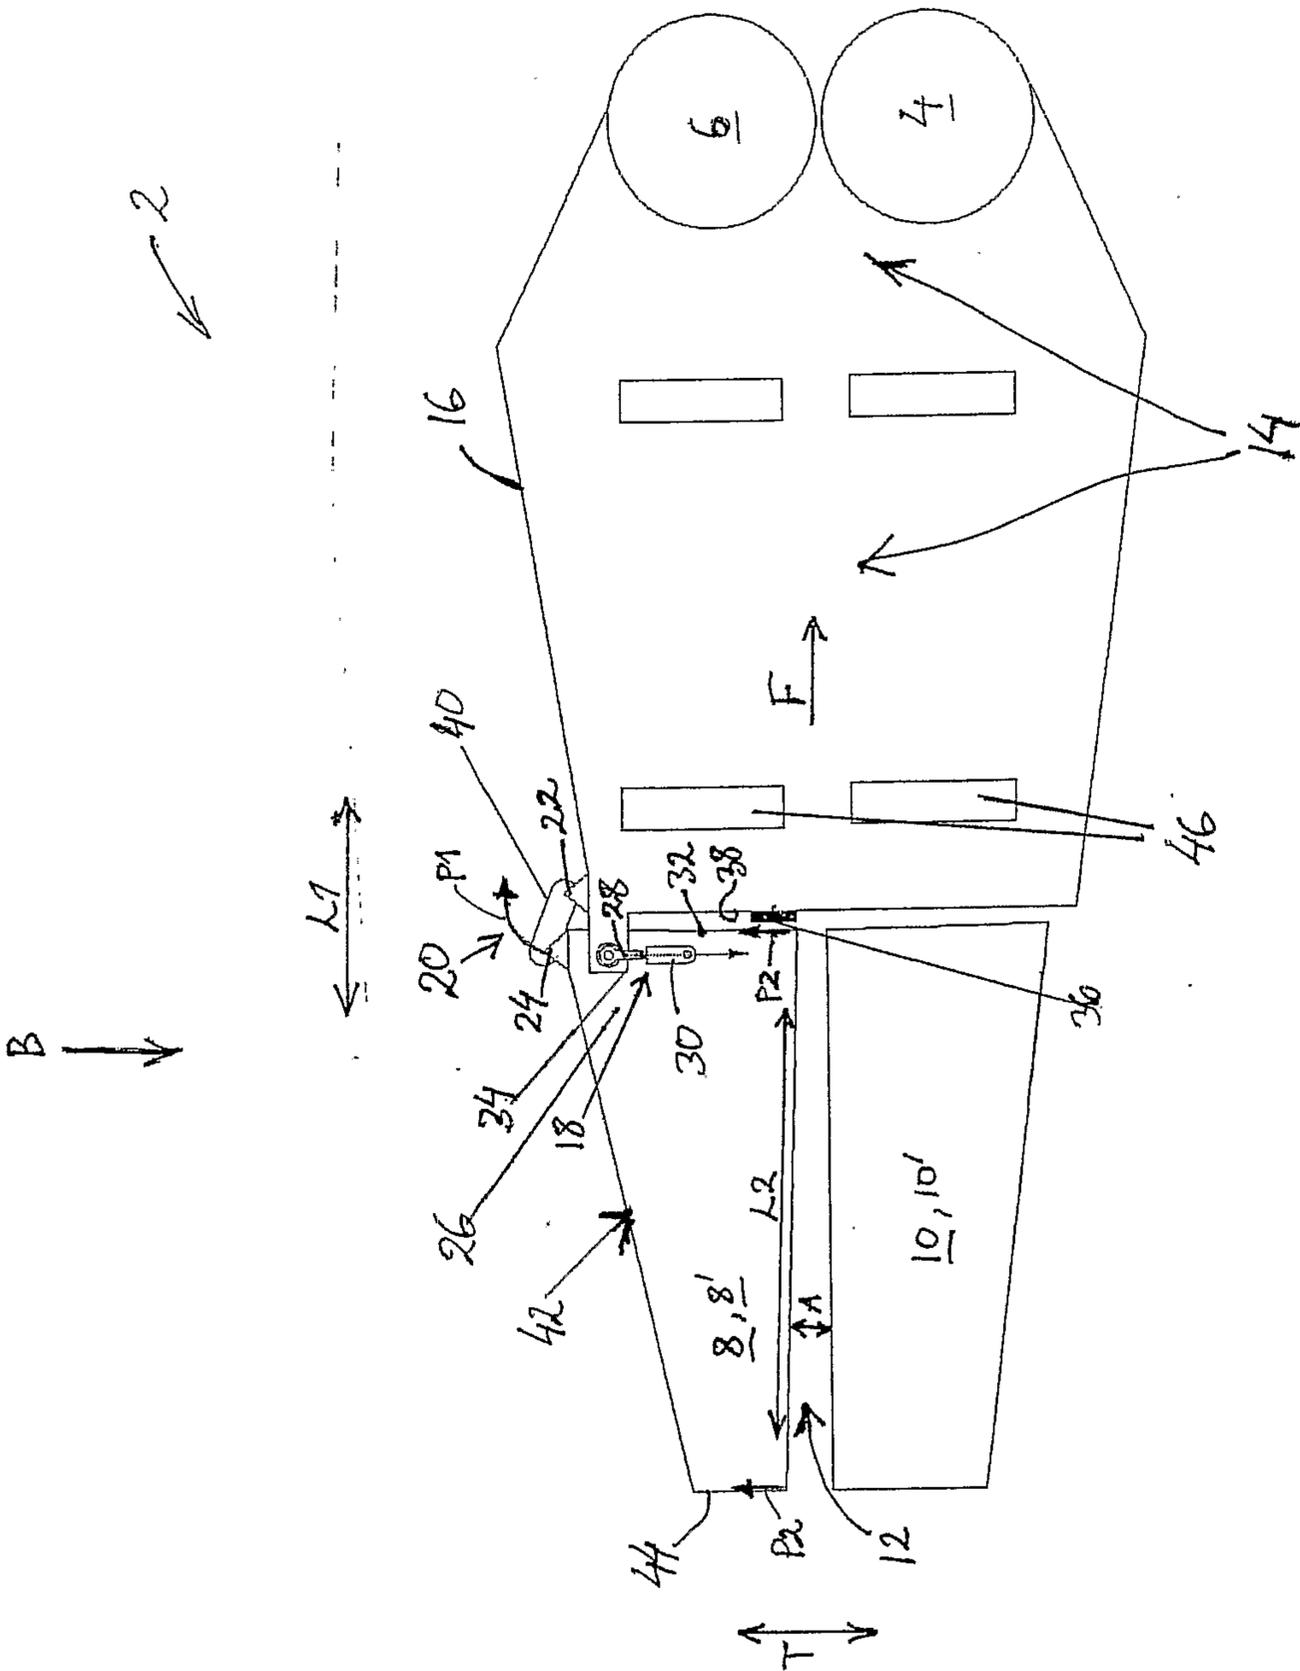


FIG. 1

