




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>B05B 3/04</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 96/01153</b> (43) International Publication Date: 18 January 1996 (18.01.96)</p>
<p>(21) International Application Number: PCT/GB95/01585 (22) International Filing Date: 4 July 1995 (04.07.95) (30) Priority Data: 9413652.0 6 July 1994 (06.07.94) GB 9420105.0 5 October 1994 (05.10.94) GB 9422385.6 5 November 1994 (05.11.94) GB (71)(72) Applicant and Inventor: HARRIS, Gerald [GB/GB]; The Whitehouse, 1 Southwood Road, Troon, Ayrshire KA10 7EL (GB). (74) Agent: MURGITROYD &amp; COMPANY; 373 Scotland Street, Glasgow G5 8QA (GB).</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).  <b>Published</b> <i>With international search report.</i></p>

(54) Title: SPRINKLER DEVICE

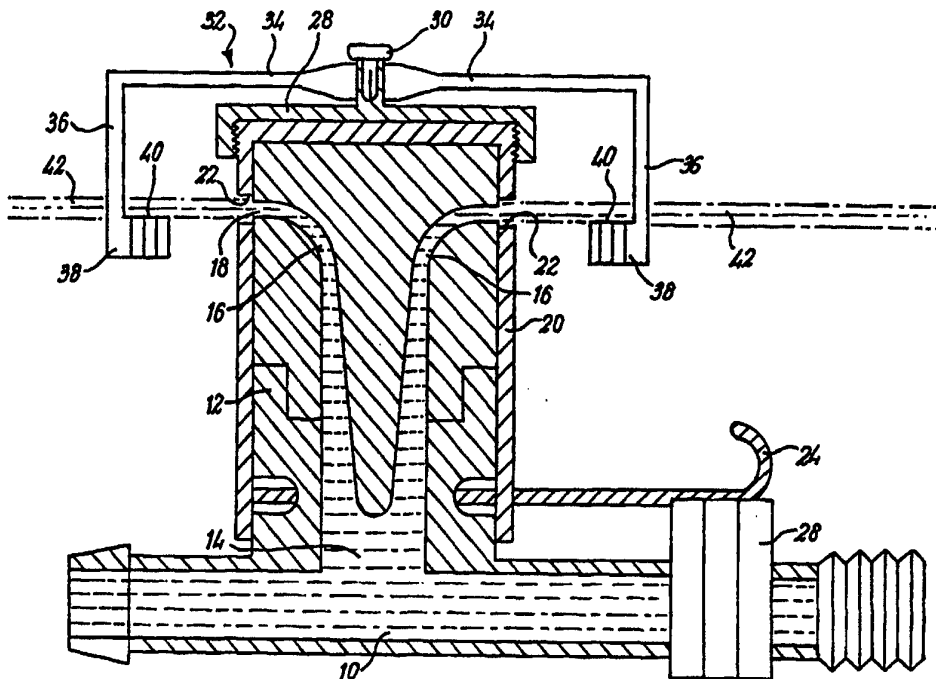

(57) Abstract

Water is supplied under pressure to a sprinkler device which produces one or more laminar flow jets (42). A high speed rotor (32) intercepts the jets (42) in a manner to impact violently upon the boundary layer. This produces a novel mode of operation in which water exits the jet (42) along its length as vapour to form a mist of fine droplets.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

1     "Sprinkler Device"

2

3     This invention relates to sprinkler devices for  
4     dispersing water or other liquids.

5

6     It is well known to use sprinkler devices to distribute  
7     water across a cultivated area. However, known  
8     sprinklers are not entirely satisfactory. Various  
9     types of known sprinklers suffer from one or more of  
10    disadvantages such as wind drift, excessive evaporation  
11    of water while airborne, leaving areas within the  
12    overall spray pattern unwatered, and damage to tender  
13    crops from water jet impact.

14

15    It is also known to use fixed systems of sprinklers for  
16    fire suppression, but to date no such system has coped  
17    satisfactorily with a wide range of fire risks  
18    including flammable liquids.

19

20    According to the present invention a sprinkler device  
21    comprises a liquid inlet and at least one liquid outlet  
22    joined by a flow passage, the flow passage being  
23    constructed to produce a substantially laminar fluid  
24    flow at the outlet to cause a substantially laminar

1 flow liquid jet to issue from the outlet, and a rotor  
2 having blades positioned to intercept the boundary  
3 layer of said liquid jet.

4

5 The invention also provides systems for irrigation,  
6 fire suppression, snow generation and water  
7 purification.

8

9 Preferred features of the invention will be apparent  
10 from the following description and from the claims.

11

12 Embodiments of the invention will now be described, by  
13 way of example, with reference to the drawings, in  
14 which:

15

16 Fig. 1 is a cross-sectional side view of a  
17 sprinkler device forming a first embodiment of the  
18 invention;

19 Fig. 2 is a plan view of the sprinkler device of  
20 Fig. 1;

21 Fig. 3 illustrates in detail the geometry of part  
22 of the device;

23 Fig. 4 illustrates different modes of operation of  
24 the device;

25 Fig. 5 is a schematic cross-section of a second  
26 embodiment;

27 Fig. 6 is a perspective view of a rotor assembly  
28 used in the device of Fig. 5;

29 Figs 7 and 8 are schematic cross-sections of a  
30 third embodiment; and

31 Fig. 9 is a cross-section of a further embodiment.

32

33 Referring particularly to Fig. 1, a sprinkler device  
34 comprises a through conduit 10 for connection in a  
35 supply line of hose pipe or the like. A cylindrical  
36 housing 12 extends from the conduit 10 and defines a

1 water channel 14 communicating with the conduit 10.

2

3 The water channel 14 divides into a number of channels  
4 16 (suitably two, four or six in number) which are  
5 circumferentially equispaced around the housing 12.  
6 Each channel 16 converges and curves, as will be  
7 described in greater detail below, to terminate in an  
8 outlet 18.

9

10 A sleeve 20 is rotatably mounted on the housing 10.  
11 The sleeve 20 is provided with apertures 22 positioned  
12 such that rotation of the sleeve 20 relative to the  
13 housing opens or blocks selected ones of the outlets  
14 18. As best seen in Fig. 2, the sleeve 20 may be  
15 provided with a spring arm 24 which can be manually  
16 positioned in a selected slot 26 of an arcuate block 28  
17 secured to the conduit 10, to set the desired  
18 rotational position of the sleeve 20.

19

20 A cap 28 is screwed to the top of the sleeve 20 and  
21 mounts an upstanding pin 30 which acts as a rotational  
22 bearing for a rotor assembly 32. The rotor assembly 32  
23 comprises radial arms 34 (suitably two, four or six in  
24 number) each having an outer drop arm 36 carrying a  
25 blade 38. The blade 38 has a top edge 40 which is  
26 parallel to the path of water jets 42 exiting from the  
27 outlets 18, and the position of the top edge with  
28 respect to the water jets 42 can be adjusted by  
29 screwing the cap 28 in and out with respect to the  
30 sleeve 20.

31

32 An important feature of the present invention is that  
33 the water flow through the channels 14 and 16 to the  
34 outlets 18 is laminar. Referring now also to Fig. 3,  
35 each of the channels 16 has a vertically extending,  
36 converging section 16A, a transitional section 16B, a

1 converging section 16C and a parallel exit section 16D.  
2 The transition section 16B is defined by surfaces 44  
3 which are circular arcs about a point 48. This  
4 geometry causes water flowing from the conduit 10 to be  
5 accelerated while flowing to the outlet 18 in laminar  
6 flow. The sections 16C, 16D assist in restoring smooth  
7 laminar flow if any disturbance occurs in the  
8 transition section 16B.

9  
10 A significant feature of the present invention is that  
11 the laminar flow jet 42 exiting each of the outlets 18  
12 may be intercepted by the blades 38 such that the edge  
13 40 just breaks through the surface of the water jet 42.  
14 The rotor assembly 32 may be driven by a suitable  
15 mechanical drive but preferably, as shown, it is driven  
16 by the water jets 42 acting on the rotor assembly  
17 turbine fashion, and the blades 38 are angled for this  
18 purpose. In a particularly preferred arrangement, the  
19 rotor speed is such that the blades 38 move at  
20 supersonic speed, typically with the rotor rotating at  
21 about 10,000 RPM, and the point at which the blades 38  
22 contact the jet 42 is spaced from the outlet 18, by a  
23 distance equivalent to about one-half of the jet  
24 diameter.

25  
26 This combination of features produces a water pattern  
27 which is believed to be different in nature to any  
28 produced in the prior art. The water pattern consists  
29 of a jet of water which produces, along its entire  
30 length, water vapour and fine water particles of a  
31 nature very similar to a rain cloud. This in turn  
32 causes fine misty "rain" to fall on the ground in  
33 proximity to the point of production. This permits  
34 both a long jet giving a considerable throw and little  
35 affected by wind, and also a gentle precipitation onto  
36 the ground minimising impact damage.

1 An understanding of the precise physical phenomena  
2 underlying this mode of action is not necessary to  
3 achieve practical results. It is believed that the  
4 causes may be as follows. The laminar flow jet has an  
5 outer boundary layer with a relatively low speed and a  
6 high surface tension. When this outer boundary layer  
7 is impacted by the rotor blades with considerable force  
8 and typically with about 300,000 impacts per second, a  
9 relatively large amount of energy is transferred to a  
10 relatively small volume of water, causing the surface  
11 tension in the boundary layer to be destroyed and a  
12 quantity of water vapour to be produced. The water  
13 which is vaporised expands by a factor of about 1700,  
14 and a proportion of this water vapour is forced into  
15 and dissolves in the remainder of the water jet,  
16 producing internal pressure within the jet which, at  
17 the same time, has been deprived of a stable skin of  
18 high surface tension. The dissolved vapour pressure  
19 subsequently causes a mixture of gaseous water vapour  
20 and fine liquid particles to be precipitated from the  
21 water jet, substantially at a uniform rate along the  
22 path of the jet until, at the extremity of the jet  
23 path, no solid jet remains. The fine water particles  
24 produced in this manner typically have a diameter of  
25 about 5 microns.

26  
27 Fig. 4a shows a turbine blade 38 impacting a water jet  
28 42 in the mode just described. The blade suitably  
29 enters the jet to a depth equivalent to between 5% and  
30 15% of the jet diameter.

31  
32 The relative position of the rotor assembly 32 may also  
33 be adjusted to allow a plain jet to be emitted, as in  
34 Fig. 4b, by removing the blade 38 from contact with the  
35 jet 42; or, as seen in Fig. 4c, to cause the blade 38  
36 to intercept the jet substantially entirely which

1 causes the jet to break up adjacent the device  
2 producing localised misting.

3

4 In one typical example of this embodiment, suitable for  
5 irrigation, the jet diameter is 17 mm and the water  
6 supply pressure 8 to 15 bar, producing a rotor speed of  
7 8,000 to 10,000 rpm and a jet length of 30 to 40  
8 metres.

9

10 A second embodiment is schematically shown in Figs. 5  
11 and 6. This embodiment operates in a similar manner to  
12 that of Figs. 1 to 3 and like parts are denoted by like  
13 references. In this embodiment, the outlets 18 are  
14 angled upwardly to achieve a greater throw, and the  
15 rotor assembly 32 is of a different form.

16

17 The rotor assembly 32 comprises a cap-shaped member  
18 which is bent and slit to form a rotor disc 100  
19 integral with depending, angled rotor blades 102. The  
20 rotor blades 102 in this arrangement are above the  
21 water jets and the lower edges 104 of the blades 102  
22 are arranged parallel with the jets.

23

24 Figs 7 and 8 show a further embodiment in which angled  
25 jets are provided by separate flow pipes 200 connected  
26 to a supply conduit 202. The rotor assembly 32 in this  
27 case is similar to that of Fig. 1, but impact with the  
28 water jets is provided by top edges 304 of the blades  
29 38.

30

31 A further embodiment is illustrated in Fig. 9.

32

33 In this embodiment, a sprinkler device has a body 400  
34 defining an inlet 402 for connection to a supply  
35 conduit. The inlet 402 communicates with a tapered  
36 flow passage 404, which divides into three tapered flow



1 passages 406 defined by inserts 408 and terminating in  
2 equispaced outlets 410. A rotor assembly 412 is  
3 rotatably mounted on the exterior of the body 400, and  
4 has blades 414 positioned to intercept the water jets  
5 416 produced by the outlets 410.

6  
7 The water jets 416 are arranged in a conical formation  
8 with a cone angle A which may suitably be in the range  
9 35°- 50°. Although not shown in Fig. 9, the rotor  
10 assembly 412 may conveniently be mounted for adjustment  
11 axially of the body 400, thus allowing the depth of  
12 penetration of the rotor blades into the water jets to  
13 be adjusted.

14  
15 This embodiment is particularly useful in fire  
16 suppression applications in which the relationship of  
17 rotor to jet and the supply pressure can be set to  
18 produce a dense, finely divided mist.

19  
20 A typical example of this embodiment uses three nozzles  
21 of 0.6 to 1.00 mm diameter and a water supply pressure  
22 of 30 bar, with the rotor running at about 10,000 rpm.  
23 This produces a jet length of about 1 to 2 metres.  
24 Suitably, the sprinkler device is mounted vertically to  
25 produce a vertically downward jet; this has the effect  
26 of producing a curtain of water vapour and very fine  
27 water droplets which rapidly suppresses fire by cooling  
28 and by exclusion of oxygen.

29  
30 It is believed that, when used in this mode with jet  
31 nozzles of less than two millimetres, three types of  
32 water droplets are produced. A very fine mist with  
33 particle sizes of the order of 5 microns is produced in  
34 the manner discussed above. In addition, two other  
35 types of droplet formation are believed to occur.

36

1 The central part of the jet, which is not impacted by  
2 the rotor, exhibits a tendency to form into globules at  
3 a distance from the jet which approximates to 1000  
4 times the jet diameter. These globules typically have  
5 a size less than 1000 microns, and their formation is  
6 believed to be influenced by surface tension pressure  
7 compressing the outer surface or quasi-skin of the jet.

8  
9 Additionally, droplets of intermediate size of  
10 approximately 450 microns are thought to be formed by  
11 physical shearing away of water from the jet by the  
12 rotor tips which create a window in the outer surface  
13 of the jet.

14  
15 It will be appreciated that the embodiments of Figs. 5  
16 to 9 are arranged to operate only in the mode shown in  
17 Fig. 4a, that is the rotor is fixed with respect to the  
18 jet. These embodiments could, however, readily be  
19 modified to provide adjustment of the rotor.

20  
21 The sprinkler device of the present invention may be  
22 used in applications other than irrigation and fire  
23 suppression.

24  
25 In suitable conditions of atmospheric temperature and  
26 humidity, the sprinkler device may be used to generate  
27 snow, for example on ski slopes.

28  
29 The device may also be used to treat salt or brackish  
30 water. Owing to the mode of operation described above,  
31 water is precipitated from the jet via a vapour phase  
32 to form very fine droplets. Thus if the sprinkler  
33 device is supplied with salt water, the mist produced  
34 in the initial stages is substantially pure water,  
35 leaving the continuing jet with an increased salt  
36 concentration.

1 This feature can be utilised to secure purified water  
2 by catching the early product of the jet in a trough or  
3 tunnel, and allowing the later stages of the jet to run  
4 to waste.

5

6 In general terms, the invention operates satisfactorily  
7 with supply pressures in the range of 2.5 to 40.00 bar  
8 and rotor speeds of 4,000 to 15,000 rpm, with best  
9 results achieved in the ranges 8 to 12 bar and 8,000 to  
10 10,000 rpm. It is particularly convenient to use a  
11 plurality of jets arranged in a conical manner, since  
12 this facilitates precise adjustment of the rotor  
13 penetration by axial adjustment of the rotor.

14 Typically, suitable cone angles are 15° to 50° for the  
15 fire suppression application, and 130° to 165° for the  
16 irrigation application.

1     CLAIMS

2

3     1.   A sprinkler device comprising a liquid inlet and  
4     at least one liquid outlet joined by a flow passage,  
5     the flow passage being constructed to produce a  
6     substantially laminar fluid flow at the outlet to cause  
7     a substantially laminar flow liquid jet to issue from  
8     the outlet, and a rotor having blades positioned to  
9     intercept the boundary layer of said liquid jet.

10

11    2.   A sprinkler device according to claim 1, in which  
12    the liquid inlet is joined to a plurality of outlets by  
13    respective flow passages each constructed to produce a  
14    substantially laminar flow at the respective outlet.

15

16    3.   A sprinkler device according to claim 2, in which  
17    all of the liquid jets from said outlets are  
18    intercepted by a common rotor.

19

20    4.   A sprinkler device according to claim 3, in which  
21    the jets are arranged conically about the rotor axis.

22

23    5.   A sprinkler device according to claim 4, in which  
24    the cone angle is in the range 15° to 50°.

25

26    6.   A sprinkler device according to claim 4, in which  
27    the cone angle is in the range 130° to 165°.

28

29    7.   A sprinkler device according to any preceding  
30    claim, in which the rotor is driven in rotation by the  
31    liquid jet or jets impinging thereon.

32

33    8.   A sprinkler device according to any preceding  
34    claim, in which the or each flow passage tapers.

35

36    9.   A sprinkler device according to any preceding

1 claim, in which the rotor is rotated at a speed at  
2 which the blade velocity is supersonic.

3

4 10. A sprinkler device according to claim 9, in which  
5 the rotor speed is approximately 10,000 RPM.

6

7 11. A sprinkler device according to any preceding  
8 claim, including adjustment means providing relative  
9 movement between the rotor and the outlet or outlets to  
10 provide adjustment of the depth of penetration of the  
11 rotor blade into the jet or jets.

12

13 12. A sprinkler device according to any of claims 1 to  
14 10, in which the rotor is fixed in position relative to  
15 the outlet or outlets such that the rotor blades  
16 intercept the jet or jets to a depth equal to 5% to 15%  
17 of the jet diameter.

18

19 13. A sprinkler device according to any preceding  
20 claim in which the rotor is so positioned that the  
21 rotor blade intercepts the or each jet at a location  
22 spaced along the jet from its respective outlet by a  
23 distance substantially equal to 50% of the jet  
24 diameter.

25

26 14. An irrigation system comprising one or more  
27 sprinkler devices according to any preceding claim  
28 connected to a source of pressurised water.

29

30 15. A fire suppression system comprising one or more  
31 sprinkler devices according to any preceding claim  
32 connected to a source of pressurised water.

33

34 16. A system for generating snow comprising one or  
35 more sprinkler devices according to any preceding claim  
36 connected to a source of pressurised water.


1 17. A system for desalinating salt or brackish water  
2 comprising one or more sprinkler devices according to  
3 any preceding claim connected to a pressurised source  
4 of said water.



5

6 18. The system of any of claims 14 to 17 in which the  
7 water is supplied at a pressure of 8 to 12 bar.


8

9

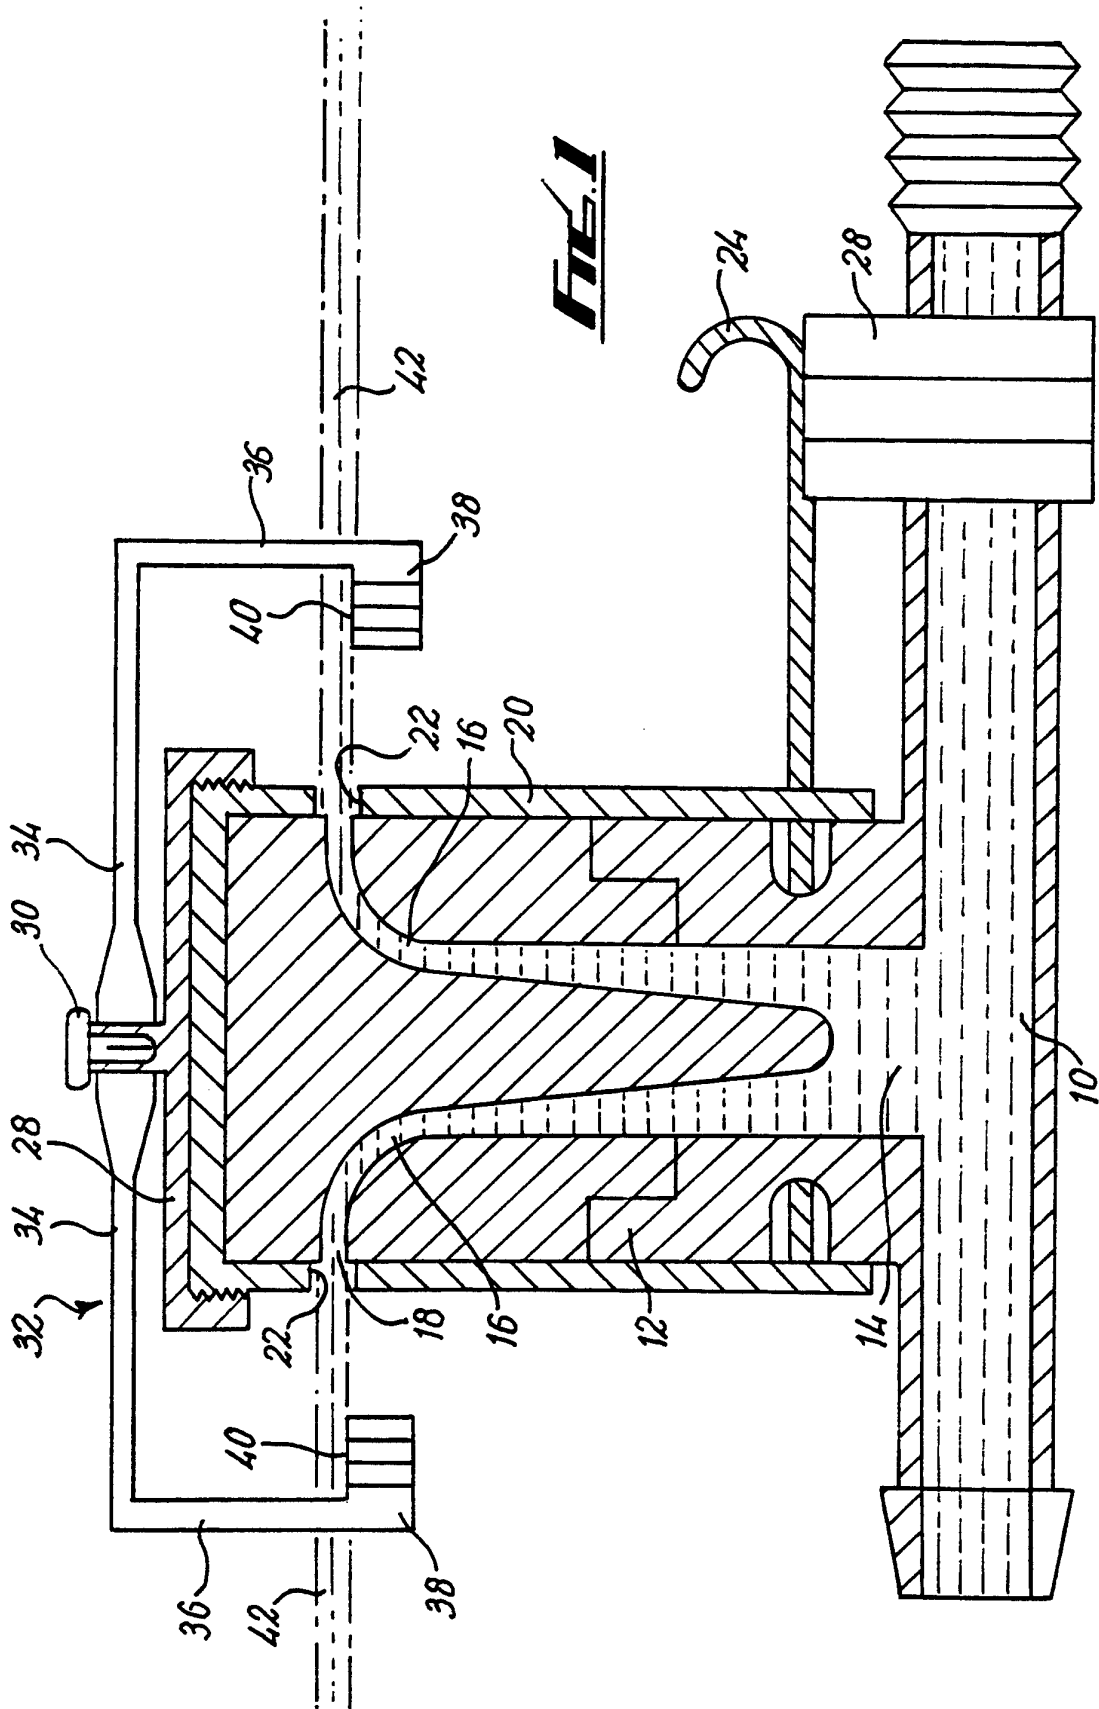


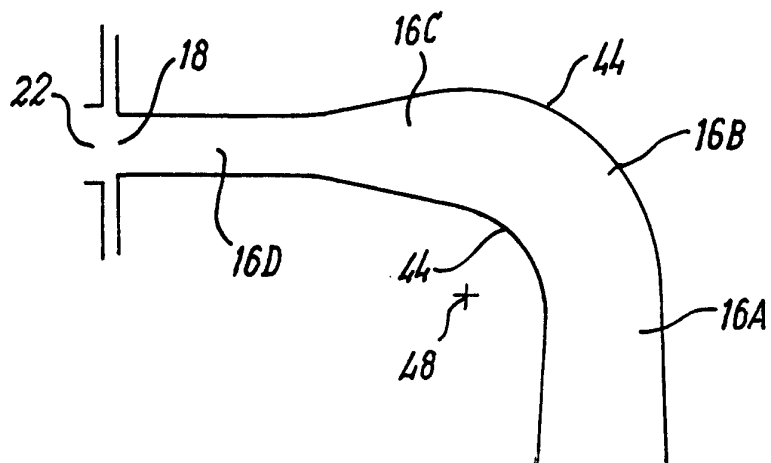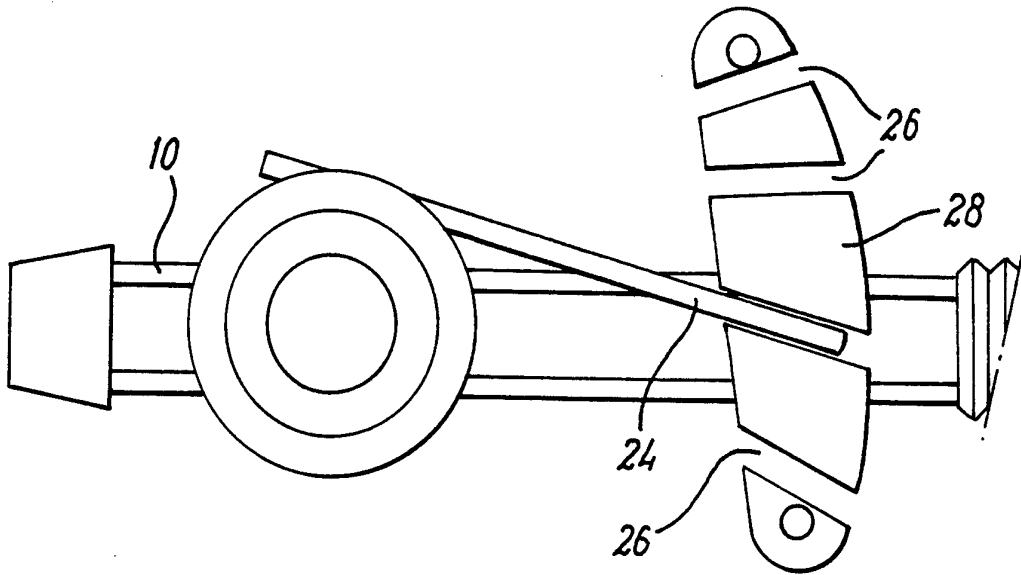




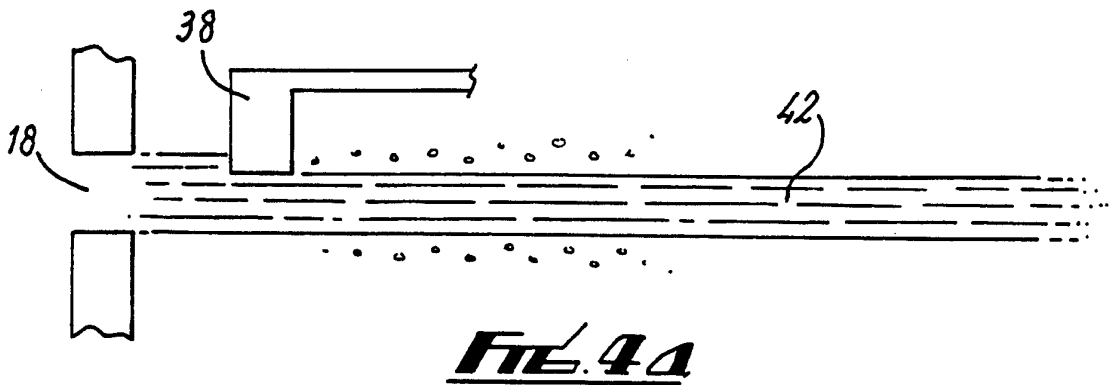


**Fig. 4a**

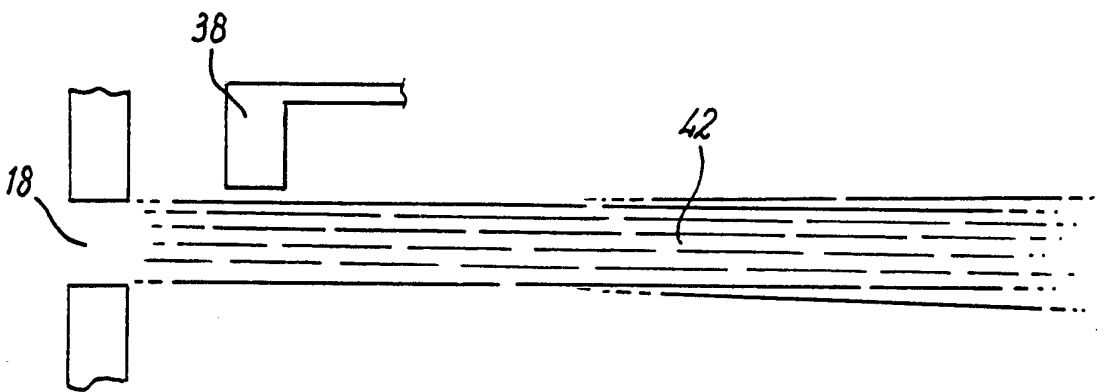


**Fig. 4b**

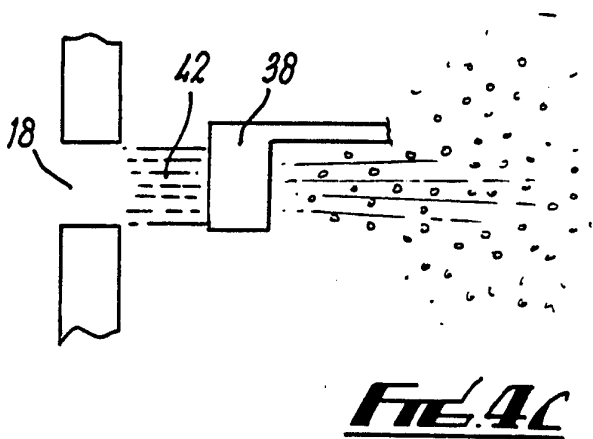


**Fig. 4c**

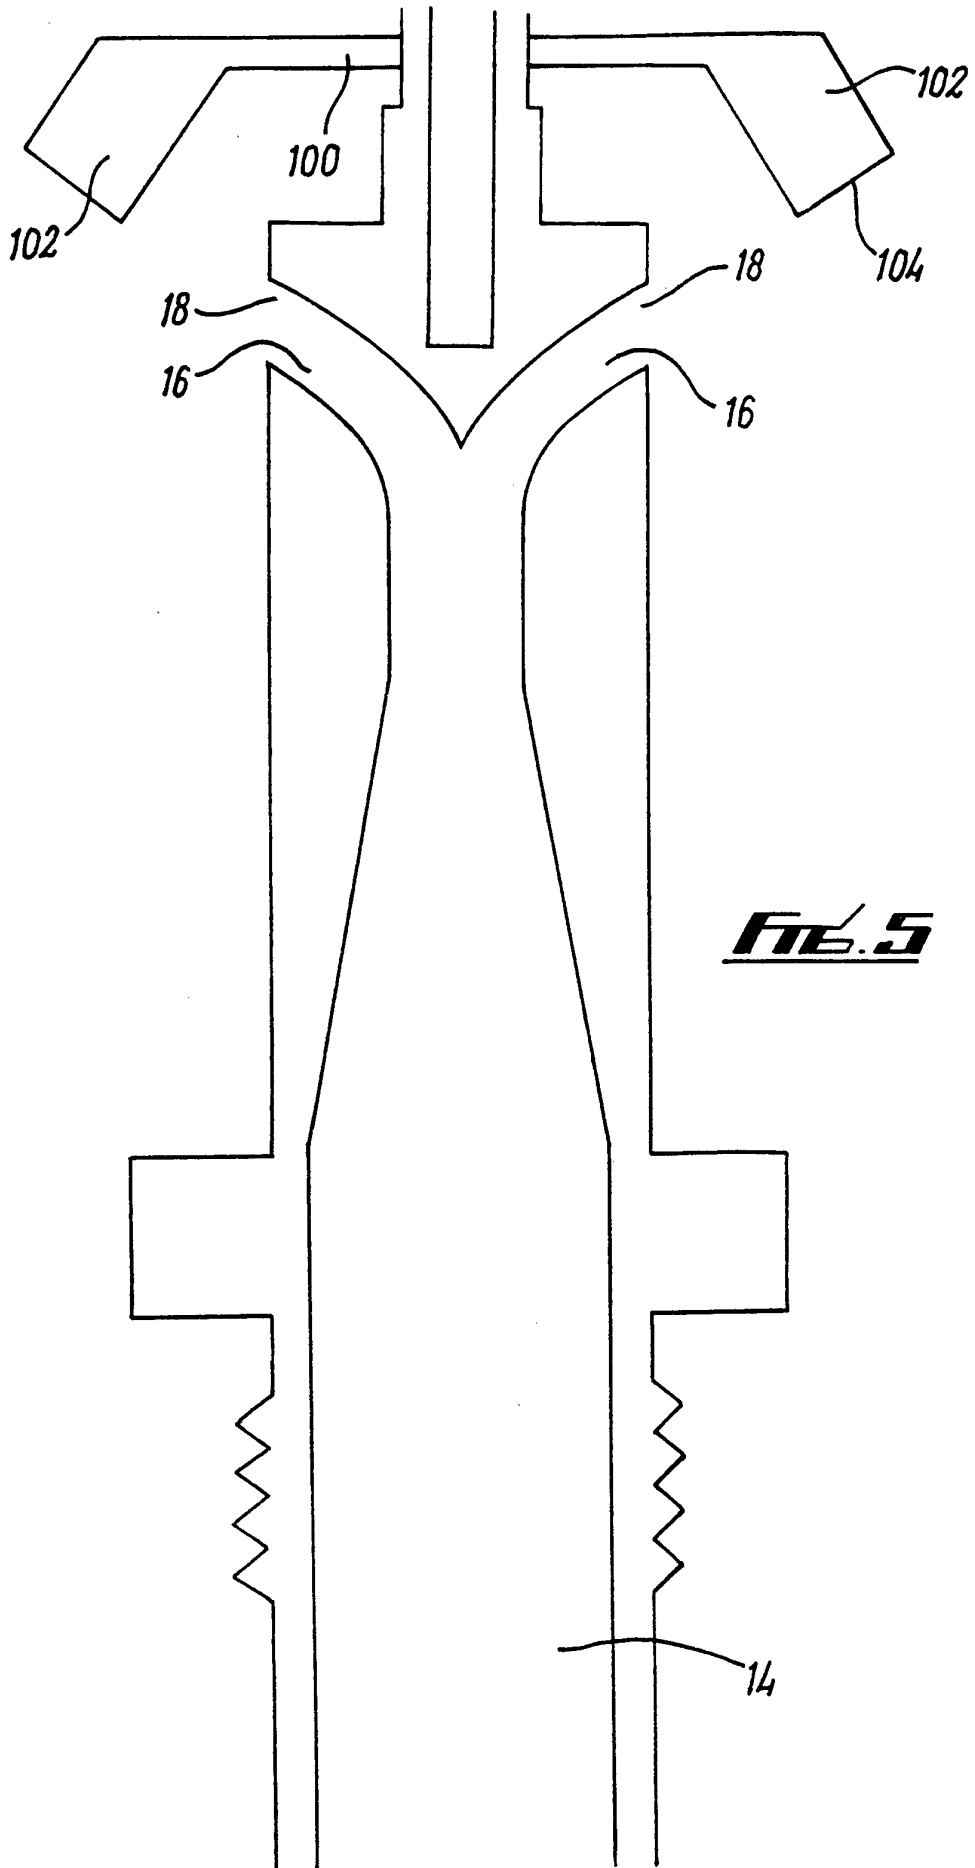


**FIG. 5**

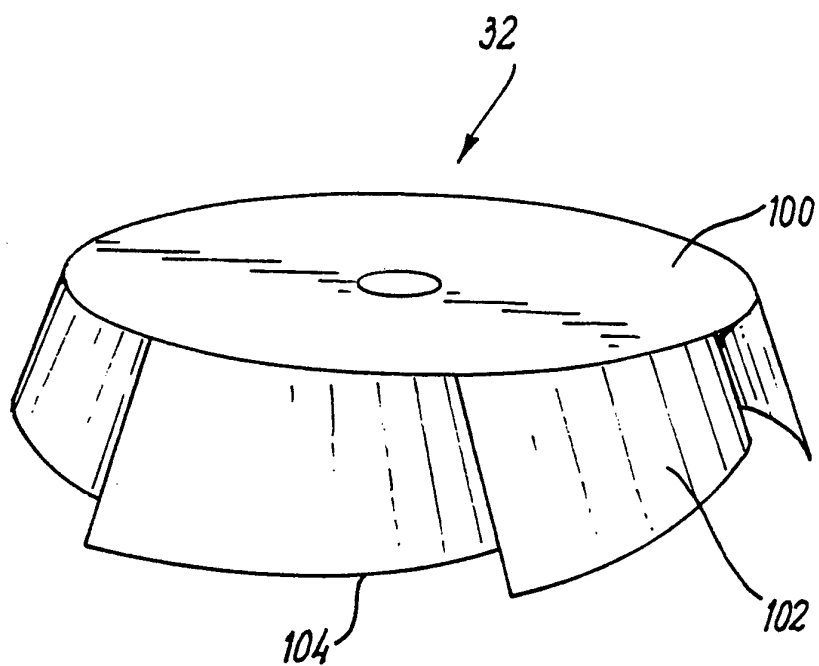

**FIG. 6**

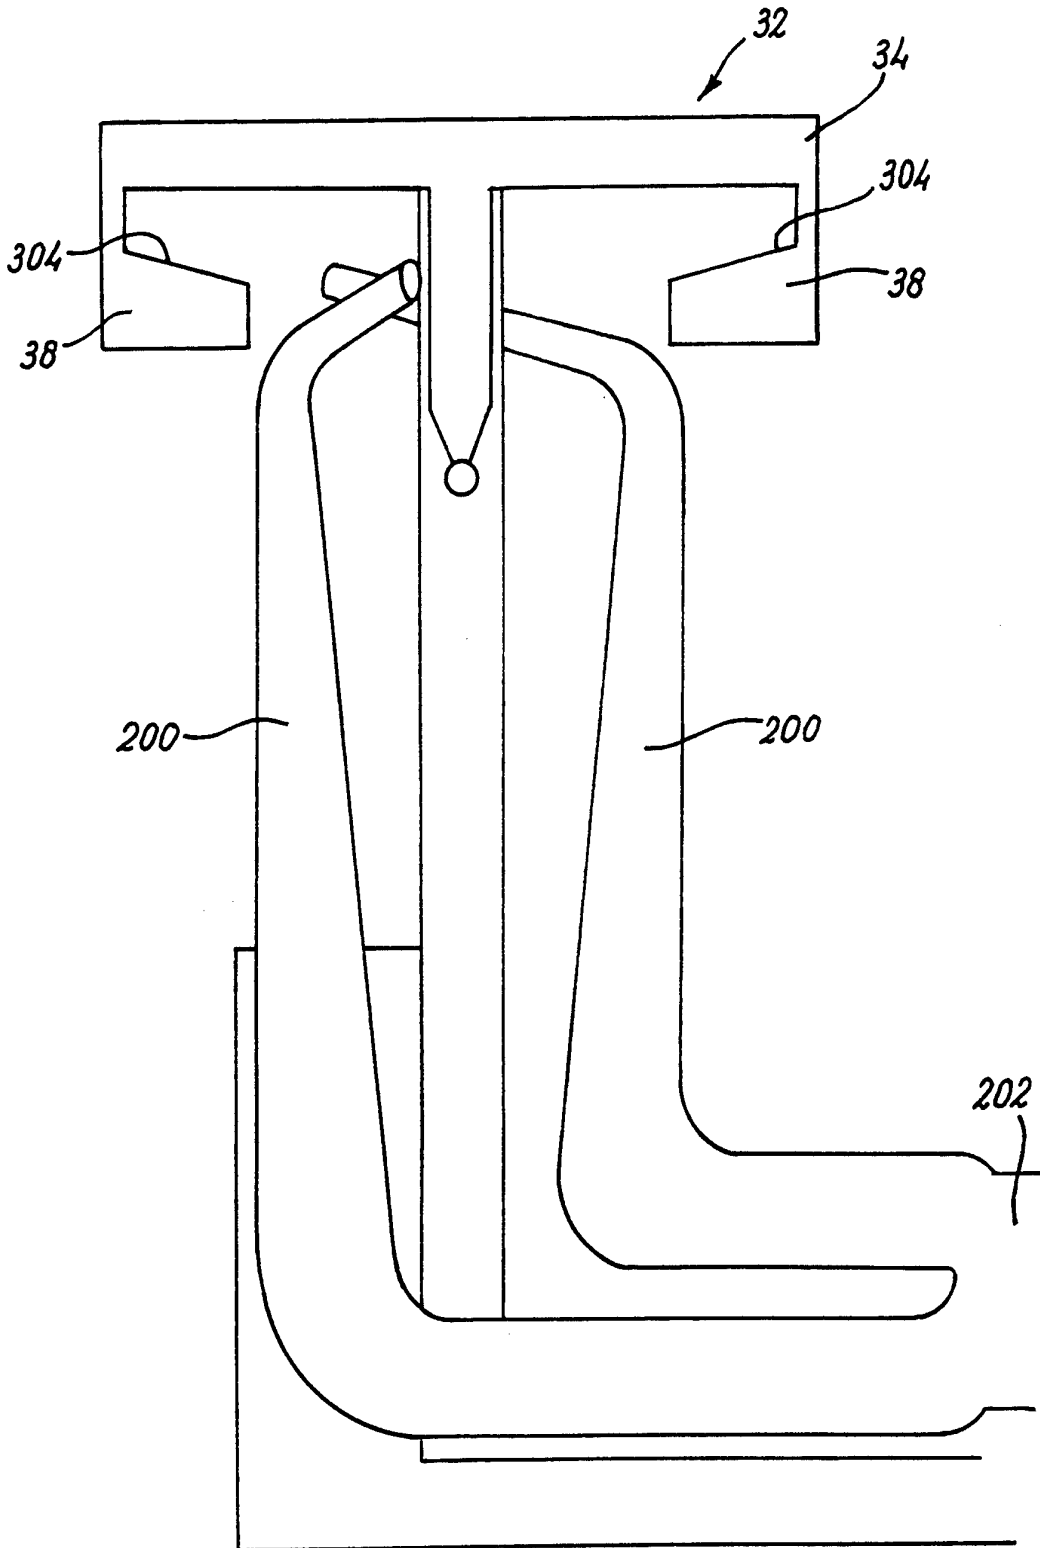


**FIG. 7**

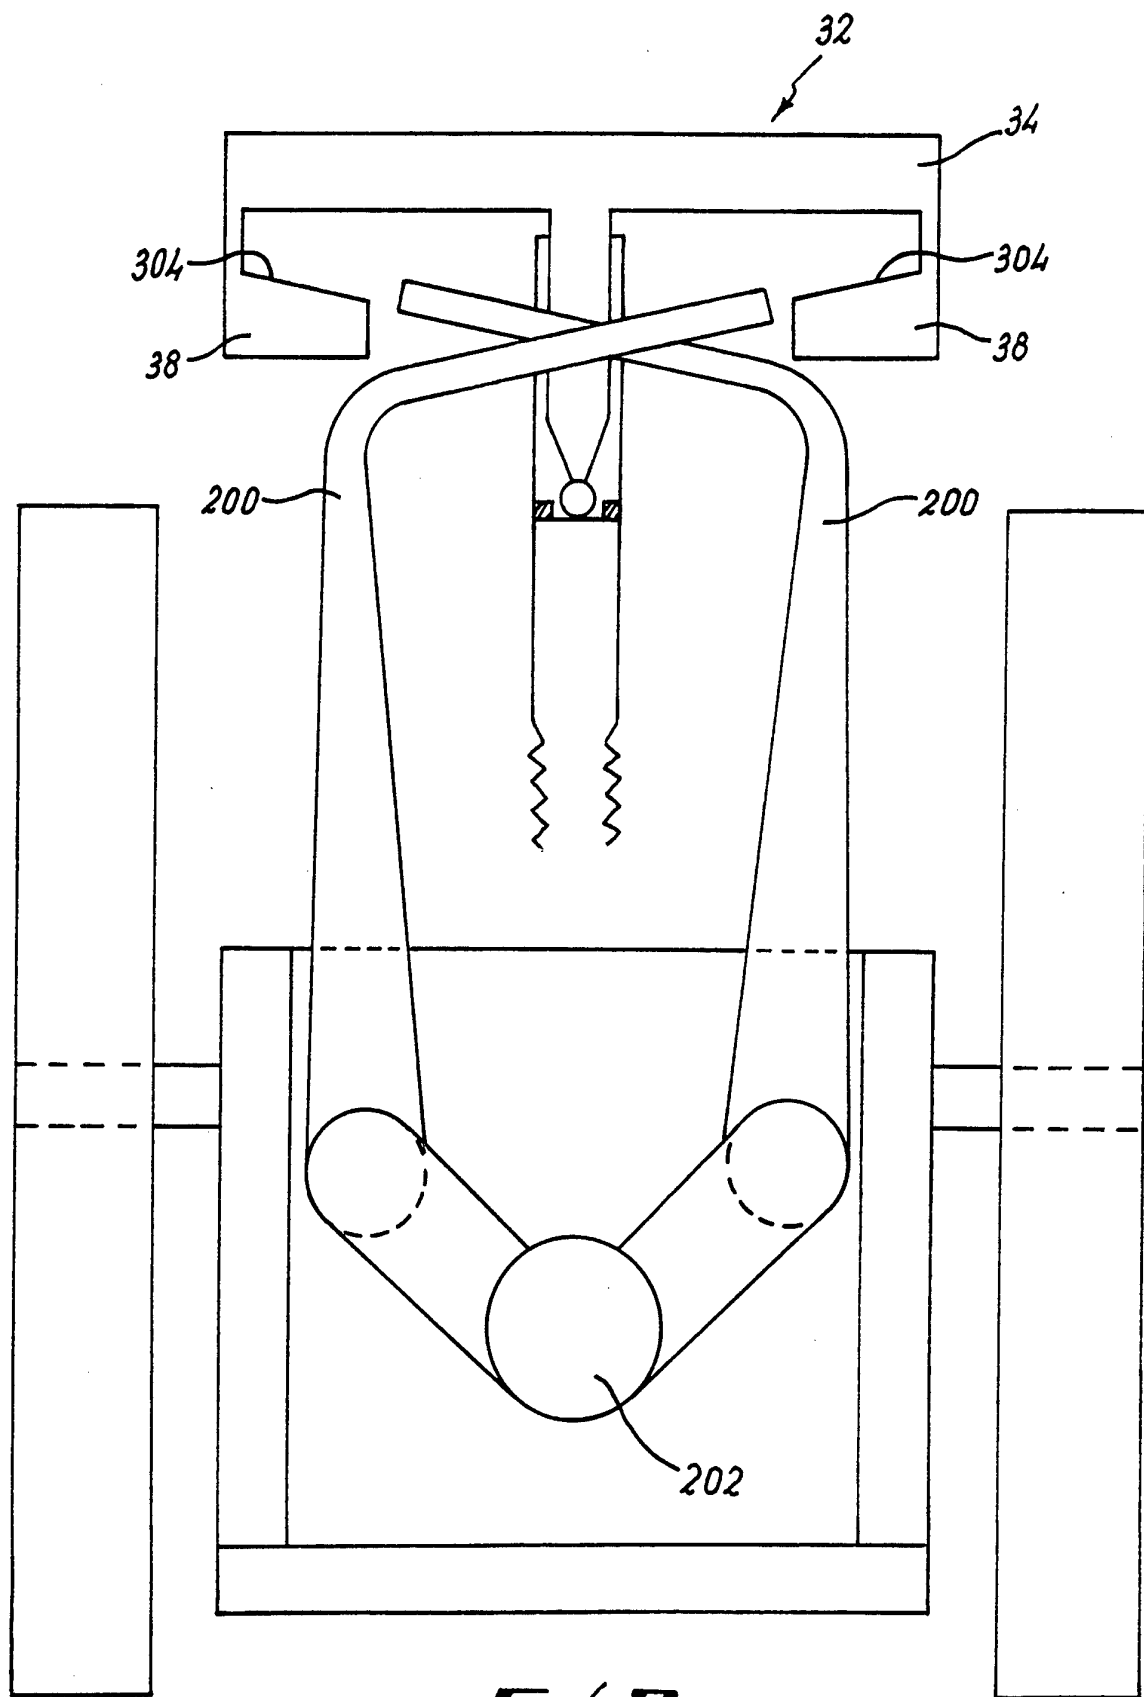

**FIG. 8**

SUBSTITUTE SHEET (RULE 26)

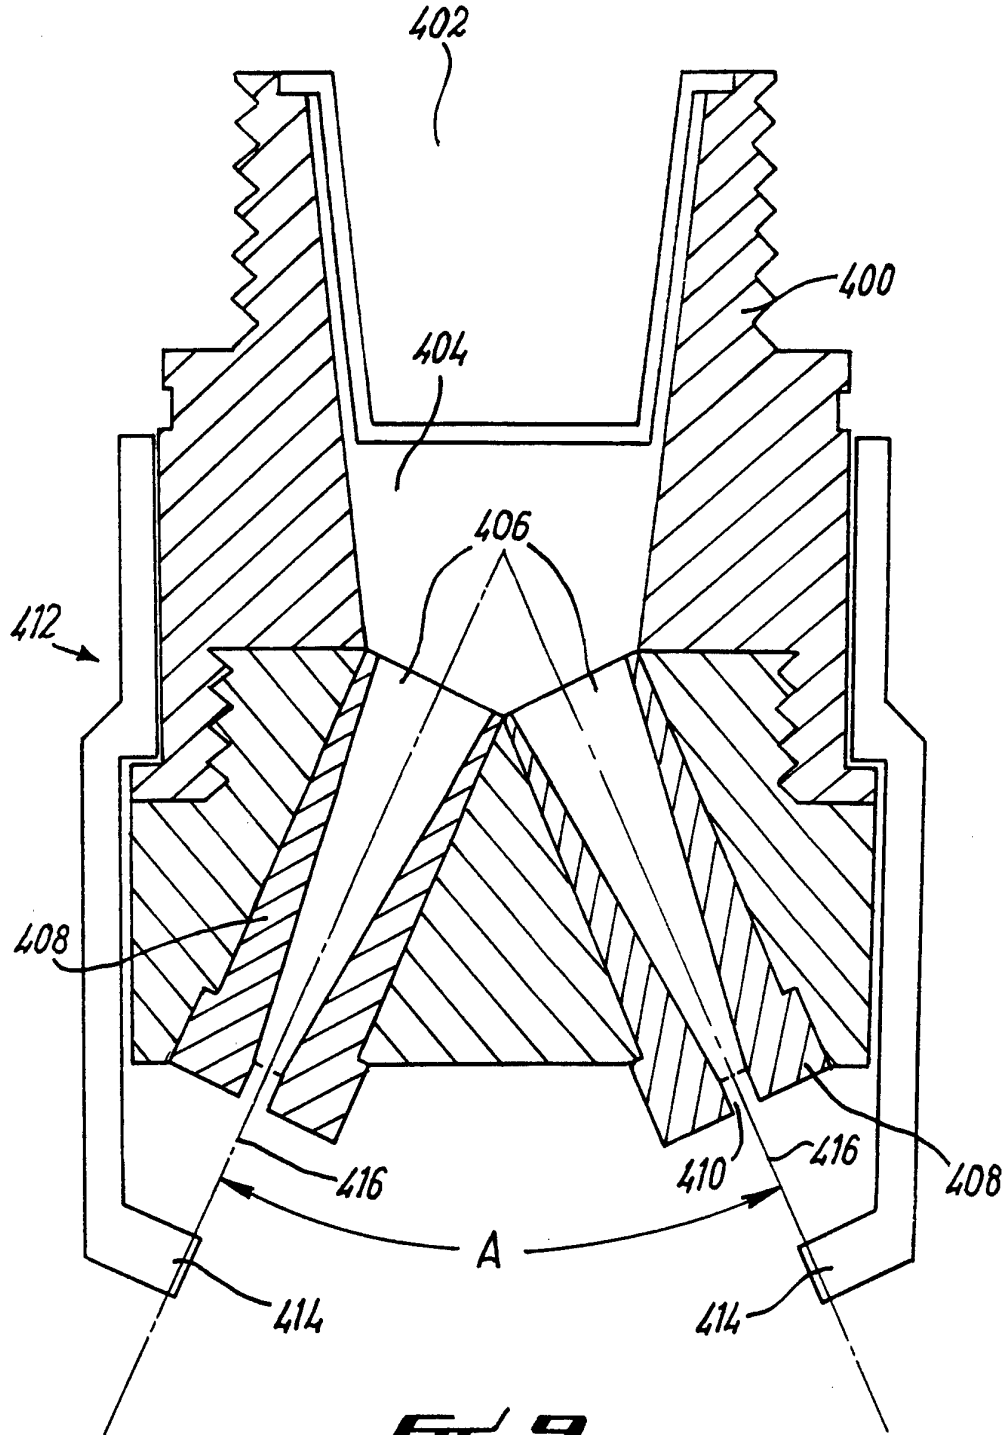

# INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/GB 95/01585

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 6 B05B3/04

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,964 808 (J. T. TILLINGHAST) 22 July 1964 see page 2, line 87 - page 3, line 27 ---	1,7,14
X	US,A,5 224 652 (KESSLER BRIAN D) 6 July 1993 see column 3, line 26 - line 37 ---	1-3,7,8
X	CH,A,620 832 (MAEDER LINUS) 31 December 1980 see claim 1 ---	1-4,7,15
X	US,A,1 993 011 (LINDBERG) 5 March 1935 see page 1, right column, line 26 - line 33 ---	1,7,11, 14
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

4 October 1995

Date of mailing of the international search report

13.10.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+ 31-70) 340-3016

Authorized officer

Juguet, J

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/01585

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR,A,2 266 455 (PERROT REGNERBAU GMBH & CO) 31 October 1975 see the whole document -----	1-3,7,14



# INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/GB 95/01585

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-964808		NONE	
US-A-5224652	06-07-93	NONE	
CH-A-620832	31-12-80	NONE	
US-A-1993011	05-03-35	NONE	
FR-A-2266455	31-10-75	NONE	