

(No Model.)

2 Sheets—Sheet 1.

J. M. CHAMBERLAIN.

MACHINE FOR CLEANSING CLOTHES.

No. 332,588.

Patented Dec. 15, 1885.

Fig. 1.


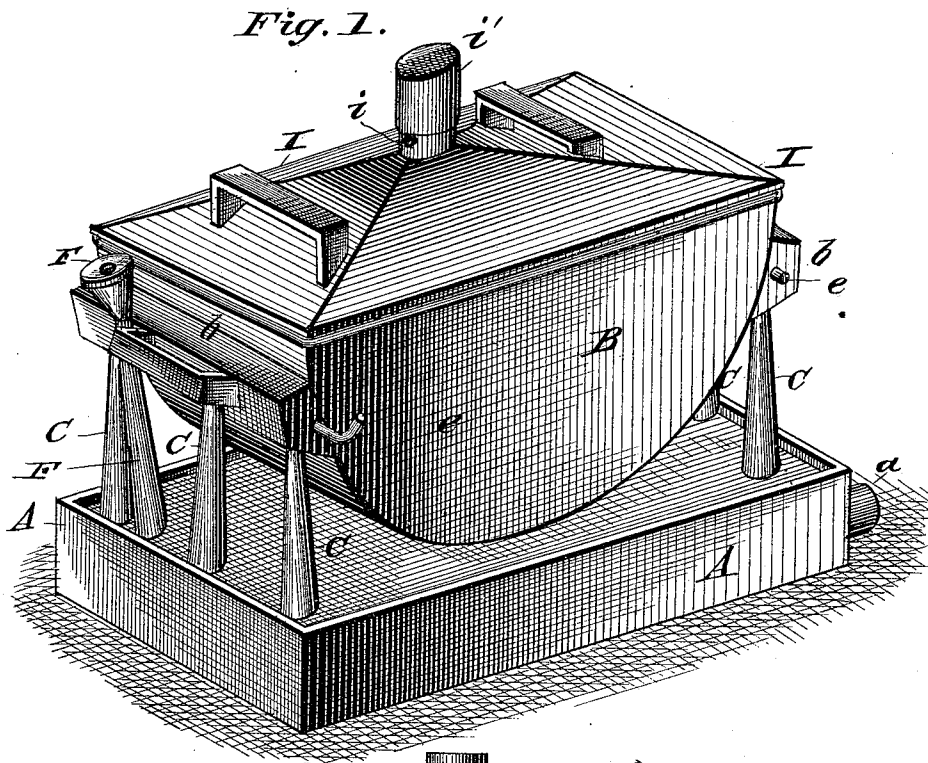


Fig. 3.

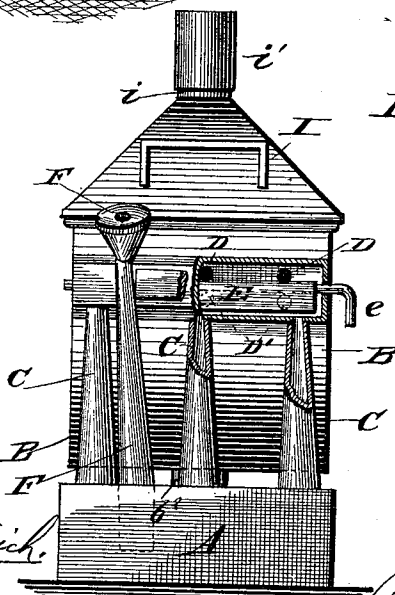

WITNESSES

Phil C. Dietrich
John McCleary

INVENTOR

James M. Chamberlain
By *J. M. McCleary*
Attorney

(No Model.)

2 Sheets—Sheet 2.

J. M. CHAMBERLAIN.

MACHINE FOR CLEANSING CLOTHES.

No. 332,588.

Patented Dec. 15, 1885.

Fig. 2.


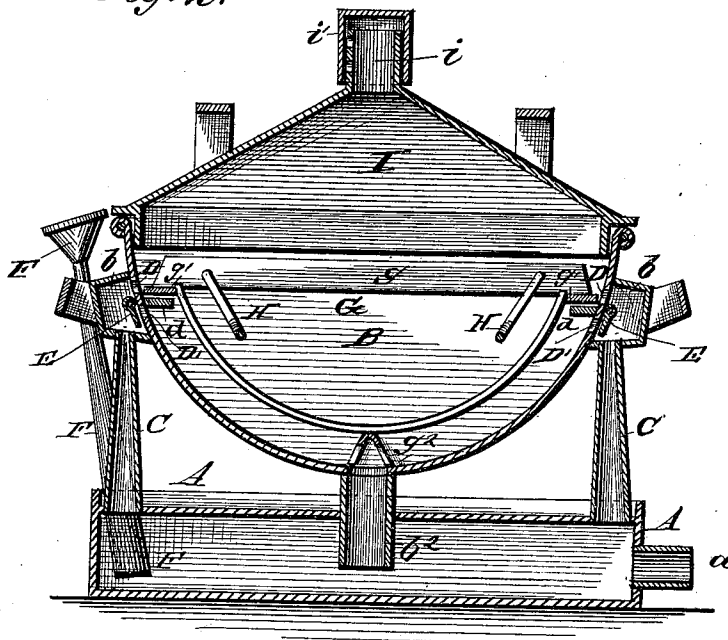


Fig. 4.

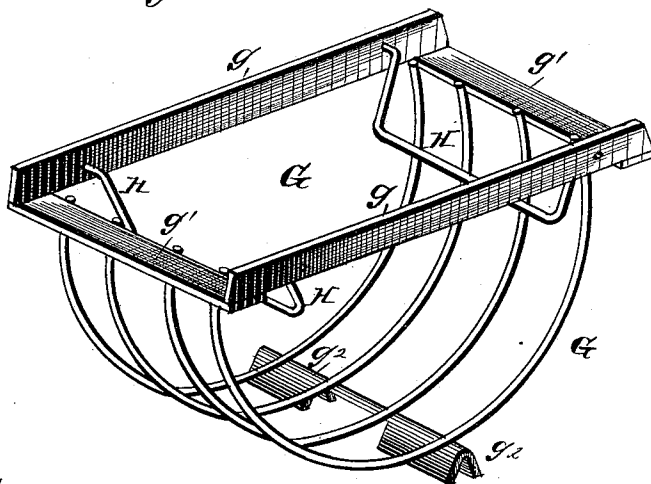

WITNESSES

Phil Dietrich
C. Scott McCamy

INVENTOR

James M. Chamberlain
By J. M. Casey
Attorney

UNITED STATES PATENT OFFICE.

JAMES M. CHAMBERLAIN, OF WINFIELD, KANSAS.

MACHINE FOR CLEANSING CLOTHES.

SPECIFICATION forming part of Letters Patent No. 332,583, dated December 15, 1935.

Application filed March 20, 1885. Serial No. 159,586. (No mode'.)

To all whom it may concern:

Be it known that I, JAMES M. CHAMBERLAIN, of Winfield, in the county of Cowley and State of Kansas, have invented certain
5 new and useful Improvements in Machines for Cleansing Clothes; and I do hereby declare the following to be a full, clear, and exact description of the invention, such as will enable
10 others skilled in the art to which it pertains to make and use the same.

My invention relates to a machine for cleansing clothes by steam, the object being to provide a machine so constructed as to permit
15 steam to be introduced both above and below the clothes.

The invention consists in the features of construction and combinations of parts hereinafter fully described, and pointed out in the
20 claims.

In the accompanying drawings, Figure 1 is a perspective view of a machine constructed in accordance with my invention. Fig. 2 is a central longitudinal section of the same. Fig. 3 is an end elevation, partly broken away; and
25 Fig. 4 illustrates the inner removable clothes-frame detached.

A represents a rectangular box, closed on all sides and provided with a suitable water-inlet, *a*. This box forms the water-reservoir
30 of the machine, and at the same time serves as a base to support the clothes-vessel B and its hollow standards C, which latter serve as steam-pipes. The vessel B is semicircular in form, and is formed at each end with a steam-chamber, *b*. These chambers *b* communicate
35 with the interior of the vessel B by means of two series of openings, D and D', separated by cleats *d d*.

E E represent valves extending across the machine at each end, within the chambers *b*, and formed with finger-pieces *e e*, so that the valves may be turned to close either row or series of openings D and D'. The steam-pipes C connect the water-reservoir with the steam-chambers *b*. The vessel B is formed with a
40 central water-outlet, *b*², which extends down into the reservoir A a sufficient distance to prevent the entrance of steam through it. The office of this outlet is to convey waste water
45 from the clothes to the reservoir.

At one end of the machine is arranged a pipe, F, whose lower end extends into the

reservoir A below low-water mark, while its upper end is provided with a whistle to signal when the water in the reservoir has fallen
55 below the required mark.

The cleats *d d*, in addition to separating the upper and lower rows of openings in the clothes-vessel, serve to support a clothes-frame, G. This frame consists of parallel side pieces, *g g*, end cross-pieces, *g' g'*, and parallel semi-circular rods secured to said end pieces. A
60 central transverse support, *g*², is secured to the semicircular rods of the frame, said support being adapted to rest on the bottom of
65 the vessel B, and being cut away centrally to permit the escape of waste water through the opening *b*² of the vessel.

H H represent transverse bails or bars, preferably secured across the ends of the
70 clothes-frame removably, to hold the clothes in place.

I represents the cover of the vessel, fitting the latter tightly, and formed with a central tubular outlet, *i*, for the escape of steam and
75 dirt from the clothes. This outlet *i* is provided with a removable cap, *i'*, for use when desired.

The operation of my improved machine may be explained as follows: Water is supplied to
80 the reservoir A. The clothes are then thoroughly soaped and placed on the frame G. The entire device is then placed upon the stove. As soon as the water is sufficiently heated, steam will rise through the pipes C,
85 and will enter the vessel B either above or below the clothes, accordingly as the valves E E are turned.

In practice it takes but about twenty minutes to sufficiently steam the clothes, and at
90 the end of that time the water in the reservoir will have fallen sufficiently to permit the entrance of steam to the whistle-pipe to signal the completion of the operation.

It will be apparent that the clothes-frame
95 may be readily removed for cleaning when necessary.

Having fully described my invention, what I claim as new, and desire to secure by Letters
100 Patent, is—

1. A steam clothes-cleanser consisting of the combination of a water-reservoir, a clothes-vessel supported above the latter by steam-pipes and provided with steam-chambers, and

valves for regulating the escape of steam from said chambers to the clothes-vessel, substantially as set forth.

2. The combination, with a box or water reservoir forming the base of the machine, of a clothes-vessel connected thereto by steam-pipes and formed with steam-chambers, an alarm-whistle, and a cover provided with an escape-pipe, substantially as set forth.

3. In a steam clothes-cleanser, the combination, with the clothes-vessel formed at its ends with upper and lower steam-openings, of partition-cleats separating said openings, and a clothes-frame supported upon said cleats, substantially as set forth.

4. In a steam clothes-cleanser, the combination with the water-reservoir, of a clothes-vessel provided with a central discharge-tube, and a clothes-frame supported within said vessel and provided with a transverse rest, which is cut away above said discharge-opening of the vessel, substantially as set forth.

In testimony whereof I have signed this specification in the presence of two subscribing witnesses.

JAMES M. CHAMBERLAIN.

Witnesses:

CORNELIUS TRUMP,
J. FLICKINGER.