




(22) **Date de dépôt/Filing Date:** 2008/03/20
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2008/09/23
 (45) **Date de délivrance/Issue Date:** 2014/04/29
 (30) **Priorité/Priority:** 2007/03/23 (US60/896818)

(51) **Cl.Int./Int.Cl. B04B 1/20** (2006.01),
B04B 1/08 (2006.01), **B04B 11/02** (2006.01),
B04B 7/08 (2006.01)
 (72) **Inventeur/Inventor:**
 WICK, ROD, CA
 (73) **Propriétaire/Owner:**
 WICK, ROD, CA
 (74) **Agent:** OYEN WIGGS GREEN & MUTALA LLP

(54) **Titre : APPAREILLAGE ET METHODES DE REMEDIATION AUX DEBLAIS DE FORAGE ET AUTRES MATERIAUX PARTICULAIRES**
 (54) **Title: APPARATUS AND METHODS FOR REMEDIATING DRILL CUTTINGS AND OTHER PARTICULATE MATERIALS**

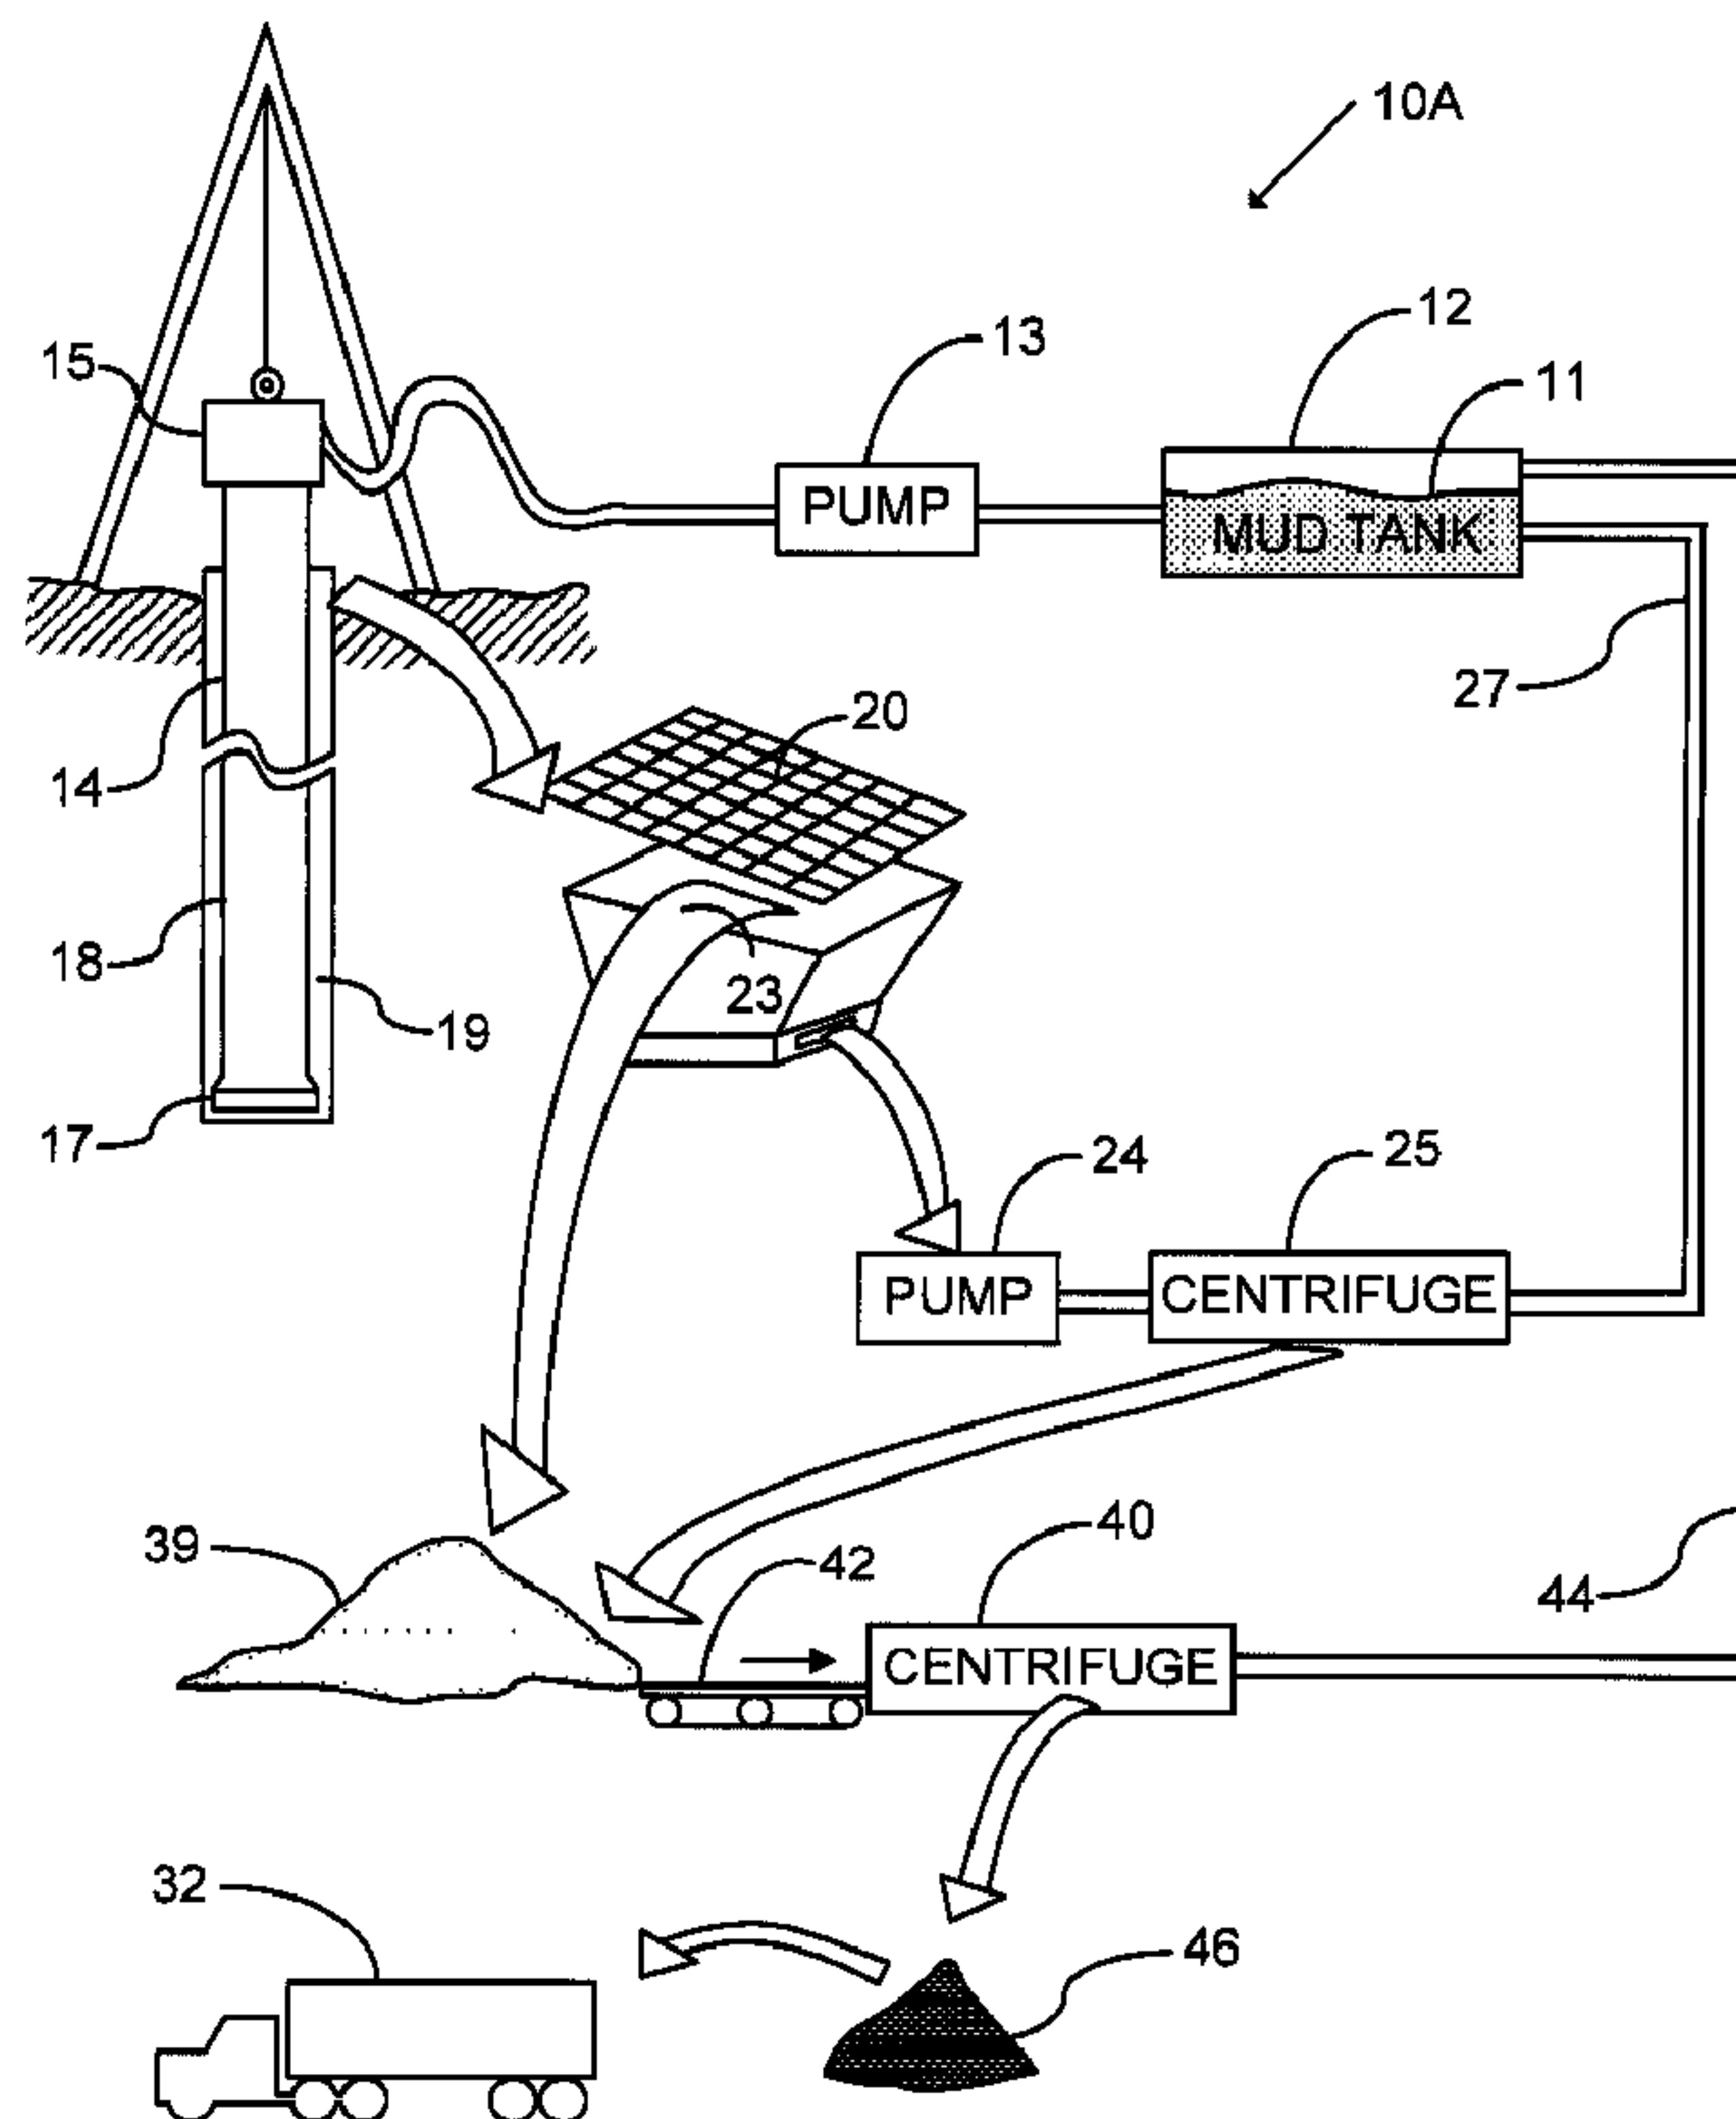

(57) **Abrégé/Abstract:**

Apparatus for separating liquids, such as oils from solids, such as drill cuttings, comprises a decanter-type centrifuge. In example implementations the centrifuge has a bowl angle of four degrees or less and a low fluid depth of two inches or less. A material



(57) Abrégé(suite)/Abstract(continued):

conveyor such as an auger is provided to carry material having a relatively high initial solids content, such as 50% or more into the centrifuge. The apparatus may comprise heaters to heat the material. In example implementations the decanter- type centrifuge processes solids from a main centrifuge and/or a shale shaker.

ABSTRACT OF THE DISCLOSURE

Apparatus for separating liquids, such as oils from solids, such as drill cuttings, comprises a decanter-type centrifuge. In example implementations the centrifuge has a bowl angle of four degrees or less and a low fluid depth of two inches or less. A material conveyor such as an auger is provided to carry material having a relatively high initial solids content, such as 50% or more into the centrifuge. The apparatus may comprise heaters to heat the material. In example implementations the decanter-type centrifuge processes solids from a main centrifuge and/or a shale shaker.

**APPARATUS AND METHODS FOR REMEDIATING DRILL CUTTINGS AND
OTHER PARTICULATE MATERIALS**

5 **Cross-Reference to Related Application**

[0001] This application claims priority from United States application No. 60/896,818 filed 23 March 2007.

Field of the Invention

10 [0002] This invention relates to removing oily residues from particulate materials. The methods and apparatus may be applied to separating oil-based drilling fluids from drill cuttings.

Background

15 [0003] Drilling fluids are used in drilling deep wells, such as wells for extraction of oil or natural gas. The drilling fluids help to keep the well bore open and also flush cuttings made by the drill bit to the surface. In a typical drilling operation, drilling fluid (also called drilling mud) is pumped down through the bore of a drill string to a drill bit. The drilling fluid exits through apertures in the drill bit and returns to the surface in an annular
20 space between the drill string and a wall of the drill bore. The drilling fluid carries with it cuttings of rock or other material that is being drilled through.

[0004] At the surface, the cuttings are separated from the drilling fluid so that the drilling fluid may be reused. This separation may occur in several stages. In a typical operation,
25 the drilling fluid is first passed through a shale shaker. The shale shaker comprises a vibrating screen. Large cuttings do not pass through the screen whereas the drilling fluid and small particles pass through the screen. The drilling fluid is then typically passed through a centrifuge. In most cases the centrifuge is a horizontal decanter-type centrifuge. The centrifuge separates smaller particulate solids from the drilling fluid. The drilling fluid
30 is then returned to a tank from which it can be reused.

[0005] Various types of drilling fluid are used. Oil-based drilling fluids are used in some circumstances. Such oil-based drilling fluids have properties that are desirable in some applications. One difficulty that occurs, particularly with oil-based drilling fluids, is that
35 the separation of particles from the drilling fluid is not perfect. Particles that have been separated by a shale shaker or a centrifuge typically carry some drilling fluid with them. Oily materials can constitute environmental hazards. In most jurisdictions it is not legal to

dump cuttings or other soil which is contaminated with oil. Thus, disposing of cuttings in cases where an oil-based drilling fluid has been used can be very expensive.

5 [0006] In some cases, the oil content of the cuttings is sufficiently high that regulations govern the transportation of the cuttings. Such regulations can require that the cuttings be mixed with sawdust or another oil-absorbent material to prevent the release of oil during shipment. This adds significantly to the expense of transportation and also increases the volume of material to be disposed of, thus compounding a problem.

10 [0007] It is common practice to truck cuttings to a storage area and to store the cuttings until such time as somebody finds a practical way to remediate the cuttings by removing or breaking down the oil which coats the particles of the cuttings. The existence of such storage areas is a significant potential liability.

15 [0008] Various methods for removing oils from soil or other similar materials have been proposed in the literature. Some such methods are economically impractical and others do not work.

20 [0009] There is a need for cost-effective, practical methods and apparatus able to remove oils from soils and other similar materials. There is a particular need for such methods and apparatus that are suitable for alleviating the problems described above.

Brief Description of the Drawings

25 [0010] The accompanying drawings illustrate non-limiting embodiments of the invention.

[0011] Figure 1 is a schematic illustration of a prior art drilling operation.

[0012] Figure 2 is a schematic diagram of a drilling operation implementing a method for remediating drilling cuttings according to the invention.

30

[0013] Figures 3 and 3A are flow diagrams illustrating methods according to example embodiments of the invention.

35 [0014] Figure 4 is a cross section through a horizontal decanter-type centrifuge adapted according to an embodiment of the invention.

[0015] Figure 5 is an alternate cross sectional view of the horizontal decanter-type centrifuge shown in Figure 4.

5 [0016] Figure 6 is a schematic illustration of a horizontal decanter-type centrifuge according to an embodiment of the invention equipped with a heating system.

[0017] Figure 7 shows an advantageous layout for apparatus according to an embodiment of the invention.

10 Detailed Description

[0018] Throughout the following description specific details are set forth in order to provide a more thorough understanding to persons skilled in the art. However, well known elements may not have been shown or described in detail to avoid unnecessarily obscuring the disclosure. Accordingly, the description and drawings are to be regarded in
15 an illustrative, rather than a restrictive, sense.

[0019] Figure 1 shows a typical prior art drill rig **10**. Drill rig **10** has a mud tank **12** containing drilling fluid **11**. The drilling fluid **11** is pumped through a pump **13** into a drill string **14** by way of swivel **15**. The drilling fluid passes downward through a bore **18** in
20 drill string **14** to a drill bit **17**. As the drill bit **17** cuts away at rock or other material, drilling cuttings are carried upwardly by the drilling fluid through an annular space **19** surrounding drill string **14**.

[0020] After the drilling fluid reaches the surface, it is passed through a shale shaker **20**.
25 Larger particles of cuttings do not pass through shale shaker **20** and are removed as solids **22** at a solids output **23**. Fluids and smaller particles which pass through shale shaker **20** are pumped by pump **24** to a centrifuge **25**. The centrifuge **25** separates some suspended solids **29** from the drilling fluid **11**. Drilling fluid **11** is then returned to mud tank **12** by way of conduit **27**.

30

[0021] The separated solids **22** and **29** are then mixed with a material such as sawdust **30** and loaded into a truck **32** for transportation to a storage and treatment location.

[0022] Figure 2 shows a drill rig **10A** modified according to an embodiment of the
35 invention. Apparatus which is common to Figures 1 and 2 is identified by the same reference numerals in Figure 2 as in Figure 1. In the embodiment of Figure 2, solids

output by shale shaker 20 and centrifuge 25 are collected. The collected solids 39 are passed to a second centrifuge 40 by way of a material conveyor 42. It is convenient but not mandatory that the collected solids 39 be passed directly to second centrifuge 40 by a material conveyor. In some embodiments, collected solids 39 are conveyed to second centrifuge 40 by a loader or other material carrier. It is also possible to stockpile collected solids 39 and process the collected solids 39 in batches periodically.

[0023] Second centrifuge 40 removes further drilling fluid from the collected material 39.

10 In the illustrated embodiment, the drilling fluid removed by second centrifuge 40 is returned to mud tank 12 by way of conduit 44. The drilling fluid could instead be collected and reused in some other manner. Solids 46 output by second centrifuge 40 have a significantly reduced oil content as compared to solids 39. Solids 46 may, in many cases, be loaded directly into a truck 32 for transportation to a storage facility with reduced risk that any oil will escape during transportation to the storage facility. In some embodiments, solids 46 have a liquid content of 8% to 12% or less.

20 **[0024]** It can be seen from Figure 2 that second centrifuge 40 is connected in series with first centrifuge 25 in the sense that the solids output from first centrifuge 25 are passed through second centrifuge 40. The material at the input of second centrifuge 40 may have a relatively high solids content. For example, the material at the input of second centrifuge 40 may have a solids content in excess of 50%, in some embodiments, 60%, or even 70%, or more (as much as 90% in some cases).

25 **[0025]** Figure 3 shows a method 50 according to one embodiment of the invention. At block 52, method 50 receives drilling fluid containing cuttings. In optional block 54 larger particles are removed from the cuttings by a fluid/solid separation device, for example by way of a shale shaker. In block 56 the drilling fluid is subjected to a first centrifuging step. In block 58 the solids separated from the drilling fluid in first centrifuging step 56 are passed to a second stage. In block 60 the second stage solids are subjected to a second centrifuging step. In block 62 the fluids from the second centrifuging step are collected. The collected fluids may be reused.

35 **[0026]** Collecting and reusing drilling fluid that would otherwise be disposed of with drilling cuttings can provide a significant cost savings because drilling fluids can be expensive. Collecting more of the drilling fluid permits both a higher recovery of costs and reduces the contamination of solid material that is removed from the drilling fluid in second centrifuging step 60.

[0027] First centrifuging step **56** and second centrifuging step **60** may optionally be carried out by the same centrifuge (at different times). However, in a preferred embodiment, different centrifuges are used for steps **56** and **60**. In particular, it can be advantageous to adapt the centrifuge used for second centrifuging step **60** to treat materials high in solids content. In some embodiments the solids passed to the second stage in block **58** have a relatively high solids content compared to the solids content of material that is typically passed to a centrifuge for centrifugal separation. In some embodiments, the solids content of the solids passed to the second stage in block **58** is at least twice as great as the solids content of the material centrifuged in block **56**. In some embodiments the solids content of the solids passed to the second stage in block **58** is three or more, in some cases four or more times as great as the solids content of the material centrifuged in block **56**. This ratio can be even greater in some cases, especially where the material centrifuged in block **56** has a relatively low solids content.

15

[0028] Figure 3A shows a method **65** according to another embodiment of the invention. Method **65** begins at block **66** by collecting material that has a high solids content. In this context, high solids content means a solid content of at least 50% and, in some embodiments, 60%, or 70%, or more. The high solids content material is passed into a centrifuge in block **68**. In some embodiments, block **68** comprises carrying the high solids content material into a centrifuge by way of a mass conveyor, such as an auger. Where the centrifuge used in block **68** is an axially-fed centrifuge, such as a horizontal decanter-type centrifuge, then the mass conveyor may comprise an auger that extends axially relative to the centrifuge. In block **70**, fluids are removed from the high solids content material by centrifugation. Solids are expelled in block **72**. Fluids removed from the material of block **70** may be collected for reuse.

20

[0029] Figure 4 is a partially schematic view of a centrifuge **100** adapted for separating liquids, such as oil-based drilling fluid, from an in-feed material having a relatively high solids content (e.g. a solids content of 50% or more, or in some cases, 60% or more or 70% or more). Centrifuge **100** comprises a drum **102** which can be driven for rotation about its axis **103** by a motor **104** and a suitable transmission **106**. Drum **102** is housed inside drum housing **105**. An auger **108** comprising a hollow shaft **109** supporting auger flights **110** is disposed inside drum **102**. Auger **108** can be rotated about axis **103** at a rate that is slightly different from the rate of rotation of drum **102**. In the illustrated embodiment, auger **108** is driven by a separate motor **111** via a suitable transmission **112**.

30

35

- 6 -

Alternative arrangements for driving drum 102 and auger 108 could be provided. For example, drum 102 and auger 108 could be driven by a single motor by way of suitable transmissions that cause drum 102 and auger 108 to rotate at different rates about axis 103.

5 [0030] Material 101 is introduced into centrifuge 100 by way of an in-feed auger 118 which carries the material into centrifuge 100 through an axial conduit 119. In an example embodiment, auger 118 has a diameter of 4 inches. In another example embodiment, auger 118 has a diameter in the range of about 4 inches to about 6 inches. In the illustrated embodiment, conduit 119 passes through the bore of bearings 120 that support drum 102
10 for rotation. The material is delivered to a bore 121 of hollow shaft 109. From there, the material can exit through apertures 122 into a volume 124 between shaft 109 and housing 105.

[0031] A feed mechanism 130 may be used to encourage the material to move from bore
15 121 to volume 124 without plugging. The feed mechanism may, for example, comprise a suitable cage-feed, spider-feed or bar-feed mechanism of types known in the art. Due to the high solids content of the material entering centrifuge 100, it is preferable to provide a feed mechanism that has large passages (e.g. large apertures 122) to make it unlikely that the feed mechanism will become plugged with material.

20

[0032] Figure 5 illustrates a cross section of centrifuge 100 through plane A-A in Figure 4. Feed mechanism 130 comprises apertures 122 cut through the walls of an axial portion of auger 108. In the embodiment illustrated by Figures 4 and 5, apertures 122 are rectangular in shape. Edges 131 of segments 132 of the walls of auger 108 remaining
25 between apertures 122 may have a slope which facilitates the exit of particles of material through apertures 122 into volume 124. In the illustrated embodiment, edges 131 slope toward each other so that they meet and form a peak pointing toward the centre of auger 108. Other shapes may be used to facilitate the exit of particles through apertures 122. For example, segments 132 may have convex curved inner walls.

30

[0033] In a region 114, the inner wall of housing 105 is substantially cylindrical. Drum 102 has a tapered portion 116 in which the radius of drum 102 decreases as one moves in direction 125. Flights 110 of auger 108 are shaped to conform to the contours of drum 102. There is a very small clearance between flights 110 and the inside of housing 105. As
35 a result, the rotation of auger 108 tends to sweep any particles of material along centrifuge 100 in direction 125.

[0034] In the embodiment illustrated in Figure 4, the particles of material are carried by auger **118** through region **114** to a region in bore **121** of auger **108** which is intermediate the opposing ends of centrifuge **110**. Preferably the particles are delivered in bore **121**
5 near a region in drum **102** where region **114** meets tapered portion **106**. In another embodiment, which is not illustrated, auger **118** may enter centrifuge **110** from tapered portion **116**. The particles of material first pass through region **116** as they are carried in auger **118** and delivered to a region in bore **121** which is near where tapered portion **116** meets region **114**. After the particles are delivered to bore **121**, the particles exit bore **121**
10 through apertures **122** and move into volume **124**.

[0035] As particulate material in volume **124** is carried by auger **108** in a direction **125** it begins to move radially inwardly along the inside surface of housing **105** when it reaches region **116**. Any liquid that is coating or otherwise associated with the particles
15 experiences a radially-outward force which, because of the inward slope of the walls of housing **102** in region **116** tends to cause the liquid to flow in a direction **126** which is opposite to direction **125**. Because auger **108** urges particles of solid material in direction **125** while the centrifugal forces acting on the liquids tend to cause the liquids, which can flow between flights **110** and housing **105**, to flow in direction **126**, a separation of the
20 solids from the liquids occurs in region **116**. Solids are carried to the end of drum **102** where they exit through openings **128**. Liquids exit drum **102** at the other end of the centrifuge at openings **129**. The liquids can be captured for reuse. The solids can be collected for disposal.

[0036] In some embodiments, flights **110** are closer together in region **114** and are farther apart in region **116**. This can help to move fine particles out of the fluid that collects in region **114**. In an example embodiment, flights **110** are arranged to provide a double lead in region **114** and to provide a single lead in region **116**. The double lead may, for example, provide flights spaced apart by four inches while the single lead provides flights
30 spaced apart by eight inches.

[0037] Many of the features of centrifuge **100** are conventional and may be varied in any suitable manner. One area in which centrifuge **100** differs from conventional horizontal decanter type centrifuges is the provision of in-feed auger **118** which carries materials
35 having a relatively high solids content into centrifuge **100**. Another area in which centrifuge **100** may differ from prior centrifuges is in the angle θ made by the outer wall

- 8 -

of drum **102** to axis **103** in region **116** (this angle may be called the bowl angle). In most centrifuges, θ is at least 4° and may be 6° or more. In some embodiments of this invention, θ is significantly smaller. For example, in some embodiments of the invention θ is less than 4° . θ is in the range of $\frac{1}{2}^\circ$ to 3.5° in some embodiments. In some
5 embodiments θ is approximately 2° . In some embodiments θ is $2^\circ \pm \frac{1}{2}^\circ$.

[0038] Another adaptation that centrifuge **100** may have to facilitate separation of liquids from high-solids-content infeed material is a shallow fluid depth. The fluid depth in region **114** is determined by the positions of openings **129**.

10

[0039] Having a low angle θ is thought by the inventor to assist in separating liquids from solids because, with a small angle θ , especially in combination with a shallow fluid depth, region **116** can be longer such that particles spend more time in region **116** before exiting centrifuge **100** than they would do if angle θ were steeper. In some embodiments,
15 openings **129** are positioned to provide a fluid depth of $2 \frac{1}{2}$ inches or less. The fluid depth may be, 2 inches, 1 inch or $\frac{3}{4}$ inches in example embodiments. In some embodiments, the fluid depth is in the range of $\frac{3}{4}$ inches to 2 inches.

20

[0040] In some embodiments, region **116** has the length of at least 40 inches. In example embodiments, region **116** has a length of 45 to 80 inches. In some embodiments, region **114** is shorter than region **116** and region **116** may have a length of at least 70% of a length of drum **102**.

25

[0041] In some embodiments, the radius of drum **102** reduces by at least 15% between the point at which particles enter region **116** and the point at which particles exit region **116** (in the illustrated case, at exit openings **128**).

30

[0042] In the illustrated embodiment, centrifuge **100** is horizontal. Axis **103** is horizontal to within $\pm 5^\circ$. An auger **118** or other material conveyor may be provided in the context of a horizontal decanter-type centrifuge having features which are otherwise known in the art or may be provided in combination with a centrifuge having a small angle θ in region **116**, as described above.

35

[0043] In preferred embodiments of the invention, the solids content of material exiting centrifuge **100** at openings **128** is greater than 85%. In many areas, this solids content is high enough (or conversely, the liquids content is low enough) that it is permissible to ship

- 9 -

the materials directly in a truck without mixing them first with sawdust or other liquid-absorbing materials. This reduces the volume of material that must be carried away to a storage and/or treatment location and also renders the material more environmentally benign by removing more liquids which would otherwise be considered to be pollutants.

5 Ideally the fluid content of the solid material exiting centrifuge **100** is less than 10%.

[0044] Liquids which are removed from centrifuge **100** at openings **129** may include oils that can be reused in oil-based drilling fluids or used in the formulation of oil-based drilling fluids. Such recovered oils are a valuable by-product. Ideally the liquids removed
10 at openings **129** have a solids content not exceeding about 5%.

[0045] The efficiency with which a centrifuge **100** can perform separation may be increased by increasing the temperature of the material being treated by centrifuge **100**. Centrifuge **100** may be operated in areas which could have explosive atmospheres. It is
15 therefore desirable that any system provided to heat the materials being treated in centrifuge **100** be designed without open flames or other sources of ignition. In some embodiments, heating is provided by circulating hot air and/or hot fluids (e.g. hot water, glycol, or mixtures thereof). The air and/or fluids may be heated electrically, for example.

20 [0046] In some embodiments, heat is applied to one or more of:

- housing **105**;
- conduit **119** and/or auger **118**; and
- a feed funnel or conveyor through which the material to be treated passes to infeed
25 auger **118**.

[0047] The heat may be supplied, for example, by:

- passing a heated fluid or gas through coils, a suitable heating jacket or other passages such that the heated fluid comes into thermal contact with the material to be treated;
- 30 • providing electrical heating elements in thermal contact with the material to be treated; and/or
- the like.

Thermal contact may be made through a wall of centrifuge **100** or its associated apparatus or more directly with the material to be treated.

35

[0048] Advantageously, by the time it has reached apertures **122** or feed mechanism **130** the material to be treated is at a temperature in excess of 95 °F, preferably at least 120 °F and more preferable at least 150 °F. Where glycol is used as a heat transfer agent, the glycol may be heated, for example, to a temperature in the range of 200 °F to 300 °F and then circulated to warm the incoming material and centrifuge **100**. In some embodiments, the glycol or other heat exchange fluid is heated by an electrical heating element which may be an immersion-type heating element.

[0049] It can be beneficial to heat the incoming material at or near to the inlet of centrifuge **100**. If the incoming material is heated too early then some oil may separate from the material before the material reaches centrifuge **100**. In some cases this could result in leakage of oil or interfere with the operation of a material conveyor **42** or other apparatus for delivering material to centrifuge **100**. In an example embodiment, heating is provided both around housing **105** and around conduit **119** and/or auger **118**. In some embodiments, material to be treated is also heated at or in a first centrifuge **25**.

[0050] Figure 6 shows schematically a centrifuge **200** that includes a heating system. Centrifuge **200** includes a feed funnel **202** that receives material to be treated. Feed funnel **202** delivers the material to an infeed auger **204** that passes through a conduit **206**. Conduit **206** extends into the rotating drum **208** of centrifuge **200**. Centrifuge **200** may operate in the same or substantially the same way as centrifuge **100**, which is described above.

[0051] A heating jacket **214** surrounds drum **208**. Heating jacket **214** may comprise an insulated wall **215**. Heating elements **218** are provided within heating jacket **214**. The heating elements in the illustrated embodiment include coils of tubing. A heater **220** heats a heat exchange fluid. The heat exchange fluid is circulated through heating elements **218** by a circulation pump **222**. In the illustrated embodiment additional heating elements are provided. In particular:

- heating elements **224** are provided on the walls of feed funnel **202**;
- heating elements **225** are provided on the wall of conduit **206**; and,
- heating elements **226** are provided within a shaft **227** of infeed auger **204**.

[0052] In some embodiments, some or all of the heating is provided in other manners. For example, heating may be provided by electrical heating elements or by mechanical friction. In some embodiments, drum **208** is heated by mechanical friction between drum **208** or a member that rotates with drum **208** and a stationary member.

5 [0053] Figure 7 shows one advantageous arrangement for apparatus 230 according to an example embodiment of the invention. Apparatus 230 comprises a main centrifuge 234 and a shale shaker 236 arranged on either side of an input bin 238. Solids 239A from main centrifuge 234 and solids 239B from shale shaker 236 are both delivered into input bin 238.

10 [0054] A conveyor 242 carries the solids to a feed funnel 244 of a horizontal decanter-type centrifuge 246 that serves as a horizontal decanter oil cuttings drier to separate oils from the solids as described above. Oils may be returned to a drill rig or other collection point for reuse in drilling fluid by a fluid output line 247. Solids having much reduced oil content are delivered by solids output 248 to a collection point from which the solids can be loaded for transport.

15 [0055] The arrangement illustrated in Figure 7 is advantageous because it permits operation with or without centrifuge 246. When centrifuge 246 is not present or is not operational because it is being serviced or the like then operation can continue with solids 239A and 239B being collected in input bin 238. The solids can be allowed to collect in bin 238 until centrifuge 246 is back online or can be handled in a manner known in the prior art while centrifuge 246 is not present or not operational.

20 [0056] In some embodiments, heaters 250 are provided to preheat material in input bin 238 and or material being delivered by conveyor 242. For example, heaters 250 may be applied to heat the structures of input bin 238 and/or conveyor 242. For example, the heaters may heat the walls and/or floor of input bin 238 and/or the structure of conveyor 242. In some embodiments, input bin 238 and/or conveyor 242 may be located inside an insulated structure 251 to conserve heat.

30 [0057] Apparatus 230 can be conveniently located in close proximity to a drill rig.

[0058] The various aspects of the invention described herein may be used independently of one another. For example:

- The methods for processing drilling fluids which involve feeding the solids output by one centrifuge and/or a shale shaker into a second centrifuge may be practiced without using the specific centrifuge designs described herein.

- 12 -

- A centrifuge may be provided with a feed auger **118** or other material conveyor to bring high-solids-content material into the centrifuge without having a low bowl angle and vice versa.
- A centrifuge may be provided with a heating system as described herein while differing in other design features from the example centrifuges described herein.
- The methods for removing liquids from high-solids-content materials by passing the high-solids-content materials through a centrifuge may be practiced without using the specific centrifuge designs described herein.

Features of different disclosed embodiments may be combined in combinations and sub-combinations other than those expressly described and depicted herein.

[0059] Where a component (e.g. a material conveyor, bearing, assembly, device, etc.) is referred to above, unless otherwise indicated, reference to that component (including a reference to a "means") should be interpreted as including as equivalents of that component any component which performs the function of the described component (i.e., that is functionally equivalent), including components which are not structurally equivalent to the disclosed structure which performs the function in the illustrated exemplary embodiments of the invention.

[0060] While a number of exemplary aspects and embodiments have been discussed above, those of skill in the art will recognize certain modifications, permutations, additions and sub-combinations thereof. The invention may be applied to separate oils from oily materials other than drill cuttings. For example, the invention may be applied to separate oils or oily materials from dirt in the event of oil spills or leaks.

WHAT IS CLAIMED IS:

1. A system for treating drilling fluid, the system comprising:

5 a shale shaker comprising a vibrating screen located to receive drilling fluid containing cuttings retrieved from a well bore and to separate solids that do not pass through the vibrating screen;

a horizontal decanter-type centrifuge connected to take in the separated solids from the shale shaker and to separate liquids from the separated solids; and

10 a main centrifuge having an inlet connected to receive fluids that do pass through the vibrating screen of the shale shaker and a solids outlet wherein the solids outlet of the main centrifuge is connected to deliver solids to the inlet of the horizontal decanter-type centrifuge;

wherein the horizontal decanter-type centrifuge comprises:

15 a generally horizontal rotatable drum having a first tapered portion in which liquids are separated from the separated solids, the tapered portion having a wide end and a narrow end; and

20 an infeed conveyor for delivering the separated solids to a main auger inside the drum, the main auger comprising a hollow shaft which supports a plurality of flights for sweeping the delivered separated solids toward a first set of openings near the narrow end, while permitting liquids which have separated from the separated solids to flow toward a second set of openings at an end of the drum opposing the narrow end.

25 2. A system according to claim 1 wherein the drum comprises a second generally cylindrical portion joined to the tapered portion at the wide end and flights of the main auger are closer together in a second part of the main auger that extends through the second portion than are the flights of the main auger in a first part of the main auger that extends through the first tapered portion of the drum.

30

- 14 -

3. A system according to claim 2 wherein the flights of the main auger are arranged in a single lead configuration in the first part of the main auger and in a double lead configuration in the second part of the main auger.
- 5 4. A system according to any one of claims 1 to 3 wherein the horizontal decanter-type centrifuge comprises a heating jacket adjacent to the drum, the heating jacket disposed to heat a wall of the drum.
- 10 5. A system according to any one of claims 1 to 3 wherein the infeed conveyor comprises a conduit having a bore for carrying the material into the drum and the horizontal decanter-type centrifuge comprises one or more heating elements in thermal contact with the conduit.
- 15 6. A system according to any one of claims 1 to 4 wherein the infeed conveyor comprises an axial conduit that is substantially concentric with the drum.
7. A system according to any one of claims 1 to 6 wherein an axis of rotation of the drum is within $\pm 5^\circ$ of horizontal.
- 20 8. A system according to any one of claims 1 to 6 wherein the drum is supported for rotation by a plurality of bearings and the infeed conveyor extends through a bore of at least one of the bearings into the hollow shaft of the main auger.
- 25 9. A system according to claim 8 wherein the infeed conveyor comprises an auger.
10. A system according to claim 9 wherein an angle between an axis of rotation of the drum and an inside wall of the tapered portion is 4 degrees or less.
- 30 11. A system according to claim 10 wherein the second openings are spaced radially inwardly from the inner wall of the drum by an amount such that a fluid depth of 2 inches or less is maintained.

- 15 -

12. A system according to any one of claims 9 to 11 comprising a heater arranged to heat material being treated in the horizontal decanter-type centrifuge.
- 5 13. A system according to claim 12 wherein the heater comprises a heating element located within a shaft of the auger of the infeed conveyor.
- 10 14. A system according to any one of claims 1 to 13 comprising a bin located to receive solids from the solids outlet of the main centrifuge and the solids that do not pass through the vibrating screen of the shale shaker and a material conveyor connected to carry material from the bin to the input of the horizontal decanter-type centrifuge.
- 15 15. A system according to any one of claims 1 to 3 comprising one or more heaters arranged to heat solids in the horizontal decanter-type centrifuge.
16. A system according to claim 15 wherein the infeed conveyor comprises an infeed auger and the one or more heaters comprise a heating element located within a shaft of the infeed auger.
- 20 17. A method for removing liquids from drilling fluid containing cuttings, the method comprising:
- passing the drilling fluid and cuttings to an input of a solid/fluid separation device;
 - 25 processing the drilling fluid and cuttings in the solid/fluid separation device to provide a first output enriched in solids and a second output enriched in fluids;
 - passing the first output of the solid/fluid separation device to an input of a centrifuge;
 - 30 processing the first output in the centrifuge to provide a third output enriched in solids and a fourth output enriched in liquids;

- 16 -

passing the second output of the solid/fluid separation device to a main centrifuge; and

processing the second output of the solid/fluid separation device in the main centrifuge to provide a fifth output enriched in liquids and a sixth output enriched in solids, and passing the sixth output of the main centrifuge to the input of the centrifuge.

18. A method according to claim 17 wherein the centrifuge comprises a horizontal decanter-type centrifuge.

19. A method according to claim 18 wherein the solid/fluid separation device comprises a screen.

20. A method according to any one of claims 18 and 19 wherein the solid/fluid separation device comprises a shale shaker.

21. A method according to any one of claims 18 to 20 comprising heating the first output to a temperature of at least 100 °F before completing processing the first output in the horizontal decanter-type centrifuge.

22. A method according to any one of claims 18 to 21 wherein passing the first output of the solid/fluid separation device to the input of the horizontal decanter-type centrifuge comprises carrying the first output along an infeed conveyor that is concentric with an axis of rotation of a drum of the horizontal decanter-type centrifuge.

23. A method according to claim 22 comprising heating the first output as the first output is carried along the infeed conveyor.

- 17 -

24. A method according to any one of claims 22 and 23 wherein the infeed conveyor comprises a conduit having a bore and the method comprises heating the conduit.
- 5 25. A method according to any one of claims 17 to 24 wherein the first output has a solids content of at least 50%.
26. A method according to claim 25 wherein the third output has a solids content of 85% or more.
- 10 27. A method according to any one of claims 17 to 26 comprising collecting the fifth and fourth outputs and recycling the fifth and fourth outputs as drilling fluid.
- 15 28. A method according to claim 17 comprising heating the first output to a temperature of at least 100 °F before completing processing the first output in the centrifuge.
- 20 29. A method according to any one of claims 17 to 24 or 28 wherein the centrifuge comprises a horizontal decanter-type centrifuge and the first output has a solids content of at least 50%.
- 25 30. A method according to claim 29 wherein passing the first output of the solid/fluid separation device to the input of the centrifuge comprises carrying the first output along an infeed auger that is concentric with an axis of rotation of a drum of the centrifuge.
- 30 31. A method according to any one of claims 29 and 30 comprising collecting the fourth and fifth outputs and recycling the fourth and fifth outputs as drilling fluid.

- 18 -

32. A method according to any one of claims 29 to 31 comprising maintaining a fluid depth of 2 inches or less in the horizontal decanter-type centrifuge.
33. A method according to any one of claims 29 to 32 wherein the horizontal
5 decanter-type centrifuge comprises a rotating drum and the method comprises heating a wall of the drum.

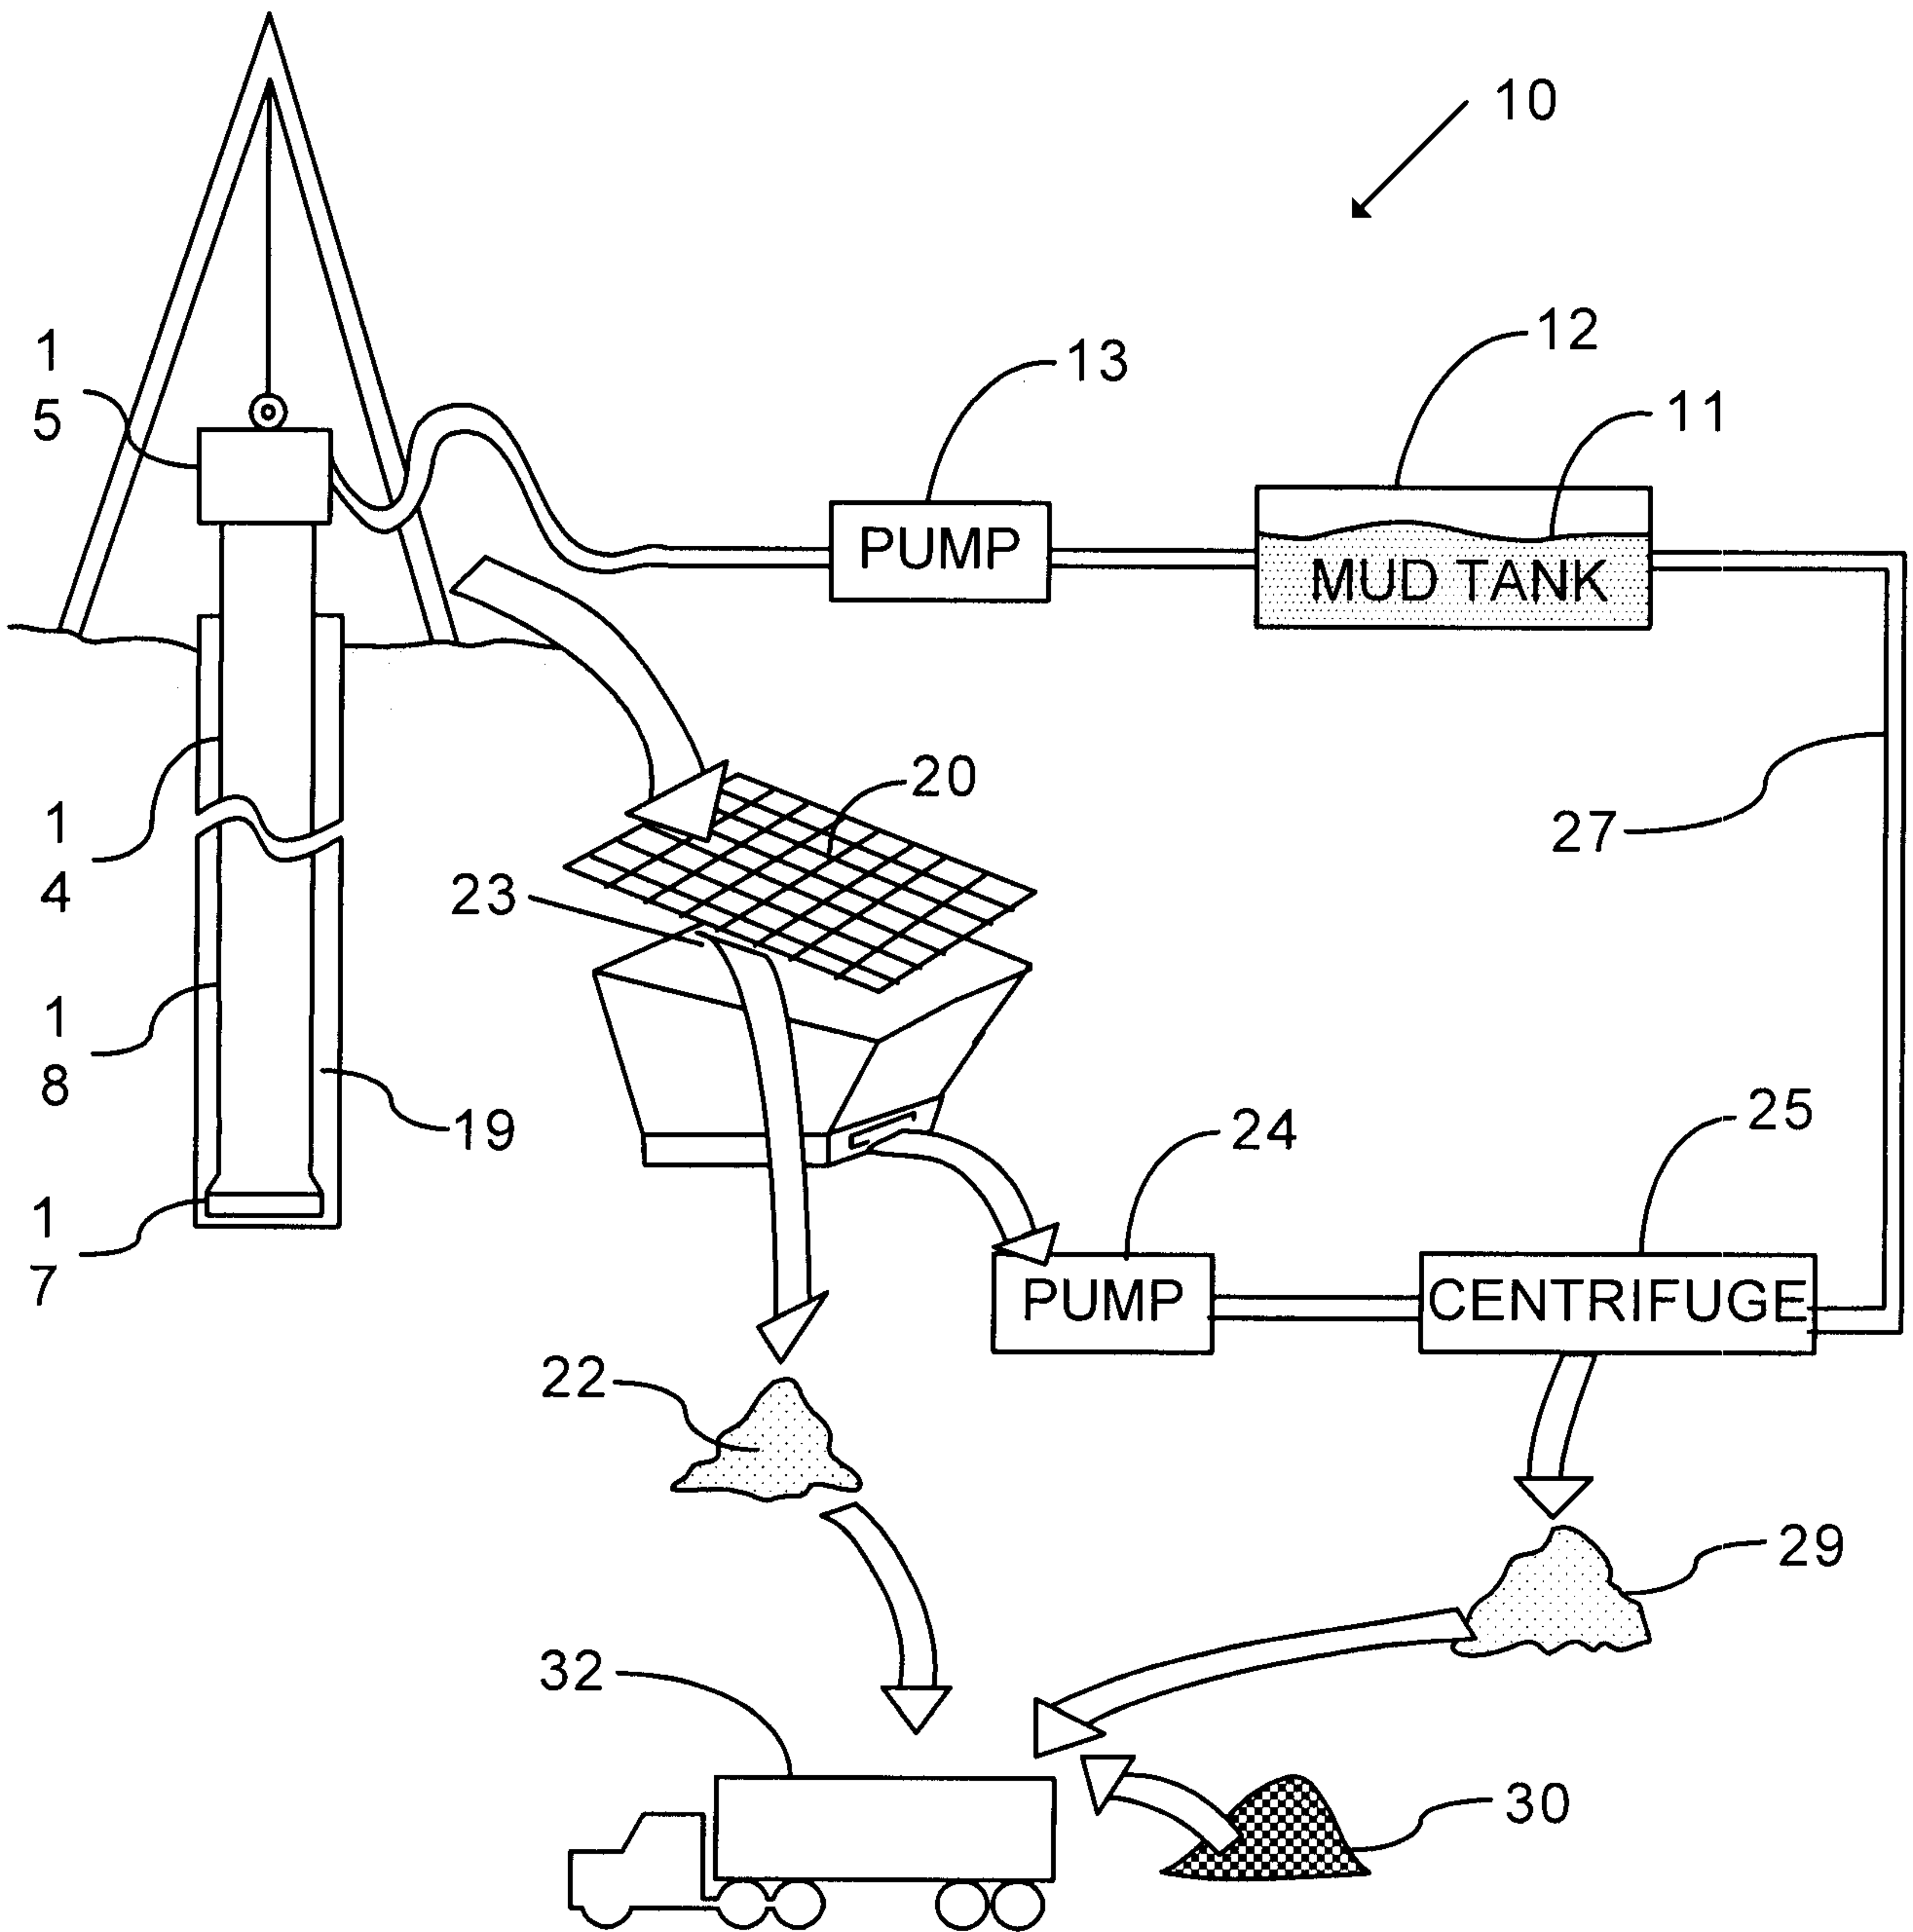


FIGURE 1 (PRIOR ART)

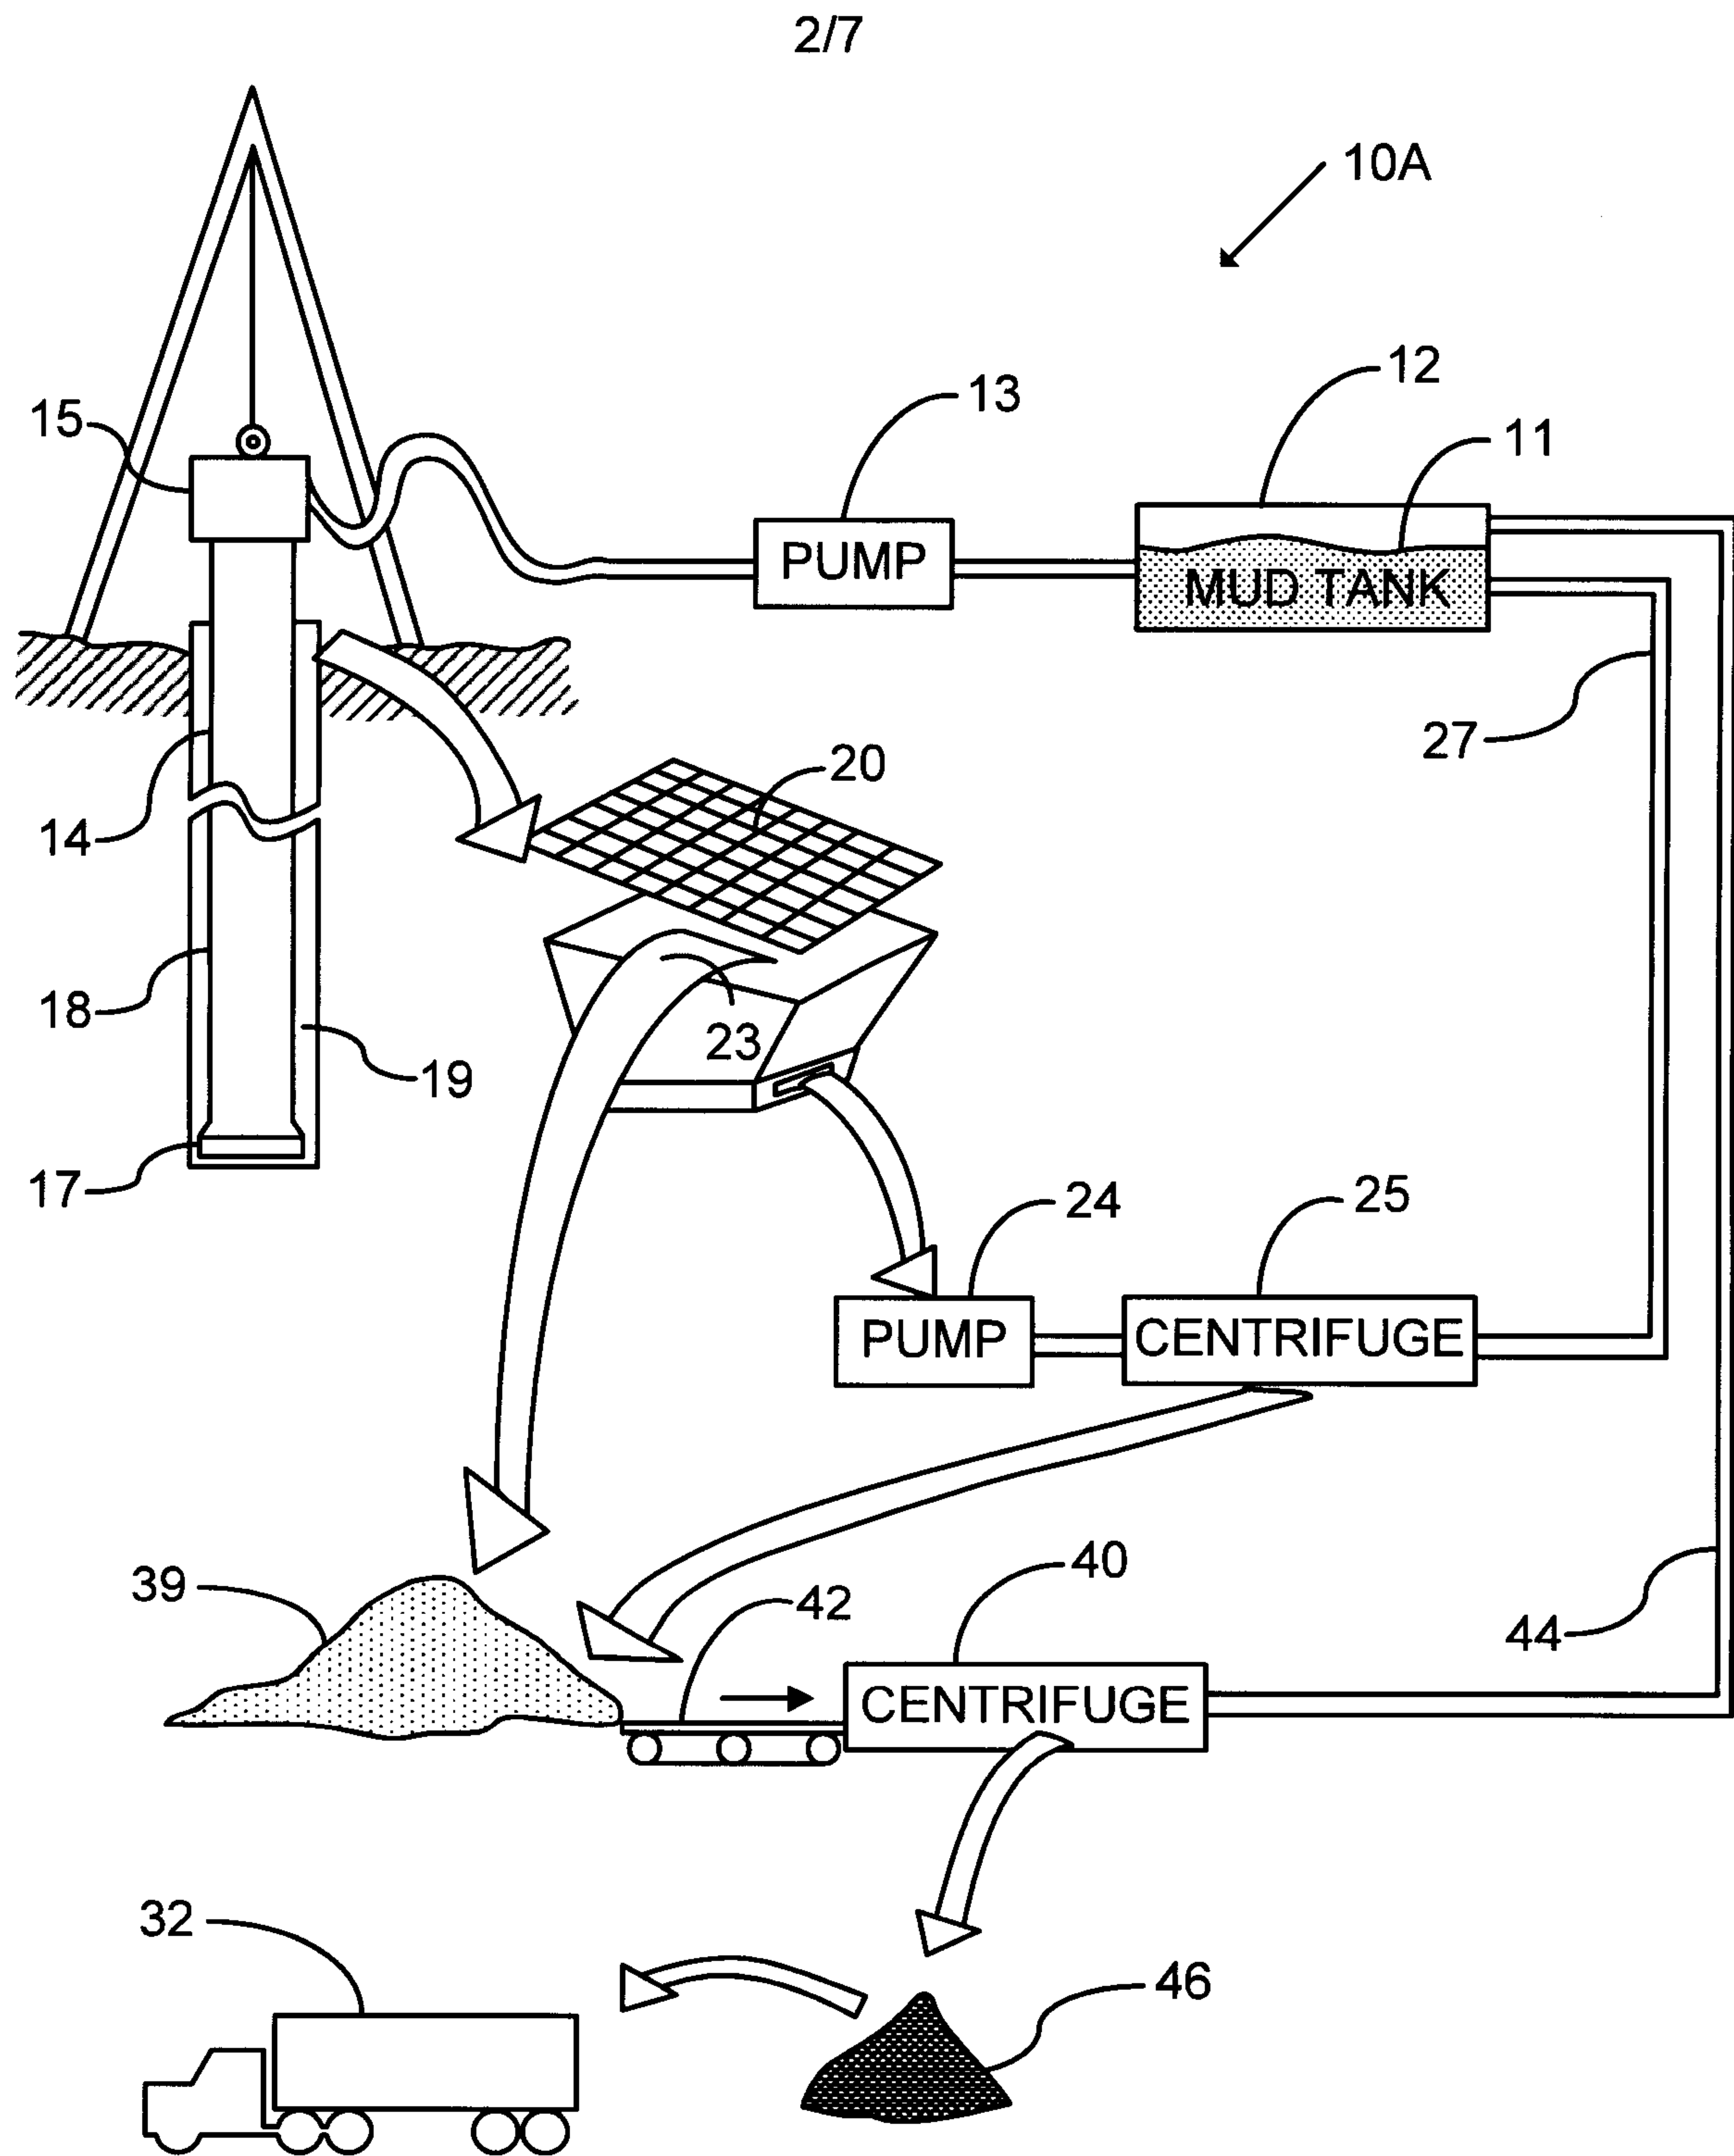


FIGURE 2

3/7

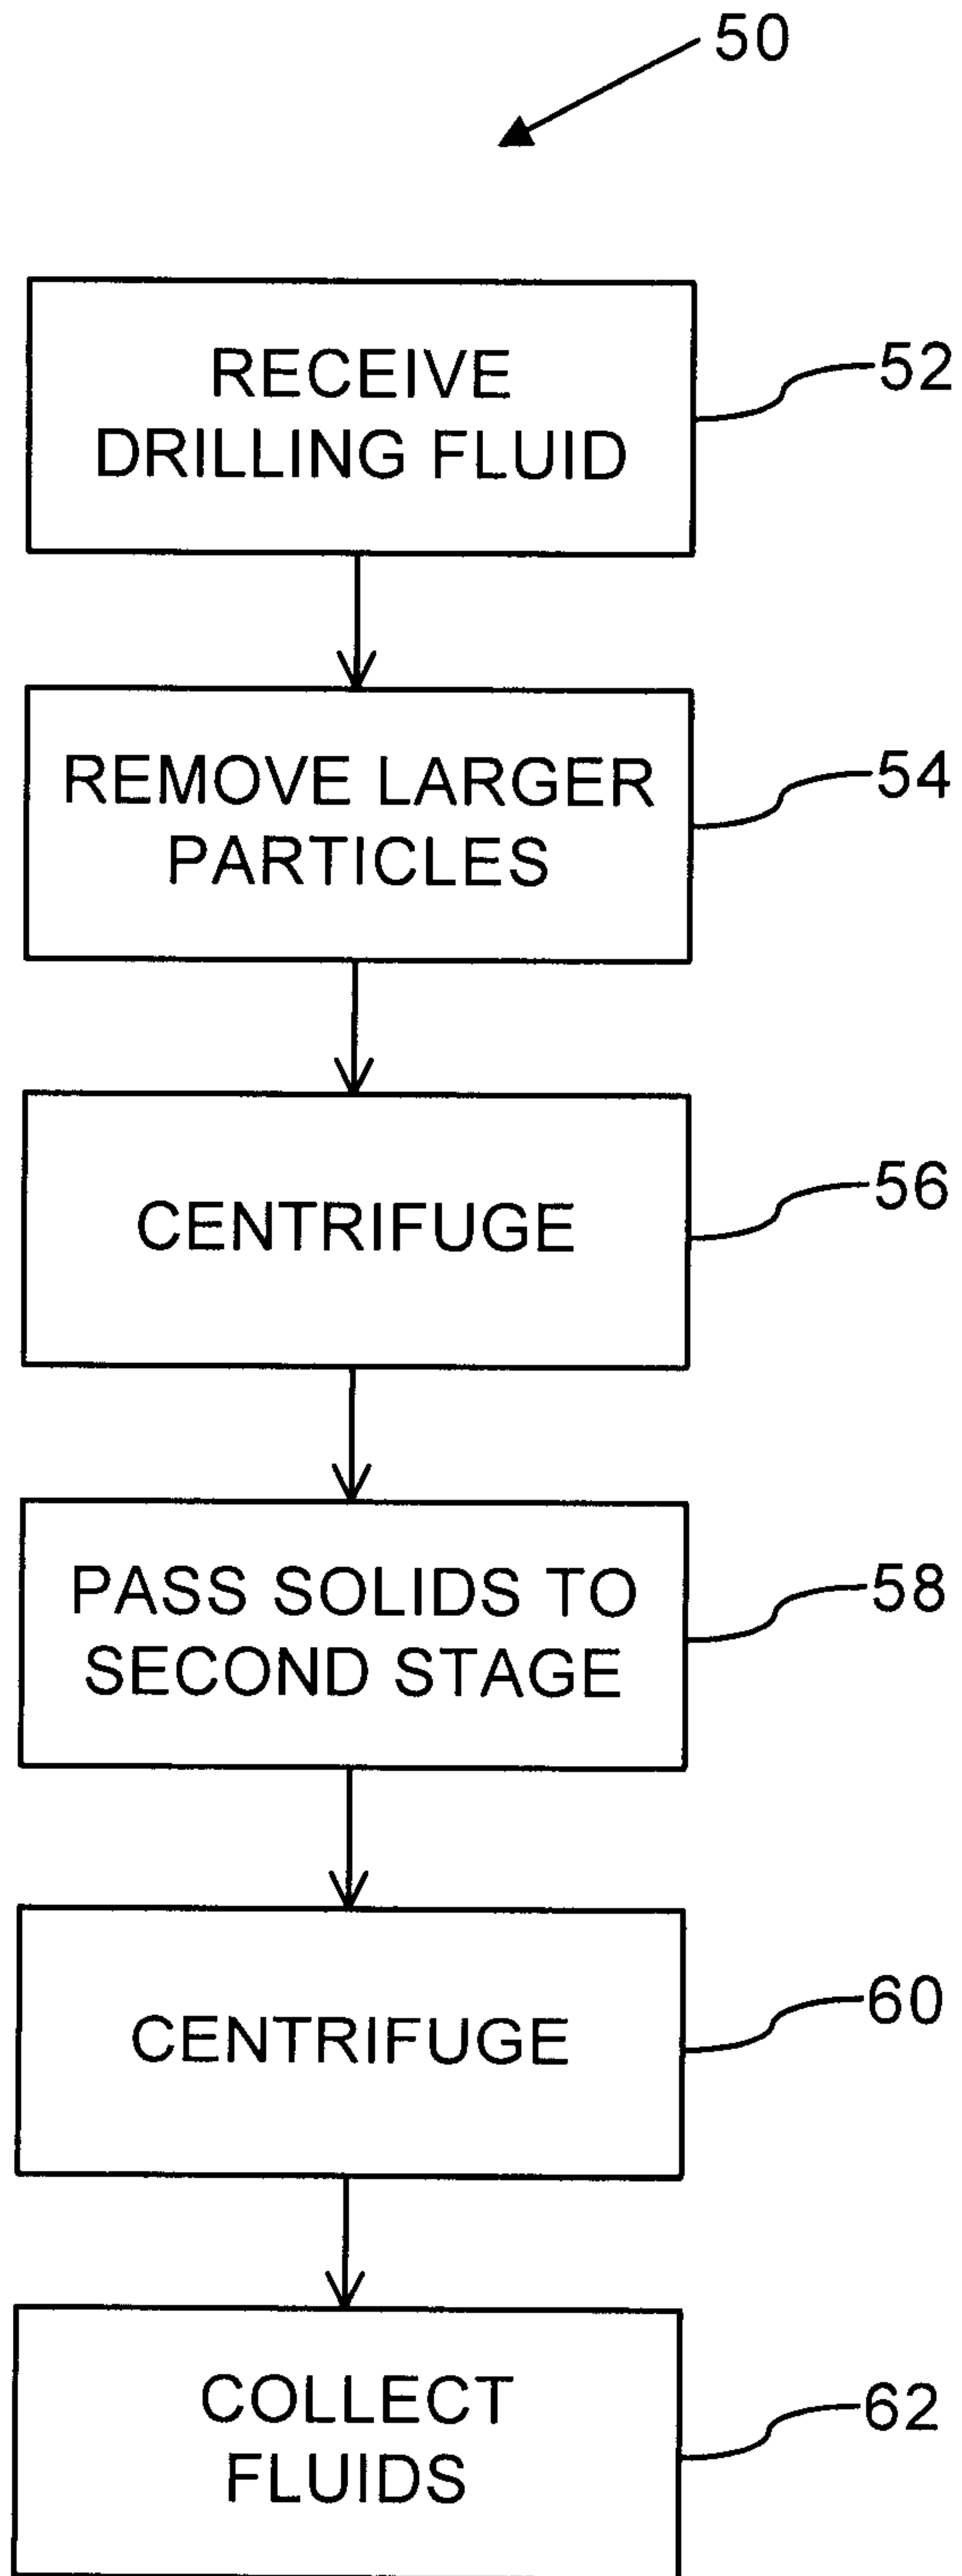


FIGURE 3

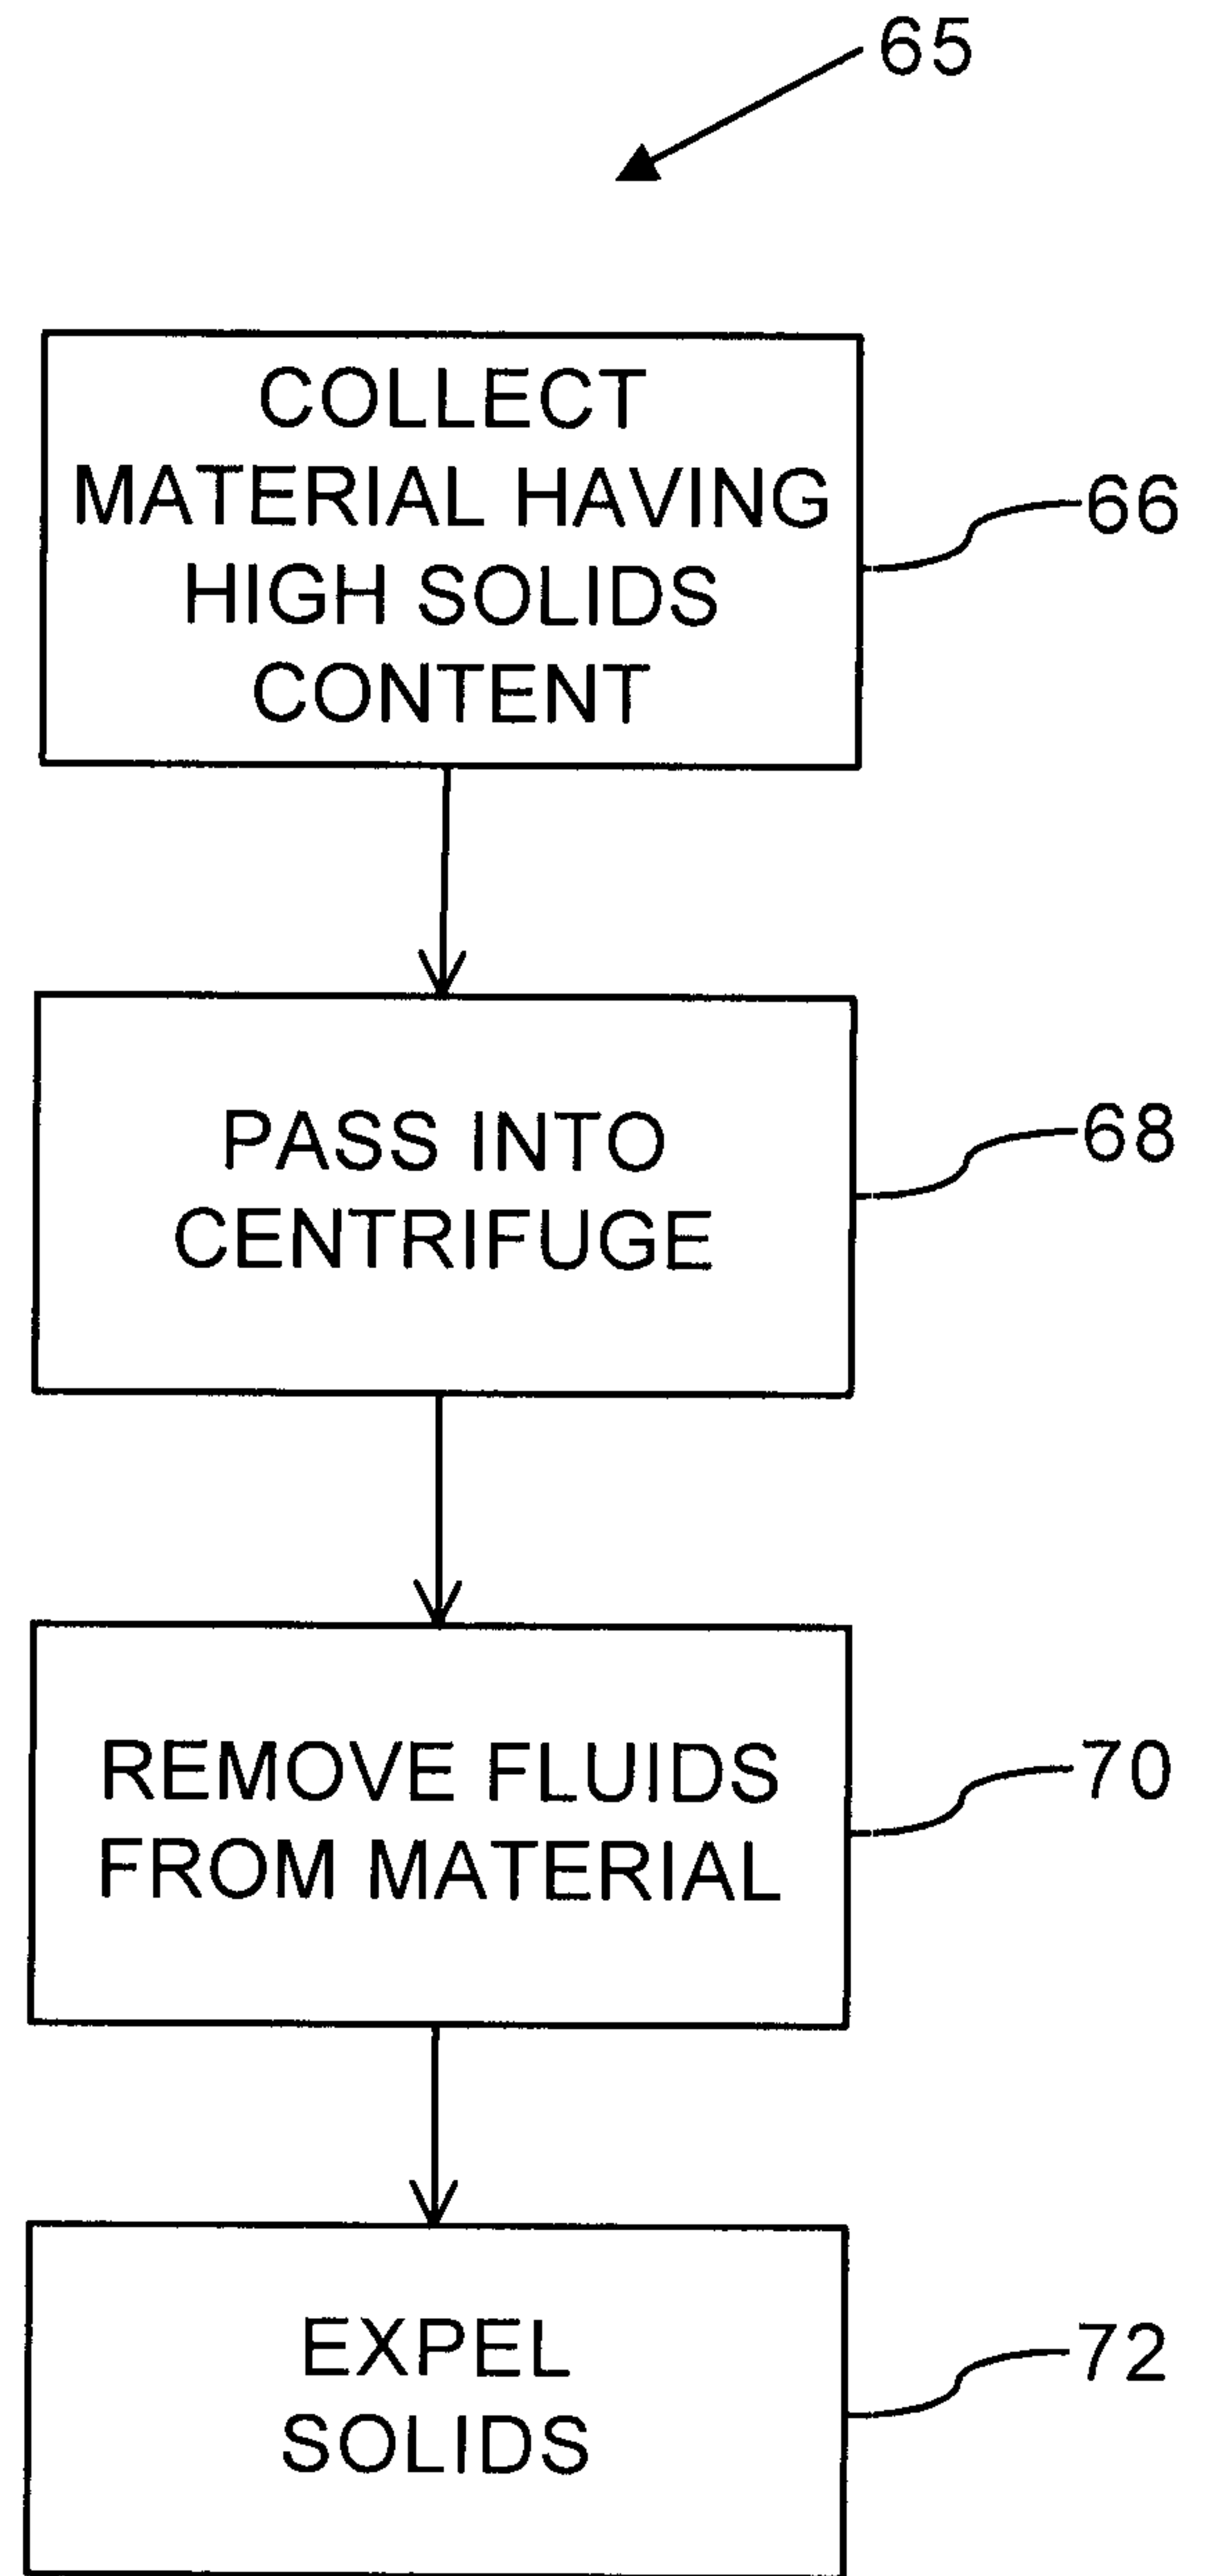


FIGURE 3A

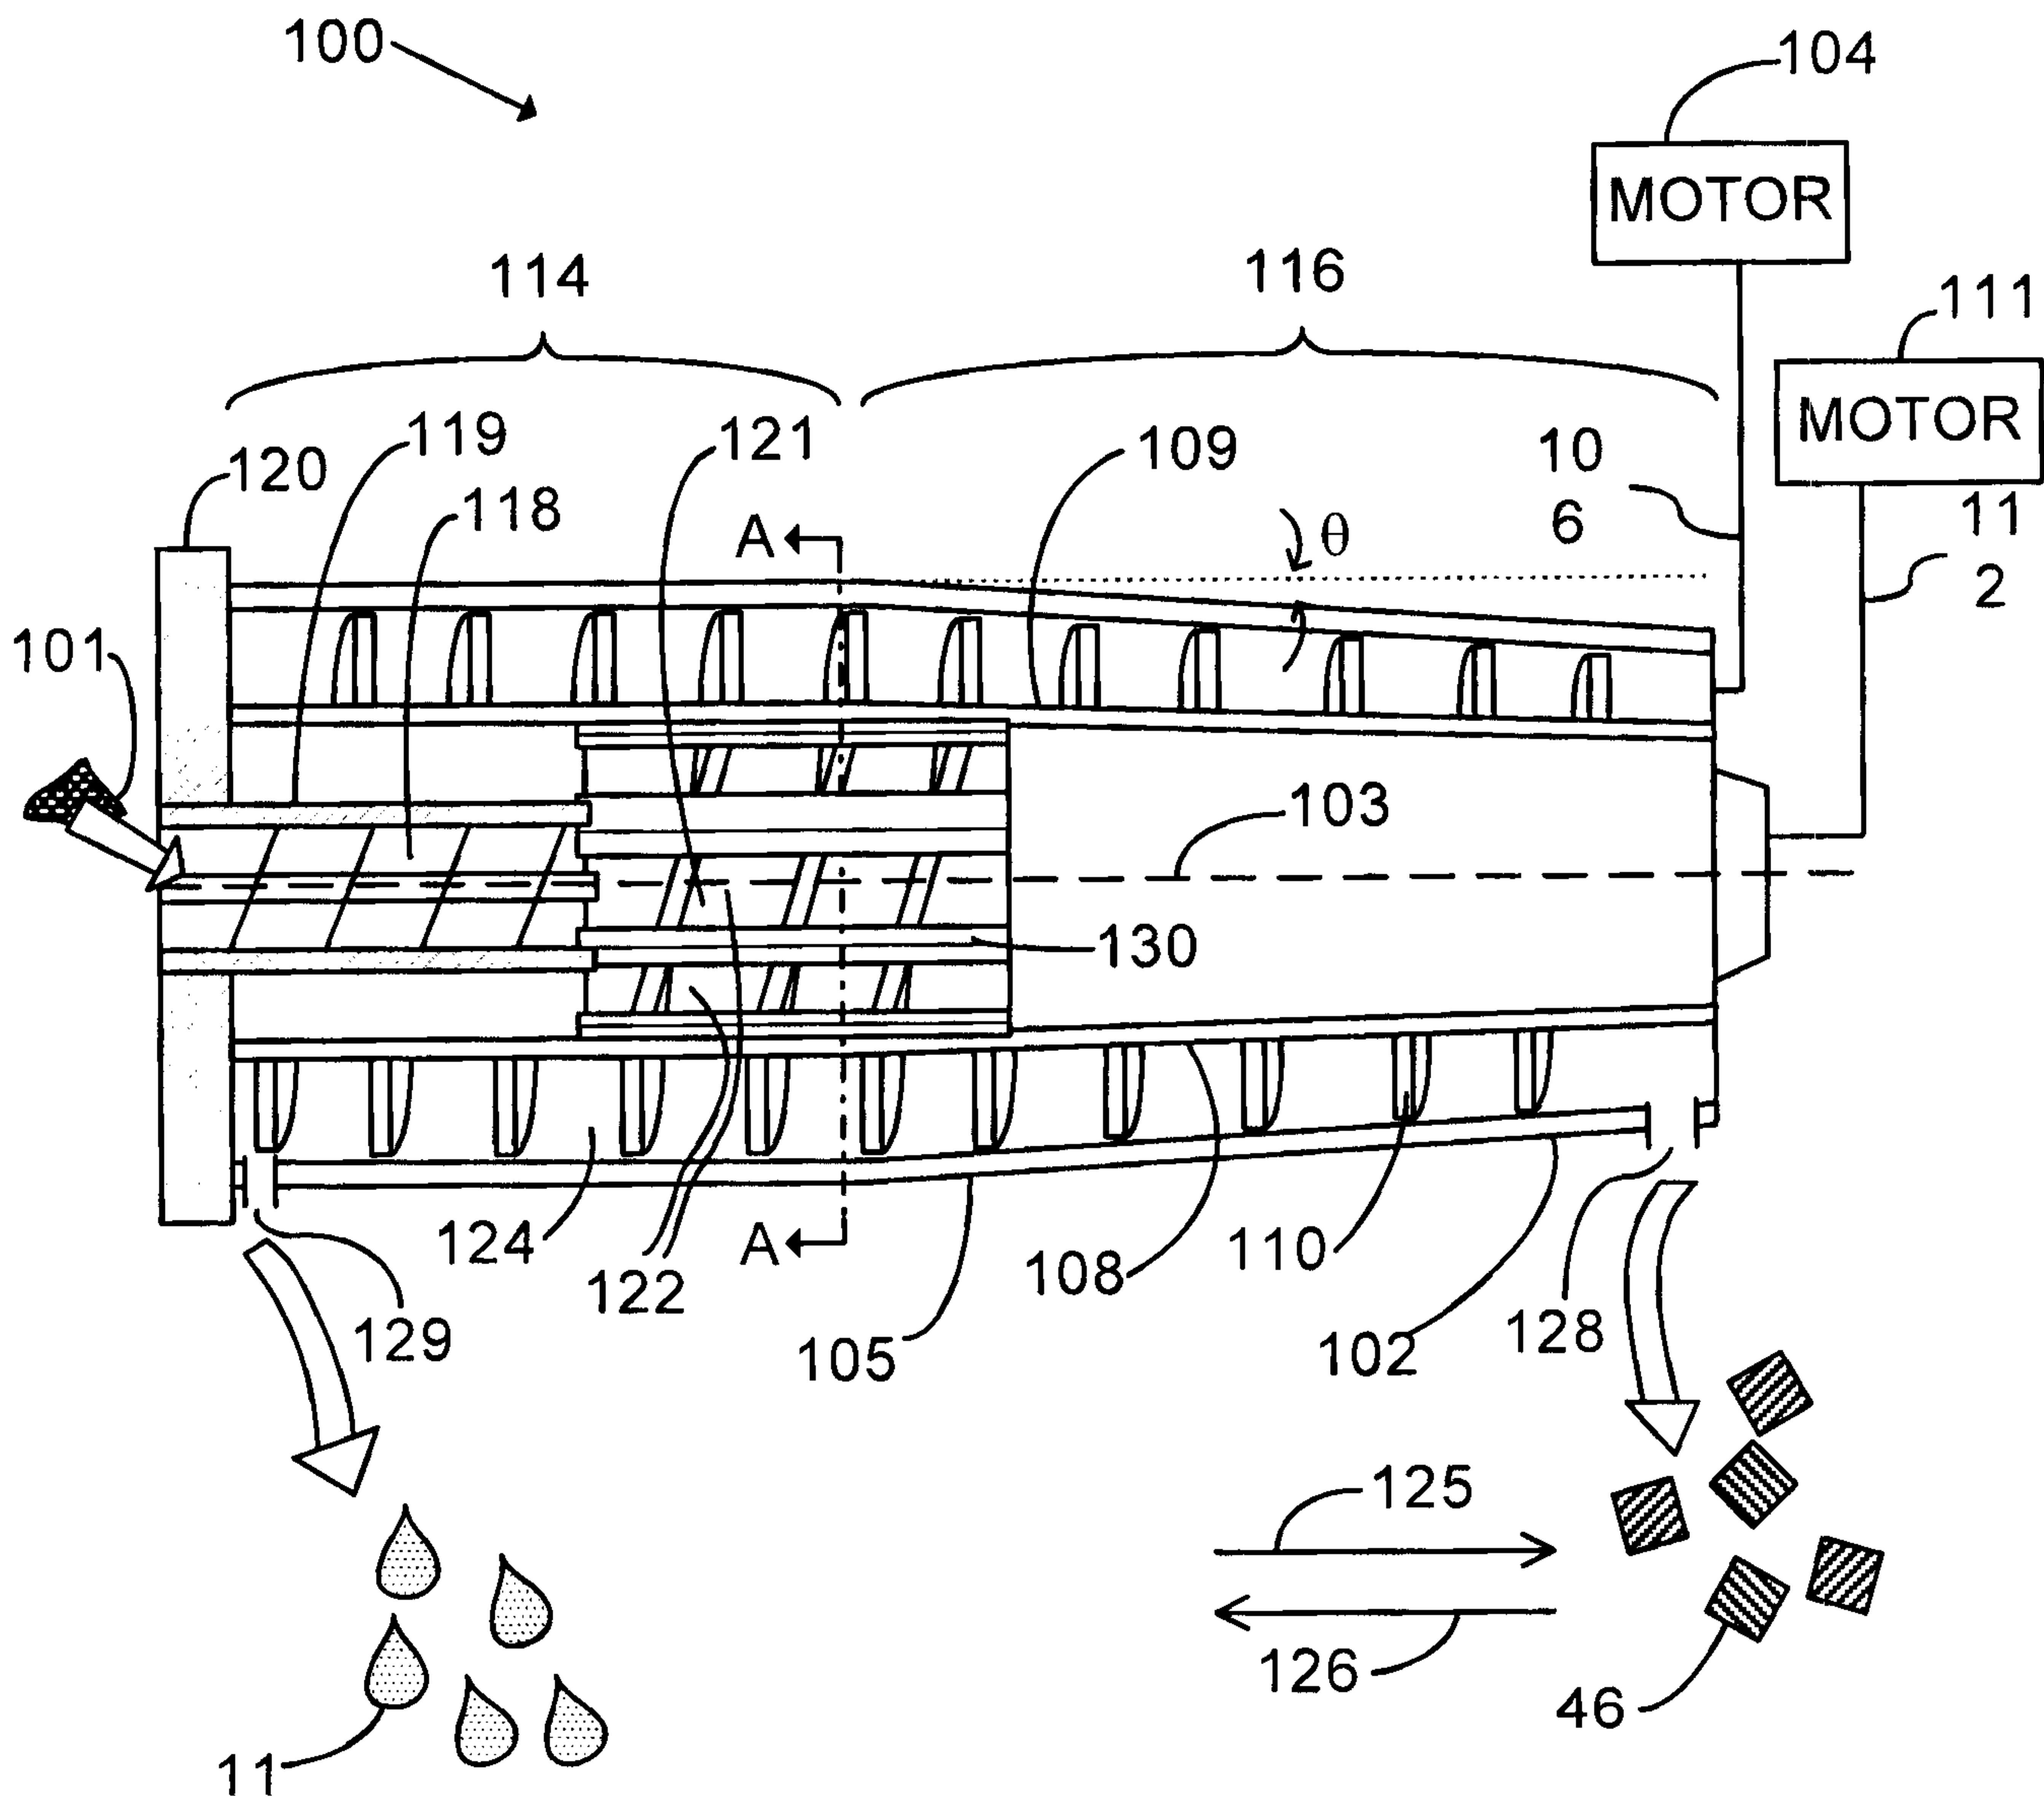


FIGURE 4

5/7

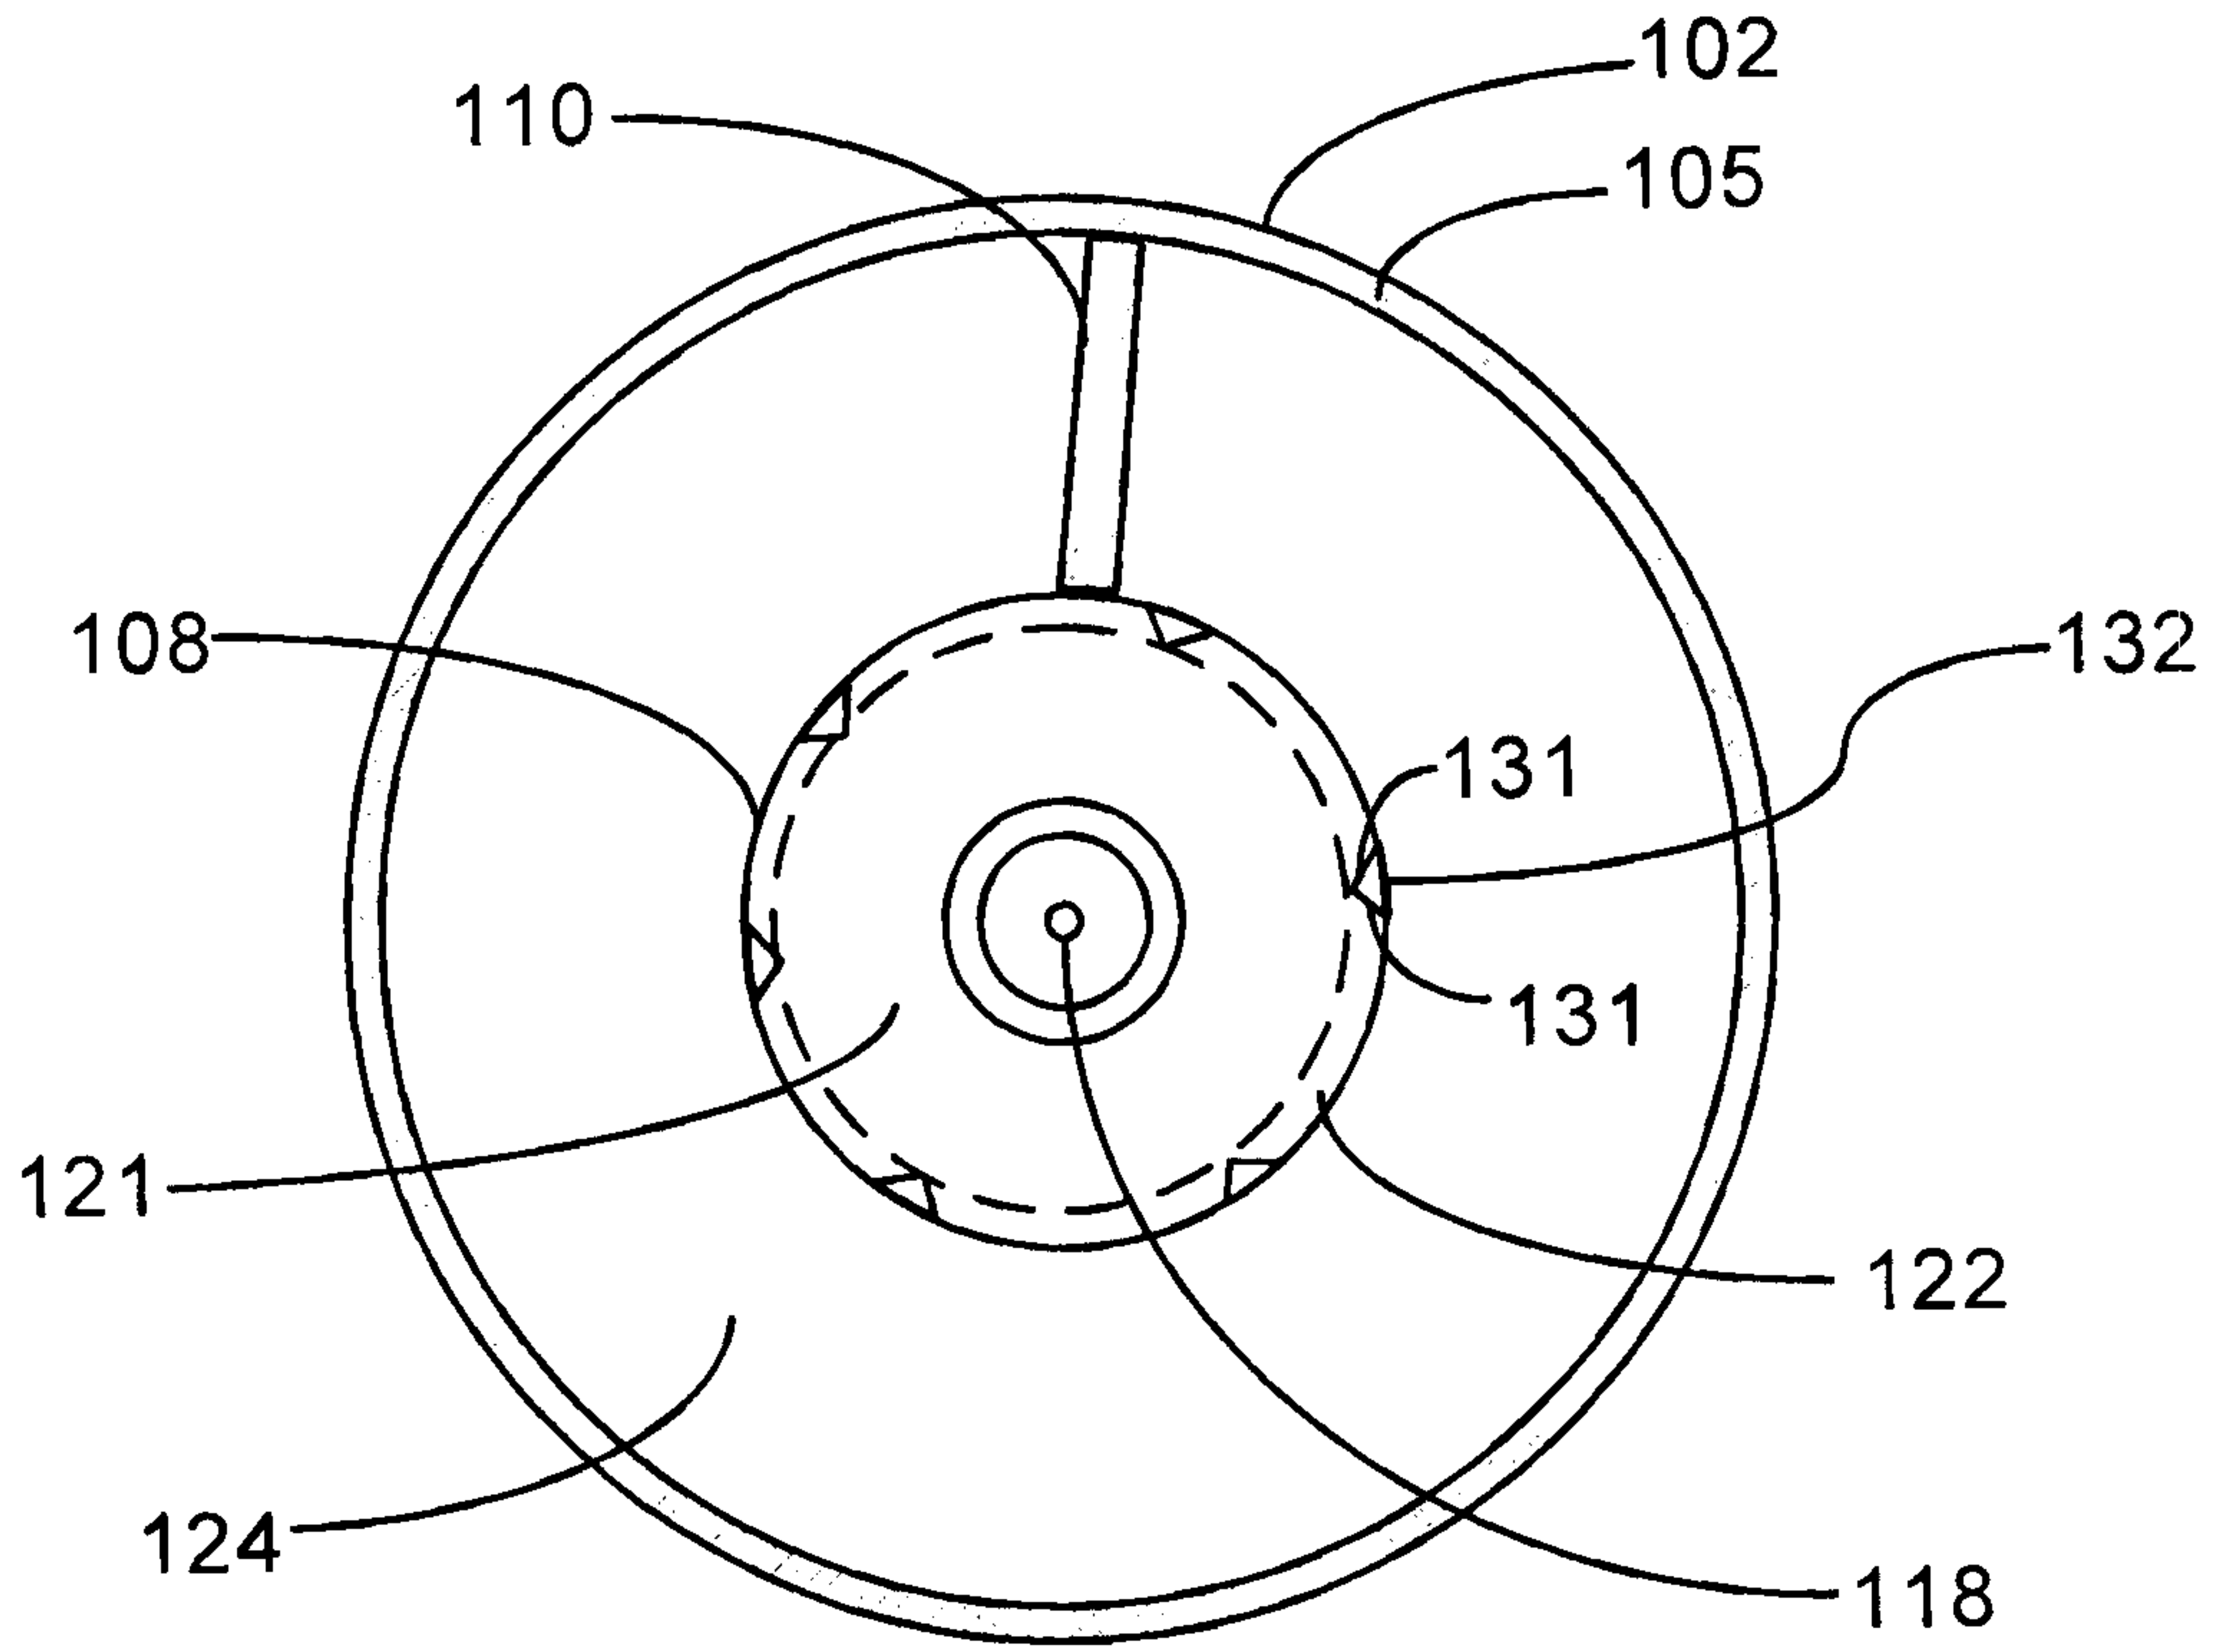


FIGURE 5

6/7

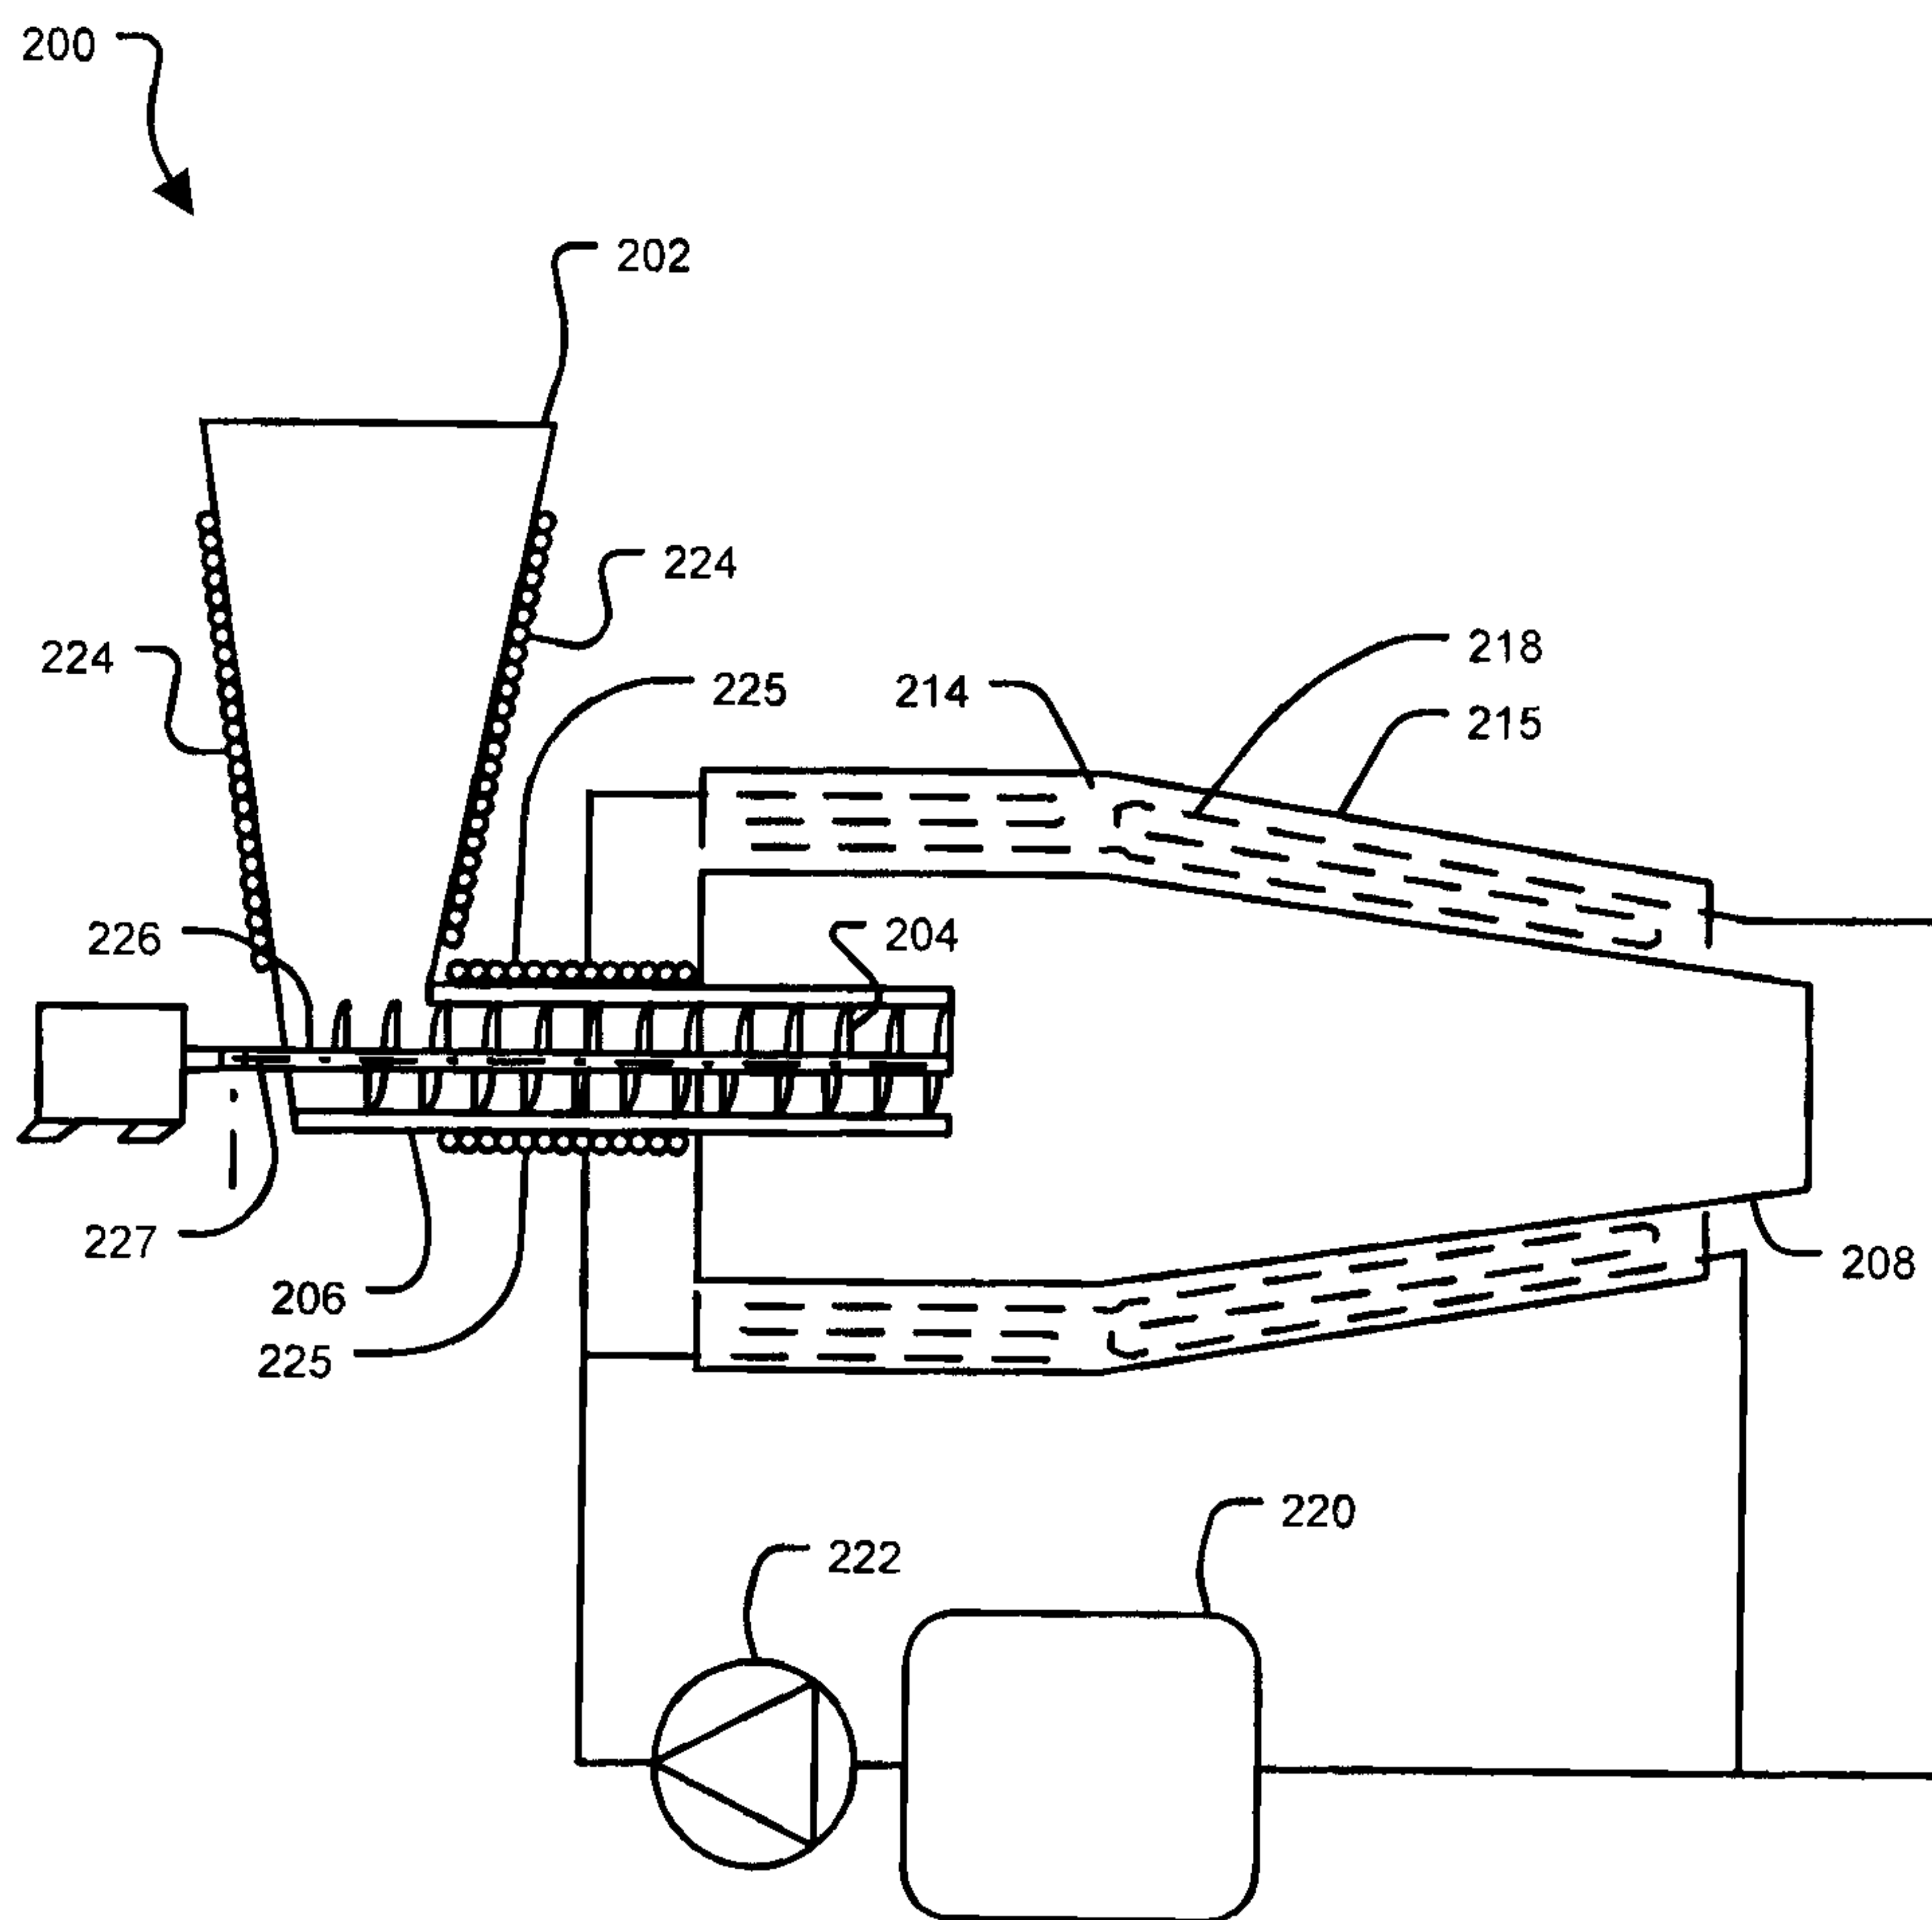


FIGURE 6

7/7

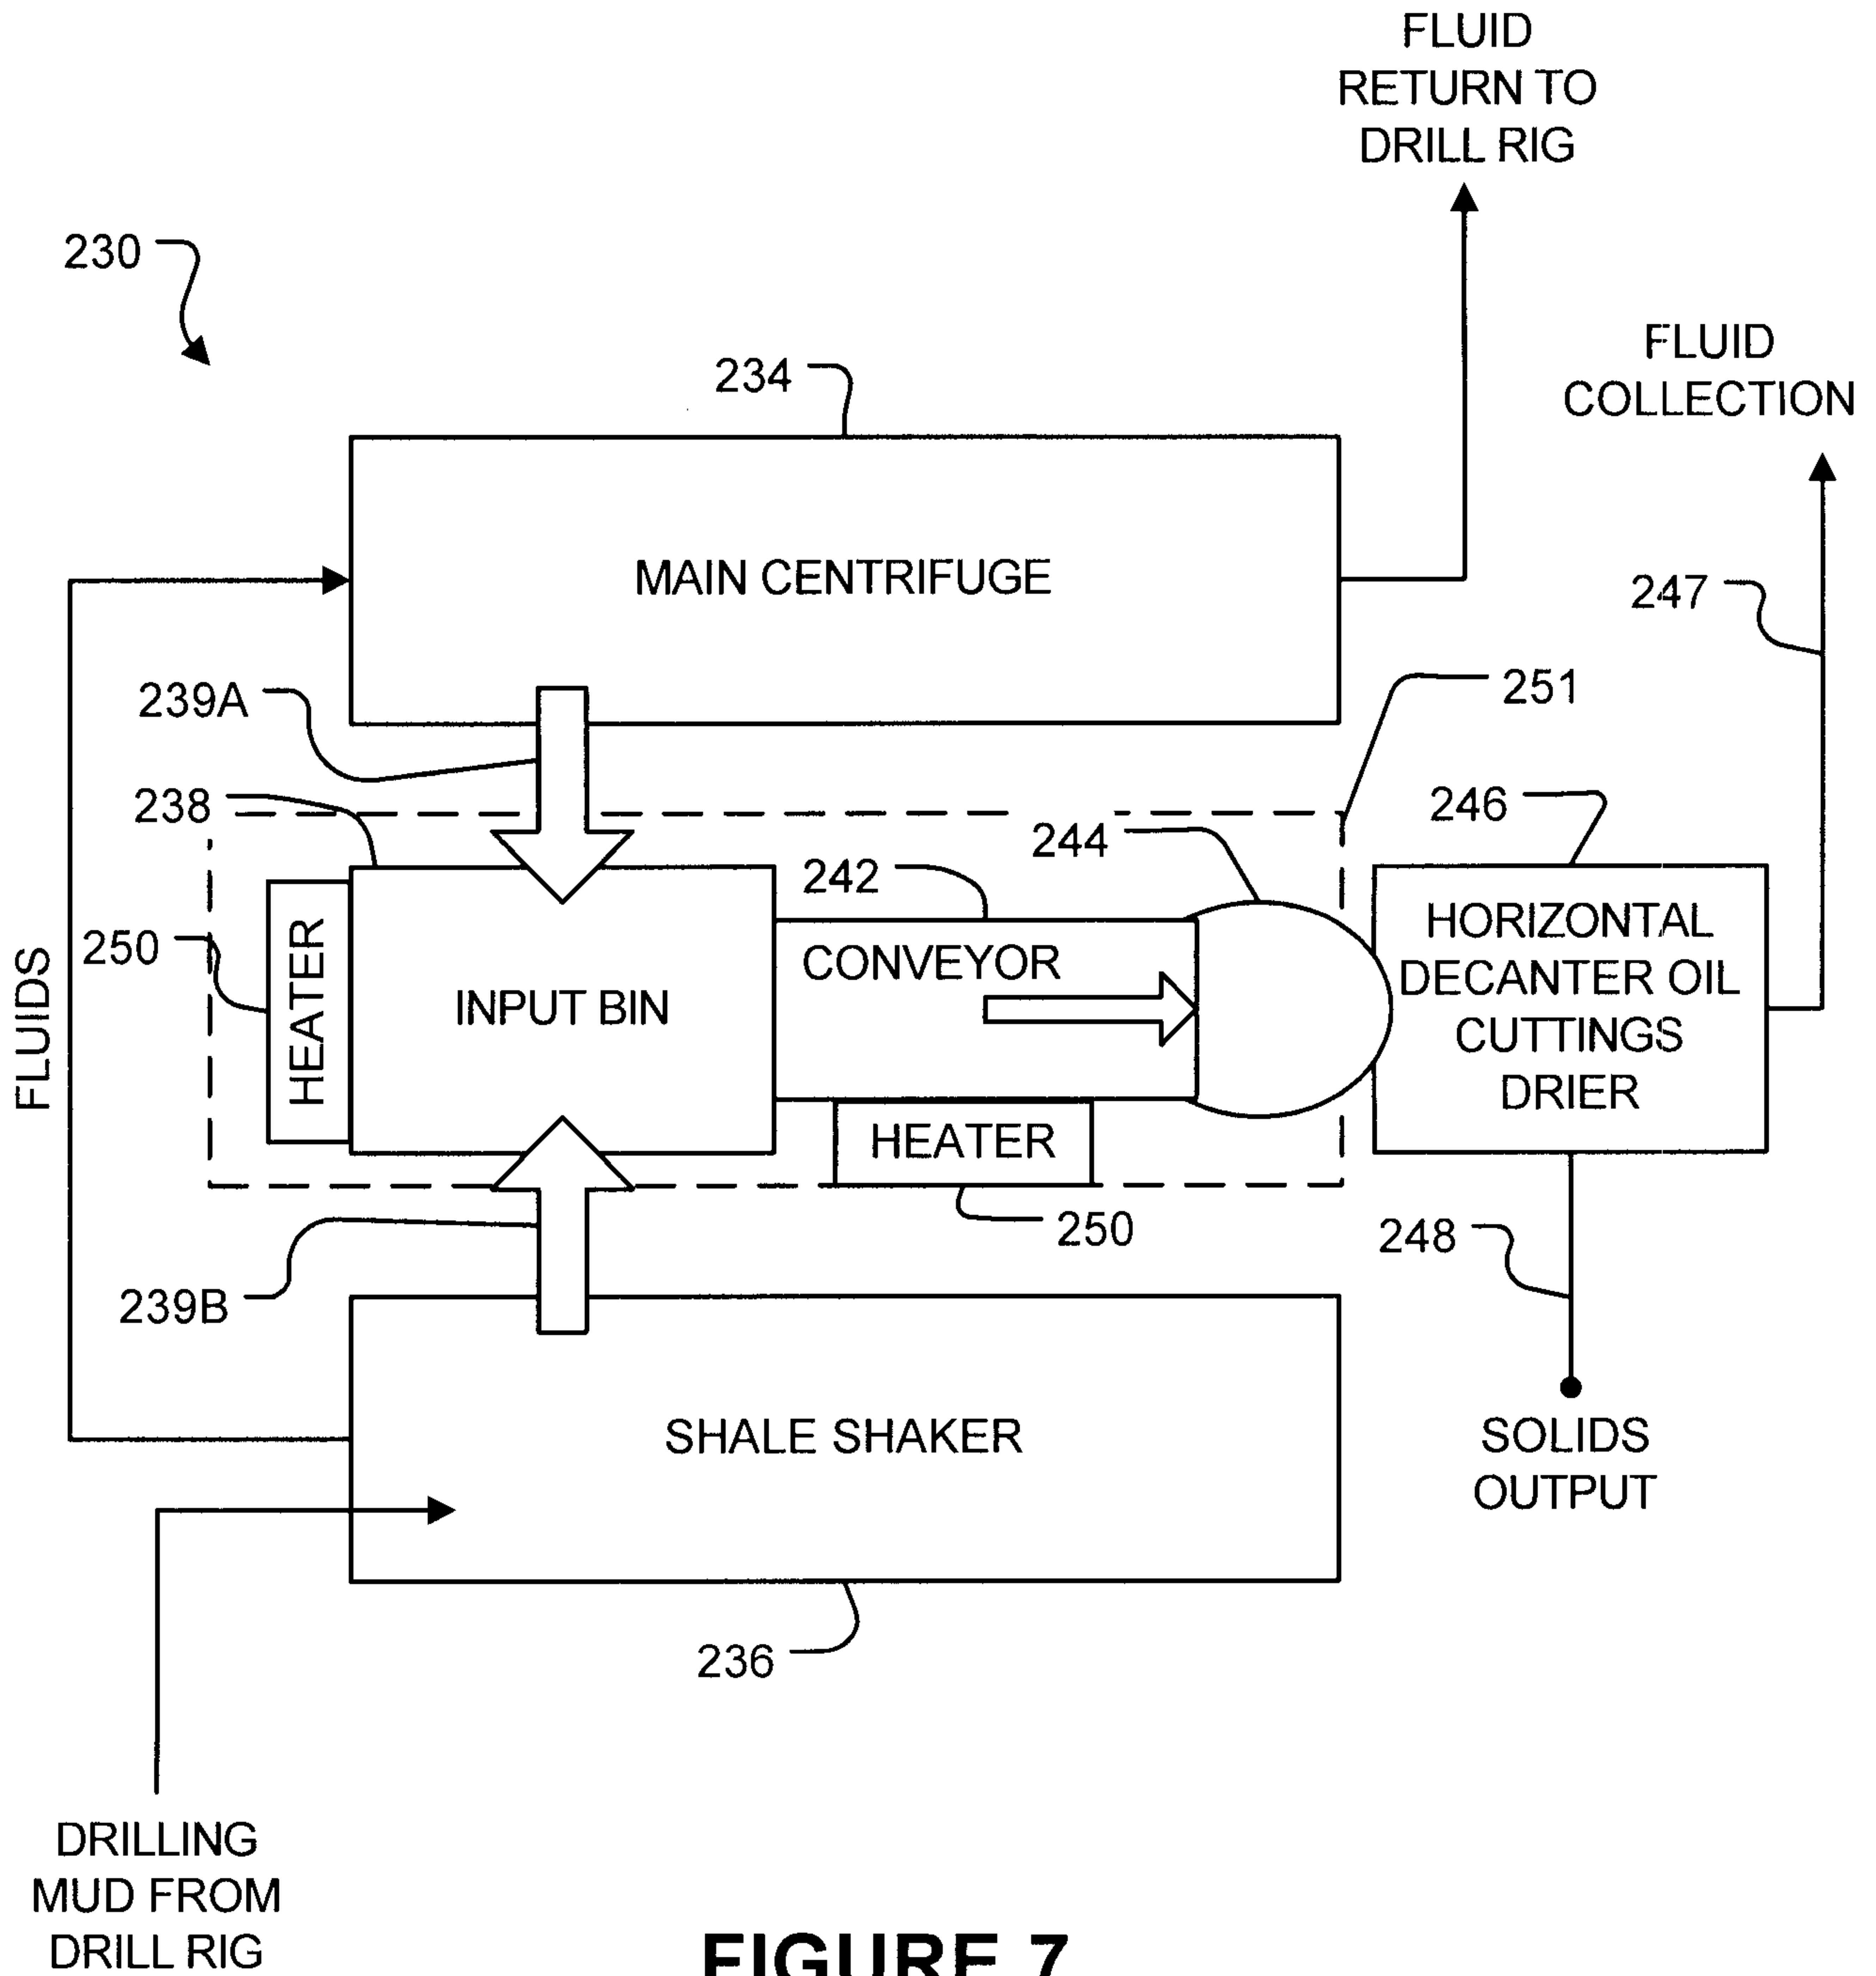


FIGURE 7

