



(72) GYLLENSTEDT, JAN, SE


(71) AB VOLVO, SE

(51) Int.Cl.<sup>6</sup> F02F 3/02

(30) 1997/01/16 (9700109-3) SE

(54) **PISTON DESTINE A UN MOTEUR A COMBUSTION INTERNE**

(54) **INTERNAL COMBUSTION ENGINE PISTON**

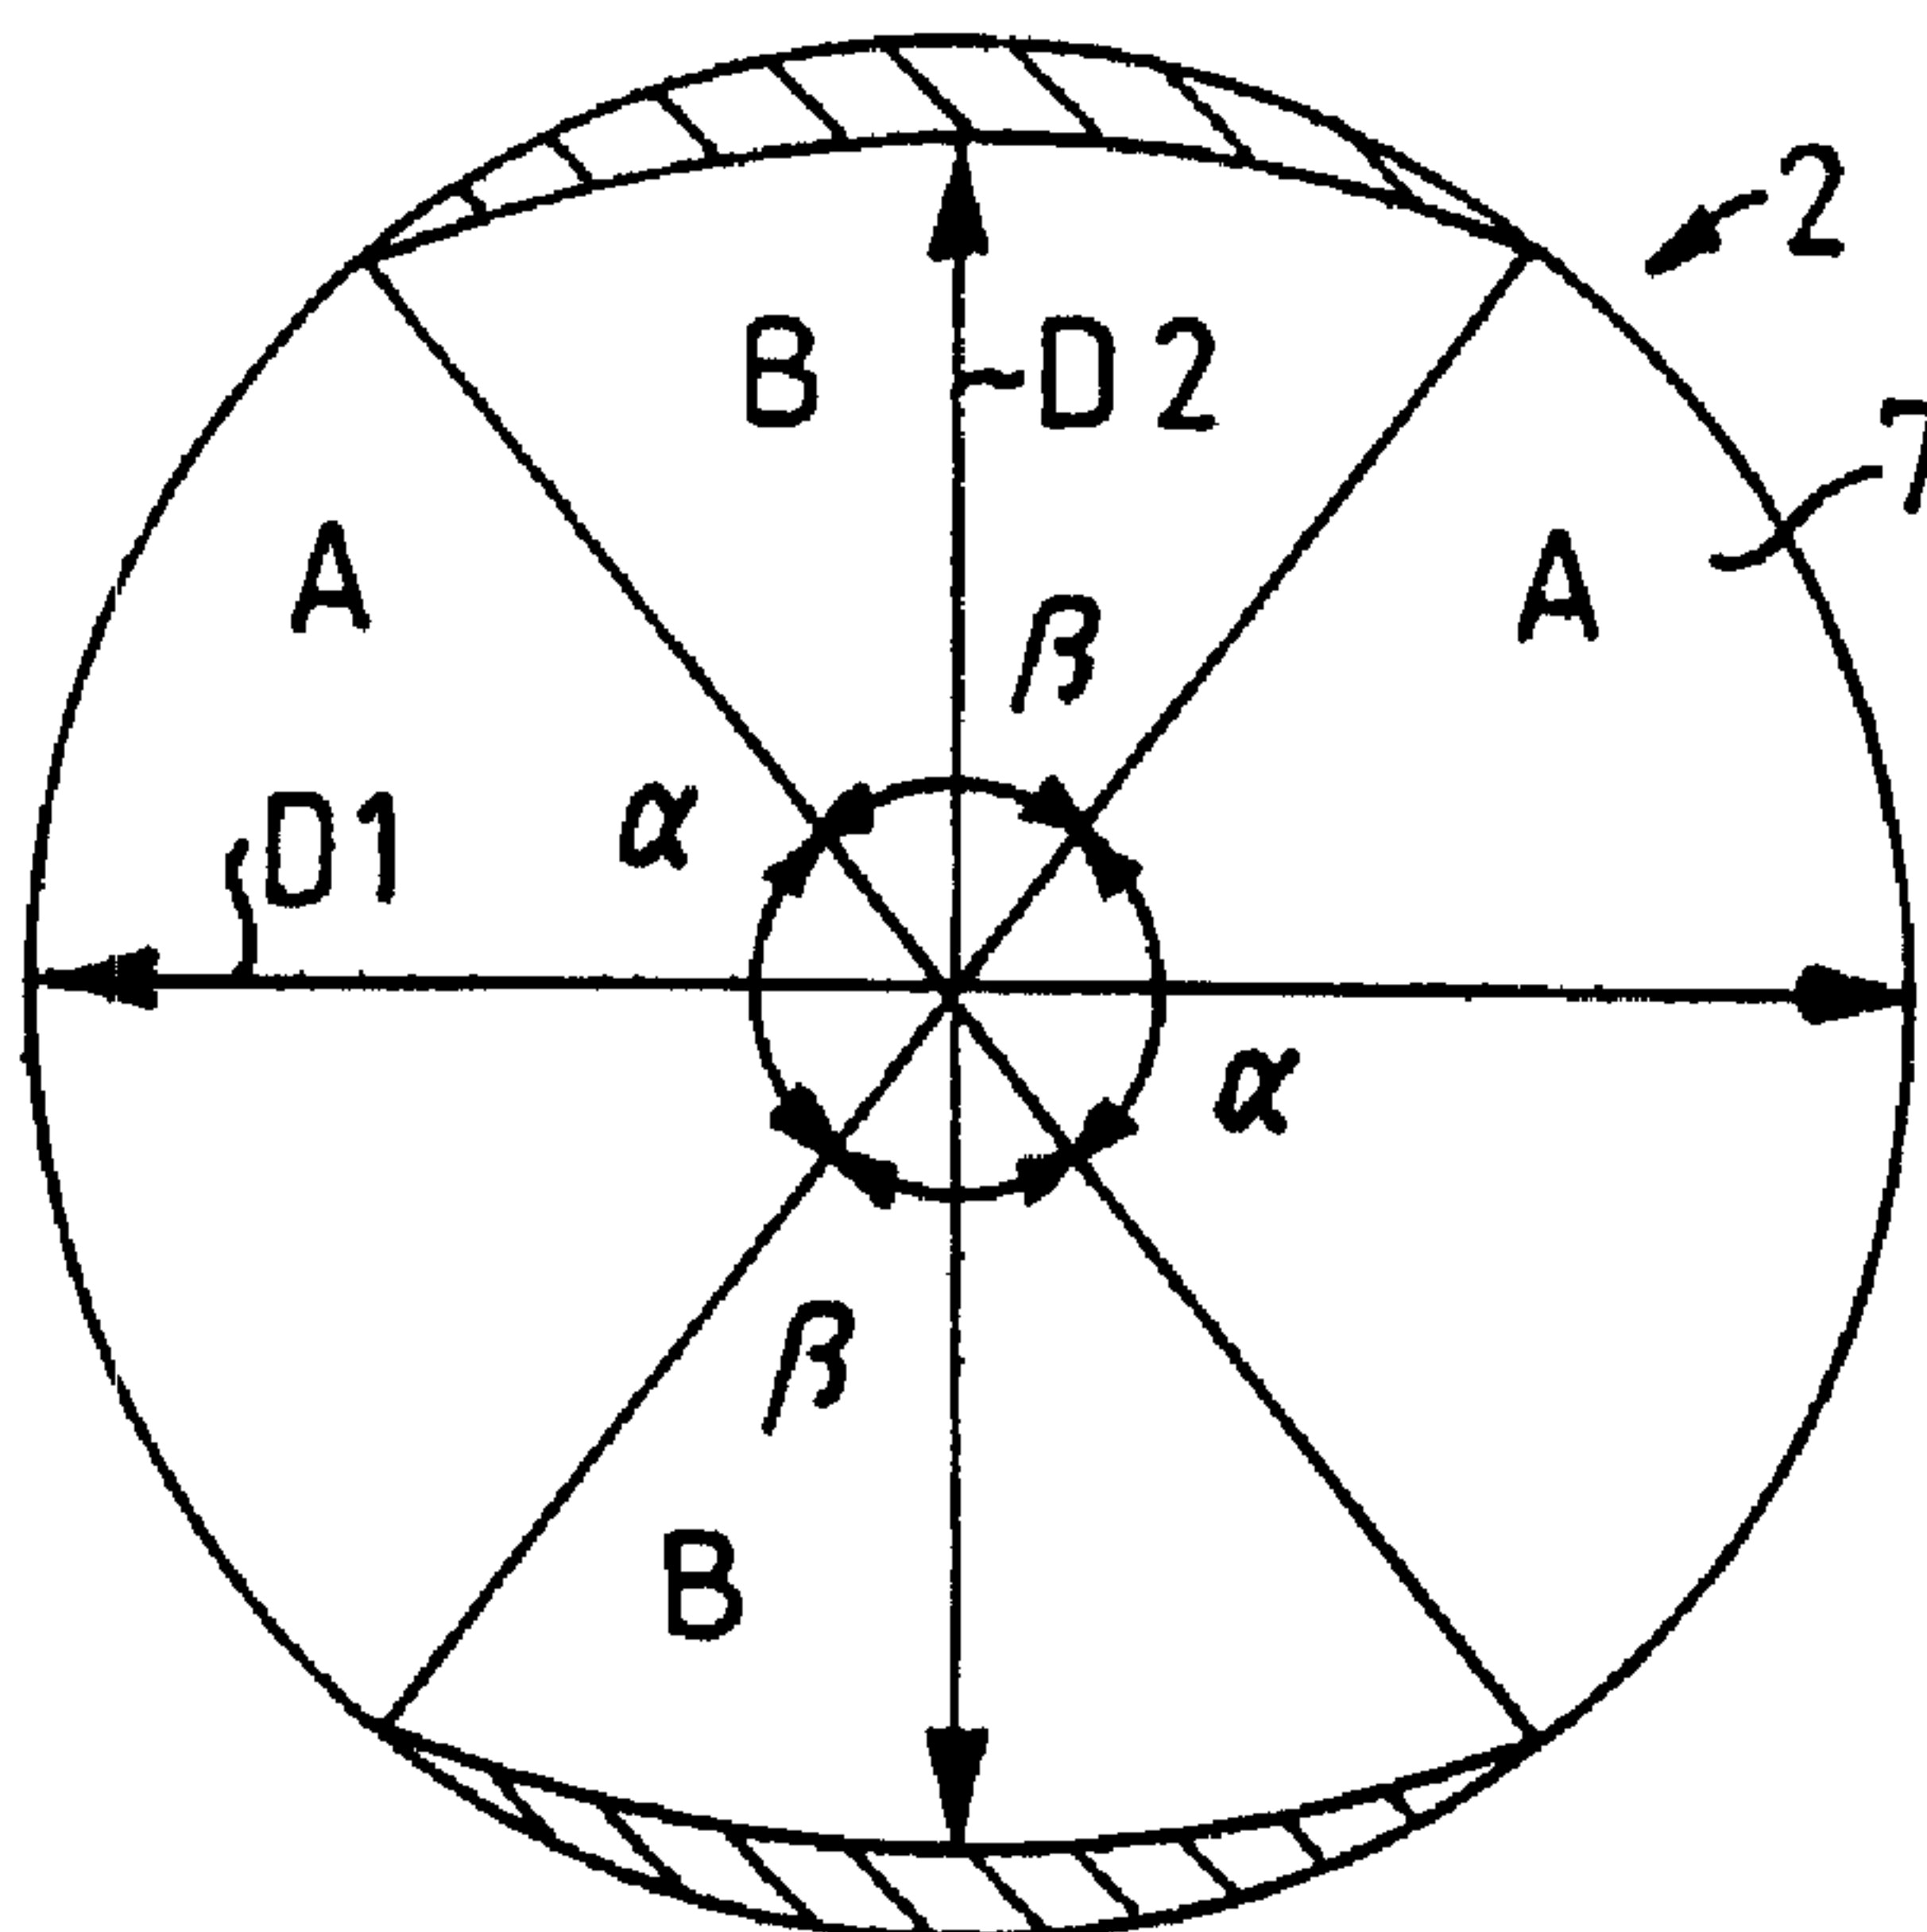

(57) L'invention concerne un piston destiné à un moteur à combustion interne. Ce piston (2) comprend un anneau supérieur dont la coupe transversale présente une différence de diamètre d'au moins 0,3 % du plus grand diamètre (D1) afin d'éliminer tout risque de polissage du cylindre.

(57) Piston for an internal combustion engine. The piston (2) has a top ring land with a diameter differential of at least 0,3 % of the major diameter (D1) to eliminate the risk of cylinder polishing.


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>F02F 3/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/31929</b> <b>(43) International Publication Date:</b> 23 July 1998 (23.07.98)
<b>(21) International Application Number:</b> PCT/SE98/00056 <b>(22) International Filing Date:</b> 15 January 1998 (15.01.98)  <b>(30) Priority Data:</b> 9700109-3                      16 January 1997 (16.01.97)                      SE  <b>(71) Applicant (for all designated States except US):</b> AB VOLVO [SE/SE]; S-405 08 Göteborg (SE).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> GYLLENSTEDT, Jan [SE/SE]; Halleröd 1377, S-442 90 Kungälv (SE).  <b>(74) Agents:</b> HELLBOM, Lars et al.; Albihns Patentbyrå Stockholm AB, P.O. Box 3137, S-103 62 Stockholm (SE).		<b>(81) Designated States:</b> AU, BR, CA, CN, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>

**(54) Title:** INTERNAL COMBUSTION ENGINE PISTON**(57) Abstract**

Piston for an internal combustion engine. The piston (2) has a top ring land with a diameter differential of at least 0,3 % of the major diameter (D1) to eliminate the risk of cylinder polishing.

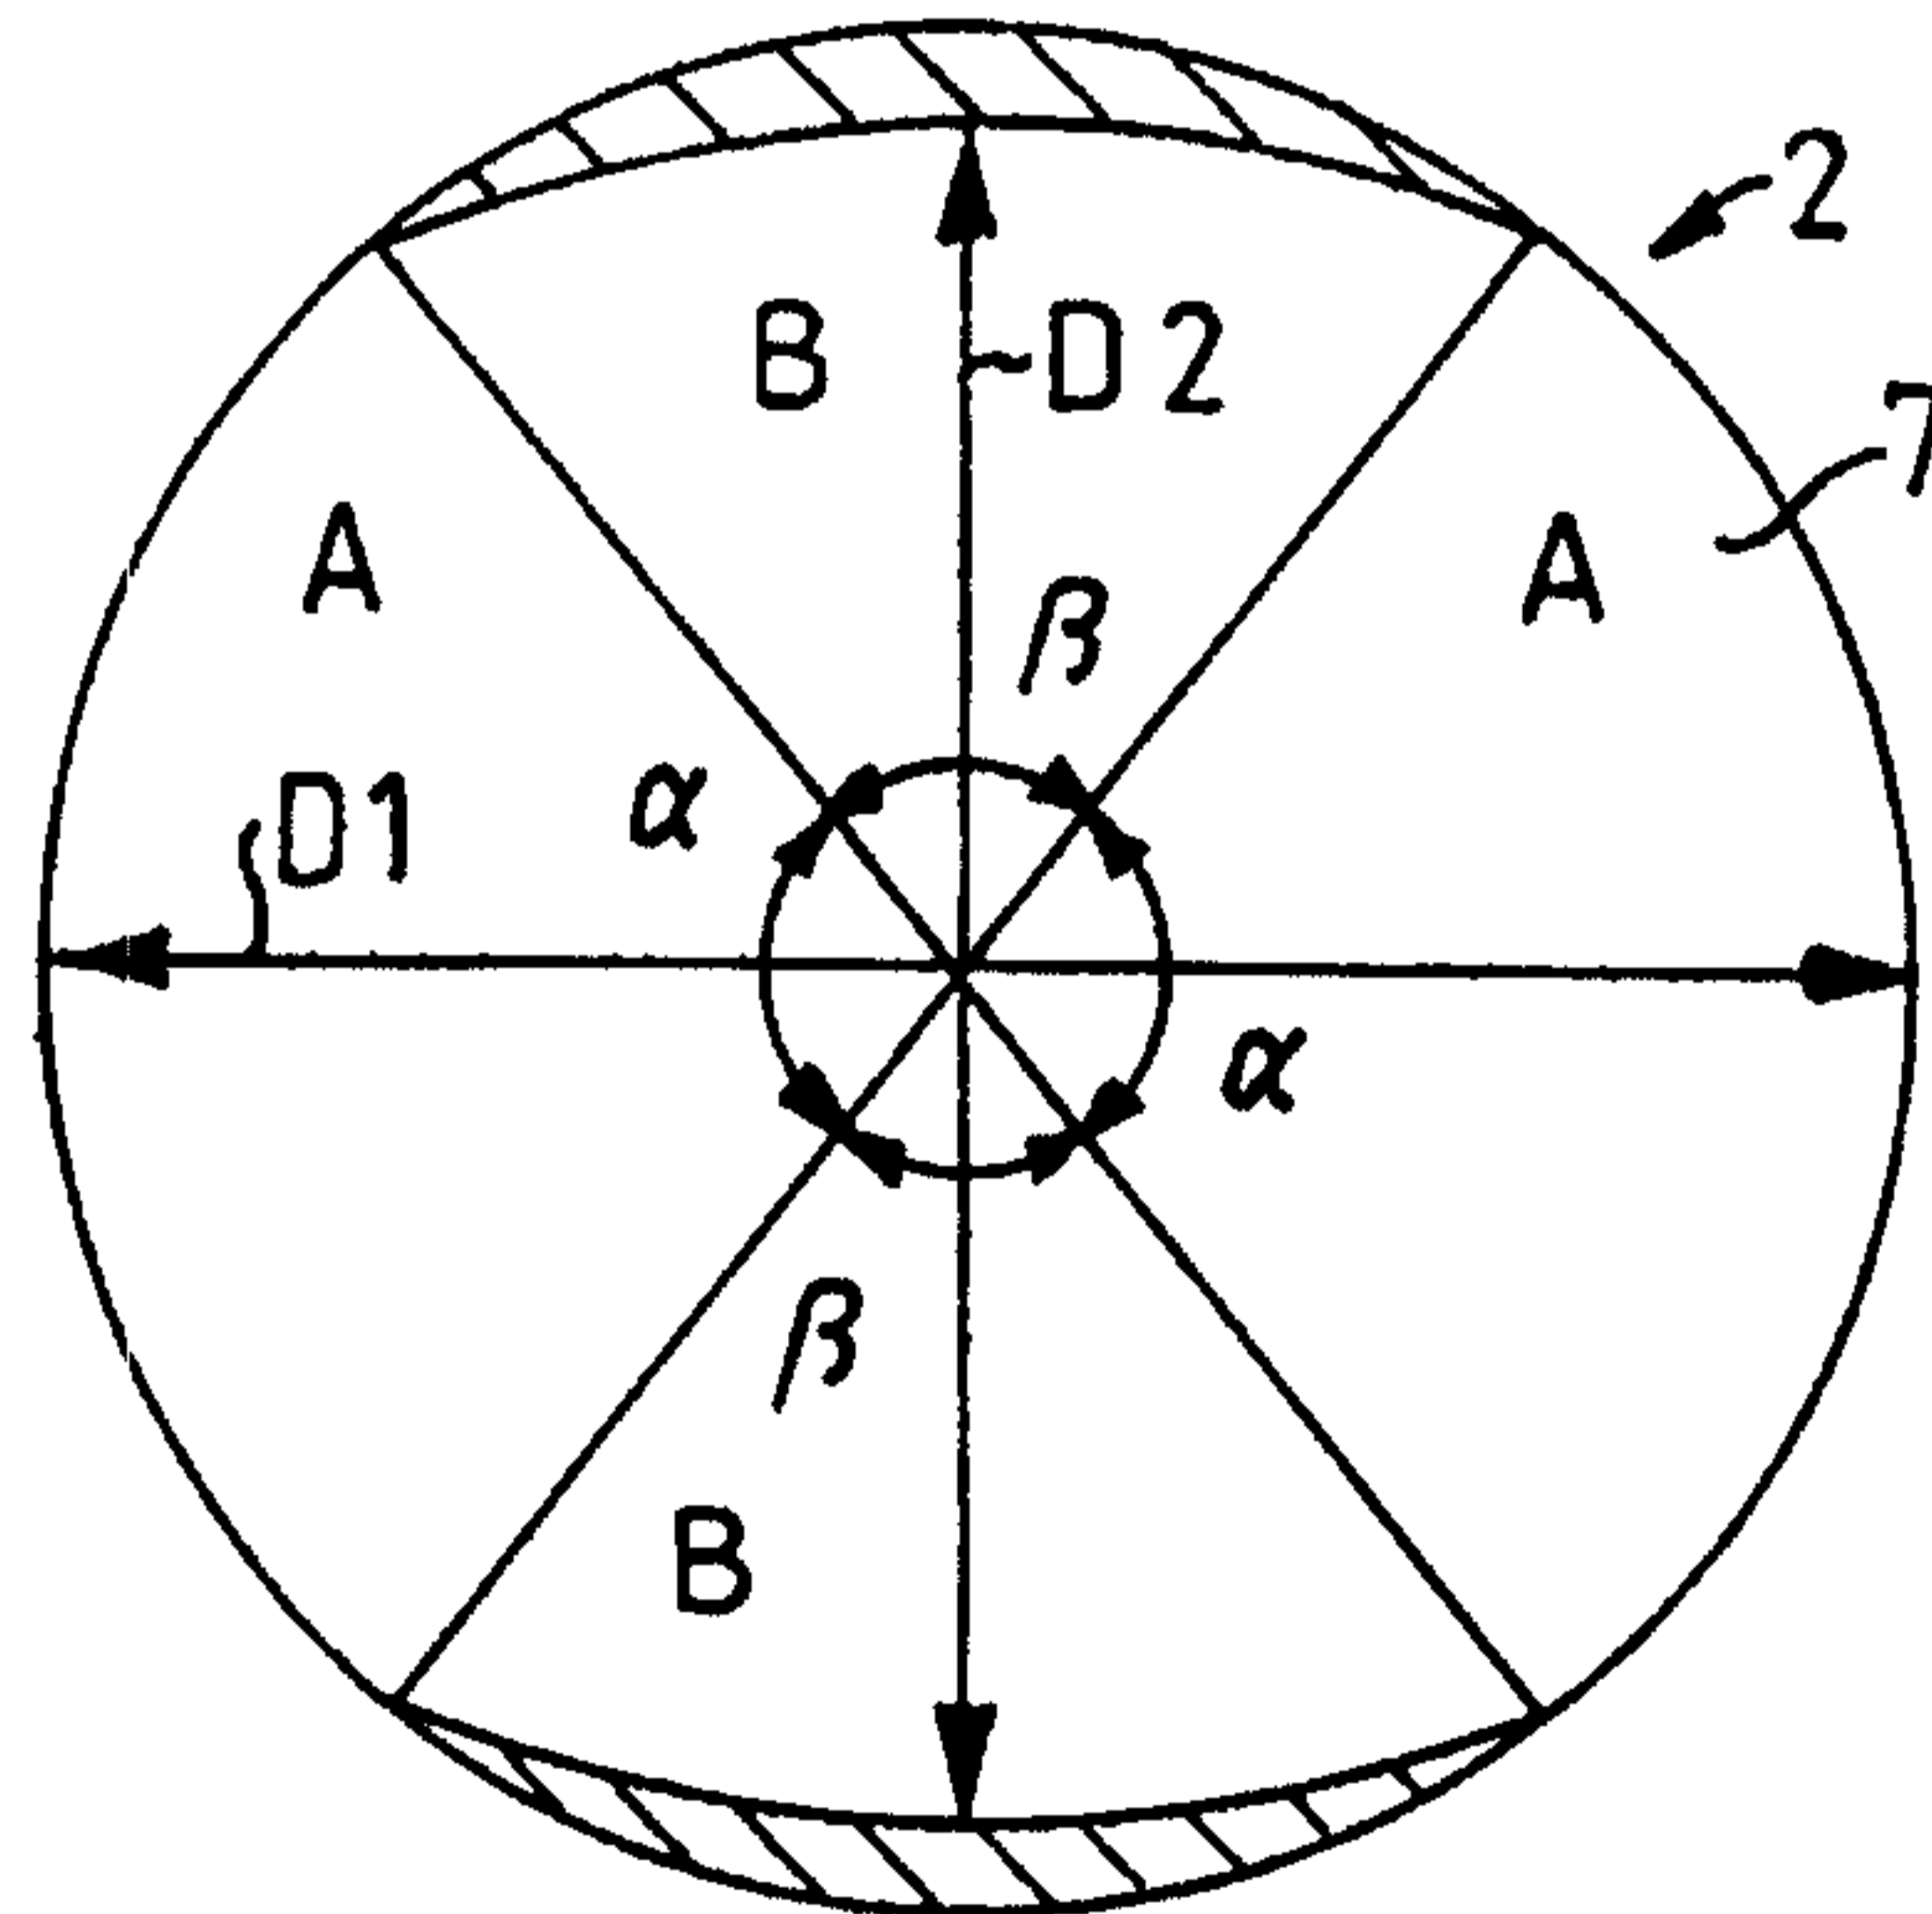

**Internal combustion engine piston**

The present invention relates to a piston for an internal combustion engine comprising an essentially cylindrical body with a plurality of axially spaced ring grooves in its lateral surface spaced from an end surface, a first portion of the cylindrical  
5 body, lying between said end surface and the most closely adjacent ring groove, having varying cross section.

It is a known fact that pistons for internal combustion engines change their shape  
10 during engine operation under the influence of heat in the combustion chamber and the occurrence of dynamic forces.

The shape of the piston in its cold state must therefore be adapted to these changes in shape so that there is maintained between the piston and the cylinder wall, a  
15 clearance which is neither so small as to risk polishing of the cylinders when coke is deposited on the piston, nor so large that emissions and performance are negatively affected. Cylinder polishing results in increased oil consumption and can result in shearing.

The shape of the piston must also be adapted to those changes in shape which occur  
20 in the engine block itself as it is heated, which results in the outer cylinders in a multicylinder engine becoming inclined relative to the centre cylinders. In other words, the cylinders will assume a "fan" shape as the engine block is heated and expands more at the top than at the bottom during engine operation.

In order to adapt the shape of the piston to this changing shape in the engine block, it is common to make the piston with an oval cross section with the minor diameter oriented in the longitudinal direction of the engine. The difference between the major and minor diameters of this piston portion is, in previously known engine  
25 designs, not larger than ca 0,15 mm, which means a "normal" so-called top ring land.  
30

clearance in the transverse direction of the engine of 0,40 mm and in the longitudinal direction of 0,55 mm when the engine is cold. In a known engine with a 131 mm cylinder diameter, this means a difference between the major and minor diameters which is ca 0,1% of the major diameter. This clearance has, however, in certain engine designs not proved to be sufficient to eliminate the risk of polishing of the cylinders. It is a known fact that a small top ring land clearance can increase the risk of polishing the cylinder. This can be avoided by providing the piston with a large top ring land clearance. The clearance in this case has amounted to ca 2 mm, which has, however, led to a large detrimental volume having a negative effect on emissions and performance.

The purpose of the present invention is to achieve a piston of the type described by way of introduction, by which it is possible to avoid cylinder polishing without making the detrimental volume so large that emissions and performance are affected more than marginally.

This is achieved according to the invention by virtue of the invention that the difference between the major and minor diameters of the cross section of the top ring land of the piston is at least 0,3% of the major diameter.

The invention is based on the idea of first investigating where cylinder polishing occurs and having a top ring land ovality which provides as little clearance as possible where no polishing occurs and increases the clearance only so much in the polished cylinder portions that polishing is avoided. Tests performed have shown that for a given engine design, polishing could not be avoided with common top ring land ovality on the order of 0,15 mm, i.e. ca 0,1%, while it was only possible to eliminate polishing from 0,3%.

The invention will be described in more detail below with reference to examples shown in the accompanying drawing, where Fig. 1 shows a schematic longitudinal

section through a cylinder lining with a portion of a piston therein in accordance with the invention, and Fig. 2 shows the piston in Fig. 1 seen from above and with its ovality greatly exaggerated.

5 In Fig. 1, 1 designates a cylinder lining in a multicylinder internal combustion engine of diesel type and 2 designates the upper portion of a piston, the lower portion (not shown) of which can be made in one piece with the upper portion 2 or be a separate portion joined with the latter, i.e. a pendulum piston. The upper portion 2 of the piston is made with first, second and third ring grooves 3, 4 and 5,  
10 respectively, for piston rings (not shown).

The so-called top ring land of the piston, i.e. the piston portion 6 between the upper surface 7 and the upper edge 8 of the first piston ring groove 3 is, firstly, slightly conical, as shown greatly exaggerated in Fig. 1, and is, secondly, oval as is shown  
15 greatly exaggerated in Fig. 2. D1 marks the diameter of the basic circle, i.e. the largest diameter of the oval piston portion 6, while D2 marks the smallest diameter of this portion 6.

Tests performed have shown that the difference between D1 and D2 must be at least  
20 0,3% of D1 over a certain portion of the height h of the top ring land 6 of the piston and that the greatest difference should not exceed 3%. In tests performed on an engine with an inner diameter of 131 mm of the cylinder lining and a piston with an ovality of the piston top ring land which was 0,99 mm, the greatest clearance between the piston and the cylinder lining for a cold engine was 9,5 mm in the  
25 longitudinal direction of the engine and 0,51 mm in the transverse direction of the engine. It was found that previous problems with the same engine as regards cylinder polishing when the top ring land ovality was 0,15 mm could be completely eliminated without affecting performance and emissions more than marginally, when the ovality was increased to 0,99 mm, was having a diameter difference of  
30 ca 0,8% instead of ca 0,1%.

In Fig. 2, the shaded areas mark the deviation of the top ring land oval from a perfect circle. The sections A within the angular sectors  $\alpha$  have a small top ring land clearance with a major diameter D1, while the sectors B within the angular sectors  $\beta$  have a varying diameter with a minimum diameter D2 at the centre of the sector, so that a soft transition is obtained between the sectors B with large clearance and the sectors A with small clearance to the cylinder lining. The sector angle  $\alpha$  can vary from a minimum of  $15^\circ$  to a maximum of  $120^\circ$  depending on the engine. The positions of the sectors are determined by those locations in which testing has shown that there is a risk of polishing. It is most common, however, that polishing occurs in the longitudinal direction of the engine and that D2 is thus parallel to the longitudinal direction.

**Claims**

1. Piston for an internal combustion engine comprising an essentially cylindrical body (2) with a plurality of axially spaced ring grooves (3,4,5) in its lateral surface spaced from an end surface (7), a first portion of the cylindrical body (6), lying between said end surface (7) and the most closely adjacent ring groove (3), having varying cross section, **characterized** in that the difference between the maximum and minimum diameters (D1,D2) of the cross section is at least 0,3% of the maximum diameter (D1) in any portion of said first portion.
2. Piston according to Claim 1, **characterized** in that the difference between the maximum and minimum diameters (D1,D2) of the cross section is at most 3% of the maximum diameter (D1) in any portion of said first portion.
3. Piston according to one of Claims 1 or 2, **characterized** in that the diameters (D1,D2) increase from the end surface (7) to the ring groove (3).
4. Piston according to one of Claims 1-3, **characterized** in that it is housed in a cylinder (1) with constant diameter and that the difference between the diameter of the cylinder and the minimum diameter (D2) of said piston portion (2) is less than 3% of the cylinder diameter, while the difference between the cylinder diameter and the maximum diameter (D1) of said piston portion (2) is greater than 0,3% of the cylinder diameter.

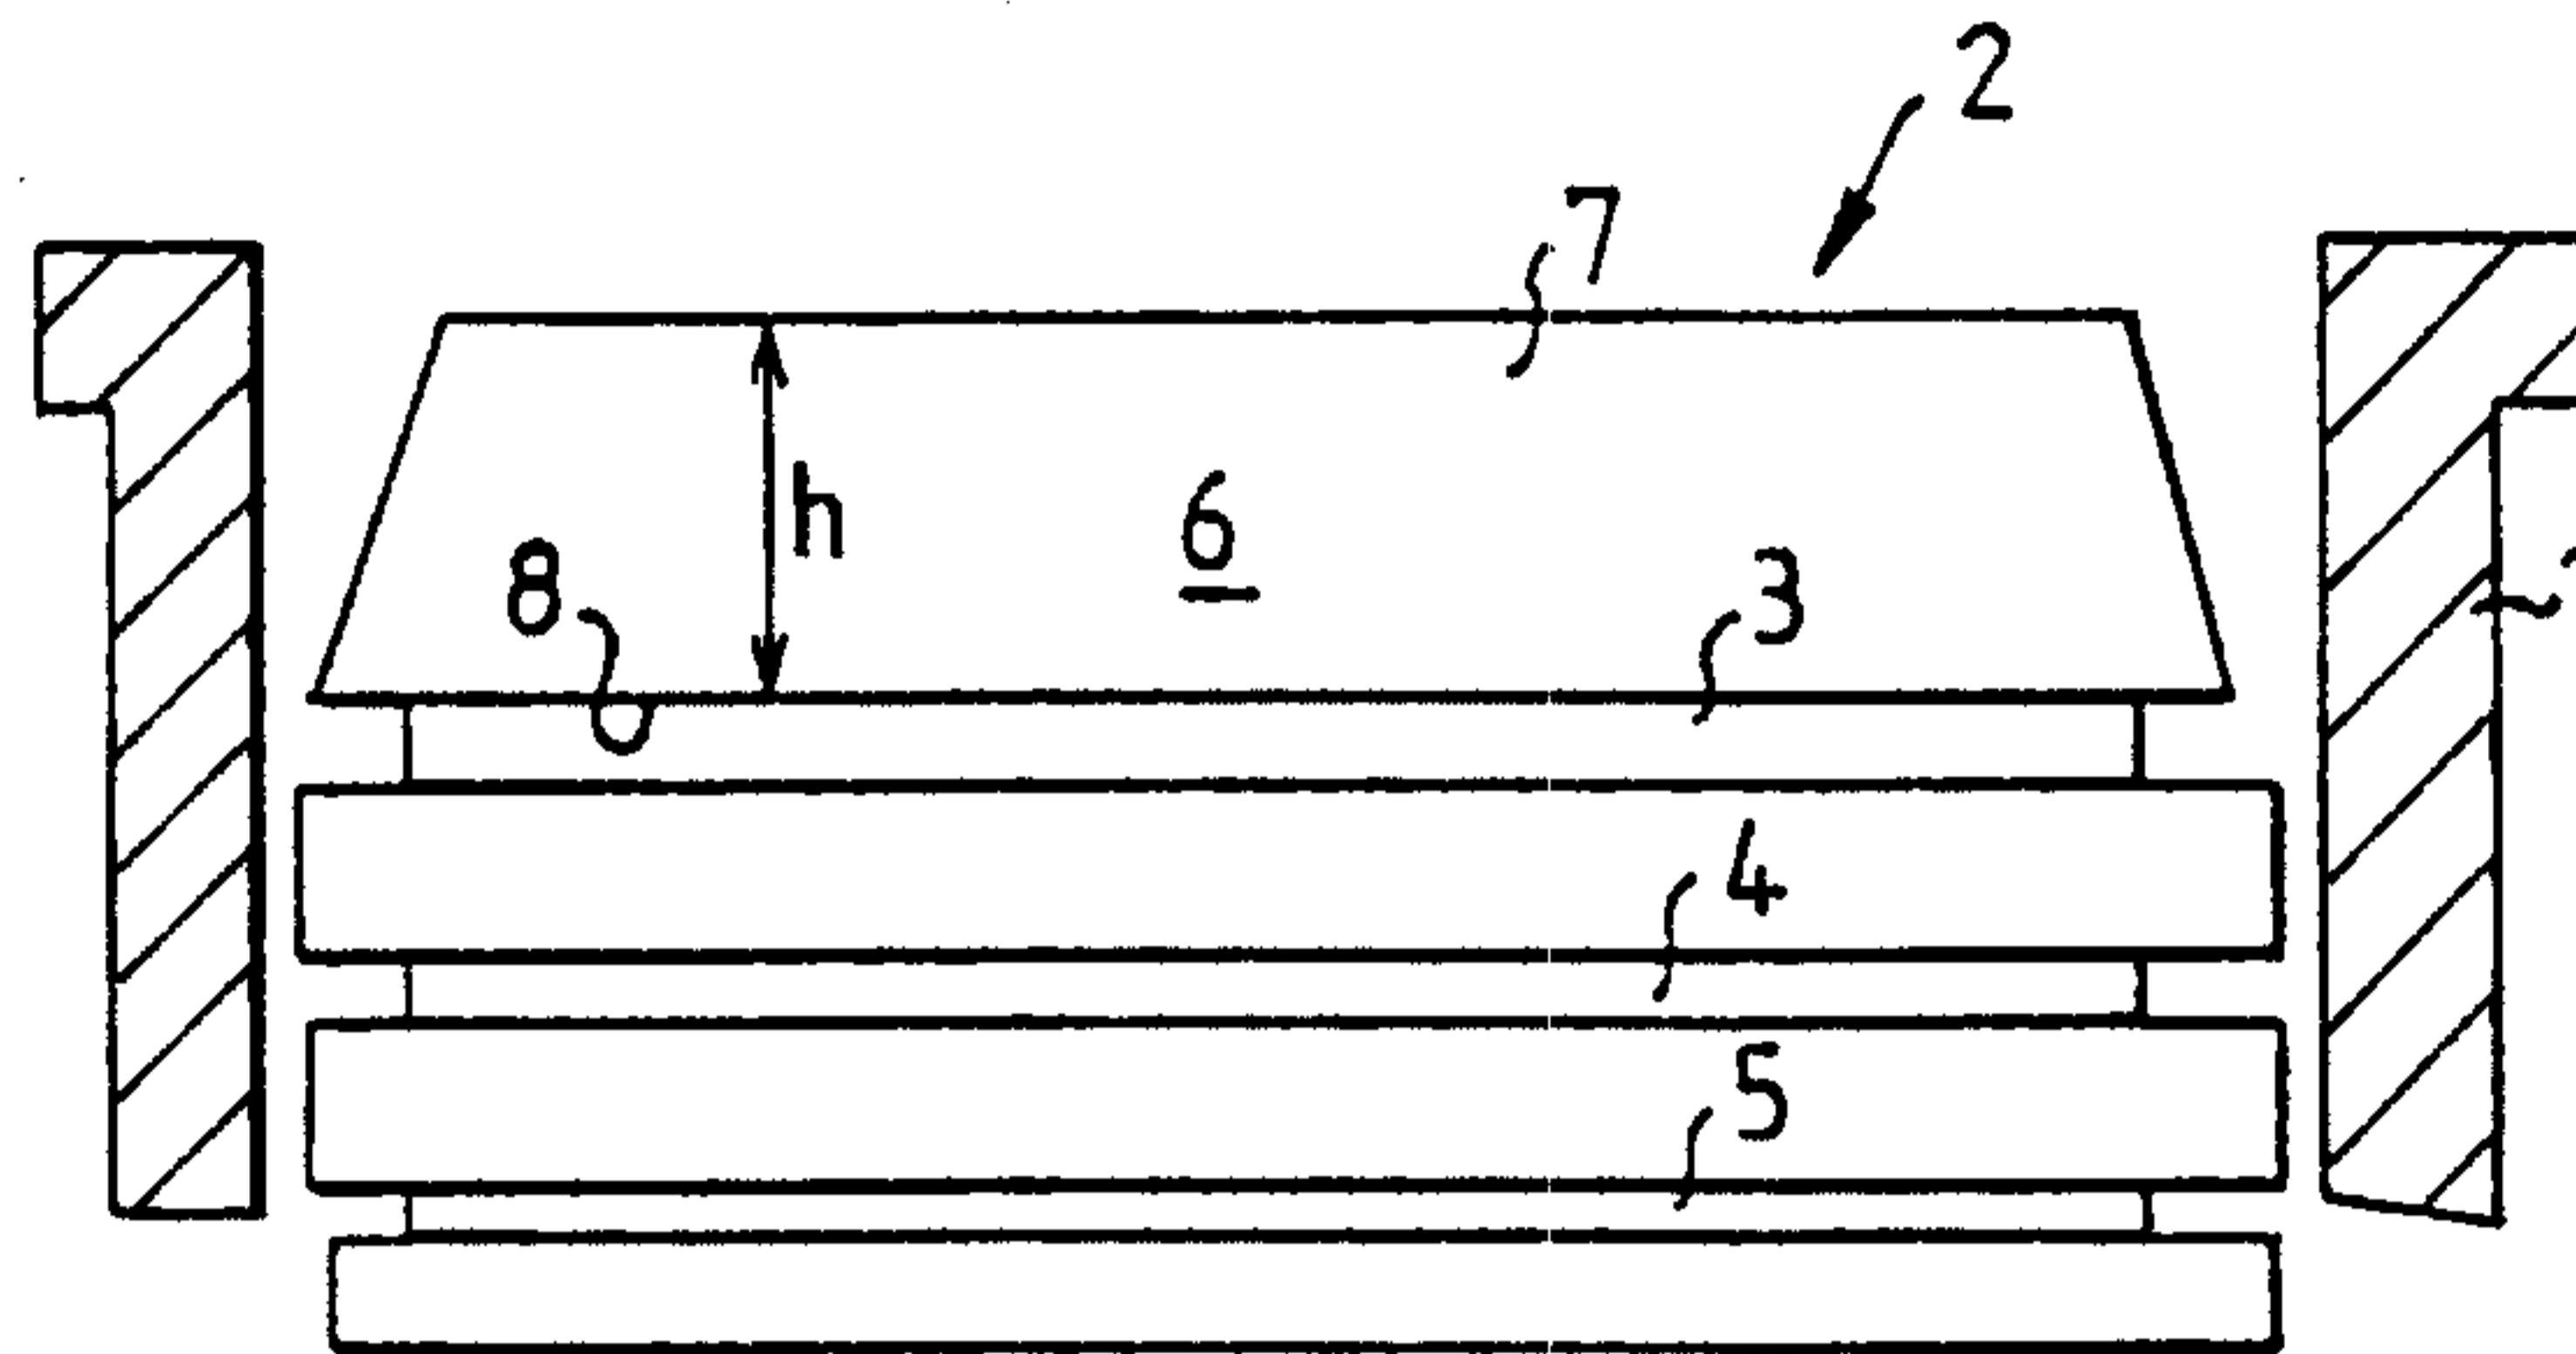


FIG. 1

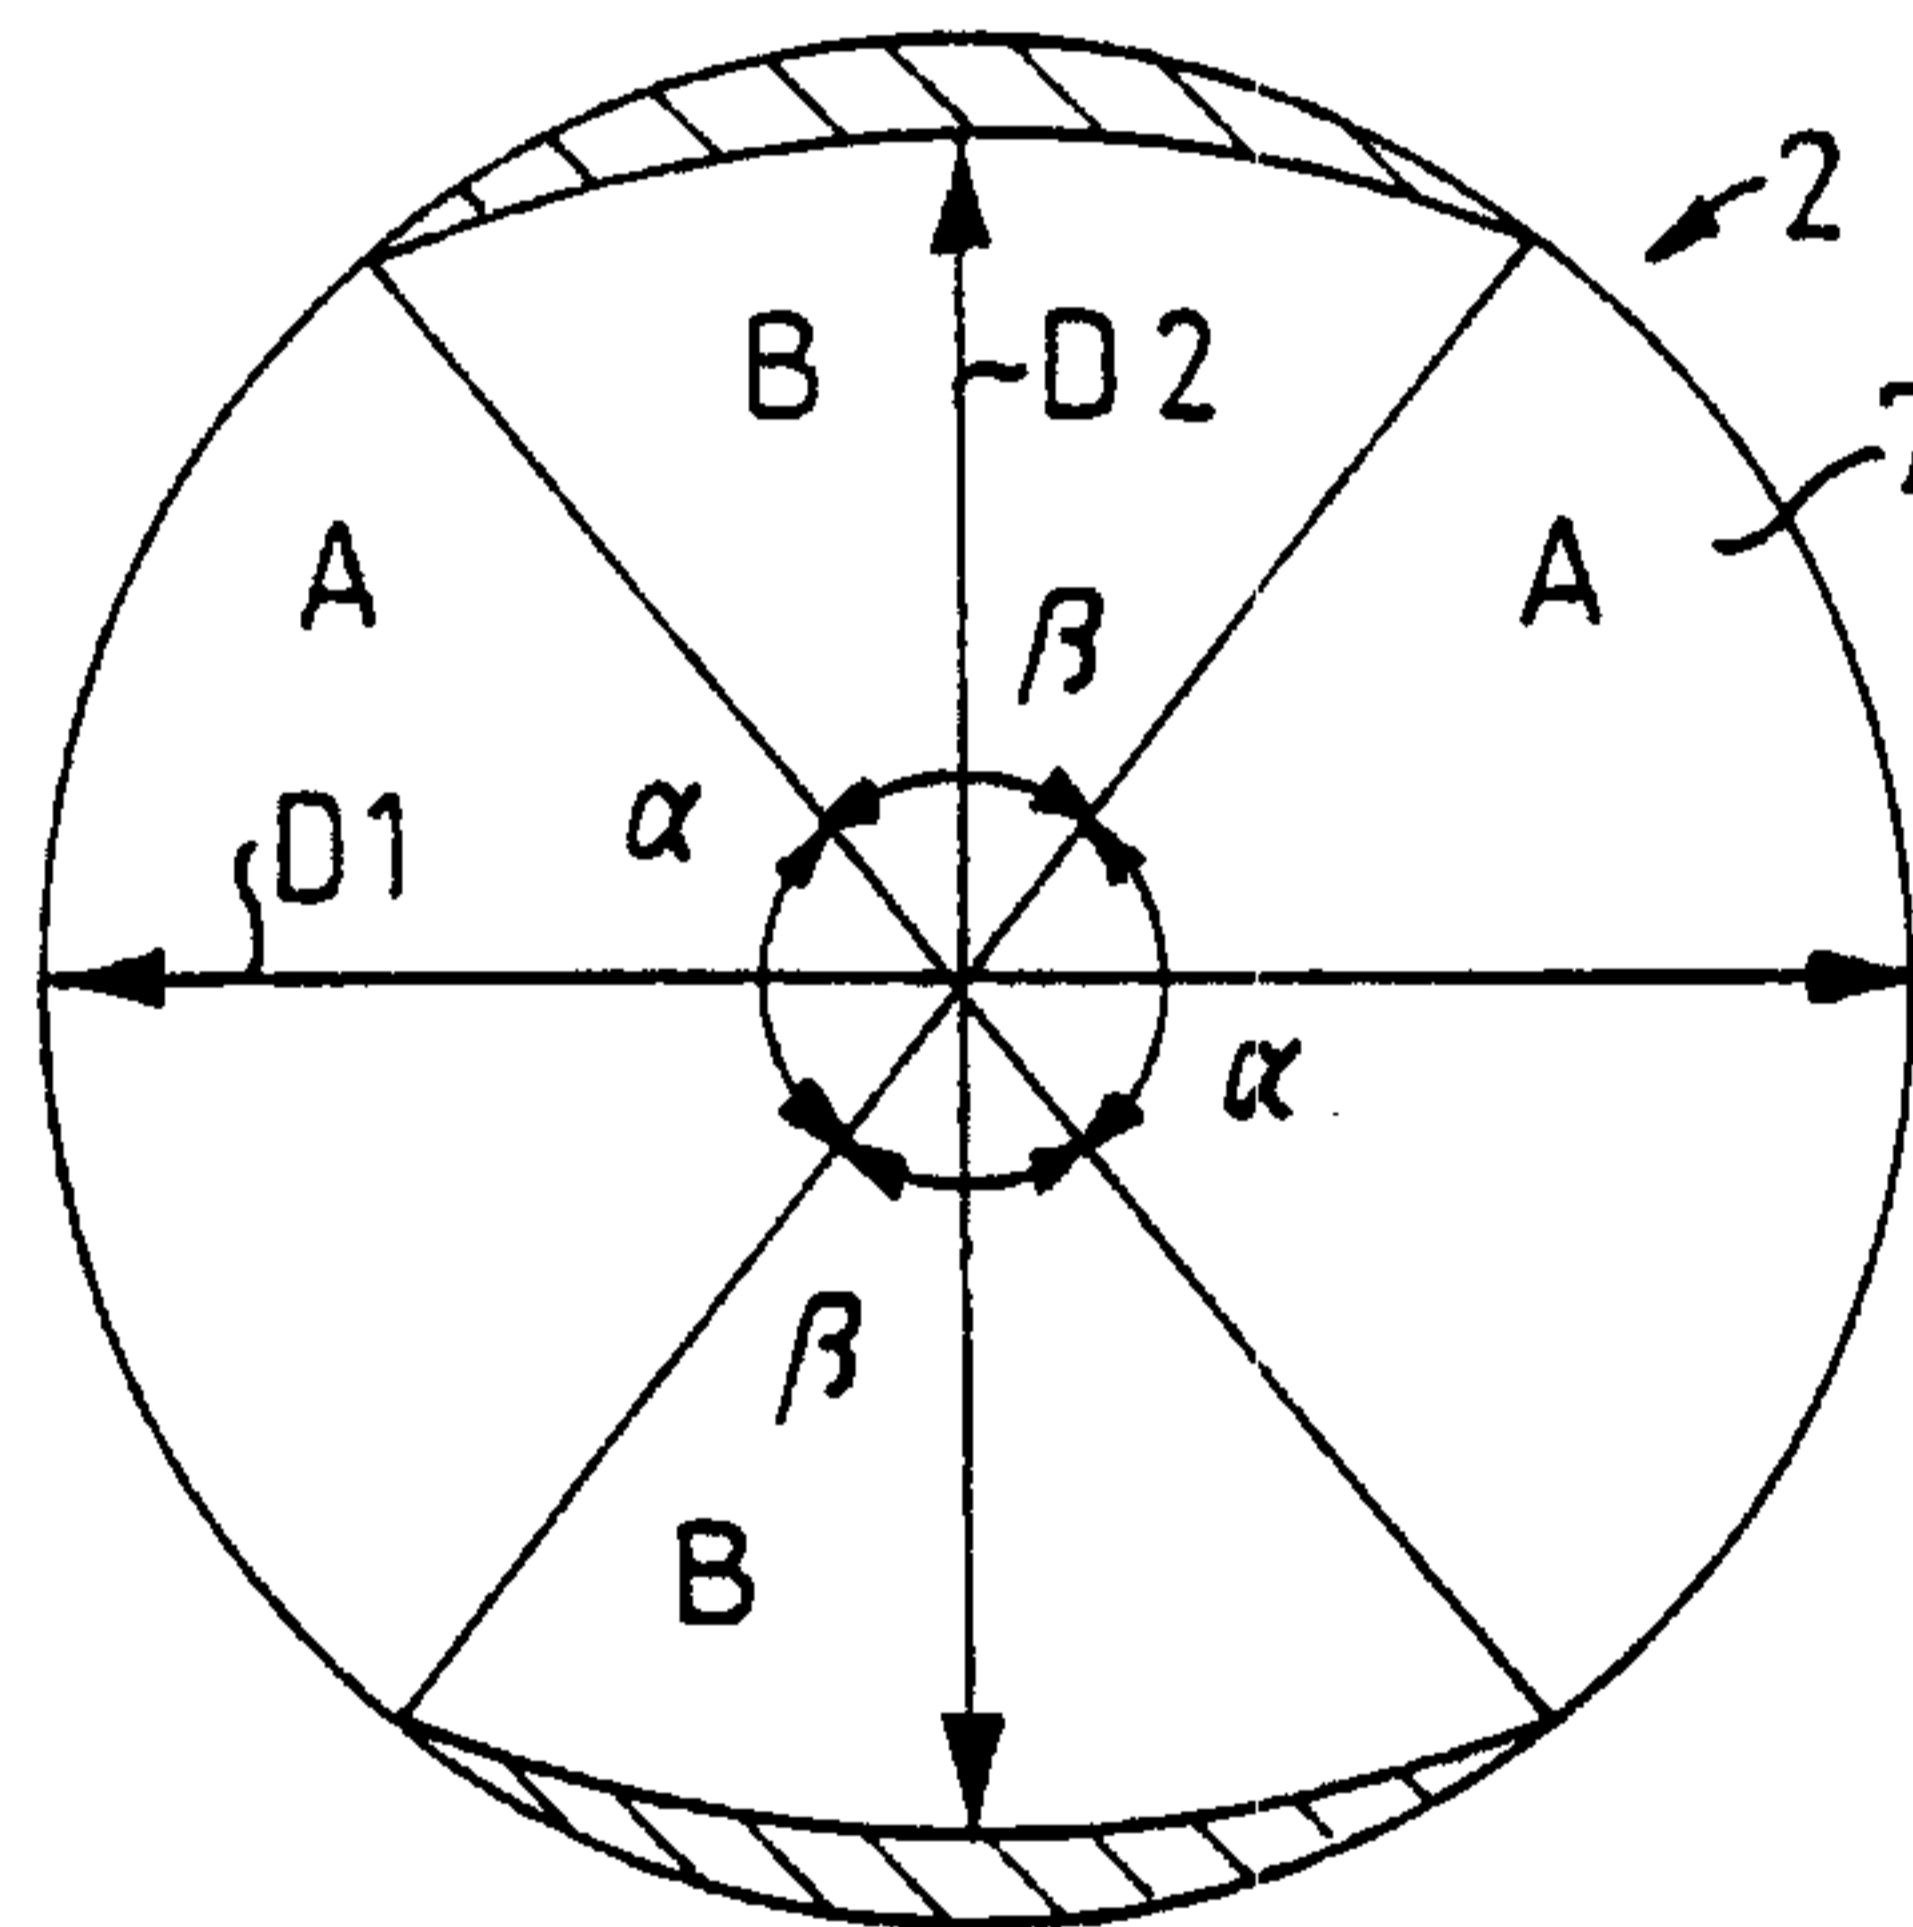


FIG. 2