

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 302 123 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.08.2004 Bulletin 2004/33

(51) Int Cl.7: **A45C 13/26**

(21) Application number: **01830638.1**

(22) Date of filing: **09.10.2001**

(54) **Rolling suitcase with handle system**

Rollkoffer mit Griffsystem

Valise à roulettes avec système de poignées

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(43) Date of publication of application:
16.04.2003 Bulletin 2003/16

(73) Proprietor: **VALIGERIA RONCATO S.p.A.**
35011 Campodarsego (IT)

(72) Inventor: **Mancini, Stefano**
60035 Jesi, Ancona (IT)

(74) Representative: **Perani, Aurelio et al**
Perani Mezzanotte & Partners
Piazza San Babila 5
20122 Milano (IT)

(56) References cited:
WO-A-99/34701 **DE-U- 9 302 510**
US-A- 5 706 921 **US-A- 5 901 822**
US-B1- 6 220 477

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 302 123 B1

Description

[0001] The present invention relates to a handle system for suitcases, bags and the like, in particular of the type provided with wheels in order to facilitate rolling of said suitcases over a support surface.

[0002] As is well known, a handle system for rolling suitcases must satisfy very complex requirements.

[0003] During transportation, a rolling suitcase is in contact both with the hand of the person transporting the suitcase and with the support surface on which the suitcase rolls by means of rollers. A first indispensable requirement consists in adaptation to the individual height of the person transporting the suitcase.

[0004] Whereas conventional suitcases are raised from the ground, because they are suspended from the hand of the person transporting them, and are therefore stabilized owing to the effect of gravity, rolling suitcases pose the problem of lateral instability which results in the risk of overturning.

[0005] As regards the modes of use, a rolling suitcase may be pulled along or pushed and its position with respect to the body of the person transporting it should in theory satisfy a large number of requirements which vary depending on the situation and are often difficult to reconcile, for example the overall volume in confined spaces, the freedom of movement of the person transporting the suitcase, control over the direction of travel and the dynamic stability of the movement.

[0006] In the currently known handle systems used for rolling suitcases, substantially two main types may be defined.

[0007] The first type of handle of the known art consists in a handle made of flexible material which is usually fixed to one of the narrow sides of the suitcase in the direction of travel. Owing to the flexibility of the material, the handle adapts itself to the inclination of the hand of the person transporting the suitcase and is oriented in the direction of the force exerted by that person. Adaptation to the person's height is achieved by means of inclination and raising, on one side, of the case which therefore rests only on a very narrow base of rollers. This type of handle therefore allows only pulling, and not pushing, of the rolling suitcase.

[0008] The second type of handle of the known art consists in a handle which is made of rigid material and can be extracted from one of the wide sides of the suitcase and which allows pulling of the suitcase in an inclined position resting on a very wide base of rollers. The rigidity of the connection between the handle and the suitcase, as well as the greater width of the roller base improves both the lateral stability of the suitcase and the control over the direction of movement.

[0009] The handle systems for rolling suitcases of the known art have, however, certain drawbacks with regard to their versatility and ease of use.

[0010] A first drawback of the handles described above consists in the fact that they allow movement of

a rolling suitcase only in a predefined configuration which very often is not suitable for particular situations, such as alternation between pulling and pushing or movement within very confined spaces such as lifts, public transport vehicles and the like.

[0011] A second drawback consists in the fact that the handle systems of the known art do not allow an advantageous control over the play between the forces acting on the suitcase. In the particular case of handles made of flexible material it is difficult to control the direction of travel of the suitcase which travels by means of the rollers on the support surface. Well-known consequences of this are a wavering movement and overturning of the suitcase.

[0012] Although allowing a greater lateral stability and improved control over the direction of travel of the rolling suitcase compared to the abovementioned flexible handles, rigid and extractable handles, however, have another drawback, namely that they envisage only one configuration for transportation of the suitcase, in which the suitcase remains inclined and at a distance from the person transporting it. Therefore, in confined spaces it is necessary to lift the suitcase instead of pulling it along.

[0013] To overcome the above limitations WO 99/34701 discloses a luggage item provide with a telescoping handle assembly comprising a first gripping element and an auxiliary second gripping element which can be rotated in at least two selectable positions, relative to the first gripping element.

[0014] The resulting structure is relatively complex and unsatisfactory.

[0015] The object of the present invention is therefore that of providing a handle system for rolling suitcase which allows the problems mentioned with reference to the known art to be overcome and which ensures easy and safe manoeuvring which can be adapted to the various situations of transportation of the rolling suitcases.

[0016] These and other objects are achieved by means of a handle system according to Claim 1.

[0017] A non limiting example of embodiment of the present invention will be described below, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of an embodiment of the handle system according to the invention, mounted on a suitcase;

Figure 2 is a front view of the handle system shown in Figure 1;

Figure 3 is a side view of the handle system shown in Figure 2;

Figure 4a shows the adjustable element of the handle system according to the invention in a first locked position;

Figure 4b shows the adjustable element of the handle system according to the invention in a second locked position;

Figure 5 shows an exploded view of the handle system according to the invention;

Figure 6 shows right-angle views of the adjustable element of the handle system according to the invention;

Figures 7, 8 and 9 show perspective views of the individual elements of the locking mechanism of the handle system according to the invention;

Figure 10 shows partially sectioned, right-angle views of a base element of the handle system according to the invention;

Figure 11 shows a cross-sectional view of a detail of the locking mechanism of the handle system according to the invention;

Figures 12 and 13 show cross sections of the base element of the handle system along the lines XII and XIII in Figure 2;

Figures 14a and 14b illustrate different modes of use of the handle system according to the invention; Figures 15a and 15b are two photographs which illustrate operation of the handle system.

[0018] With reference to Figure 1, a handle system according to the invention is denoted in its entirety by 1. Said system 1 is mounted on a suitcase 2 which has a container body 3 with a set of rollers 4 mounted on the base of said container body 3 in order to facilitate rolling of the suitcase 2 along a support surface.

[0019] The handle system 1 comprises a base element 5 connected to said container body 3 as well as an adjustable element 6. A first end 6' of said adjustable element 6 is rotatably connected to said base element 5 by an adjusting joint 7 and a second end 6" thereof forms a handle 8.

[0020] In accordance with one embodiment, the handle 8 is formed anatomically so that it can be adapted to the form of the human hand. Advantageously, said adjustable element 6 has an overall shape which is curved so as to be adapted in the abovementioned locked positions both to the anatomy and to the inclination of the hand of the person who is pushing or pulling the suitcase 2.

[0021] In accordance with a further embodiment, the suitcase 2, or a trolley, comprises at least one element for locking the opening of the half-shells forming the suitcase. For example, the half-shells arranged next to each other to form the suitcase are kept closed in a releasable manner by means of at least one lock (100) positioned on the facing edges of the latter, in particular along the edges present on the vertical side of the suitcase. Advantageously, the suitcase has at least one lock 101 or 102 on the upper side, or width or side opposite to the set of rollers 4 and, preferably, two locks 101 and 102 which, in this position, are particularly easy to use.

[0022] As shown for example in Figures 2 and 5, said adjusting joint comprises a pin 9 which is rotatably housed in one or more seats formed in a central lug 10 of said first end 6' of the adjustable element 6 and inserted into holes 11 provided in two lateral lugs 12 formed by said base element 5 so as to create a hinge

between said base element 5 and said adjustable element 6.

[0023] The central lug 10 is arranged between the lateral lugs 12, and said central lug 10 and lateral lugs 12 have contact surfaces 13, 13' which are substantially perpendicular with respect to the orientation of the pin 9 and facing each other.

[0024] In order to be able to achieve the abovementioned releasable locking of the adjustable element 6 with respect to the base element 5, two key elements 14 are provided, said elements being inserted with one end into first key seats 15 formed in the contact surfaces 13 of the central lug 10 and with the other end into second key seats 15' formed in the contact surfaces 13' of the lateral lugs 12, resulting in a form fit between said base element 5 and said adjustable element 6.

[0025] In accordance with the preferred embodiment of the present invention, the key elements 14 are arranged aligned with said pin 9 and have through-holes 16 which are substantially central and which form said seats for the pin 9 and which allow a transverse movement of said key elements 14 along said pin 9.

[0026] Advantageously, the key elements 14 have a substantially tubular shape with radial and/or frontal protuberances 17 which are distributed at intervals along the external circumference of said elements 14, and said first key seats 15 and second key seats 15' have a shape matching the external shape of the key elements 14 so as to provide said form fit between the base element 5 and the adjustable element 6.

[0027] With even greater advantage, said first key seats 15 have a shape matching the whole key element 14 and said second key seats 15' have a shape matching only said protuberances 17. This particular configuration allows sliding of said key elements 14 inside said first key seats 15 as well as locking of said adjustable element 6 in different angular positions by means of insertion of said protuberances 17 in said second key seats 15'.

[0028] Both in order to facilitate sliding of the key elements 14 and in order to increase the locking effect, the protuberances 17 projecting from said key elements 14 also extend with respect to the orientation of the pin 9 in the radial and longitudinal direction and have a substantially trapezoidal shape viewed in cross section.

[0029] In the embodiment shown in Figure 5, the key elements 14 have four protuberances 17 distributed at an angle of 90° with respect to each other, and the second key seats 15' have respectively four cavities with a matching shape and arrangement. This results in the possibility of adjustment of the adjustable element 6 with respect to the base element 5 in 90° steps.

[0030] The first key seats 15 are connected together inside said central lug 10, forming a single through-seat 15 between said contact surfaces 13, inside which said key elements 14 can be retracted by means of suitable actuating means in order to free said second key seats 15' and disengage said geometric coupling.

[0031] In accordance with the preferred embodiment of the invention, said actuating means comprise an operating pushbutton 18 connected to a longitudinal transmission bar 19, two transverse transmission elements 20 connected to the key elements 14 as well as deviating means 21, 22 which are able to convert the longitudinal movement of said longitudinal transmission bar 19 into a mutual transverse movement of said transmission elements 20 in order to move the two key elements 14 inside said first seat 15 towards or away from each other.

[0032] As can be seen from the figures, said deviating means consist of studs 21 which extend from the longitudinal transmission bar 19 and guide channels 22 formed in said transverse transmission elements 20, said guide channels 22 receiving said studs 21 and comprising a section inclined with respect to both the longitudinal and the transverse directions.

[0033] The transverse transmission elements 20 are plates directly formed on the mutually facing sides of said key elements 14.

[0034] In the embodiment shown in Figure 9, each of the key elements 14 has, associated with them, two of said plates 20 which are aligned together with a central space for the pin 9, each of said plates 20 having a guide channel 22 on two opposite sides, respectively. In this case, the total number of guide channels 22 associated with each individual key element 14 is four.

[0035] In order to convert the longitudinal movement of the longitudinal transmission bar 19 into a mutual transverse movement of the key elements 14, the guide channels 22 of both the transverse transmission elements 20 have a substantially specular form with respect to the plane of the longitudinal transmission element 19. In particular, the guide channels 22 have respectively two outer sections which are parallel and staggered with respect to each other as well as an inclined central section. Advantageously, the path of the guide channels 22 is rounded and is substantially in the shape of an S.

[0036] Depending on the orientation of the guide channels 22, the key elements 14 may be moved away from or towards each other by means of a longitudinal movement, in either direction, of the longitudinal transmission bar 19. The result is that release of the locking action may be performed either by means of pressing or of pulling of the operating element 18.

[0037] In the embodiment shown in the figures, the operating pushbutton 18 can be actuated by means of pressure.

[0038] A further embodiment envisages an operating element 18 comprising both a pressing surface and a cavity for the fingers which allows actuation by means of pulling.

[0039] In the exploded view of Figure 5 and from the details shown in Figures 7 and 8 it can be seen that said longitudinal transmission bar 19 is composed of two individual parts which form a double-T section formed by two flanges 19' facing each other and connected by

means of a web 19".

[0040] The plate-like projections 20 of the key elements 14 are received by the interstice between said flanges 19' on the mutually facing surfaces of which said studs 21 are formed, said studs being in turn received and guided by said guide channels 22.

[0041] The pin 9, in addition to intersecting the key elements 14, also intersects said longitudinal transmission bar 19 which has, in the zone of intersection with the pin 9, an opening 23 which allows a movement of the longitudinal transmission bar 19 which is perpendicular with respect to the pin 9.

[0042] In the embodiment in which said longitudinal transmission element 19 is a bar in the form of a double T, the opening 23 is formed in said web 19".

[0043] The surface which delimits the side opposite to the operating element 18 of said elongated opening 23 forms a stop surface 24 for said pin 9, preventing the actuating means 18, 19, 20, 21, 22 from coming out of their housing 25 inside the adjustable element 6.

[0044] In order to prevent accidental unlocking of the adjustable element 6, two helical springs 26 which are pre-tensioned and which abut in special counter-seats formed in said housing 25 are also envisaged, said helical springs 26 acting directly on the operating element 18.

[0045] Owing to the resilient pre-tensioning of the helical springs 26, the insertion of the protuberances 17 into said second key seats 15' becomes a snap-type engagement and release of the locking action by means of retraction of the key elements 14 requires that the resilient force of the springs 26 must be overcome by means of manual operation of the actuating element 18.

[0046] Obviously, the abovementioned stop surface 24 prevents the operating element 18 from coming out of the housing 25 owing to the resilient load exerted by the springs 26.

[0047] In accordance with a particularly advantageous embodiment, the base element 5 is not formed as one piece, but has an extractable portion 5', connected to said adjusting joint 7, and a fixed portion 5", which can be connected to said container body. The extractable portion 5' is slidably housed inside a channel 27 formed in the fixed portion 5" and allows adjustment of the distance between the adjusting joint 7 and the container body 3.

[0048] Advantageously, the channel 27 has, viewed in cross section, a substantially elliptical shape and the extractable portion 5' has, viewed in cross section, a substantially elliptical tubular shape matching the cross section of the channel 27.

[0049] In accordance with one embodiment, the base element 5 has yielding locking means which allow said extractable portion 5' to be locked resiliently in one or more positions inside the channel 27 of said fixed portion 5".

[0050] These yielding locking means preferably comprise one or more stop cavities 28 formed in the surface

of said channel 27 and one or more thrusting elements 29 projecting in a yielding manner from the outer surface of said extractable portion 5' and able to snap-engage resiliently into said stop cavities 28.

[0051] Advantageously, the thrusting elements 29 are two metal spheres 28 housed inside a small tube with two openings having a diameter smaller than the diameter of the spheres and pushed towards said openings by means of a pre-tensioned spring arranged between said spheres inside the tube, this tube being arranged at the opposite end to the adjusting joint 7 of the extractable portion 5'.

[0052] The extractable portion 5' has, formed in it, reinforcing ribs which form a central circular tube for strengthening the walls of the elliptical profile.

[0053] The operating principle of the handle system 1 according to the invention will be described below with reference to the example of a rolling suitcase with four rollers.

[0054] According to a first mode of use involving pulling of a rolling suitcase 2, the system 1 allows extraction of the extractable portion 5' from the channel 27 of the fixed portion 5" by means of the handle 8 in order to adapt the handle 8 to the height of the person transporting the suitcase 2.

[0055] During this extraction of the extractable portion 5', the latter slides inside the channel 27 and is resiliently stopped by means of the thrusting elements 29 which snap-engage inside the stop cavities 28.

[0056] During a following step, the suitcase 2 is brought into an inclined position where it rests with only two rollers 4 on the support surface. Adjustment of the inclination of the adjustable element 6 occurs in three steps: unlocking - adjustment - locking.

[0057] Unlocking is performed without difficulty by means of pushing or pulling of the operating element 18 using the same hand which grips the handle 8, the longitudinal movement of the operating element 18 being transmitted by means of the longitudinal transmission bar 19. The studs 21 of the longitudinal transmission bar 19 slide inside the inclined section of the guide channels 22 and convert said longitudinal movement into a mutual transverse movement of the key elements 14, which are fully retracted into the first key seats 15, freeing the second key seats 15' and thus releasing locking of the adjustable element 6 (compare Figures 15a and 15b).

[0058] The adjustment of the adjustable element 6 is performed using the same hand which grips the handle 8. A specific rotating action of the hand is not even required because, owing to the gravitational effect, the centre of gravity of the suitcase 2 tends to lower automatically, advantageously stabilizing the suitcase 2 and bringing the adjustable element 6 into the most suitable position for the hand. This adjustment is further facilitated thanks to the curved shape of the adjustable element 6 and the anatomical shape of the handle 8 itself.

[0059] Locking of the adjustable element 6 in the optimum position for the person transporting the suitcase

is performed by means of reinsertion of the protuberances 17 in the second key seats 15'. Owing to the pre-tensioning of the springs 26, this reinsertion is performed automatically and by means of snap-engagement, as soon as the protuberances 17 and the second key seats 15' are aligned with each other again.

[0060] In order to prevent automatic locking in an undesirable position, it is sufficient to keep the operating pushbutton 18 pressed until the adjustable element is located in the locked position desired.

[0061] With particular reference to a rolling suitcase which is being pulled along, the angular adjustment of the adjustable element, and therefore of the handle, allows the centre of gravity of the suitcase to be lowered in an advantageous manner and the end section of the handle to be oriented substantially in the vertical direction, as shown for example in Figure 14a.

[0062] According to a second mode of use where the rolling suitcase 2 is pushed, the system 1, by means of the angular adjustment and linear extraction operations described above, allows the suitcase 2 to be kept in a vertical position, resting on all four rollers. This position allows the suitcase to be moved as close as possible to the person transporting it and to be manoeuvred in very confined spaces, such as lifts and the like.

[0063] By means of adjustment of the adjustable element 6, the handle 8 is positioned at a point with respect to the suitcase 2, which allows the case to be pushed without the risk of overturning it and moreover ensures a certain freedom of movement for the legs of the person transporting it, as can be seen from Figure 14b.

[0064] The key elements 14 as well as the second key seats 15' are formed and positioned in such a way as to ensure a locked condition of the adjustable element 6, which has proved to be unusually advantageous in terms of stability, safety and ease of use. This condition envisages that, in the locked positions of the adjustable element 6, a straight line A which connects the centre of the handle 8 and the centre of the adjusting joint 7 intersects a plane p defined by the base of the suitcase 2, outside of the overall volume of the rollers 4.

[0065] The handle system according to the invention offers numerous advantages.

[0066] In addition to being able to be adapted always to the height of the person transporting the suitcase, the system 1 advantageously allows the centre of gravity of the suitcase to be lowered without changing the distance between person and suitcase.

[0067] The system 1 also allows the suitcase to be pulled along and pushed in very stable, safe and easy conditions. The handle system 1 also allows the suitcase to be pushed in very confined spaces, for example lifts, train and underground railway carriages, in such a way that the suitcase always remains in the immediate vicinity and eyesight of the person, does not cause an obstacle and in any case leaves room for the person's knees. The curved shape of the adjustable element also ensures a substantially vertical orientation of the handle,

both during pulling and pushing of the suitcase.

[0068] The arrangement of the actuating pushbutton 8 allows easy adjustment using the same hand which grips the handle 8, and, as a result of the abovementioned locking and actuating mechanism, the handle system is unusually versatile and reliable.

[0069] Moreover, the tubular and elliptical cross-sectional shape of the extractable portion 5' and the channel 27 ensures an enormous degree of lateral and torsional rigidity which notably improves the lateral stability, the dynamic behaviour and the control over the direction of the rolling suitcase with respect to the systems of the known art.

[0070] Obviously, a person skilled in the art, in order to satisfy contingent and specific requirements, may make further modifications and variations to the handle system 1 for rolling suitcases according to the present invention whereby the scope of protection of the invention is defined by the following claims.

Claims

1. Suitcase (2) comprising a container body (3), rolling means (4) for facilitating rolling of said container body (3) along a support surface and a handle system, said handle system comprising:
 - a base element (5) connected to said container body (3),
 - an adjustable element (6) having a first end (6') rotatably connected to said base element (5) by an adjusting joint (7) and a second end (6'') forming a handle (8),
 - releasable locking means (14,15,15') in said adjusting joint (7) locking said adjustable element (6) in one or more locking positions with respect to said base element (5),
 - actuating means (18,19,20,21,22) in said adjusting joint (7) for releasing said releasable locking means (14,15,15'),

said adjusting joint (7) comprising a central lug (10) formed by said first end (6') of said adjustable element, two lateral lugs (12) formed by said base element (5), said central lug (10) being arranged between said lateral lugs (12) and hinged thereto by a pin (9) inserted into holes (16) provided in the two lateral lugs (12) and in a seat of said central lug (10), said central lug (10) and lateral lugs (12) having contact surfaces (13,13') which are substantially perpendicular with respect to the orientation of the pin (9) and facing each other,

characterised in that said releasable locking means (14, 15, 15') comprise two or more key elements (14) which are inserted respectively with one end into first key seats (15) formed in the contact surface (13) of said central lug (10) and with the other

end into second key seats (15') formed in the contact surfaces (13') of said lateral lugs (12), said key elements (14) being retractable into at least one of said first key seats (15) or second key seats (15') by means of said actuating means (18,19,20,21,22) disengaging respectively the other key seat (15,15').

2. Suitcase (2) according to Claim 1, in which said actuating means (18,19,20,21,22) comprise an operating element (18) connected to a longitudinal transmission element (19), one or more transverse transmission elements (20) connected to said key elements (14), as well as deviating means (21,22) able to convert a longitudinal movement of said longitudinal transmission element (19) into a mutual transverse movement of said transverse transmission elements (20).
3. Suitcase (2) according to Claim 2, in which said longitudinal transmission element (19) comprises one or more rigid bars (19).
4. Suitcase (2) according to Claim 3, in which said deviating means (21, 22) comprise one or more studs (21) which extend respectively from one of said transverse transmission elements (20) or longitudinal transmission element (19) and guide channels (22) formed respectively in the other of said transverse transmission elements (20) or longitudinal transmission element (19), said guide channels (22) receiving said studs (21) and comprising a section inclined with respect to both the longitudinal and the transverse direction.
5. Suitcase (2) according to Claim 4, in which said transverse transmission elements (20) comprise plate-like projections (20) delimiting said guide channels (22) and formed directly at the mutually facing ends of said key elements (14).
6. Suitcase (2) according to Claim 5, in which said longitudinal transmission elements (19) comprise a bar with a cross-sectional shape in the form of a double T formed by two flanges (19') facing each other and connected by means of a web (19''), said plate-like projections (20) of the key elements (14) being received by the interstice between said flanges (19') on the mutually facing surfaces of which said studs (21) are formed, said studs being received and guided by said guide channels (22) of said plate-like projections (20).
7. Suitcase (2) according to any one of the preceding claims 2 to 6, comprising spring means (26) acting on said actuating means (18, 19, 20, 21, 22) so as to prevent accidental unlocking of the adjustable element (6).

8. Suitcase (2) according to Claim 7, in which said actuating means (18, 19, 20, 21, 22) and said spring means (26) are arranged inside a housing (25) formed in said adjustable element (6).
9. Suitcase (2) according to Claim 8, in which said spring means (26) comprise one or more pre-tensioned helical springs (26) abutting in a special counter-seat formed in said housing (25) and acting directly on the operating element (18).
10. Suitcase (2) according to any one of the preceding claims 2 to 9, in which said actuating means (18, 19, 20, 21, 22) comprise stop means (9, 24) for preventing said operating element (18) from coming out of said housing (25) owing to the resilient load exerted by said spring means (26).
11. Suitcase (2) according to any one of the preceding claims 2 to 10, in which said key elements (14) are arranged aligned with said pin (9) and have substantially central through-holes (16) which form seats for the pin (9) and allow a transverse movement of said key elements (14) along said pin (9).
12. Suitcase (2) according to Claim 11, in which said pin (9) also intersects said longitudinal transmission element (19) which has, in the zone of intersection with the pin (9), an opening (23) which allows a movement of said longitudinal transmission element (19) which is perpendicular with respect to said pin (9).
13. Suitcase (2) according to Claim 12, in which said opening (23) is formed in said web (19").
14. Suitcase (2) according to one of Claims 12 or 13, in which one of the surfaces delimiting said opening (23) forms a stop surface (24) for said pin (9), which prevents said actuating means (18, 19, 20, 21, 22) from coming out of said housing (25).
15. Suitcase (2) according to any one of the preceding claims 7 to 14, in which the release of said releasable locking means (14, 15, 15') is performed by means of manual actuation of said operating element (18) opposing the resilient force of said spring means (26).
16. Suitcase (2) according to any one of the preceding claims, in which said key elements (14) have a substantially tubular shape with radial and/or frontal protuberances (17) and said first key seats (15) and second key seats (15') have a matching shape for receiving said protuberances (17), providing a form fit.
17. Suitcase (2) according to Claim 16, in which said protuberances (17) are distributed at intervals along the external circumference of said key elements (14).
18. Suitcase (2) according to Claim 16, in which said first key seats (15) have a shape matching the whole key element (14) and said second key seats (15') have a shape matching only said protuberances (17), allowing the sliding of said key elements (14) inside said first seats (15) as well as locking of said adjustable element (6) in different angular positions by means of insertion of said protuberances (17) in said second seats (15').
19. Suitcase (2) according to Claim 18, in which, owing to the resilient pre-tensioning of spring means (26), the insertion of said protuberances (17) in said second seats (15') is of the snap-engagement type.
20. Suitcase (2) according to Claim 18 or 19, in which said protuberances (17) of said key elements (14) extend in the radial and longitudinal direction of the pin (9) and have a substantially trapezoidal-shaped cross section.
21. Suitcase (2) according to any one of Claims 18 to 20, in which said protuberances (17) are four in number.
22. Suitcase (2) according to any one of the preceding claims 4 to 21, in which said guide channels (22) associated with each of said key elements (14) are four in number.
23. Suitcase (2) according to any one of the preceding claims 4 to 22, in which said guide channels (22) extend along a substantially S-shaped path.
24. Suitcase (2) according to any one of the preceding claims 2 to 23, in which said operating element (18) is a pushbutton (18) which can be actuated by means of pressure.
25. Suitcase (2) according to any one of the preceding claims, in which said adjustable element (6) has an overall shape which is curved and an anatomical handle (8) able to be adapted in said locked positions to the anatomy and to the inclination of the human hand.
26. Suitcase (2) according to any one of the preceding claims, in which said base element (5) has an extractable portion (5') connected to said adjusting joint (7) and a fixed portion (5") which can be connected to said container body (3).
27. Suitcase (2) according to Claim 26, in which said extractable portion (5') is slidably housed in a chan-

nel (27) formed inside said fixed portion (5''), allowing the adjustment of the distance between said adjusting joint (7) and said container body (3).

28. Suitcase (2) according to Claim 27, comprising yielding locking means (28, 29) able to lock resiliently said extractable element (5') in one or more positions inside said fixed element (5').
29. Suitcase (2) according to Claim 28, in which said yielding locking means (28, 29) comprise one or more stop cavities (28) formed in the surface of said channel (27) and one or more thrusting elements (29) projecting in a yielding manner from the outer surface of said extractable portion (5') and able to snap-engage resiliently into said stop cavities (28).
30. Suitcase (2) according to Claim 29, in which said thrusting elements (29) comprise spheres (28) resiliently pre-tensioned by springs.
31. Suitcase (2) according to Claim 27, in which said channel (27) has a substantially elliptical shape viewed in cross section.
32. Suitcase (2) according to Claim 31, in which said extractable portion (5') has a substantially elliptical tubular shape viewed in cross section, matching the cross section of said channel (27).
33. Suitcase (2) according to Claim 32, in which said extractable portion (5') has reinforcing ribs.
34. Suitcase (2) according to Claim 33, in which said reinforcing ribs form a central circular tube able to strengthen the walls of said elliptical section.
35. Suitcase (2) according to any of the preceding claims, in which the angle of inclination of said handle (8) with respect to said container body (3) is adjustable by means of said adjusting joint (7).
36. Suitcase (2) according to Claim 35, in which the distance between said handle (8) and said container body (3) is adjustable by means of said adjusting joint (7).
37. Suitcase (2) according to Claim 36, in which the distance between said adjusting joint (7) and said container body (3) is adjustable by means of said base element (5).
38. Suitcase (2) according to any one of the preceding Claims, in which said rolling elements (4) are arranged on a base of the suitcase (2) and in which, in the locked positions of said adjustable element (6), a straight line A which connects the centre of the handle (8) and the centre of the adjusting joint

(7) intersects a plane (p) defined by said base outside of the overall volume of said rolling means (4).

39. Suitcase (2), according to any one of the preceding claims, comprising at least one lock (101; 102) in the side of said suitcase opposite to rolling means (4), able to close in a releasable manner two half-shells forming the body of the suitcase.

Patentansprüche

1. Koffer (2) mit einem Behälterkörper (3), einem Rollmittel (4), um ein Rollen des Behälterkörpers (3) entlang einer Auflagefläche zu ermöglichen, sowie einem Handgriffsystem, wobei das Handgriffsystem umfasst:

- ein mit dem Behälterkörper (2) verbundenes Basiselement (5),
- ein einstellbares Element (6) mit einem ersten Ende (6'), das drehbar mit dem Basiselement (5) durch ein Einstellgelenk (7) verbunden ist, und einem einen Handgriff (8) bildenden zweiten Ende (6''),
- lösbare Verriegelungsmittel (14,15,15') in dem Einstellgelenk (7), welche das einstellbare Element (6) in einer oder mehreren Verriegelungspositionen in Bezug auf das Basiselement (5) verriegeln,
- Betätigungsmittel (18,19,20,21,22) in dem Einstellgelenk (7) zum Lösen bzw. Freigeben der lösbaren Verriegelungsmittel (14,15,15'),

wobei das Einstellgelenk (7) einen zentralen Ansatz (10), der von dem ersten Ende (6') des einstellbaren Elements gebildet wird, und zwei von dem Basiselement (5) gebildete laterale Ansätze (12) umfasst, wobei der zentrale Ansatz (10) zwischen den lateralen Ansätzen (12) angeordnet und mit diesen über einen Stift (9), der in in den beiden lateralen Ansätzen (12) vorgesehene Löcher (16) und in einen Sitz des zentralen Ansatzes (10) eingesetzt ist, gelenkig verbunden ist, wobei der zentrale Ansatz (10) und die lateralen Ansätze (12) Kontaktflächen (13,13') aufweisen, die im wesentlichen senkrecht in Bezug auf die Ausrichtung des Stifts (9) und einander zugewandt sind,

dadurch gekennzeichnet, dass

die lösbaren Verriegelungsmittel (14,15,15') zwei oder mehrere Pass- bzw. Schlüsselemente (14) umfassen, die jeweils mit einem Ende in erste, in der Kontaktfläche (13) des zentralen Ansatzes (10) ausgebildete Pass- bzw. Schlüsselsitze (15) und mit dem anderen Ende in zweite, in den Kontaktflächen (13') der lateralen Ansätze (12) ausgebildete Pass- bzw. Schlüsselsitze (15') eingesetzt sind, wobei die Pass- bzw. Schlüsselemente (14)

in mindestens einen der ersten Pass- bzw. Schlüsselsitze (15) oder zweiten Pass- bzw. Schlüsselsitze (15') mittels der Betätigungsmittel (18,19,20,21,22) zurückziehbar sind, wobei jeweils der andere Pass- bzw. Schlüsselsitz (15,15') außer Eingriff gebracht wird.

2. Koffer (2) nach Anspruch 1, bei dem die Betätigungsmittel (18,19,20,21,22) ein Betätigungselement (18), welches mit einem longitudinalen Übertragungselement (19) verbunden ist, eines oder mehrere transversale Übertragungselemente (20), das/die mit den Pass- bzw. Schlüsselementen (14) verbunden ist/sind, sowie Ablenkmittel (21,22), welche eine Longitudinalbewegung des longitudinalen Übertragungselements (19) in eine beidseitige Transversalbewegung der transversalen Übertragungselemente (20) umwandeln können, umfassen.
3. Koffer (2) nach Anspruch 2, bei dem das longitudinale Übertragungselement (19) eine oder mehrere starre Riegel (19) umfasst.
4. Koffer (2) nach Anspruch 3, bei dem die Ablenkmittel (21,22) einen oder mehrere Zapfen (21), der/die sich jeweils von einem der transversalen Übertragungselemente (20) oder longitudinalen Übertragungselemente (19) erstreckt/erstrecken, sowie jeweils in dem anderen der transversalen Übertragungselemente (20) oder dem longitudinalen Übertragungselement (19) ausgebildete Führungskanäle (22) umfassen, wobei die Führungskanäle (22) die Zapfen (21) aufnehmen und einen in Bezug sowohl auf die Longitudinal- als auch auf die Transversalrichtung geeigneten Abschnitt umfassen.
5. Koffer (2) nach Anspruch 4, bei dem die transversalen Übertragungselemente (20) plattenartige Vorsprünge (20) umfassen, welche die Führungskanäle (22) begrenzen und direkt an den einander zugewandten Enden der Pass- bzw. Schlüsselemente (14) ausgebildet sind.
6. Koffer (2) nach Anspruch 5, bei dem die longitudinalen Übertragungselemente (19) einen Riegel mit einer Querschnittsform eines Doppel-T's umfassen, das bzw. der aus zwei einander zugewandten und mittels eines Stegs (19") verbundenen Flanschen (19') gebildet ist, wobei die plattenartigen Vorsprünge (20) der Pass- bzw. Schlüsselemente (14) durch den Zwischenraum zwischen den Flanschen (19') an den einander zugewandten Oberflächen, aus denen die Zapfen (21) gebildet sind, aufgenommen sind, wobei die Zapfen durch die Führungskanäle (22) der plattenartigen Vorsprünge (20) aufgenommen und geführt sind.

7. Koffer (2) nach einem der vorangehenden Ansprüche 2 bis 6, mit auf die Betätigungsmittel (18,19,20,21,22) einwirkenden Federmitteln (26), um ein versehentliches Entriegeln des einstellbaren Elements (6) zu verhindern.
8. Koffer (2) nach Anspruch 7, bei dem die Betätigungsmittel (18,19,20,21,22) und die Federmittel (26) innerhalb eines in dem einstellbaren Element (6) ausgebildeten Gehäuses (25) angeordnet sind.
9. Koffer (2) nach Anspruch 8, bei dem die Federmittel (26) eine oder mehrere vorgespannte Spiral- bzw. Schraubenfedern (26) umfassen, die an einem speziellen, in dem Gehäuse (25) ausgebildeten und direkt auf das Betätigungselement (18) einwirkenden Gegensitz anliegen.
10. Koffer (2) nach einem der vorangehenden Ansprüche 2 bis 9, bei dem die Betätigungsmittel (18,19,20,21,22) Anschlagmittel (9,24) zum Verhindern, dass das Betätigungselement (18) infolge der von den Federmitteln (26) ausgeübten elastischen Last aus dem Gehäuse (25) heraustritt, umfassen.
11. Koffer nach einem der vorangehenden Ansprüche 2 bis 10, bei dem die Pass- bzw. Schlüsselemente (14) mit dem Stift (9) ausgerichtet angeordnet sind und im wesentlichen zentrale Durchgangslöcher (16) aufweisen, die Sitze für den Stift (9) bilden und eine transversale Bewegung der Pass- bzw. Schlüsselemente (14) entlang dem Stift (9) ermöglichen.
12. Koffer (2) nach Anspruch 11, bei dem sich der Stift (9) auch mit dem longitudinalen Übertragungselement (19) kreuzt, das in der Kreuzungszone mit dem Stift (9) eine Öffnung (23) aufweist, welche eine Bewegung des longitudinalen Übertragungselements (19) ermöglicht, die in Bezug auf den Stift (9) senkrecht ist.
13. Koffer (2) nach Anspruch 12, bei dem die Öffnung (23) in dem Steg (19") ausgebildet ist.
14. Koffer (2) nach einem der Ansprüche 12 oder 13, bei dem eine der die Öffnung (23) begrenzenden Oberflächen eine Anschlagfläche (24) für den Stift (9) bildet, die verhindert, dass die Betätigungsmittel (18,19,20,21,22) aus dem Gehäuse (25) treten.
15. Koffer (2) nach einem der vorangehenden Ansprüche 7 bis 14, bei dem das Lösen der lösbaren Verriegelungsmittel (14,15,15') mittels einer manuellen Betätigung des Betätigungselements (18) gegen die elastische Kraft der Federmittel (26) erfolgt.
16. Koffer (2) nach einem der vorangehenden Ansprü-

che, bei dem die Pass- bzw. Schlüsselemente (14) im wesentlichen Röhrenform mit radialen und/oder frontalen Vorsprüngen (17) aufweisen und die ersten Pass- bzw. Schlüsselsitze (15) und zweiten Pass- bzw. Schlüsselsitze (15') eine passende Form zur Aufnahme der Vorsprünge (17) aufweisen, so dass sie eine Formpassung bilden.

17. Koffer (2) nach Anspruch 16, bei dem die Vorsprünge (17) in Intervallen entlang dem Außenumfang der Pass- bzw. Schlüsselemente (14) verteilt sind.
18. Koffer (2) nach Anspruch 16, bei dem die ersten Pass- bzw. Schlüsselsitze (15) eine Form aufweisen, welche zu dem gesamten Pass- bzw. Schlüsselement (14) passt, und die zweiten Pass- bzw. Schlüsselsitze (15') eine Form aufweisen, welche nur zu den Vorsprüngen (17) passt, wodurch das Gleiten der Pass- bzw. Schlüsselemente (14) in den ersten Sitzen (15) sowie eine Verriegelung des einstellbaren Elements (6) in verschiedenen Winkelpositionen mittels Einführen der Vorsprünge (17) in die zweiten Sitze (15') ermöglicht wird.
19. Koffer (2) nach Anspruch 18, bei dem infolge der elastischen Vorspannung der Federmittel (26) das Einsetzen der Vorsprünge (17) in die zweiten Sitze (15') eine Art Einschnappeingriff ist.
20. Koffer (2) nach Anspruch 18 oder 19, bei dem sich die Vorsprünge (17) der Pass- bzw. Schlüsselemente (14) in der Radial- und Longitudinalrichtung des Stifts (9) erstrecken und einen im wesentlichen trapezoidförmigen Querschnitt aufweisen.
21. Koffer (2) nach einem der Ansprüche 18 bis 20, bei dem die Vorsprünge (17) vier an der Zahl sind.
22. Koffer (2) nach einem der vorangehenden Ansprüche 4 bis 21, bei dem die jedem der Pass- bzw. Schlüsselemente (14) zugeordneten Führungskanäle (22) vier an der Zahl sind.
23. Koffer (2) nach einem der vorangehenden Ansprüche 4 bis 22, bei dem die Führungskanäle (22) sich entlang einem im wesentlichen S-förmigen Weg erstrecken.
24. Koffer (2) nach einem der vorangehenden Ansprüche 2 bis 23, bei dem das Betätigungselement (18) ein Druckknopf (18) ist, der mittels Druck betätigt werden kann.
25. Koffer (2) nach einem der vorangehenden Ansprüche, bei dem das einstellbare Element (6) eine Gesamtform, die gekrümmt ist, sowie einen anatomischen Handgriff (8), der in den verriegelten Positionen der Anatomie und der Neigung der menschli-

chen Hand angepasst ist, aufweist.

26. Koffer (2) nach einem der vorangehenden Ansprüche, bei dem das Basiselement (5) einen ausziehbaren Abschnitt (5'), der mit dem Einstellgelenk (7) verbunden ist, sowie einen feststehenden Abschnitt (5''), der mit dem Behälterkörper (3) verbunden werden bzw. sein kann, aufweist.
27. Koffer (2) nach Anspruch 26, bei dem der ausziehbare Abschnitt (5') verschiebbar in einem innerhalb des feststehenden Abschnitts (5'') ausgebildeten Kanal (27) aufgenommen ist, wodurch die Einstellung des Abstands zwischen dem Einstellgelenk (7) und dem Behälterkörper (3) ermöglicht wird.
28. Koffer (2) nach Anspruch 27, mit nachgiebigen Verriegelungsmitteln (28,29), welche das ausziehbare Element (5') in einer oder mehreren Positionen innerhalb des feststehenden Elements (5'') elastisch verriegeln können.
29. Koffer (2) nach Anspruch 28, bei dem die nachgiebigen Verriegelungsmittel (28,29) eine oder mehrere in der Oberfläche des Kanals (27) ausgebildete Anschlagsausnehmungen (28) sowie eines oder mehrere Schubelemente (29), die in elastischer Weise von der Außenfläche des ausziehbaren Abschnitts (5') vorstehen und in die Anschlagsausnehmungen (28) federnd bzw. elastisch in einen Schnappeingriff kommen können, aufweisen.
30. Koffer (2) nach Anspruch 29, bei dem die Schubelemente (29) Kugeln (28), die durch Federn elastisch vorgespannt sind, umfassen.
31. Koffer (2) nach Anspruch 27, bei dem der Kanal (27), im Querschnitt betrachtet, eine im wesentlichen elliptische Form aufweist.
32. Koffer (2) nach Anspruch 31, bei dem der ausziehbare Abschnitt (5'), im Querschnitt betrachtet, eine im wesentlichen elliptische Rohrform aufweist, die zu dem Querschnitt des Kanals (27) passt.
33. Koffer (2) nach Anspruch 32, bei dem der ausziehbare Abschnitt (5') Verstärkungsrippen aufweist.
34. Koffer (2) nach Anspruch 33, bei dem die Verstärkungsrippen ein zentrales kreisförmiges Rohr bilden, welches die Wände des elliptischen Abschnitts verstärken kann.
35. Koffer (2) nach einem der vorangehenden Ansprüche, bei dem der Neigungswinkel des Handgriffs (8) in Bezug auf den Behälterkörper (3) mittels des Einstellgelenks (7) einstellbar bzw. anpassbar ist.

36. Koffer (2) nach Anspruch 35, bei dem der Abstand zwischen dem Handgriff (8) und dem Behälterkörper (3) mittels des Einstellgelenks (7) einstellbar ist.
37. Koffer (2) nach Anspruch 36, bei dem der Abstand zwischen dem Einstellgelenk (7) und dem Behälterkörper (3) mittels des Basiselements (5) einstellbar bzw. anpassbar ist. 5
38. Koffer (2) nach einem der vorangehenden Ansprüche, bei dem die Rollelemente (4) an einer Basis des Koffers (2) angeordnet sind, und bei dem in den Verriegelungspositionen des einstellbaren Elements (6) eine gerade Linie A, die das Zentrum des Handgriffs (8) und das Zentrum des Einstellgelenks (7) verbindet, eine durch die Basis-Außenseite des Gesamtvolumens der Rollmittel (4) festgelegte Ebene (p) schneidet. 10
39. Koffer (2) nach einem der vorangehenden Ansprüche mit mindestens einem Schloss (101;102) in der Seite des Koffers gegenüber Rollmitteln (4), das in einer lösbaren Weise zwei den Körper des Koffers bildende Halbschalen schließen kann. 15 20

Revendications

1. Valise (2) comprenant un corps de conteneur (3), des moyens de roulement (4) pour faciliter le roulement dudit corps de conteneur (3) le long d'une surface de support et un système de poignée, ledit système de poignée comprenant :
- un élément de base (5) connecté audit corps de conteneur (3) ; 30
 - un élément ajustable (6) ayant une première extrémité (6') connectée de façon tournante audit élément de base (5) par une articulation d'ajustement (7) et une seconde extrémité (6'') formant une poignée (8) ; 35
 - des moyens de verrouillage libérables (14, 15, 15') dans ladite articulation d'ajustement (7) verrouillant ledit élément ajustable (6) dans une ou plusieurs positions de verrouillage par rapport audit élément de base (5) ; 40
 - des moyens d'actionnement (18, 19, 20, 21, 22) dans ladite articulation d'ajustement (7) pour libérer lesdits moyens de verrouillage libérables (14, 15, 15'), 45 50

ladite articulation d'ajustement (7) comprenant une patte centrale (10) formée par ladite première extrémité (6') dudit élément ajustable, deux pattes latérales (12) formées par ledit élément de base (5), ladite patte centrale (10) étant disposée entre lesdites pattes latérales (12) et articulée à celles-ci par une broche (9) introduite dans des trous (16) prati-

qués dans les deux pattes latérales (12) et dans un siège de ladite patte centrale (10), ladite patte centrale (10) et lesdites pattes latérales (12) ayant des surfaces de contact (13, 13') qui sont sensiblement perpendiculaires par rapport à l'orientation de la broche (9) et tournées l'une vers l'autre,

caractérisée par le fait que

lesdits moyens de verrouillage libérables (14, 15, 15') comprennent deux éléments de clé (14) ou davantage qui sont introduits respectivement par une extrémité dans des premiers sièges de clé (15) formés dans la surface de contact (13) de ladite patte centrale (10) et par l'autre extrémité, dans des seconds sièges de clé (15') formés dans les surfaces de contact (13') desdites pattes latérales (12), lesdits éléments de clé (14) étant rétractables dans au moins l'un desdits premiers sièges de clé (15) ou seconds sièges de clé (15') à l'aide desdits moyens d'actionnement (18, 19, 20, 21, 22) désengageant respectivement l'autre siège de clé (15, 15').

2. Valise (2) selon la revendication 1, dans laquelle lesdits moyens d'actionnement (18, 19, 20, 21, 22) comprennent un élément d'actionnement (18) connecté à un élément de transmission longitudinal (19), un ou plusieurs éléments de transmission transversaux (20) connectés auxdits éléments de clé (14), ainsi que des moyens de déviation (21,22) capables de convertir un mouvement longitudinal dudit élément de transmission longitudinal (19) en un mouvement transversal réciproque desdits éléments de transmission transversaux (20). 25
3. Valise (2) selon la revendication 2, dans laquelle ledit élément de transmission longitudinal (19) comprend une ou plusieurs barres rigides (19). 30
4. Valise (2) selon la revendication 3, dans laquelle lesdits moyens de déviation (21, 22) comprennent un ou plusieurs goujons (21) qui s'étendent respectivement à partir de l'un desdits éléments de transmission transversaux (20) ou élément de transmission longitudinal (19) et canaux de guidage (22) formés respectivement dans l'autre desdits éléments de transmission transversaux (20) ou élément de transmission longitudinal (19), lesdits canaux de guidage (22) recevant lesdits goujons (21) et comprenant une section inclinée par rapport à la fois à la direction longitudinale et à la direction transversale. 40 45 50
5. Valise (2) selon la revendication 4, dans laquelle lesdits éléments de transmission transversaux (20) comprennent des projections (20) de type plaques délimitant lesdits canaux de guidage (22) et formées directement au niveau des extrémités tournées l'une vers l'autre desdits éléments de clé (14). 55

6. Valise (2) selon la revendication 5, dans laquelle lesdits éléments de transmission longitudinaux (19) comprennent une barre ayant une configuration en coupe transversale dans la forme d'un double T formé par deux brides (19') tournées l'une vers l'autre et connectées au moyen d'une âme (19''), lesdites projections (20) de type plaques des éléments de clé (14) étant reçues par l'interstice entre lesdites brides (19') sur les surfaces tournées l'une vers l'autre dont lesdits goujons (21) sont formés, lesdits goujons étant reçus et guidés par lesdits canaux de guidage (22) desdites projections (20) de type plaques.
7. Valise (2) selon l'une quelconque des revendications précédentes 2 à 6, comprenant des moyens de ressort (26) agissant sur lesdits moyens d'actionnement (18, 19, 20, 21, 22) de façon à empêcher un déverrouillage accidentel de l'élément ajustable (6).
8. Valise (2) selon la revendication 7, dans laquelle lesdits moyens d'actionnement (18, 19, 20, 21, 22) et lesdits moyens de ressort (26) sont disposés à l'intérieur d'un logement (25) formé dans ledit élément ajustable (6).
9. Valise (2) selon la revendication 8, dans laquelle lesdits moyens de ressort (26) comprennent un ou plusieurs ressorts hélicoïdaux pré-tendus (26), venant en butée dans un contre-siège spécial formé dans ledit logement (25) et agissant directement sur l'élément d'actionnement (18).
10. Valise (2) selon l'une quelconque des revendications précédentes 2 à 9, dans laquelle lesdits moyens d'actionnement (18, 19, 20, 21, 22) comprennent des moyens d'arrêt (9, 24) pour empêcher ledit élément d'actionnement (18) de sortir dudit logement (25) en raison de la force élastique exercée par lesdits moyens de ressort (26).
11. Valise (2) selon l'une quelconque des revendications précédentes 2 à 10, dans laquelle lesdits éléments de clé (14) sont disposés alignés avec ladite broche (9) et ont des trous traversants (16) sensiblement centraux, qui forment des sièges pour la broche (9) et permettent un mouvement transversal desdits éléments de clé (14) le long de ladite broche (9).
12. Valise (2) selon la revendication 11, dans laquelle ladite broche (9) coupe également ledit élément de transmission longitudinal (19) qui a, dans la zone d'intersection avec la broche (9), une ouverture (23) qui permet un mouvement dudit élément de transmission longitudinal (19) qui est perpendiculaire par rapport à ladite broche (9).
13. Valise (2) selon la revendication 12, dans laquelle ladite ouverture (23) est formée dans ladite âme (19'').
14. Valise (2) selon l'une des revendications 12 ou 13, dans laquelle l'une des surfaces délimitant ladite ouverture (23) forme une surface d'arrêt (24) pour ladite broche (9), qui empêche lesdits moyens d'actionnement (18, 19, 20, 21, 22) de sortir dudit logement (25).
15. Valise (2) selon l'une quelconque des revendications précédentes 7 à 14, dans laquelle la libération desdits moyens de verrouillage libérables (14, 15, 15') est effectuée au moyen d'un actionnement manuel dudit élément d'actionnement (18) s'opposant à la force élastique desdits moyens de ressort (26).
16. Valise (2) selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments de clé (14) ont une forme sensiblement tubulaire avec des protubérances radiales et/ou frontales (17) et lesdits premiers sièges de clé (15) et seconds sièges de clé (15') ont une forme s'appariant pour recevoir lesdites protubérances (17), assurant un ajustement de formes.
17. Valise (2) selon la revendication 16, dans laquelle lesdites protubérances (17) sont distribuées à des intervalles le long de la périphérie externe desdits éléments de clé (14).
18. Valise (2) selon la revendication 16, dans laquelle lesdits premiers sièges de clé (15) ont une forme s'appariant à tout l'élément de clé (14) et lesdits seconds sièges de clé (15') ont une forme s'appariant seulement auxdites protubérances (17), permettant le coulisement desdits éléments de clé (14) à l'intérieur desdits premiers sièges (15) ainsi que le verrouillage dudit élément ajustable (6) dans différentes positions angulaires au moyen d'une introduction desdites protubérances (17) dans lesdits seconds sièges (15').
19. Valise (2) selon la revendication 18, dans laquelle, en raison de la pré-tension élastique desdits moyens de ressort (26), l'introduction desdites protubérances (17) dans lesdits seconds sièges (15') est du type à engagement par encliquetage.
20. Valise (2) selon l'une des revendications 18 ou 19, dans laquelle lesdites protubérances (17) desdits éléments de clé (14) s'étendent dans la direction radiale et longitudinale de la broche (9) et ont une section en coupe transversale sensiblement trapézoïdale.
21. Valise (2) selon l'une quelconque des revendica-

tions 18 à 20, dans laquelle lesdites protubérances (17) sont au nombre de quatre.

22. Valise (2) selon l'une quelconque des revendications précédentes 4 à 21, dans laquelle lesdits canaux de guidage (22) associés à chacun desdits éléments de clé (14) sont au nombre de quatre.

23. valise (2) selon l'une quelconque des revendications précédentes 4 à 22, dans laquelle lesdits canaux de guidage (22) s'étendent le long d'un chemin sensiblement en forme de S.

24. Valise (2) selon l'une quelconque des revendications précédentes 2 à 23, dans laquelle ledit élément d'actionnement (18) est un bouton-poussoir (18) qui peut être actionné au moyen d'une pression.

25. Valise (2) selon l'une quelconque des revendications précédentes, dans laquelle ledit élément ajustable (6) a une forme d'ensemble qui est cintrée et une poignée anatomique (8) capable d'être adaptée dans lesdites positions verrouillées à l'anatomie et à l'inclinaison de la main humaine.

26. Valise (2) selon l'une quelconque des revendications précédentes, dans laquelle ledit élément de base (5) a une partie extractible (5') connectée à ladite articulation d'ajustement (7) et une partie fixe (5'') qui peut être connectée audit corps de conteneur (3).

27. Valise (2) selon la revendication 26, dans laquelle ladite partie extractible (5') est logée de façon coulissante dans un canal (27) formé à l'intérieur de ladite partie fixe (5''), permettant l'ajustement de la distance entre ladite articulation d'ajustement (7) et ledit corps de conteneur (3).

28. Valise (2) selon la revendication 27, comprenant des moyens de verrouillage élastiques (28, 29), capables de verrouiller élastiquement ledit élément extractible (5') dans une ou plusieurs positions à l'intérieur dudit élément fixe (5').

29. Valise (2) selon la revendication 28, dans laquelle lesdits moyens de verrouillage élastiques (28, 29) comprennent une ou plusieurs cavités d'arrêt (28) formées dans la surface dudit canal (27) et un ou plusieurs éléments de poussée (29) se projetant d'une manière élastique à partir de la surface externe de ladite partie extractible (5') et capables de s'engager par encliquetage de façon élastique dans lesdites cavités d'arrêt (28).

30. Valise (2) selon la revendication 29, dans laquelle lesdits éléments de poussée (29) comprennent des

sphères (28) pré-tendues de façon élastique par des ressorts.

31. Valise (2) selon la revendication 27, dans laquelle ledit canal (27) a une forme sensiblement elliptique vue en coupe transversale.

32. Valise (2) selon la revendication 31, dans laquelle ladite partie extractible (5') a une forme tubulaire sensiblement elliptique vue en coupe transversale, s'appariant à la section transversale dudit canal (27).

33. Valise (2) selon la revendication 32, dans laquelle ladite partie extractible (5') a des nervures de renforcement.

34. Valise (2) selon la revendication 33, dans laquelle lesdites nervures de renforcement forment un tube circulaire central capable de renforcer les parois de ladite section elliptique.

35. Valise (2) selon l'une quelconque des revendications précédentes, dans laquelle l'angle d'inclinaison de ladite poignée (8) par rapport audit corps de conteneur (3) est ajustable au moyen de ladite articulation d'ajustement (7).

36. Valise (2) selon la revendication 35, dans laquelle la distance entre ladite poignée (8) et ledit corps de conteneur (3) est ajustable au moyen de ladite articulation d'ajustement (7).

37. Valise (2) selon la revendication 36, dans laquelle la distance entre ladite articulation d'ajustement (7) et ledit corps de conteneur (3) est ajustable au moyen dudit élément de base (5).

38. Valise (2) selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments de roulement (4) sont disposés sur une base de la valise (2) et dans laquelle, dans les positions verrouillées dudit élément ajustable (6), une ligne droite A qui connecte le centre de la poignée (8) et le centre de l'articulation d'ajustement (7) coupe un plan (p) défini par ladite base à l'extérieur du volume d'ensemble desdits moyens de roulement (4).

39. Valise (2) selon l'une quelconque des revendications précédentes, comprenant au moins un organe de verrouillage (101, 102) dans le côté de ladite valise opposé aux moyens de roulement (4), capable de fermer d'une manière libérable deux demi-coques formant le corps de la valise.

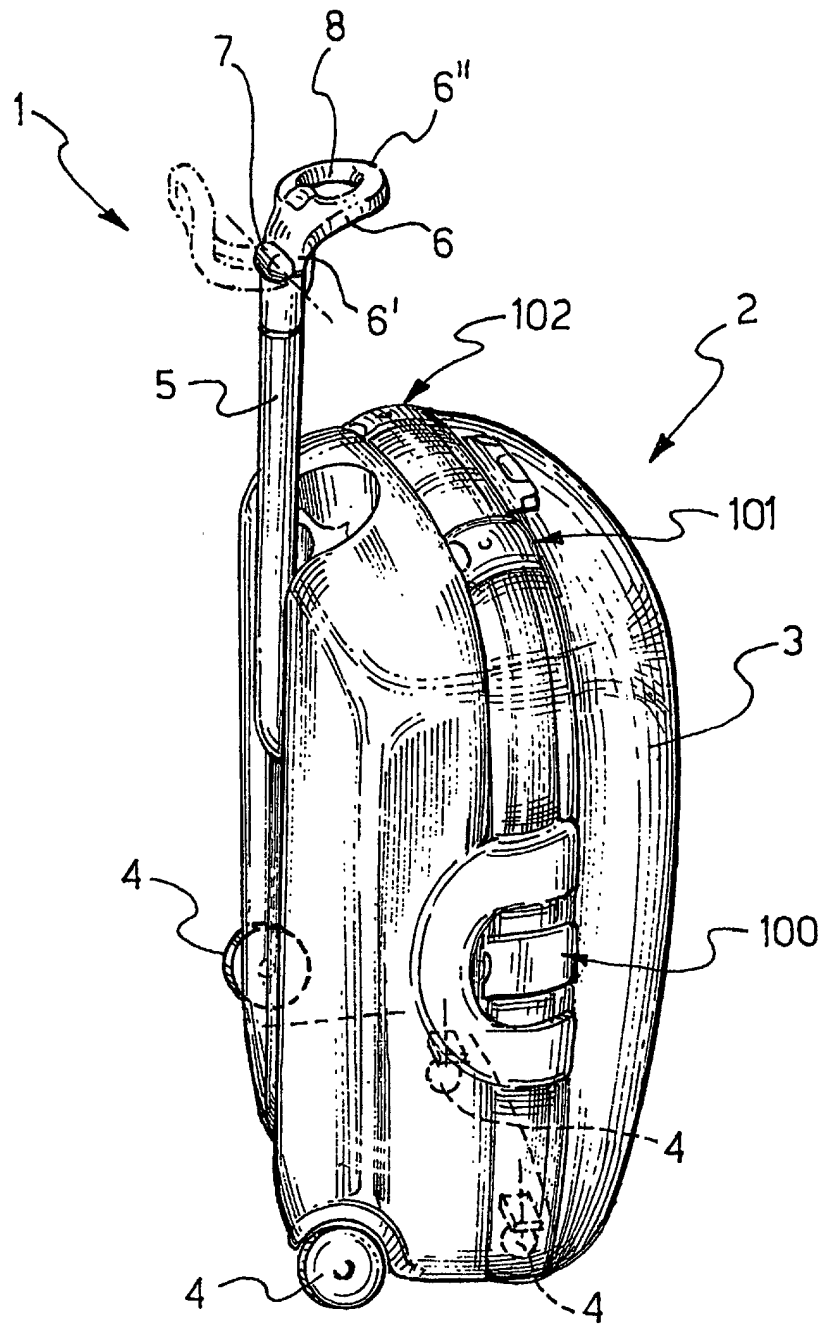
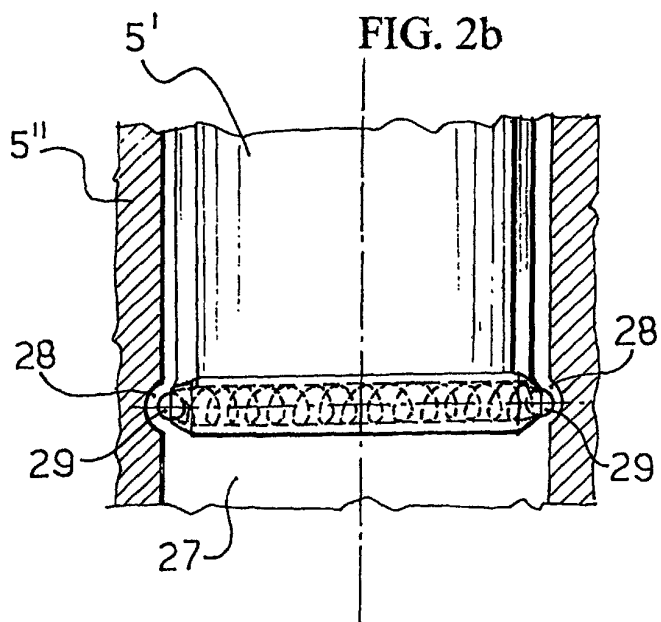
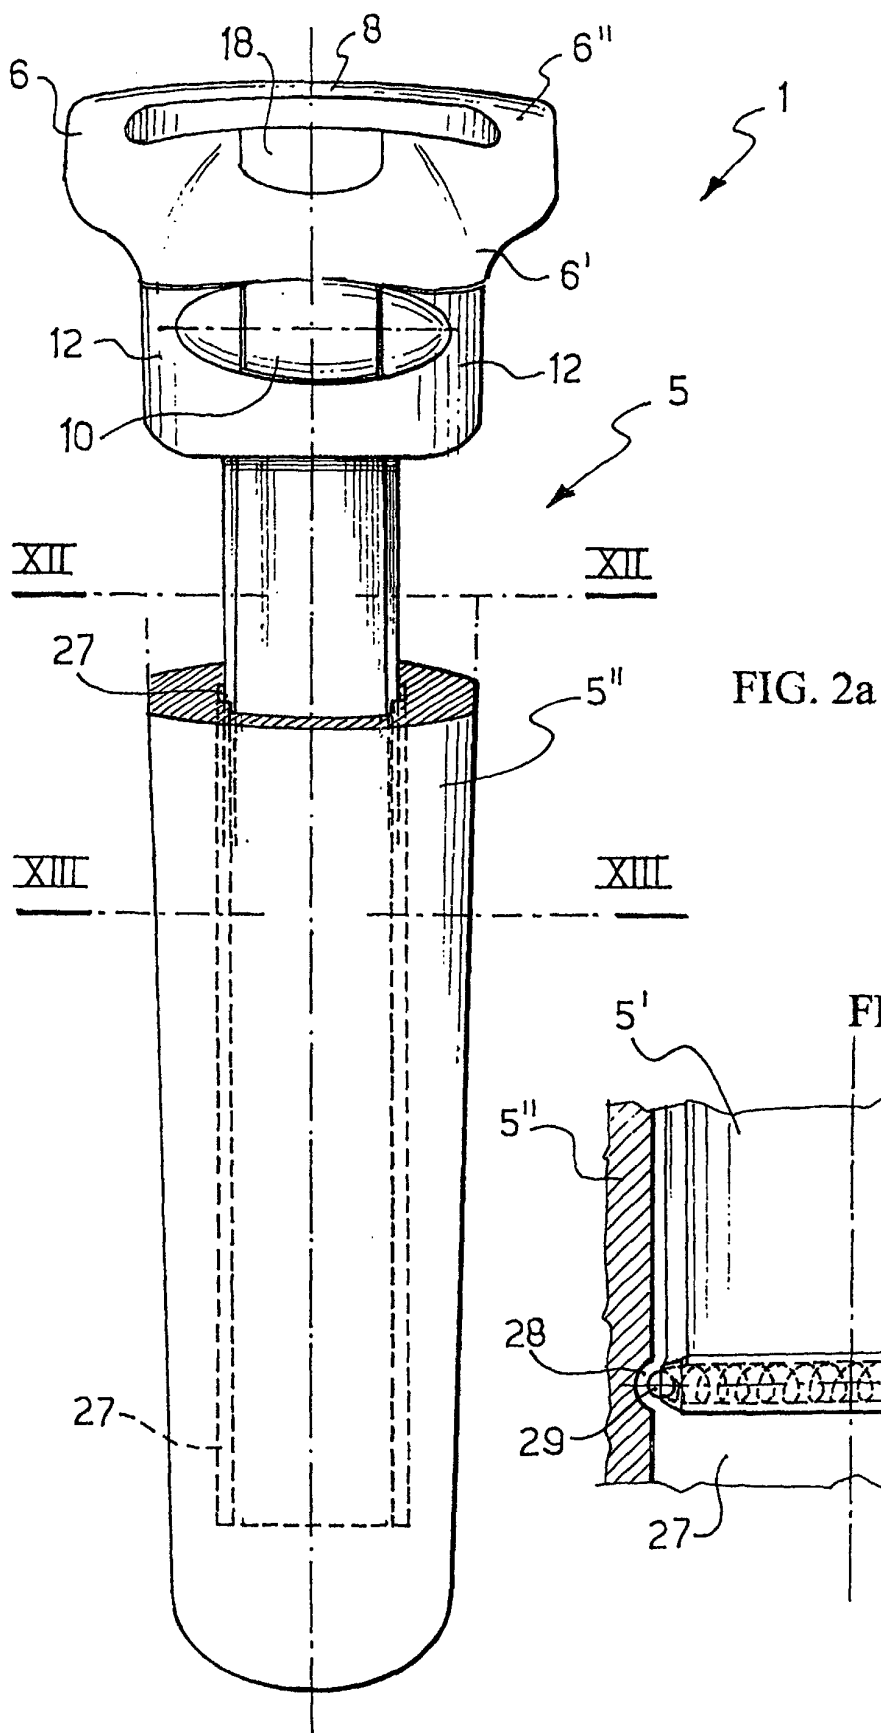


FIG. 1



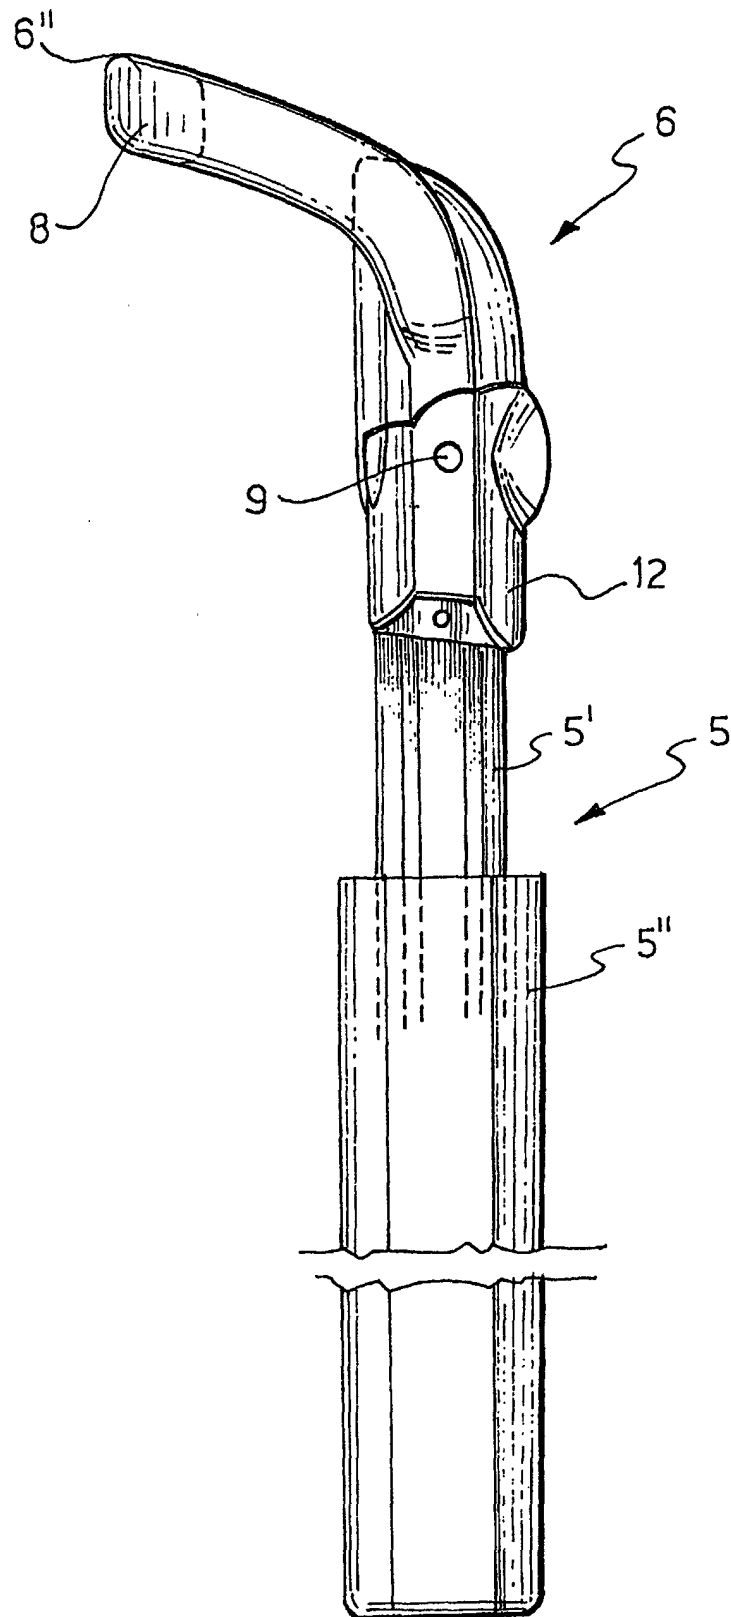


FIG. 3

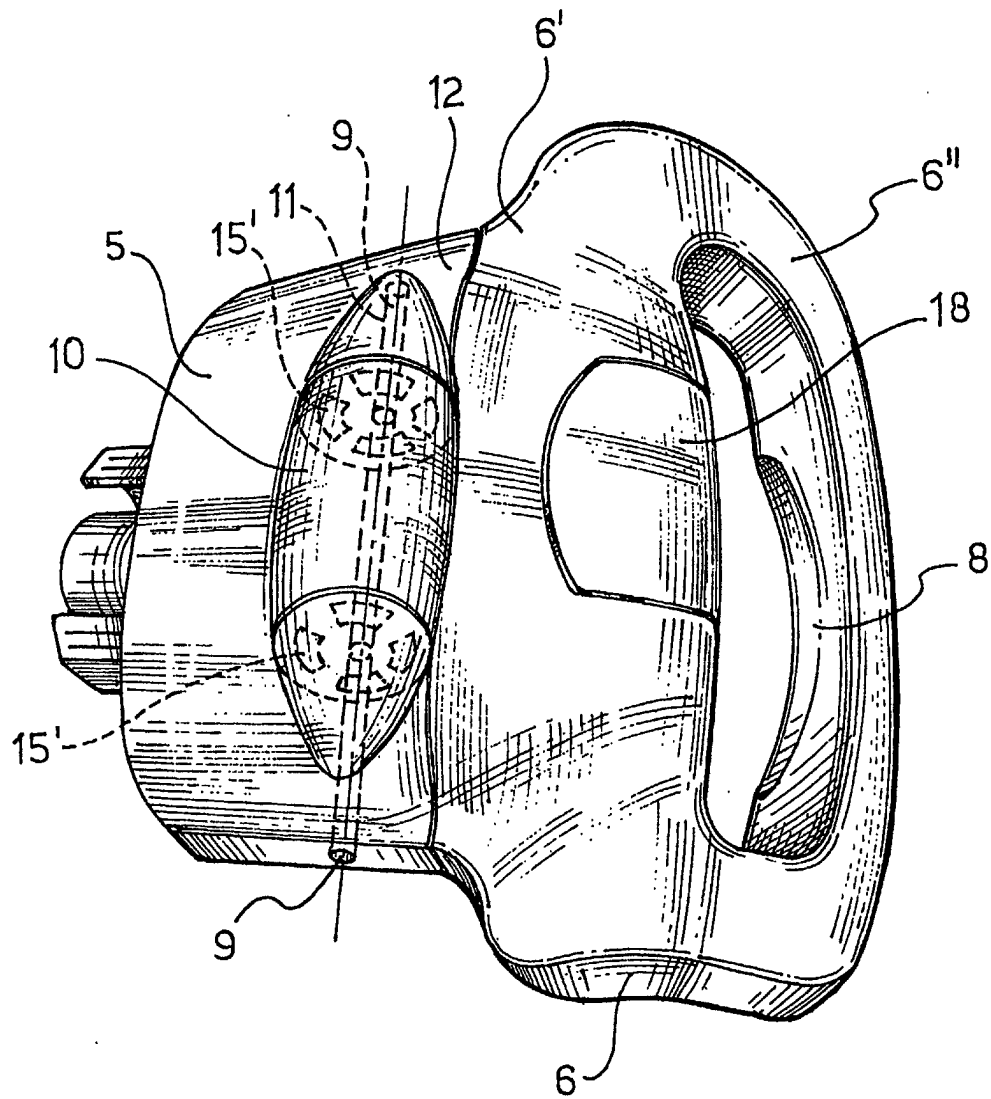


FIG. 4a

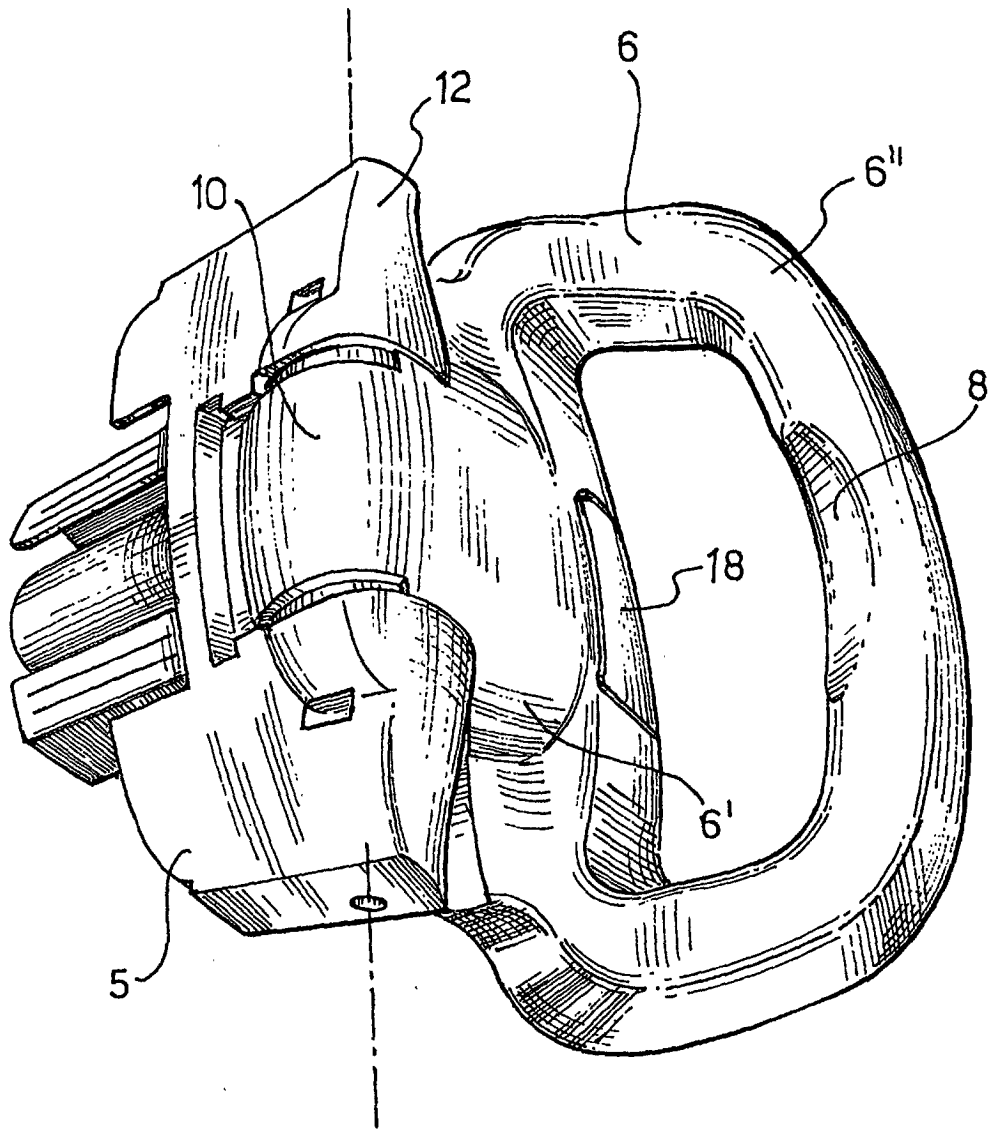
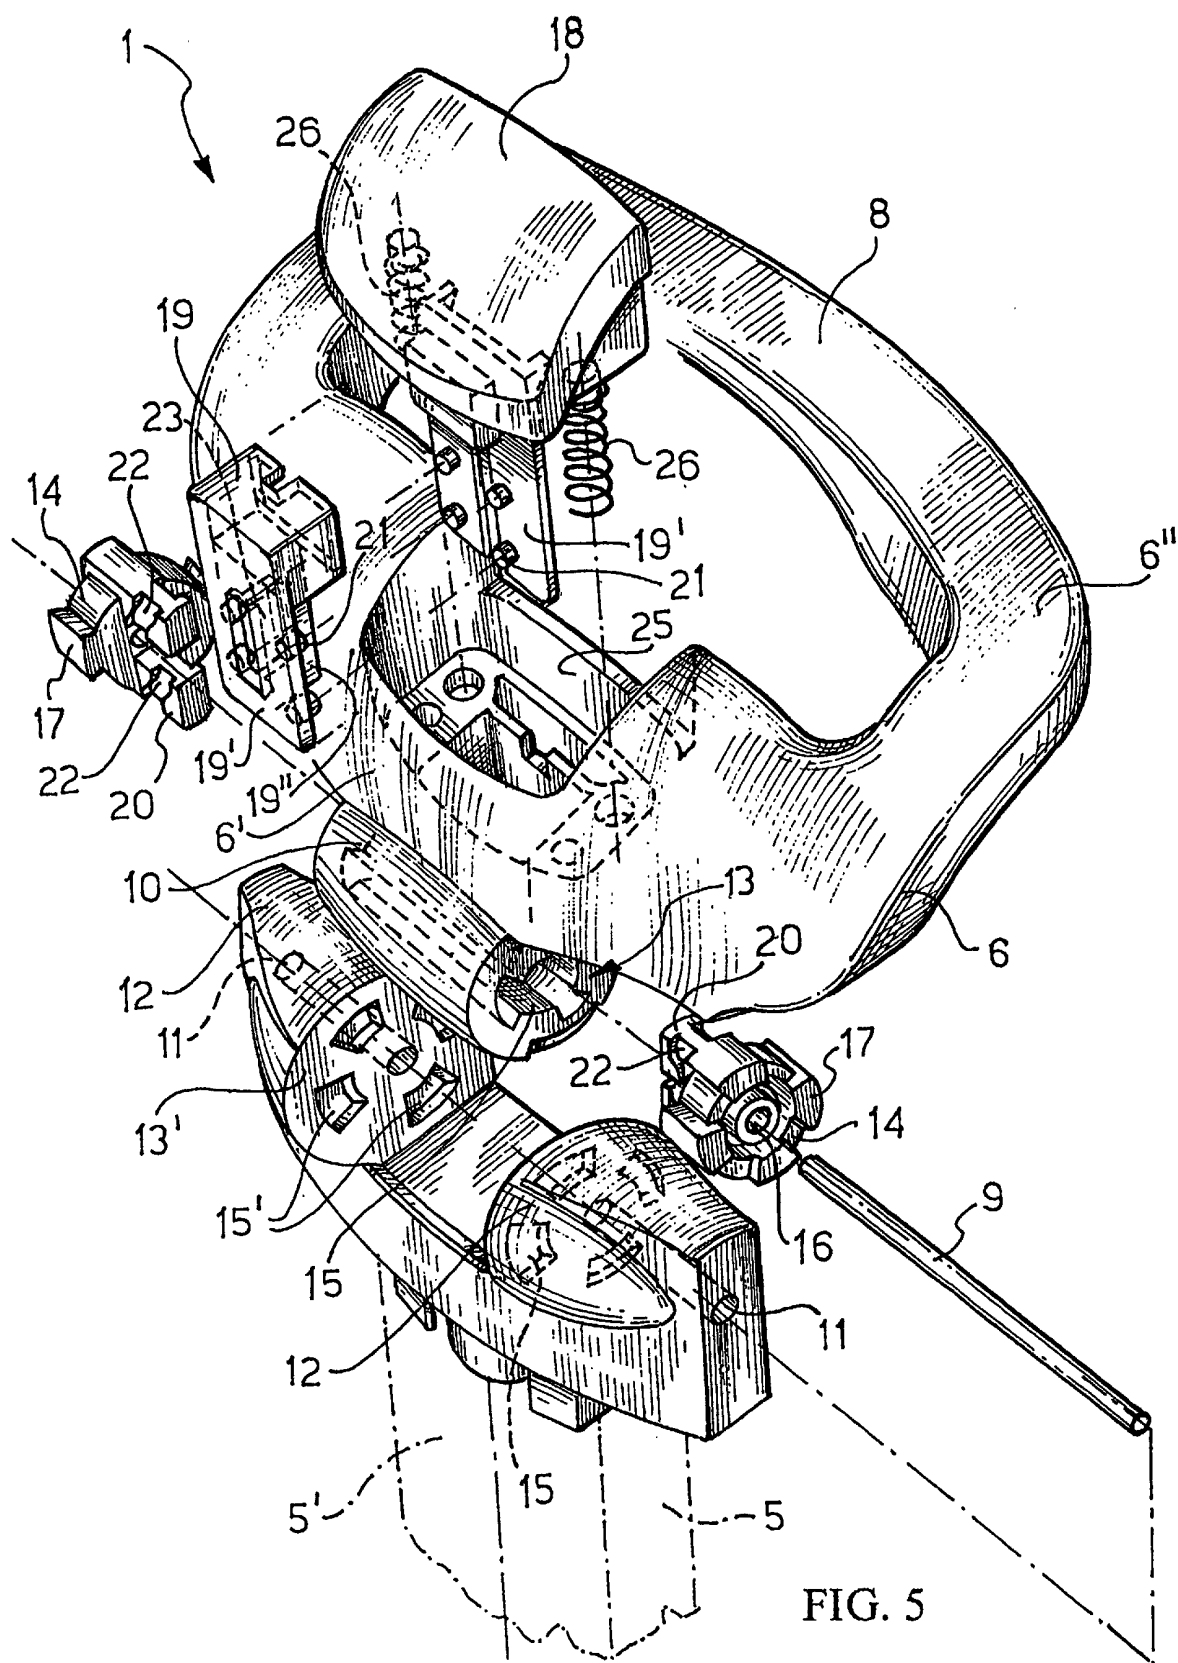
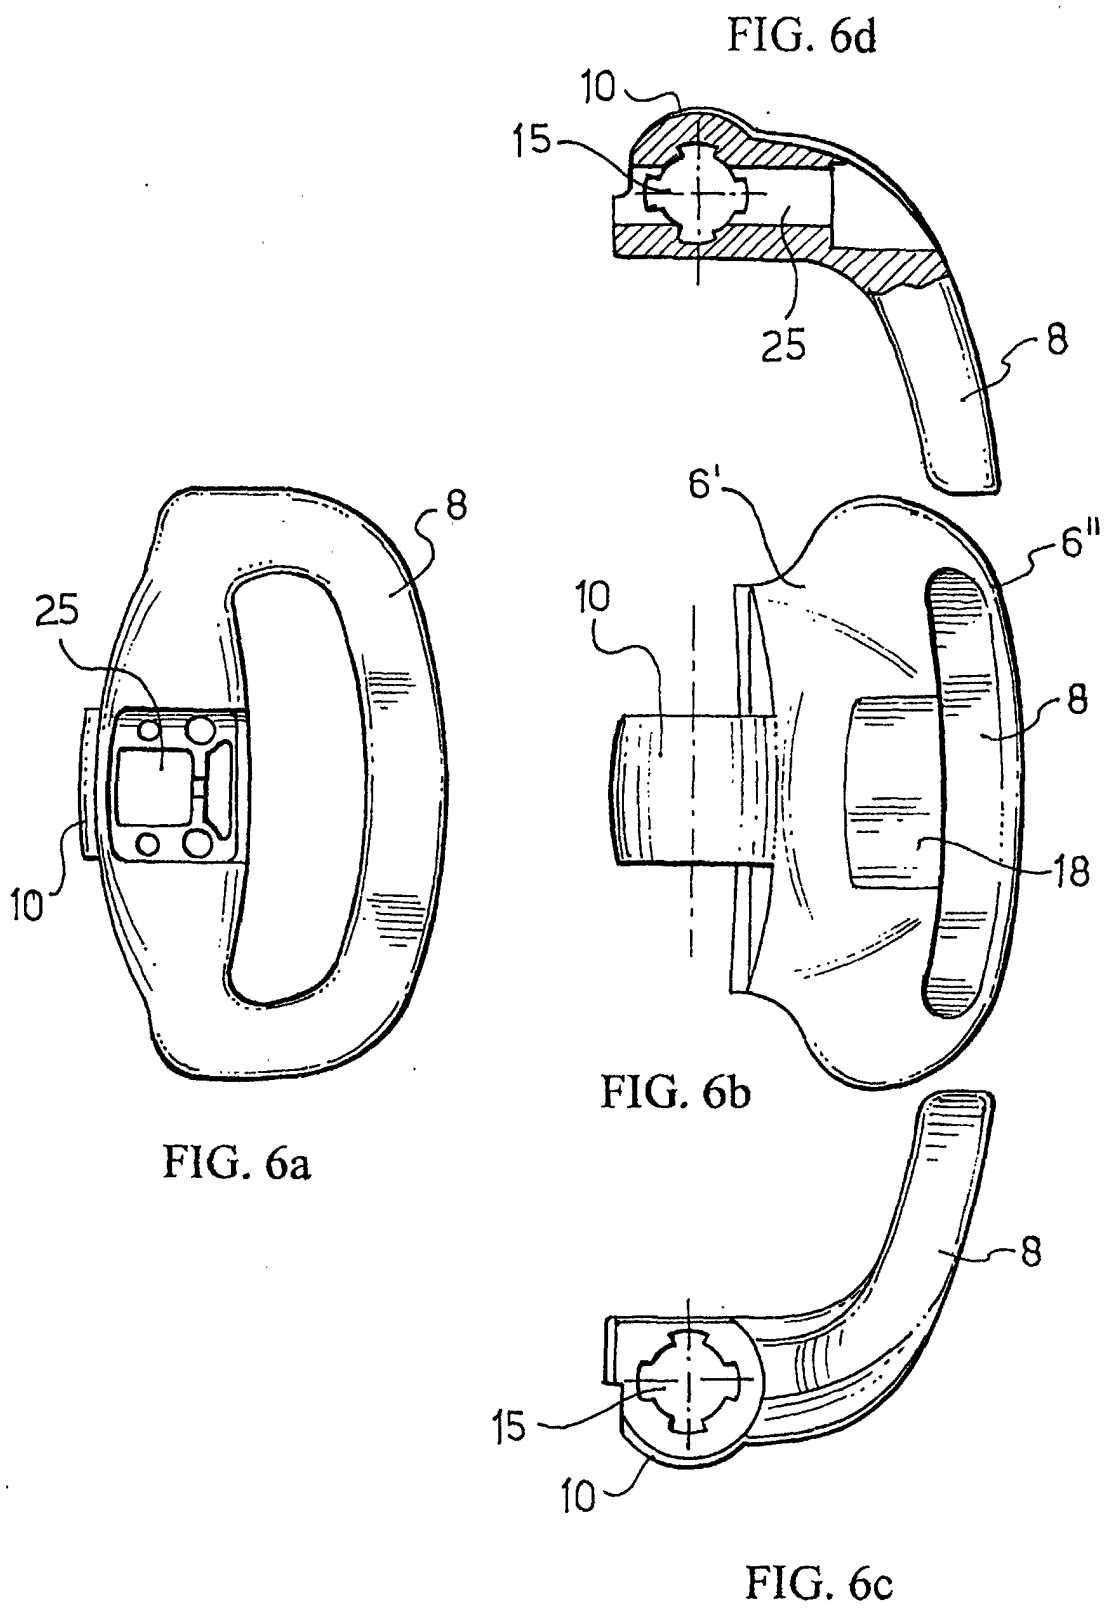


FIG. 4b





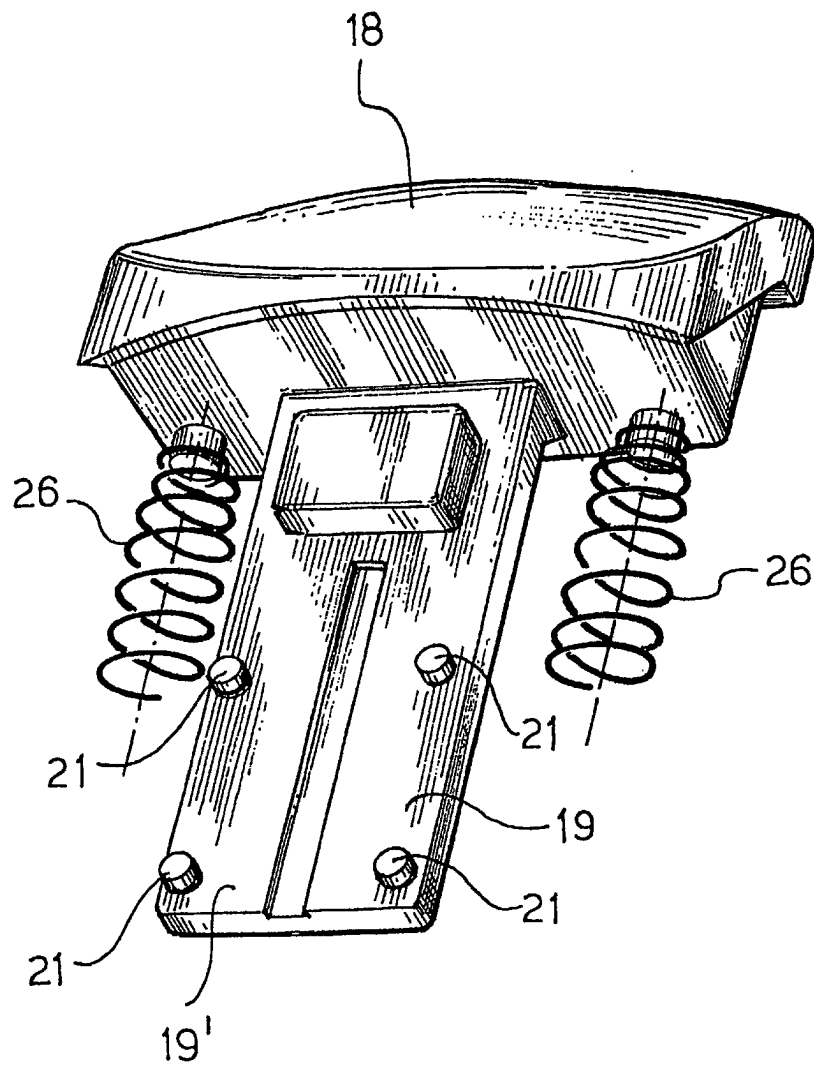


FIG. 7

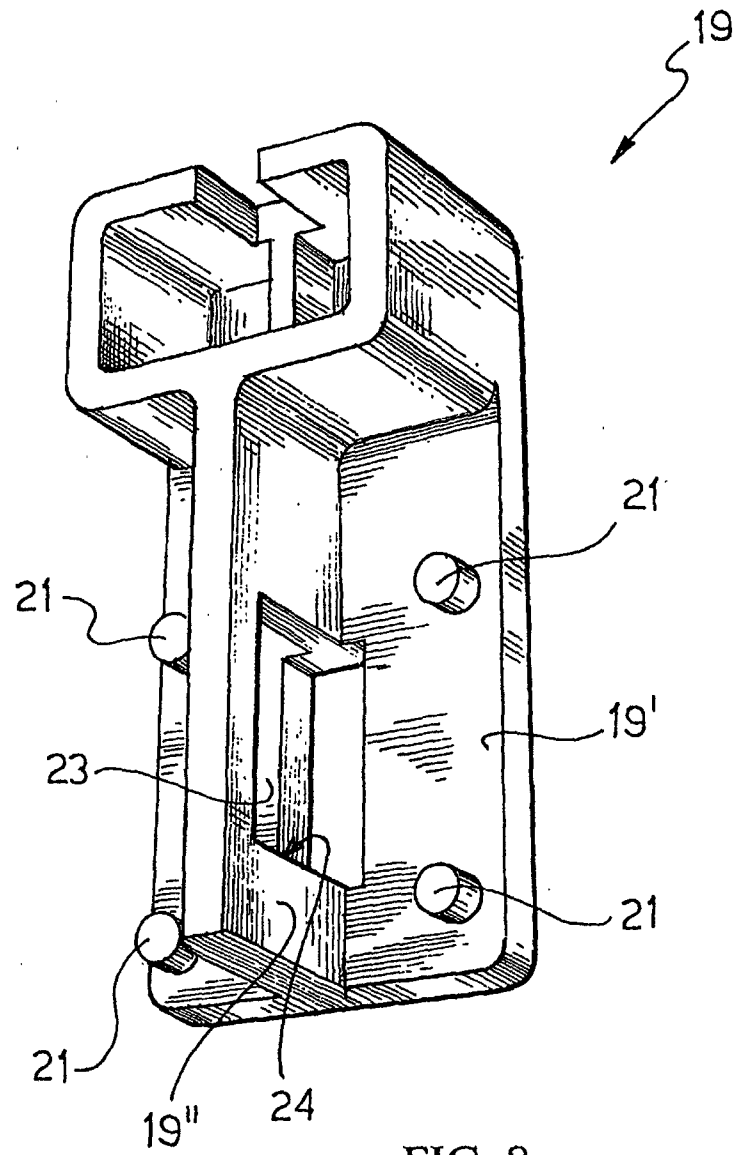


FIG. 8

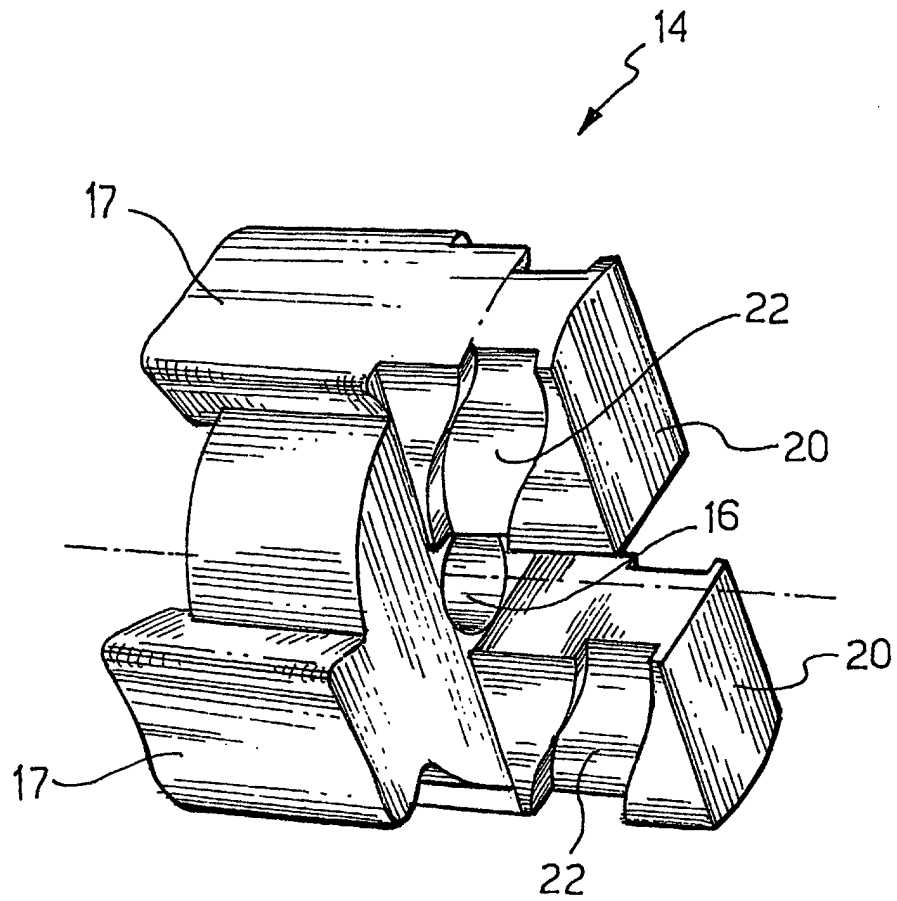


FIG. 9

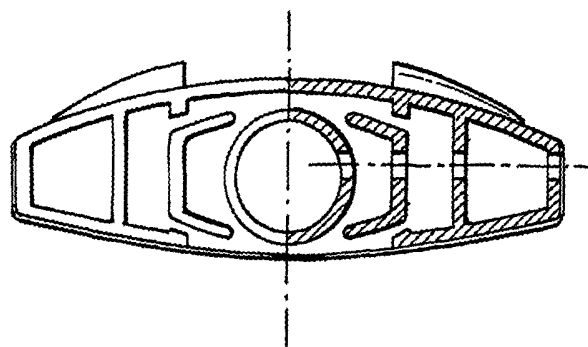


FIG. 10e

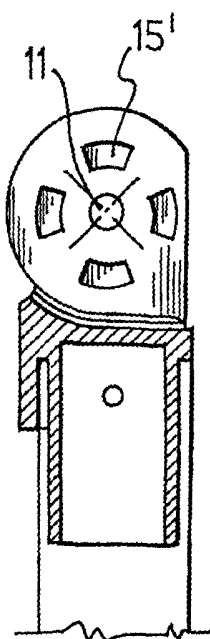


FIG. 10d

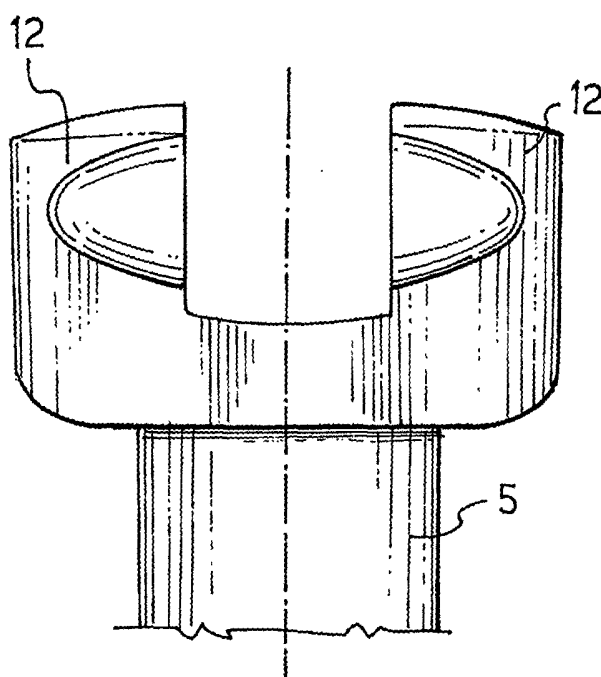


FIG. 10a

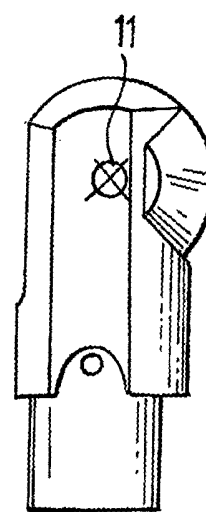


FIG. 10c

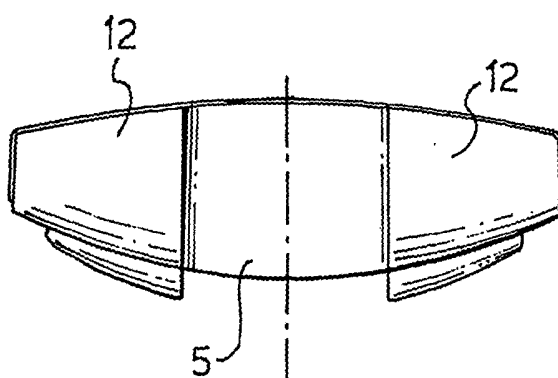


FIG. 10b

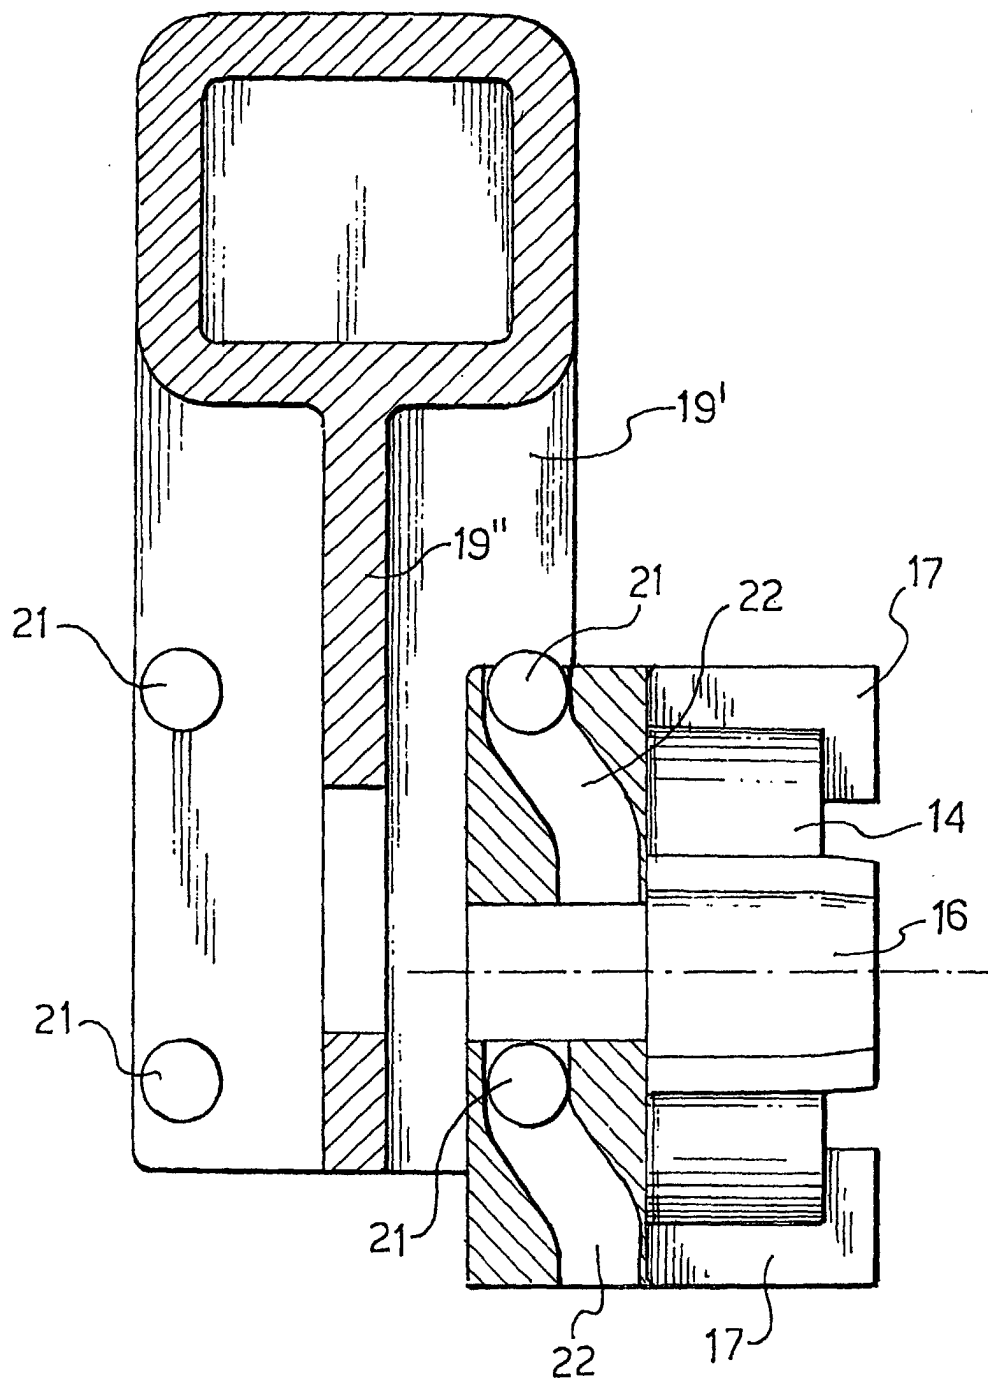


FIG. 11

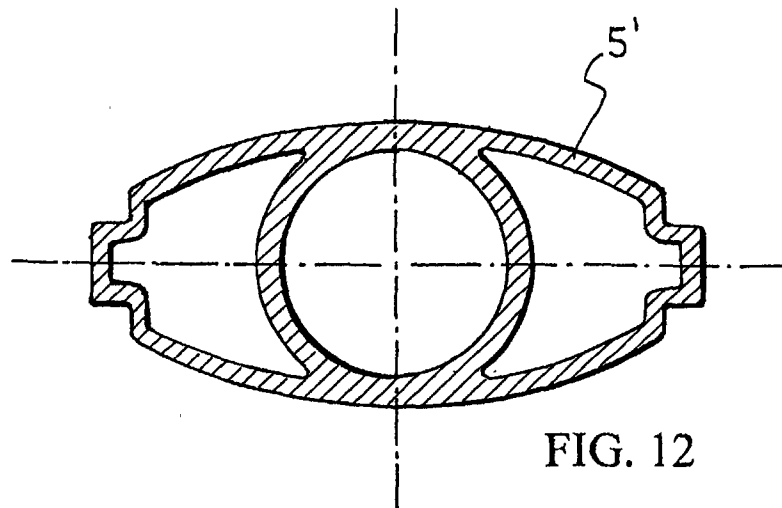


FIG. 12

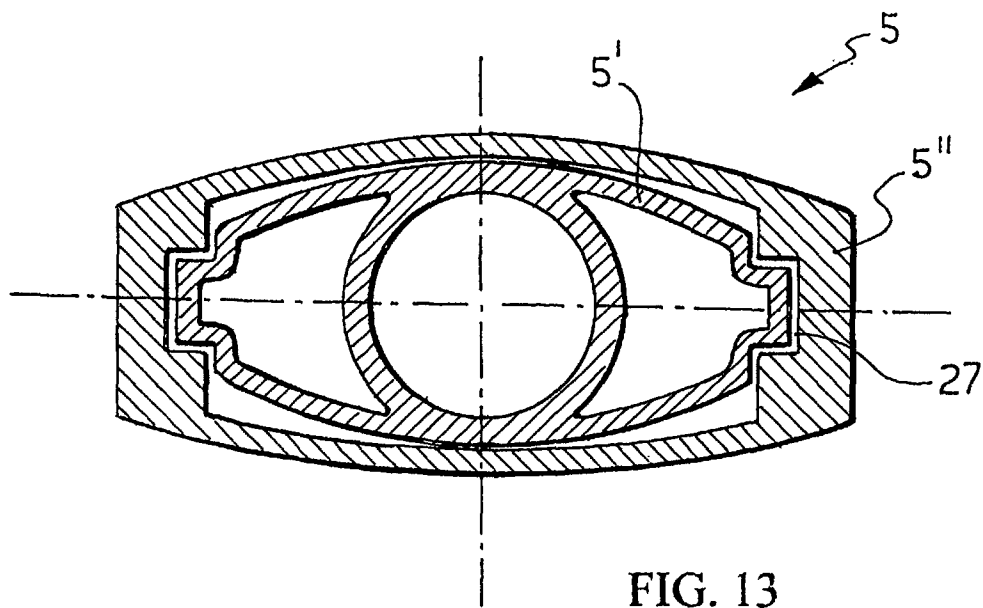


FIG. 13

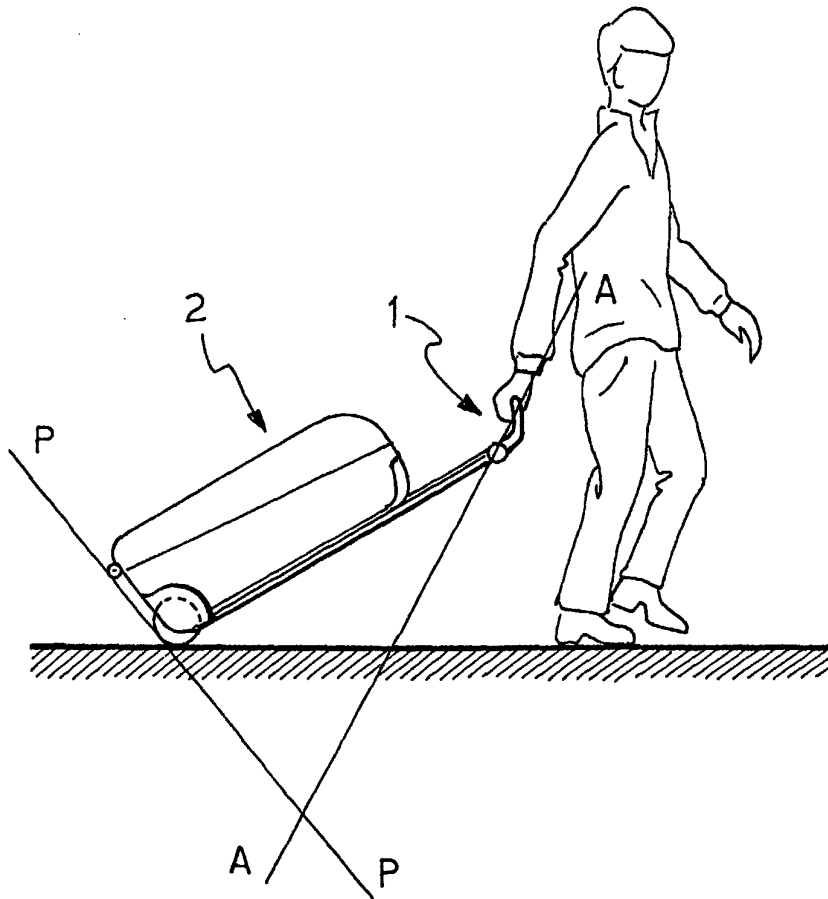


FIG. 14a

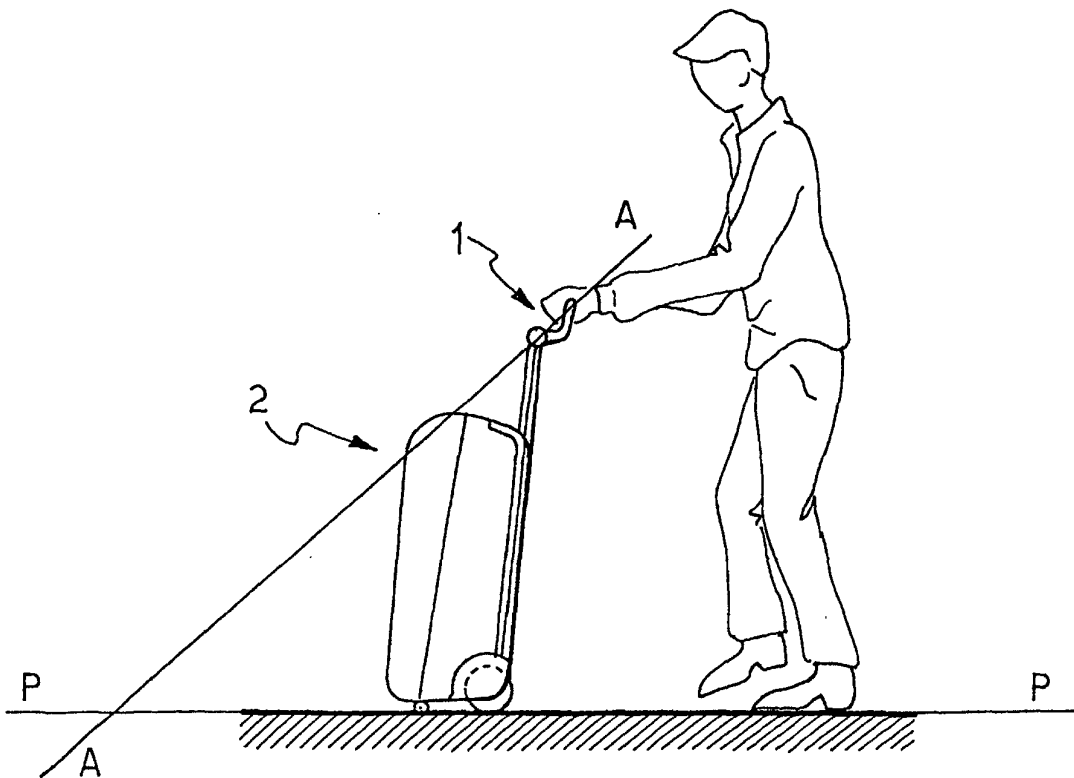


FIG. 14b

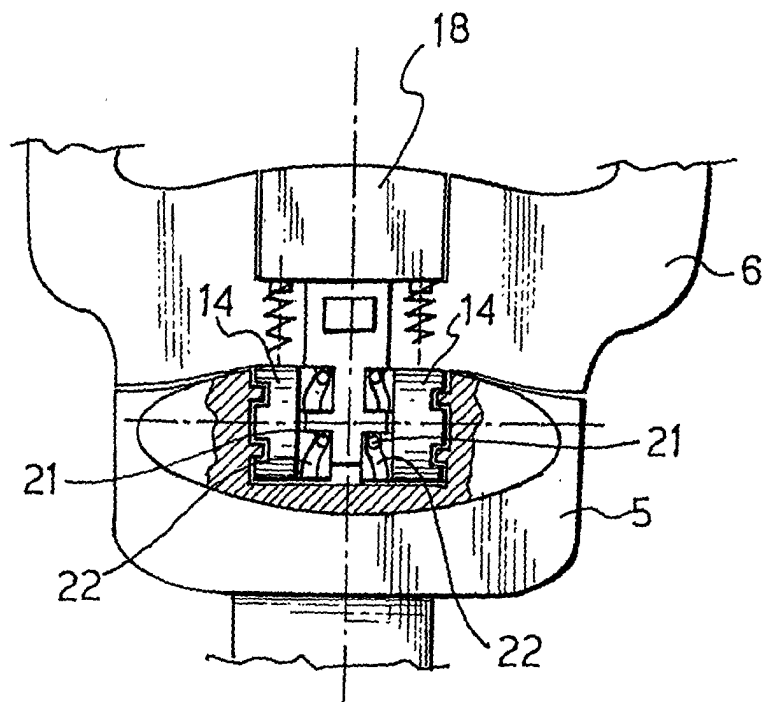


FIG. 15a

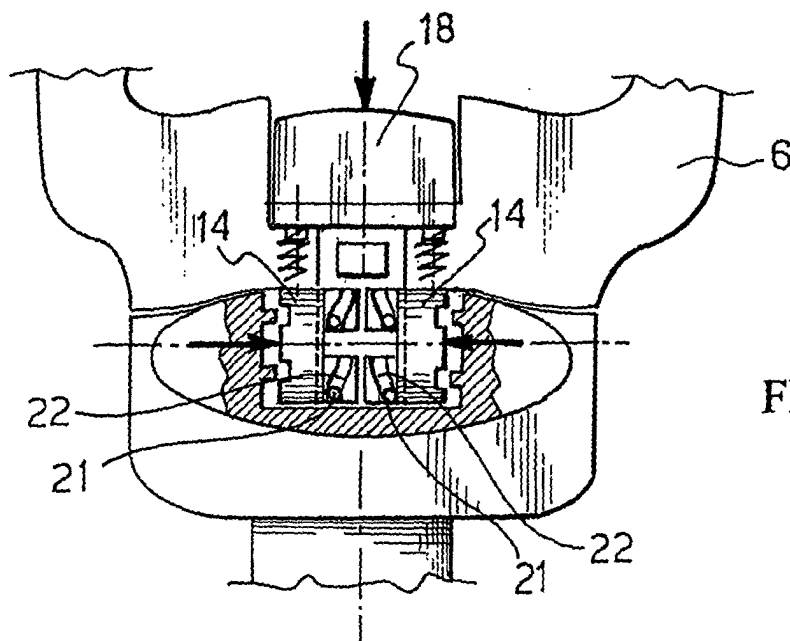


FIG. 15b