




(86) Date de dépôt PCT/PCT Filing Date: 2015/01/30
(87) Date publication PCT/PCT Publication Date: 2015/08/06
(45) Date de délivrance/Issue Date: 2020/09/22
(85) Entrée phase nationale/National Entry: 2016/07/28
(86) N° demande PCT/PCT Application No.: US 2015/013993
(87) N° publication PCT/PCT Publication No.: 2015/117039
(30) Priorité/Priority: 2014/01/31 (US61/934,565)

(51) Cl.Int./Int.Cl. *G02B 27/01* (2006.01),
H04N 13/341 (2018.01), *H04N 13/366* (2018.01),
H04N 21/235 (2011.01), *H04N 21/236* (2011.01)
(72) Inventeur/Inventor:
WELCH, WILLIAM HUDSON, US
(73) Propriétaire/Owner:
MAGIC LEAP, INC., US
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : SYSTEME ET PROCEDE D'AFFICHAGE MULTI-FOCAL
(54) Title: MULTI-FOCAL DISPLAY SYSTEM AND METHOD

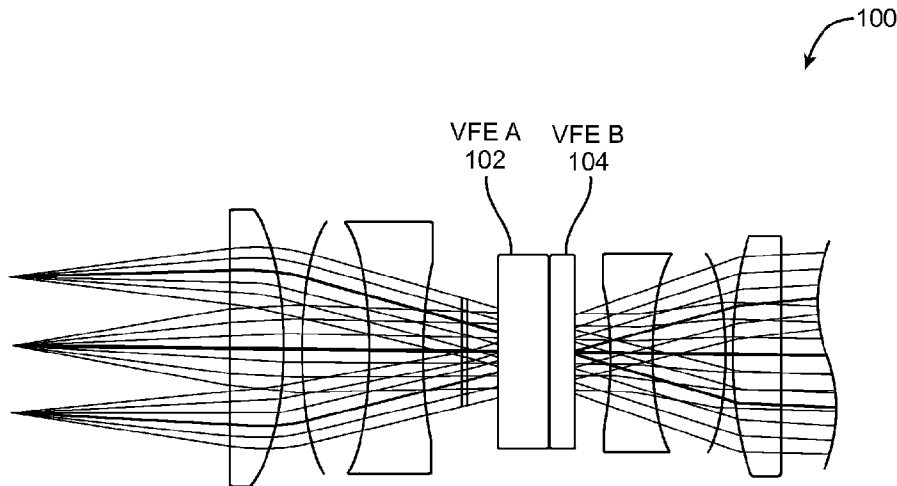

$$\phi = \phi_A + \phi_B - \frac{t}{n} \phi_A \phi_B$$

(57) Abrégé/Abstract:

Configurations are disclosed for presenting virtual reality and augmented reality experiences to users. A method of display augmented reality comprises providing one or more frames of image data to be presented to a user, transmitting light associated with the one or more frames of image data, focusing a first frame of image data at a first focal plane, focusing a second frame of image data at a second focal plane, and variably shifting the first focal plane and the second focal plane across a range of distances.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 August 2015 (06.08.2015)

(10) International Publication Number
WO 2015/117039 A1

- (51) International Patent Classification:
G02B 27/22 (2006.01) *G06T 19/00* (2011.01)
G06T 15/20 (2011.01)
- (21) International Application Number:
PCT/US2015/013993
- (22) International Filing Date:
30 January 2015 (30.01.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/934,565 31 January 2014 (31.01.2014) US
- (71) Applicant: **MAGIC LEAP, INC.** [US/US]; 1855 Griffin Road, Suite B454, Dania Beach, Florida 33004 (US).
- (72) Inventor; and
(71) Applicant: **WELCH, William Hudson** [US/US]; 1855 Griffin Road, Suite B454, Dania Beach, Florida 33004 (US).
- (74) Agent: **MEL, Peter C.**; Vista IP Law Group, LLP, 2160 Lundy Ave., Suite 230, San Jose, CA 95131 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MULTI-FOCAL DISPLAY SYSTEM AND METHOD

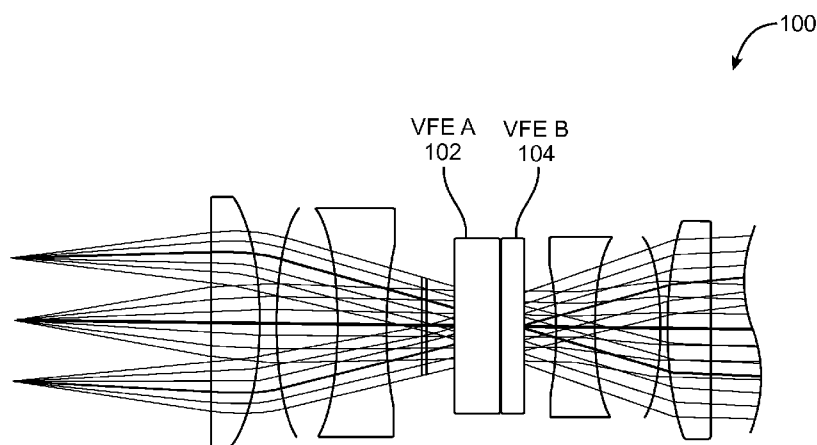

$$\phi = \phi_A + \phi_B - \frac{t}{n} \phi_A \phi_B$$

FIG. 1

(57) Abstract: Configurations are disclosed for presenting virtual reality and augmented reality experiences to users. A method of display augmented reality comprises providing one or more frames of image data to be presented to a user, transmitting light associated with the one or more frames of image data, focusing a first frame of image data at a first focal plane, focusing a second frame of image data at a second focal plane, and variably shifting the first focal plane and the second focal plane across a range of distances.

WO 2015/117039 A1

MULTI-FOCAL DISPLAY SYSTEM AND METHOD

BACKGROUND

[0001] Modern computing and display technologies have facilitated the development of systems for so called “virtual reality” or “augmented reality” experiences, wherein digitally reproduced images or portions thereof are presented to a user in a manner wherein they seem to be, or may be perceived as, real. A virtual reality, or “VR”, scenario typically involves presentation of digital or virtual image information without transparency to other actual real-world visual input; an augmented reality, or “AR”, scenario typically involves presentation of digital or virtual image information as an augmentation to visualization of the actual world around the user.

[0002] There are numerous challenges when it comes to presenting 3D virtual content to a user of an AR system. A central premise of presenting 3D content to a user involves creating a perception of multiple depths. As in some virtual content appears closer to the user, while other virtual content may appear to be coming from farther away. Thus, to achieve 3D perception, the AR system is configured to deliver virtual content at different focal planes relative to the user.

[0003] The U.S. provisional patent applications listed above present systems and techniques to generate various focal planes in the context of AR systems. The design of these virtual reality and/or augmented reality systems presents numerous challenges, including the speed of the system in delivering virtual content, quality of

virtual content, eye relief of the user, size and portability of the system, and other system and optical challenges.

[0004] The systems and techniques described herein are configured to work with the visual configuration of the typical human to address these challenges.

SUMMARY

[0005] Embodiments of the present invention are directed to devices, systems and methods for facilitating virtual reality and/or augmented reality interaction for one or more users. In one aspect, a system for displaying virtual content is disclosed.

[0006] In one or more embodiments, an augmented reality system comprises a light projection display operatively coupled to an image source for generating one or more frames of image data, and a composite variable focus element (VFE) system having a first VFE placed in series with a second VFE, the first VFE for producing at least two depth planes corresponding to the one or more frames of image data and the second VFE for variably shifting the at least two depth planes at varying distances from the user's eyes.

[0007] In one or more embodiments, the augmented reality display also comprises an accommodation tracking module to track an accommodation of the user's eyes, wherein the second VFE focuses the one or more frames of image data based at least in part on the tracked accommodation of the user's eyes. In one or more

embodiments, the light projection display is a high refresh rate display. In one or more embodiments, the light projection display is a DLP display.

[0008] In one or more embodiments, the first VFE switches between two depth planes. In one or more embodiments, the first VFE switches focus on a frame-by-frame basis. In one or more embodiments, the one or more frames of image data are provided in a time-sequential manner. In one or more embodiments, the light projection display has a high refresh rate, such that the user perceives the at least two depth planes simultaneously. In one or more embodiments, the one or more frames of image data comprise slices of a three-dimensional scene.

[0009] In another aspect, a method of displaying augmented reality comprises providing one or more frames of image data to be presented to a user, transmitting light associated with the one or more frames of image data, focusing a first frame of image data at a first focal plane, focusing a second frame of image data at a second focal plane, and variably shifting the first focal plane and the second focal plane across a range of distances.

[0010] In one or more embodiments, the one or more frames of image data are provided in a time-sequential manner. In one or more embodiments, the one or more frames of image data comprise slices of a three-dimensional scene.

[0011] In one or more embodiments, the method further comprises tracking an accommodation of the user's eyes, wherein the first focal plane and the second focal plane are variably shifted based at least in part on the tracked accommodation of the

user's eyes. The first VFE may switch focus between the first focal plane and the second focal plane.

[0012] In one or more embodiments, the first VFE switches focus on a frame-by-frame basis. In one or more embodiments, a second VFE variably shifts the first and second focal planes. In one or more embodiments, the first VFE has a first speed, and wherein the second VFE has a second speed, the first speed greater than the second speed. In one or more embodiments, the first frame of image data at the first focal plane and the second frame of image data at the second focal plane are presented in rapid succession such that the user views the two focal planes simultaneously.

[0012a] In one aspect of the invention, there is provided an augmented reality display system, including: a light projection device operatively coupled to an image source for projecting a pair of consecutive image frames including first and second consecutive image frames for viewing by a user's eyes through a display; and a composite variable focus element (VFE) system including: a first VFE and a second VFE arranged in series relative to the first VFE, wherein the composite VFE is structured such that a total optical power of the composite VFE is a combination of a first optical power of the first VFE and a second optical power of the second VFE the first VFE is configured to switch between two focus states to focus respective first and second consecutive image frames at respective first and second depth planes, the first VFE being configured to focus respective pairs of consecutive image frames to respective pairs of depth planes, a first distance between the first depth plane and the second depth plane is based at least in part upon a constant optical power difference including a difference between the first

optical power of the first VFE and the second optical power of the second VFE, and the second VFE is configured to further focus the first and second consecutive image frames to third and fourth depth planes, wherein a distance between the third depth plane and the fourth depth plane is based at least in part upon the constant optical power difference.

[0012b] In another aspect of the invention, there is provided an augmented reality display system, including: an accommodation tracking module configured to track an accommodation of a user's eyes through a display; a first variable focus element (VFE) configured to focus respective pairs of consecutive image frames to respective focal planes and switch between focus states to focus a pair of consecutive image frames including first and second consecutive image frames to respective first and second focal planes; and a second VFE arranged in series relative to the first VFE such that a total optical power of the first VFE and the second VFE is a combination of a first optical power of the first VFE and a second optical power of the second VFE, the second VFE being configured to further focus respective first and second consecutive image frames to respective third and fourth focal planes based at least in part on the tracked accommodation of the user's eyes, wherein a first distance between the first focal plane and the second focal plane and a second distance between the third focal plane and the fourth focal plane are based at least in part upon a constant optical power difference including a difference between a first optical power of the first VFE and a second optical power of the second VFE.

[0012c] In a further aspect of the invention, there is provided a method of displaying augmented reality, including: providing image data corresponding to a

pair of image frames including first and second consecutive image frames to be presented to a user through a display; transmitting light associated with the image data to project the first and second consecutive image frames; focusing the first image frame to a first focal plane using a first variable focus element (VFE); focusing the second image frame to a second focal plane using the first VFE and arranged in series relative to the first VFE, wherein a total optical power of the first VFE in series with the second VFE includes a combination of a first optical power of the first VFE and a second optical power of the second VFE, and a first distance between the first focal plane and the second focal plane is based at least in part upon a constant optical power difference including a difference between the first optical power of the first VFE and the second optical power of the second VFE; focusing the first image frame to a third focal plane using the second VFE; focusing the second image frame to a fourth focal plane using the second VFE, wherein a distance between the third focal plane and the fourth focal plane is based at least in part upon the constant optical power difference.

[0013] Additional and other objects, features, and advantages of the invention are described in the detail description, figures and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The drawings illustrate the design and utility of various embodiments of the present invention. It should be noted that the figures are not drawn to scale and that elements of similar structures or functions are represented by like reference numerals throughout the figures. In order to better appreciate how to obtain the above-recited and other advantages and objects of various

embodiments of the invention, a more detailed description of the present inventions briefly described above will be rendered by reference to specific embodiments thereof, which are

illustrated in the accompanying drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

[0015] FIG. 1 illustrates a plan view of a long range variable focus element (VFE) and a two state VFE with other optical elements, according to one example embodiment.

[0016] FIG. 2 illustrates a vari-state focus system and a hybrid focus system, according to one example embodiment.

[0017] FIG. 3 illustrates an example embodiment of varying focal planes using the hybrid focus system, according to one example embodiment.

DETAILED DESCRIPTION

[0018] Various embodiments of the invention are directed to methods, systems, and articles of manufacture for implementing multi-scenario physically-aware design of an electronic circuit design in a single embodiment or in some embodiments. Other objects, features, and advantages of the invention are described in the detailed description, figures, and claims.

[0019] Various embodiments will now be described in detail with reference to the drawings, which are provided as illustrative examples of the invention so as to enable those skilled in the art to practice the invention. Notably, the figures and the examples below are not meant to limit the scope of the present invention. Where certain elements of the present invention may be partially or fully implemented using known components (or methods or processes), only those portions of such known components (or methods or processes) that are necessary for an understanding of the present invention will be described, and the detailed descriptions of other portions of such known components (or methods or processes) will be omitted so as not to obscure the invention. Further, various embodiments encompass present and future known equivalents to the components referred to herein by way of illustration.

[0020] As discussed in U.S. Provisional Application serial number 61/909,774 (now U.S. Patent Application Serial No. 14/555,585); U.S. Patents 6,046,720; 7,555,333; 7,784,697; and U.S. Patent Applications serial numbered 11/573,118 and 12/468,832, a variable focus element (hereinafter "VFE") may be used to adjust the wavefront (e.g., focus) of an image in a dynamic fashion, and may be used to generate multi-focal 3D imagery. The VFE may enable analog focus modulation, or may switch between discrete focus states.

[0021] The subject of this disclosure is the use of a plurality of VFEs in concert to modulate the focus of images. The use of a plurality of VFEs can enable wavefront modulation characteristics that would be difficult to achieve with a single current

state of the art VFE alone. For instance, it can be a challenge to produce a single VFE that simultaneously achieves a large effective aperture, large focus range, low power consumption, and high-speed focus modulation. The use of a plurality of VFEs can enable the advantages of each VFE to be combined, to create a composite VFE system that achieves those criteria.

[0022] By placing the VFEs substantially conjugate to an exit pupil in an optical system (such as viewing optics in a near-to-eye display) and/or substantially within a telecentric lens configuration, the VFEs can modulate the focus of an image while maintaining a stable image magnification.

[0023] Figure 1 illustrates an example of a portion of one such embodiment, in which the VFEs are placed substantially within a telecentric lens configuration, such that modulation of the VFE generates a change in the focus of incident light, but generates little or no change in image magnification. In this embodiment, two VFEs are shown. The VFE 102 may, for instance, be capable of relative large focus range, such as 0-3 diopters. Such a VFE A 102, may, for the purposes of illustration, be limited in its temporal response time. If used in isolation, such a VFE A 102 may adjust the focus over the course of multiple displayed frames from a operatively coupled image source, but may not be fast enough to modulate between desired focal states on a frame-by-frame basis at the refresh rate of the operatively coupled display; for instance, it may adjust display focus in response to a change in human accommodation or vergence, or in response to the motion of elements within a displayed volumetric scene. The VFE labeled B (104) may comprise a VFE that can

switch between focal states more rapidly than VFE A, but may be limited in its total focal range (e.g., 0 to 0.3 diopters) and/or the number of focus states it can produce (e.g., two focus states). By placing VFE A 102 and VFE B 104 in series, their total optical power is combined, such that the focus state of each VFE affects the focus of an operatively coupled display. The relationship may be characterized by an example equation below.

$$\phi = \phi_A + \phi_B - \frac{t}{n} \phi_A \phi_B$$

[0024] The top portion 202 of Figure 2, is an example “Vari-focus” system that illustrates a multi-focal display system comprising a single VFE. The optical viewing distance (i.e. the focus distance) or focal plane at which the viewer perceives the virtual image may be varied as shown in Figure 2. If the single VFE is, for instance, capable of a large focus range but limited in response time, it may be able to modulate the focus of the image in response to a change in a viewer’s accommodation or fixation distance within a range 230, but may not be able to switch on a frame-by-frame basis. The bottom portion 204 of Figure 2 is labeled “hybrid-focus system” and illustrates the viewing condition that can be produced by, for instance, the operation of VFE A and VFE B illustrated in Figure 1 and described above. By rapidly switching VFE B between two focus states (two focal planes 210), and modulating the focus within the range 230, the persistence of human vision creates the impression in a viewer that he/she is seeing two image planes simultaneously.

[0025] By driving an operatively coupled display in synchrony with the VFE B, and displaying one layer of imagery in the even numbered frames and a second layer of imagery in the odd numbered frames, the viewer perceives a multi-focal display, with a relatively small separation between layers. VFE A may be used to shift the closely spaced layers within a larger focus range, over a longer time scale—for instance in response to a change in a viewer's accommodation or fixation distance. By updating the displayed image content in response to a change in a viewer's accommodation or fixation distance, e.g., by re-rendering simulated dioptric blur, the viewer can have the perception that he/she is viewing a multi-focal volumetric image that extends throughout the full focus range supported by the combined optical power of VFEs A and B. The two multiplexed focus states generated by the rapid modulation of VFE B allows the viewer's accommodation to vary within a small range before it is necessary to adjust VFE A, and providing more tolerance to accuracy errors and latency in an operatively coupled accommodation-tracking or eye-tracking system that is used to measure the accommodation or fixation distance of the viewer's eye.

[0026] Figure 3 illustrates details of a more specific embodiment, in which VFEs A and B are operatively coupled with a high refresh rate display, such as a Digital Light Projection (DLP) display with a 240 Hz refresh rate. VFE B switches between two focus states (0 and 0.3 diopters) at 240 Hz, and in phase with the DLP refresh, such that all of the even DLP frames are displayed at one optical viewing distance while all of the odd frames are displayed at a different optical viewing distance. By driving the even frames with different image content than the content displayed during the

odd frames, one layer of content is positioned at one viewing distance and the other layer of content is positioned at a second viewing distance, and the viewer perceives the two layers to be parts of the same multifocal scene that has an overall effective refresh rate of 120 Hz (240 Hz DLP refresh rate divided by 2 VFE focus states). For instance, the even DLP frames may display an image of a sharply rendered coffee cup, and the odd DLP frames may display an image of a sharply rendered wine glass.

[0027] The viewer 220 will perceive a coherent scene containing a coffee cup with a wine glass a small distance behind it. When the viewer looks at the coffee cup, the wine glass will appear slightly blurred, and when he/she shifts eye fixation and accommodation to the wine glass, it will come into sharp focus while the coffee becomes slightly blurred. The top 302 of Figure 3 shows the two display layers 210 positioned at -3 and -2.7 diopters viewing distance. In our example, the coffee cup would be optically positioned at -3 diopters (i.e., 0.333 meter distance) and the wine glass would be positioned at -2.7 diopters (i.e., 0.370 meter distance). The even and odd DLP frames may each additionally include a somewhat blurred rendering of a flower vase, such that when the viewer gazes at either the coffee cup or the wine glass, he/she will perceive a flower vase in the background of the 3D scene (e.g., at 0.500 meters apparent distance), with the amount of blur that would be expected if it were a real object that were not focused upon at the moment.

[0028] If the viewer 220 shifts gaze to the flower vase, an operatively coupled accommodation- and/or eye-tracking system detects the change in focus and

triggers a re-rendering of the imagery displayed in the DLP frames, such that the flower vase is rendered in sharp focus, while the coffee cup and wine glass are rendered with some blur. The tracking system also triggers VFE A to shift the two closely spaced focus layers 210 produced by VFE B to the area where the flower vase should reside. The bottom 304 of Figure 3 illustrates that VFE A has shifted focus state such that the two focus planes produced by VFE B are now at -2 and -1.7 diopters (0.500 meters and 0.588 meters). Now the viewer will have the perception that he/she is looking at the flower vase, it is in sharp focus, and the coffee cup and wine glass are each somewhat blurred.

[0029] Though the illustrated examples primarily address a 2 VFE system, any number of VFEs may be used. For instance, a 3 VFE system may be used to achieve a longer total focus range or a larger number of discrete focus states. Also, though the Figure 1 shows the VFEs in close proximity, they may alternatively be distributed across an optical system. For instance, VFEs may be placed at optically conjugate locations, such that the focus state of each VFE may be modulated without changing the image magnification of an operatively coupled display.

[0030] Various exemplary embodiments of the invention are described herein. Reference is made to these examples in a non-limiting sense. They are provided to illustrate more broadly applicable aspects of the invention. Various changes may be made to the invention described and equivalents may be substituted without departing from the true spirit and scope of the invention. In addition, many modifications may be made to adapt a particular situation, material, composition of

matter, process, process act(s) or step(s) to the objective(s), spirit or scope of the present invention. Further, as will be appreciated by those with skill in the art that each of the individual variations described and illustrated herein has discrete components and features which may be readily separated from or combined with the features of any of the other several embodiments without departing from the scope or spirit of the present inventions. All such modifications are intended to be within the scope of claims associated with this disclosure.

[0031] The invention includes methods that may be performed using the subject devices. The methods may comprise the act of providing such a suitable device. Such provision may be performed by the end user. In other words, the "providing" act merely requires the end user obtain, access, approach, position, set-up, activate, power-up or otherwise act to provide the requisite device in the subject method. Methods recited herein may be carried out in any order of the recited events which is logically possible, as well as in the recited order of events.

[0032] Exemplary aspects of the invention, together with details regarding material selection and manufacture have been set forth above. As for other details of the present invention, these may be appreciated in connection with the above-referenced patents and publications as well as generally known or appreciated by those with skill in the art. The same may hold true with respect to method-based aspects of the invention in terms of additional acts as commonly or logically employed.

[0033] In addition, though the invention has been described in reference to several examples optionally incorporating various features, the invention is not to be limited to that which is described or indicated as contemplated with respect to each variation of the invention. Various changes may be made to the invention described and equivalents (whether recited herein or not included for the sake of some brevity) may be substituted without departing from the true spirit and scope of the invention. In addition, where a range of values is provided, it is understood that every intervening value, between the upper and lower limit of that range and any other stated or intervening value in that stated range, is encompassed within the invention.

[0034] Also, it is contemplated that any optional feature of the inventive variations described may be set forth and claimed independently, or in combination with any one or more of the features described herein. Reference to a singular item, includes the possibility that there are plural of the same items present. More specifically, as used herein and in claims associated hereto, the singular forms "a," "an," "said," and "the" include plural referents unless the specifically stated otherwise. In other words, use of the articles allow for "at least one" of the subject item in the description above as well as claims associated with this disclosure. It is further noted that such claims may be drafted to exclude any optional element. As such, this statement is intended to serve as antecedent basis for use of such exclusive terminology as "solely," "only" and the like in connection with the recitation of claim elements, or use of a "negative" limitation.

[0035] Without the use of such exclusive terminology, the term "comprising" in claims associated with this disclosure shall allow for the inclusion of any additional element--irrespective of whether a given number of elements are enumerated in such claims, or the addition of a feature could be regarded as transforming the nature of an element set forth in such claims. Except as specifically defined herein, all technical and scientific terms used herein are to be given as broad a commonly understood meaning as possible while maintaining claim validity.

[0036] The breadth of the present invention is not to be limited to the examples provided and/or the subject specification, but rather only by the scope of claim language associated with this disclosure.

CLAIMS

1. An augmented reality display system, comprising:
 - a light projection device operatively coupled to an image source for projecting a pair of consecutive image frames comprising first and second consecutive image frames for viewing by a user's eyes through a display; and
 - a composite variable focus element (VFE) system comprising:
 - a first VFE and a second VFE arranged in series relative to the first VFE, wherein the composite VFE is structured such that
 - a total optical power of the composite VFE is a combination of a first optical power of the first VFE and a second optical power of the second VFE
 - the first VFE is configured to switch between two focus states to focus respective first and second consecutive image frames at respective first and second depth planes, the first VFE being configured to focus respective pairs of consecutive image frames to respective pairs of depth planes,
 - a first distance between the first depth plane and the second depth plane is based at least in part upon a constant optical power difference comprising a difference between the first optical power of the first VFE and the second optical power of the second VFE, and
 - the second VFE is configured to further focus the first and second consecutive image frames to third and fourth depth planes, wherein a distance between the third depth plane and the fourth depth plane is based at least in part upon the constant optical power difference.
2. The augmented reality display system of claim 1, further comprising an accommodation tracking module configured to track an accommodation of the user's eyes, wherein the second VFE is configured to focus the first and second consecutive image frames based at least in part on the tracked accommodation of the user's eyes.

3. The augmented reality display system of claim 1, wherein the light projection device is a high refresh rate display, such that the user perceives the first and second consecutive image frames simultaneously.
4. The augmented reality display system of claim 1, wherein the light projection device is a Digital Light Processing (DLP) display.
5. The augmented reality display system of claim 1, wherein the first and second consecutive image frames comprise slices of a three-dimensional scene.
6. An augmented reality display system, comprising:
 - an accommodation tracking module configured to track an accommodation of a user's eyes through a display;
 - a first variable focus element (VFE) configured to focus respective pairs of consecutive image frames to respective focal planes and switch between focus states to focus a pair of consecutive image frames comprising first and second consecutive image frames to respective first and second focal planes; and
 - a second VFE arranged in series relative to the first VFE such that a total optical power of the first VFE and the second VFE is a combination of a first optical power of the first VFE and a second optical power of the second VFE, the second VFE being configured to further focus respective first and second consecutive image frames to respective third and fourth focal planes based at least in part on the tracked accommodation of the user's eyes,wherein a first distance between the first focal plane and the second focal plane and a second distance between the third focal plane and the fourth focal plane are based at least in part upon a constant optical power difference comprising a difference between a first optical power of the first VFE and a second optical power of the second VFE.
7. The augmented reality display system of claim 6, further comprising an image source configured to provide image data corresponding to the first and second consecutive image frames.

8. The augmented reality display system of claim 7, further comprising a light projection display configured to transmit light associated with the first and second consecutive image frames.

9. The augmented reality display system of claim 7, wherein the first and second consecutive image comprise slices of a three-dimensional scene.

10. A method of displaying augmented reality, comprising:

providing image data corresponding to a pair of image frames comprising first and second consecutive image frames to be presented to a user through a display;

transmitting light associated with the image data to project the first and second consecutive image frames;

focusing the first image frame to a first focal plane using a first variable focus element (VFE);

focusing the second image frame to a second focal plane using the first VFE and arranged in series relative to the first VFE, wherein a total optical power of the first VFE in series with the second VFE comprises a combination of a first optical power of the first VFE and a second optical power of the second VFE, and a first distance between the first focal plane and the second focal plane is based at least in part upon a constant optical power difference comprising a difference between the first optical power of the first VFE and the second optical power of the second VFE;

focusing the first image frame to a third focal plane using the second VFE;

focusing the second image frame to a fourth focal plane using the second VFE,

wherein a distance between the third focal plane and the fourth focal plane is based at least in part upon the constant optical power difference.

11. The method of claim 10, wherein the consecutive first and second image frames comprise slices of a three-dimensional scene.

12. The method of claim 10, further comprising:

tracking an accommodation of the user's eyes; and

the second VFE focusing respective first and second consecutive image frames to respective third and fourth focal planes based at least in part on the tracked accommodation of the user's eyes.

13. The method of claim 10, wherein the first VFE operates at a first speed, and
the second VFE operates at a second speed greater than the first speed.

14. The method of claim 10, further comprising presenting the consecutive first and second consecutive image frames in rapid succession such that the user perceives the first and second consecutive image frames simultaneously.

15. The augmented reality display system of claim 1, wherein the first VFE is configured to operate in phase with the light projection device such that the first VFE focuses each light frame of generated by the light projection device.

16. The augmented reality display system of claim 15, wherein the first VFE and the light projection device are each configured to operate at 240 Hz.

17. The augmented reality display system of claim 1, wherein the constant optical power difference is 0.3 diopters.

18. The augmented reality display system of claim 1, wherein each of the first and second consecutive image frames includes a blurred virtual object.


19. The augmented reality display system of claim 1, wherein the first VFE is operable at a first speed, and
the second VFE is operable at a second speed greater than the first speed.

20. The method of claim 10, further comprising transmitting the light in phase with focusing the first and second consecutive image frames.

21. The method of claim 20, further comprising transmitting the light at 240 Hz, and focusing the first and second image frames at 240 Hz.
22. The method of claim 10, wherein the constant optical power difference is 0.3 diopters.
23. The method of claim 10, wherein the first and second consecutive image frames each include a blurred virtual object.

100

VFE A 102
VFE B 104

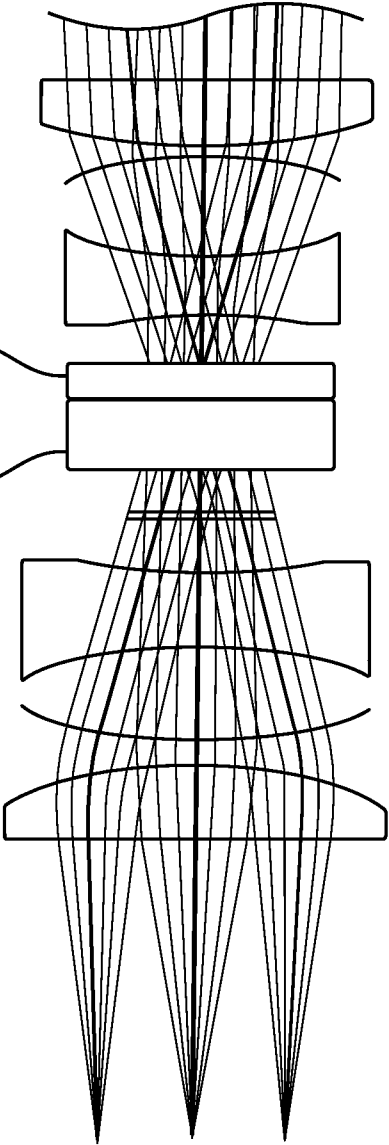

$$\phi = \phi_A + \phi_B - \frac{t}{n} \phi_A \phi_B$$

FIG. 1

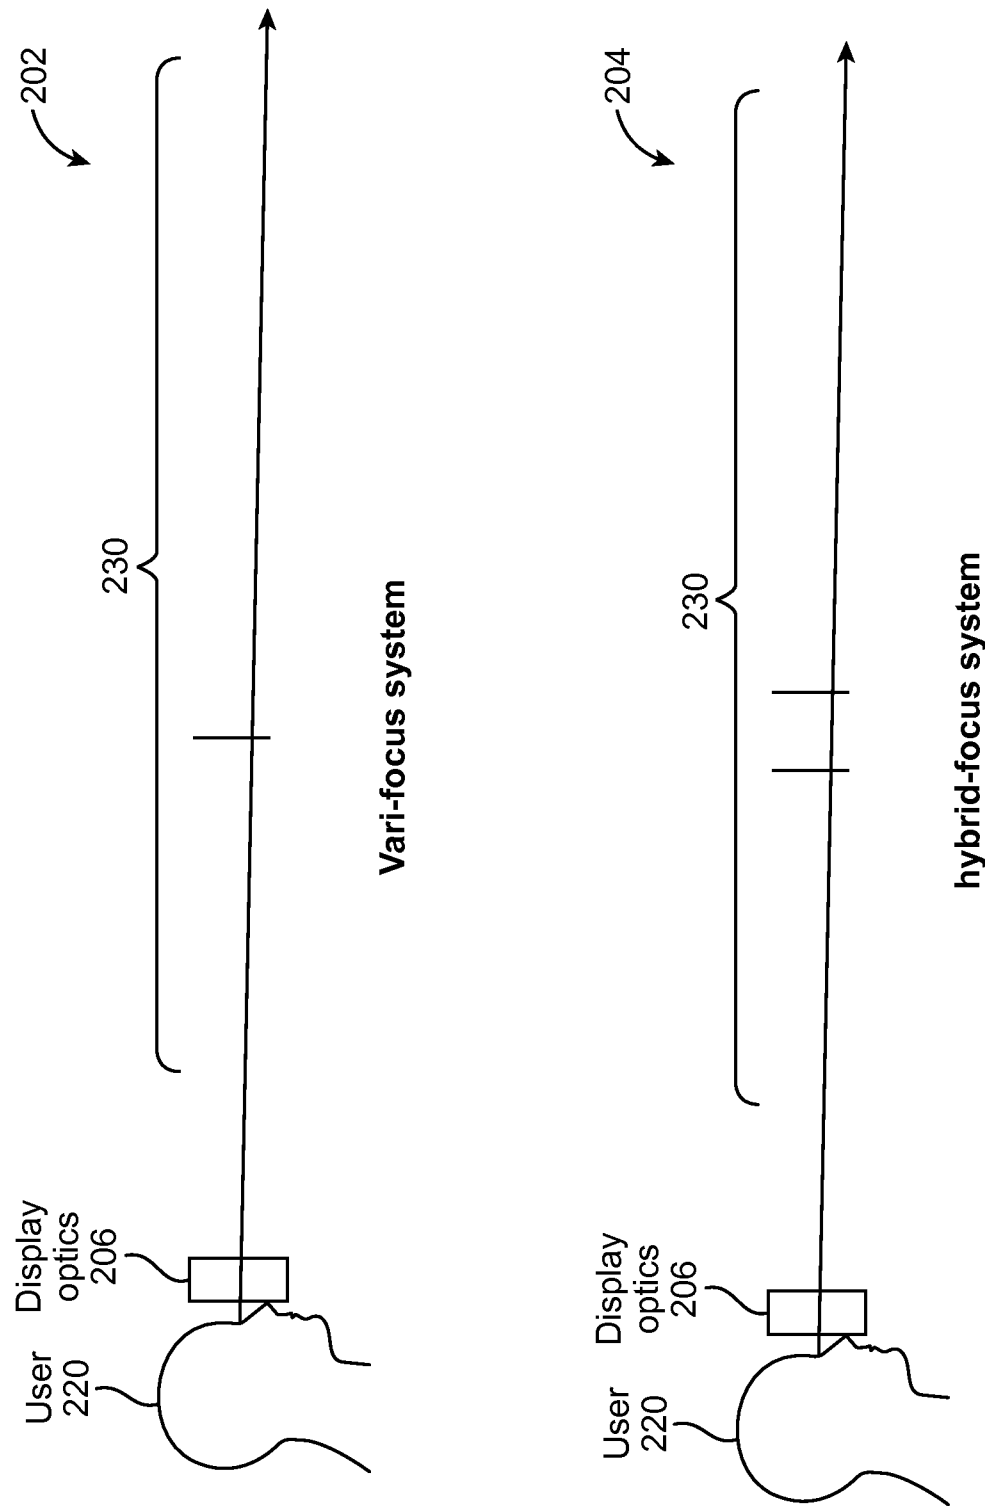


FIG. 2

3 / 3


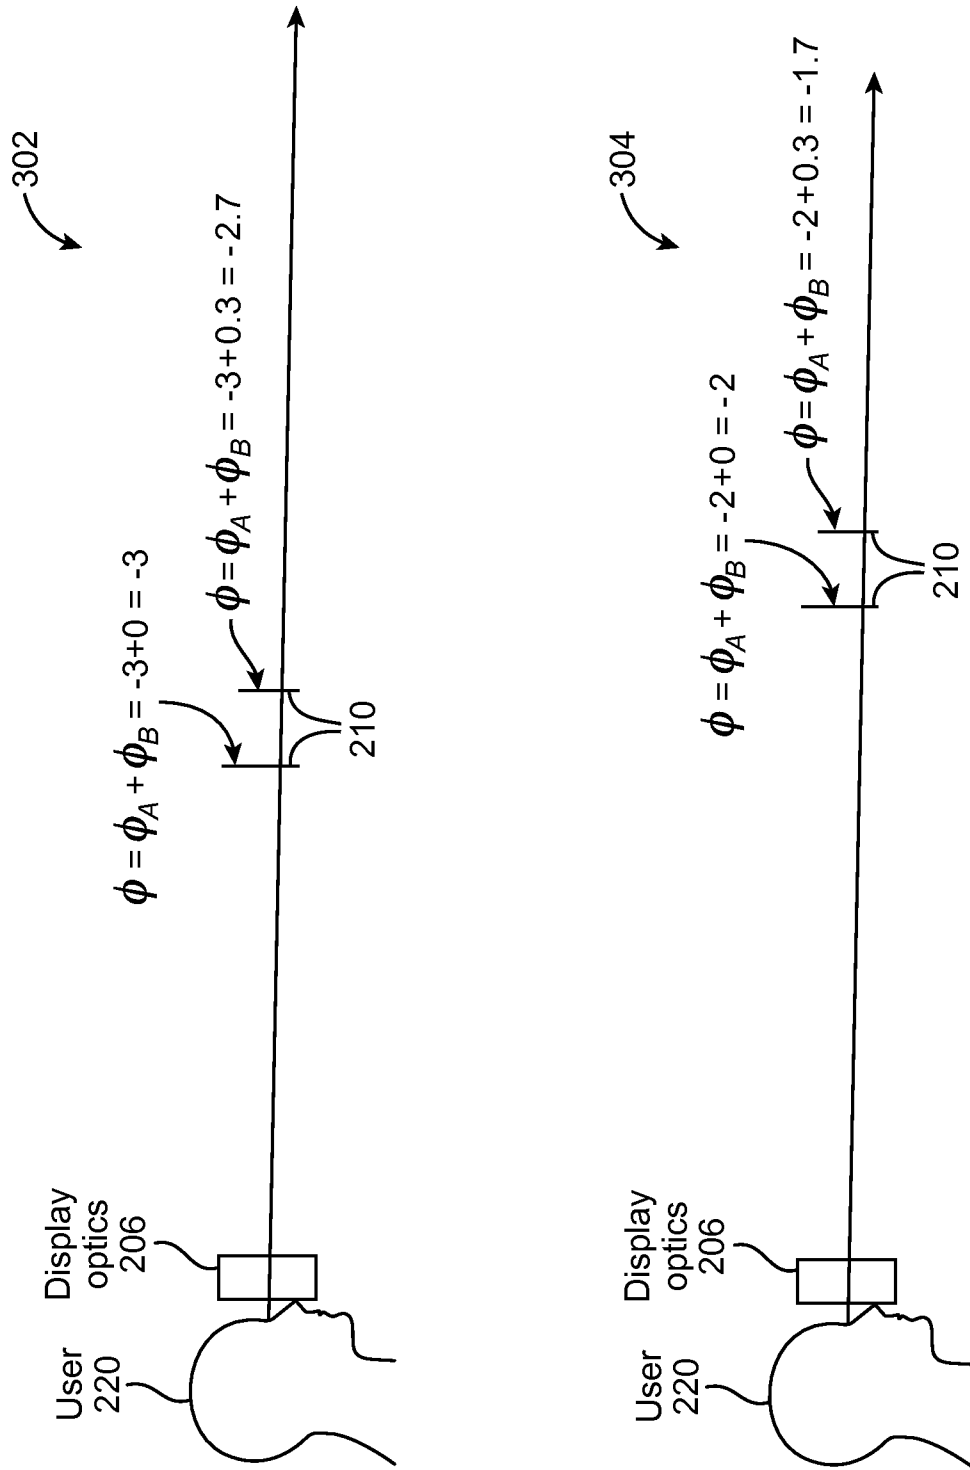


FIG. 3

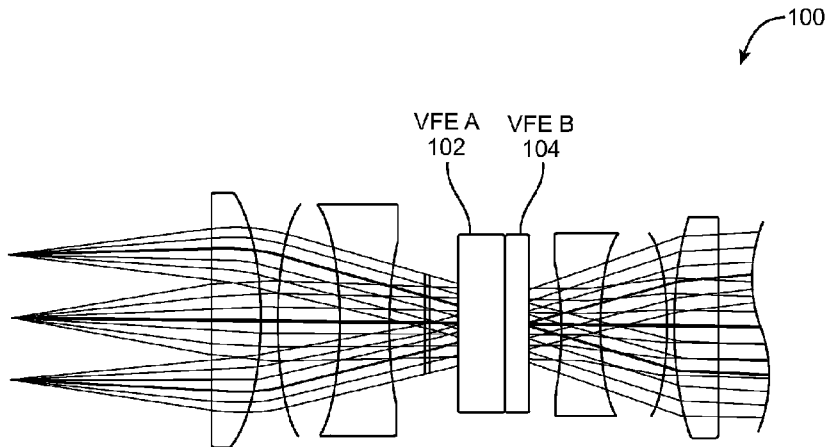

$$\phi = \phi_A + \phi_B - \frac{t}{n} \phi_A \phi_B$$