

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025632 A1

(51) International Patent Classification⁷: G11B 7/007

(21) International Application Number:
PCT/KR2003/001793

(22) International Filing Date:
2 September 2003 (02.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2002-0054756
10 September 2002 (10.09.2002) KR

(71) Applicant: SAMSUNG ELECTRONICS CO., LTD.
[KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si,
442-742 Gyeonggi-do (KR).

(72) Inventors: LEE, Kyung-Geun; 122-1002 Sibeam
Hanshin Apt., 87, Seohyun-dong, Bundang-gu, Seong-
nam-si, Gyeonggi-do 463-050 (KR). PARK, In-Sik;
615-801 Shinnamushil Kukdong Apt., 967-2 Youngtong

2-dong, Paldal-gu, Suwon-si, Gyeonggi-do 442-470
(KR). CHUNG, Chong-Sam; 718-1904 Salgugol Donga
Apt., 988-2, Youngtong 2-dong, Paldal-gu, Suwon-si,
Gyeonggi-do 442-470 (KR). YOON, Du-Seop; 315-601
Sibeamdanji Hanyang Apt. 91, Seohyun-dong, Bun-
dang-gu, Seongnam-si, Gyeonggi-do 463-050 (KR).
PARK, Chang-Min; 153-33 Maetan 1-dong, Paldal-gu,
Suwon-si, Gyeonggi-do 442-371 (KR).


(74) Agent: LEE, Young-Pil; The Cheonghwa Building,
1571-18 Seocho-dong, Seocho-gu, Seoul 137-874 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

{Continued on next page}

(54) Title: OPTICAL INFORMATION STORAGE MEDIUM

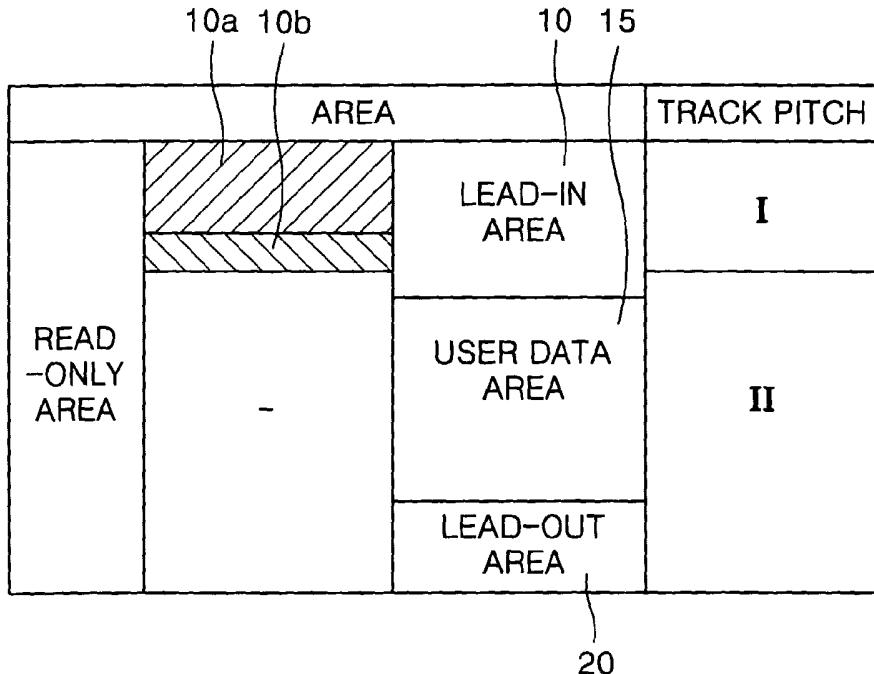

WO 2004/025632 A1

(57) Abstract: An optical information storage medium includes a lead-in area, a lead-out area, and a user data area between the lead-in and lead-out areas and in which user data is recorded. Pits are formed in the lead-in area, the user data area, and the lead-out area, and a track pitch in all or a portion of the lead-in area is different from a track pitch in the remaining area of the optical information storage medium.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*

OPTICAL INFORMATION STORAGE MEDIUM

Technical Field

The present invention relates to an optical information storage medium, and more particularly, to an optical information storage medium in which a track pitch in all or a portion of a lead-in area is different from a track pitch in remaining areas of the optical information storage medium so that the reliability of reproduction of important optical information storage medium-related information can be improved.

Background Art

Optical discs are generally used as information storage media of optical pickup devices, which record information on and/or reproduce information from the optical discs without contacting the optical discs. Optical discs are classified as either compact discs (CDs) or digital versatile discs (DVDs) according to their information recording capacity. CDs and DVDs further include 650MB CD-Rs, CD-RWs, 4.7GB DVD+RWs, DVD-random access memories (DVD-RAMs), DVD-R, DVD-rewritables (DVD-RWs), and so forth. Read-only discs include 650MB CDs, 4.7GB DVD-ROMs, and the like. Furthermore, high-density digital versatile discs (HD-DVDs) have been developed which have a recording capacity of 20GB or more.

Various methods of increasing the recording capacity of optical discs have been studied. One method of increasing the recording capacity is to reduce a size of an optical spot focused on an optical disc. To reduce the size of the optical spot, the wavelength of a laser light source should be shortened or a numerical aperture (NA) of an objective lens should be increased. Further, the track pitch of the optical disc should be reduced. The track pitch refers to a minimum distance measured from a central line of one track to a central line of an adjacent track.

FIG. 1 illustrates the structure of a conventional DVD-ROM 110. The DVD-ROM 110 includes a user data area 105 in which user data is recorded. A lead-in area 100 is formed inside the user data area 105. A lead-out area 110 which is formed outside the user data area 105. Data is recorded as dots in the lead-in area 100, the user data area 105, and the lead-out area 110. Also, the track pitch is $0.74\mu\text{m}$ in the lead-in area 100, the user data area 105, and the lead-out area 110.

The track pitch tends to be reduced when increasing the recording capacity. However, since an optical spot focused on a track may reach an adjacent track, the possibility that cross-talk will occur becomes high as the track pitch is reduced. If cross-talk occurs, an abnormal reproduction signal is output. Thus, as the track pitch is reduced, there is an increase in abnormal reproductions of information.

In particular, if information is abnormally reproduced from an area in which is recorded important information in recording and/or reproducing data, this abnormal reproduction may gravely affect a recording and/or reproduction efficiency of a disc. Accordingly, the track pitch is required to be adjusted in accordance with an increase in the recording capacity of a storage medium and the importance of data.

Disclosure of the Invention

The present invention provides an optical information storage medium in which a track pitch in an area in which is recorded important optical information storage medium-related information is different from a track pitch in a user data area in which is recorded user data so that the efficiency and reliability of the reproduction of data can be improved.

Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

According to an aspect of the present invention, an optical information storage medium includes a lead-in area, a lead-out area that is formed outside the lead-in area, and a user data area disposed between the lead-in and lead-out areas and in which user data is

recorded where pits are formed in first tracks of the lead-in area, second tracks of remaining area including the user data area, and the lead-out area, and a track pitch of between adjacent first tracks in all or a portion of the lead-in area is different from a track pitch between adjacent second and/or third tracks in the remaining areas of the optical information storage medium.

It is preferable, but not required, that the first track pitch is greater than the second track pitch in the remaining area of the optical information storage medium.

According to an aspect of the invention, the lead-in area includes an area in which optical information storage medium-related information is recorded and an area in which copy protection information is recorded.

It is preferable, but not required, that the first track pitch in at least one of the areas of the lead-in area is greater than the second track pitch in the remaining area of the optical information storage medium.

It is preferable, but not required, that a ratio of tracking error signals detected in the area having the first track pitch to tracking error signals detected in the area having the second track pitch is 1.5 or more.

Brief Description of the Drawings

FIG. 1 illustrates the schematic structure of a conventional DVD-ROM.

FIG. 2 illustrates the schematic structure of an optical information storage medium according to an embodiment of the present invention.

FIG. 3A illustrates a phase tracking error signal (a differential phase detect (DPD) signal) when a track pitch is 0.32 μ m.

FIG. 3B illustrates a phase tracking error signal (a DPD signal) when a track pitch is 0.35 μ m.

FIG. 4 is a block diagram of a recording and/or reproducing apparatus according to an embodiment of the present invention.

Best mode for carrying out the Invention

Referring to FIG. 2, an optical information storage medium 1000 according to an embodiment of the present invention includes a user data area 15, a lead-in area 10 which is formed inside the user data area 15, and a lead-out area 20 which is formed outside the user data area 15 and the lead-in area 10. A first track pitch in all or a portion of the lead-in area 10 is different from a second track pitch in remaining areas of the optical information storage medium 1000 including the user data and lead-out areas 15, 20.

The lead-in area 10 includes areas in which is recorded important data in reproduction from the optical information storage medium. Examples of the important data include optical information storage medium-related information, which is recorded in area 10a, and copy protection information, which is recorded in area 10b. The optical information storage medium-related information contains information on the type of storage medium (such as whether the medium 1000 is a recordable disc, write-once disc, or a read-only disc), information on the number of recording layers, information on the recording speed, and information on the size of the optical information storage medium 1000 (disc).

It is preferable, but not required, that a track pitch in at least one of the areas 10a and 10b is the first track pitch which is greater than the second track pitch in the remaining areas except the areas 10a and 10b. It is understood that additional important information in reproduction from the optical information storage medium 1000 may be recorded, and the track pitch in the entire lead-in area 10 may be the first track pitch which is greater than the second track pitch in the remaining areas of the optical information storage medium 1000.

The optical information storage medium according to an embodiment of the present invention is read-only optical information storage medium. The pits are formed everywhere in the lead-in area 10, the user data area 15, and the lead-out area 20. The pits are formed in a substrate in advance when manufacturing the read-only embodiment of the optical information storage medium 1000. If data is

recorded as the pits, the pits can be formed in the lead-in area 10 and the user data area 15 without stopping a process of forming the pits.

Thus, a process of manufacturing an optical information storage medium can be simplified and the time required for performing the process can be reduced.

One method of performing a tracking operation using the pits is a differential phase detect (DPD) method. For example, the DPD method is used to realize a track servo depending on the phase shift of an optical spot focused on a quarter photodetector. The DPD method is well known, and thus will not be described in detail herein.

According to the DPD method, when track pitches on the optical information storage medium are different, an output tracking error signals (such as differential phase tracking error signals) are different. For example, FIG. 3A illustrates a DPD signal when the track pitch is $0.32\mu\text{m}$, and FIG. 3B illustrates a DPD signal when the track pitch is $0.35\mu\text{m}$. Here, when the same reproduction power is output, the amplitude of a phase tracking error signal (a DPD signal) in the track pitch of $0.32\mu\text{m}$ was about 1.46V. In contrast, the amplitude of the DPD signal in the track pitch of $0.35\mu\text{m}$ was about 2.31V. Thus, the amplitude of the DPD signal when the track pitch is larger increased about 1.58 times the amplitude of the DPD signal when the track pitch is smaller. As can be seen in FIGs. 3A and 3B, as the track pitch increased, the amplitude of the DPD signal is increased. As the amplitude of the DPD signal is increased, an error detecting efficiency is improved. Thus, the reproduction efficiency and reliability are improved as the track pitch increased.

According to the result of simulations, it was found that, when the track pitch TP in the area 10a or the area 10b is I and the track pitch TP in the remaining areas of the optical information storage medium is II, it is preferable, but not required, that a ratio of a tracking error signal, particularly, a phase tracking error signal, to each of the track pitches TP is 1.5 or more as expressed by equation 1 set forth below:

$$\frac{\text{Tracking Error Signal}_{TP=I}}{\text{Tracking Error Signal}_{TP=II}} \geq 1.5 \quad \dots(1)$$

The optical information storage medium according to embodiments of the present invention can be applied to an optical information storage medium having one or more recording surfaces. In other words, if the optical information storage medium has a plurality of recording surfaces, the track pitch in all or a portion of a lead-in area of each of the plurality of recording surfaces can be greater than the track pitch in the remaining area of each of the plurality of recording surfaces. Accordingly, the track pitch in a portion of the lead-in area in which important information is recorded can be greater than the track pitch in the remaining area of the optical information storage medium so that the reproduction reliability of the important information can be increased.

While not specifically so limited, it is understood that the information storage medium can include the CD-Rs, CD-RWs, DVD-RWs, DVD-RAMs, DVD+RWs, as well as next generation high definition DVDs, such as Blu-ray discs and Advanced Optical Discs (AODs). Further, it is understood the information storage medium need not include lead-in and/or lead-out areas.

FIG. 4 is a block diagram of a recording and/or reproducing apparatus according to an embodiment of the present invention. Referring to FIG. 4, the recording apparatus includes a recording/reading unit 1001, a controller 1002, and a memory 1003. The recording/reading unit 1001 records data on a disc 1000, which is an embodiment of an information storage medium 1000 of the present invention, and reads the data from the disc 1000. The controller 1002 records and reproduces data from tracks having first and second track pitches according to the present invention as set forth above in relation to FIGs. 2 through 3B.

While not required in all aspects, it is understood that the controller 1002 can be computer implementing the method using a

computer program encoded on a computer readable medium. The computer can be implemented as a chip having firmware, or can be a general or special purpose computer programmable to perform the method.

In addition, it is understood that, in order to achieve a recording capacity of several dozen gigabytes, the recording/reading unit 1001 could include a low wavelength, high numerical aperture type unit usable to record dozens of gigabytes of data on the disc 1000. Examples of such units include, but are not limited to, those units using light wavelengths of 405 nm and having numerical apertures of 0.85, those units compatible with Blu-ray discs, and/or those units compatible with Advanced Optical Discs (AOD).

While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims and equivalents thereof.

Industrial Applicability

As described above, in an optical information storage medium according to the present invention, the track pitch in an area, such as an optical information storage medium-related information area or a copy protection information area of a lead-in area, in which important information is recorded, is greater than the track pitch in the remaining areas of the optical information storage medium. Thus, reliable reproduction of the important information can be achieved without deteriorating a signal due to cross-talk occurring between adjacent tracks during reproduction of the important information.

What is claimed is:

1. An optical information storage medium comprising:
a lead-in area;
a lead-out area; and
a user data area formed between the lead-in and lead-out areas
and in which user data is recorded,
wherein
pits are formed in tracks in the lead-in area, the user data area,
and the lead-out area, and
a first track pitch between adjacent tracks in all or a portion of the
lead-in area is different from a second track pitch between adjacent
tracks in remaining areas of the optical information storage medium.

2. The optical information storage medium of claim 1,
wherein the first track pitch is greater than the second track pitch.

3. The optical information storage medium of claim 2,
wherein the lead-in area comprises a first subarea in which optical
information storage medium-related information is recorded and a
second subarea in which copy protection information is recorded,
wherein a track pitch in at least one of the subareas is the first track
pitch.

4. The optical information storage medium of claim 3,
wherein a ratio of tracking error signals detected in the at least one of
the first and second subareas having the first track pitch to tracking
error signals detected in areas having the second track pitch is 1.5 or
more.

5. The optical information storage medium of claim 4,
wherein a ratio of differential phase tracking error signals detected in
the at least one of the first and second subareas having the first track
pitch to differential phase tracking error signals detected in the areas
having the second track pitch is 1.5 or more.

6. The optical information storage medium of claim 1, wherein the lead-in area comprises a first subarea in which optical information storage medium-related information is recorded and a second subarea in which copy protection information is recorded, wherein a track pitch in at least one of the first and second subareas is the first track pitch which is greater than the second track pitch.

7. The optical information storage medium of claim 6, wherein a ratio of tracking error signals detected in the at least one of the first and second subareas having the first track pitch to tracking error signals detected in the areas having the second track pitch is 1.5 or more.

8. The optical information storage medium of claim 7, wherein a ratio of differential phase tracking error signals detected in the at least one of the first and second subareas having the first track pitch to differential phase tracking error signals detected in the areas having the second track pitch is 1.5 or more.

9. The optical information storage medium of claim 1, wherein the optical information storage medium has more than one recording surface.

10. An optical information storage medium for recording data in tracks, comprising:

a first area in which first data is recorded in corresponding first tracks, adjacent pairs of the first tracks having a first track pitch; and
a second area in which second data is recorded in corresponding second tracks, adjacent pairs of the second tracks having a second track pitch other than the first track pitch.

11. The optical information storage medium of claim 10, wherein the first area is within a lead-in area of the optical information storage medium.

12. The optical information storage medium of claim 11, wherein the lead-in area includes additional data recorded in additional tracks, adjacent pairs of the additional tracks having another track pitch other than the first track pitch.

13. The optical information storage medium of claim 12, wherein the another track pitch is the second track pitch.

14. The optical information storage medium of claim 11, wherein the first data comprises information used in reproduction of the second data.

15. The optical information storage medium of claim 10, wherein the first data comprises information used in reproduction of the second data.

16. The optical information storage medium of claim 10, wherein the second area includes a user data area of the optical information storage medium.

17. The optical information storage medium of claim 16, wherein the first data comprises information used in reproduction of the second data.

18. The optical information storage medium of claim 16, wherein the second area includes a lead-out area disposed outside of the user data area, the lead-out area including additional data other than the second data.

19. The optical information storage medium of claim 17, wherein:

the first area is in a portion of a lead-in area, and
the second area includes another portion of the lead-in area.

20. The optical information storage medium of claim 19, wherein the second area includes a lead-out area disposed outside of the user data area, the lead-out area including additional data other than the second data.

21. An apparatus to optically transfer data with respect to an optical information storage medium, the apparatus comprising:

an optical unit to transfer first data with respect to first tracks in a first area of the optical information storage medium, and to transfer second data with respect to second tracks in a second area of the optical information storage medium other than the first area; and

a controller to control the optical unit to transfer the first and second data with respect to the corresponding first and second areas, wherein:

adjacent pairs of the first tracks have a first pitch, and adjacent pairs of the second tracks have a second pitch other than the first pitch.

22. The apparatus of claim 21, wherein the first area is within a lead-in area of the optical information storage medium.

23. The apparatus of claim 22, wherein the lead-in area includes additional data recorded in additional tracks, adjacent pairs of the additional tracks having another track pitch other than the first track pitch.

24. The apparatus of claim 23, wherein the another track pitch is the second track pitch.

25. The apparatus of claim 21, wherein the first data comprises information used by the controller in reproduction of the second data.

26. The apparatus of claim 21, wherein:

the controller uses a differential signal to perform tracking when transferring the first and/or second data with respect to the optical information storage medium, and

a first differential signal detected from the first data recorded in the first tracks is other than a second differential signal detected from the second data recorded in the second tracks.

27. The apparatus of claim 21, wherein the second area includes a user data area of the optical information storage medium, and the second data is user data which the controller reproduces and/or records in the user data area.

28. The apparatus of claim 27, wherein the first data comprises information used by the controller in reproduction of the second data.

29. The apparatus of claim 27, wherein the second area includes a lead-out area disposed outside of the user data area, the lead-out area including additional data other than the second data.

30. The apparatus of claim 28, wherein:
the first area is in a portion of a lead-in area, and
the second area includes another portion of the lead-in area.

31. The apparatus of claim 30, wherein the second area includes a lead-out area disposed outside of the user data area, the lead-out area including additional data other than the second data.

1/3

FIG. 1


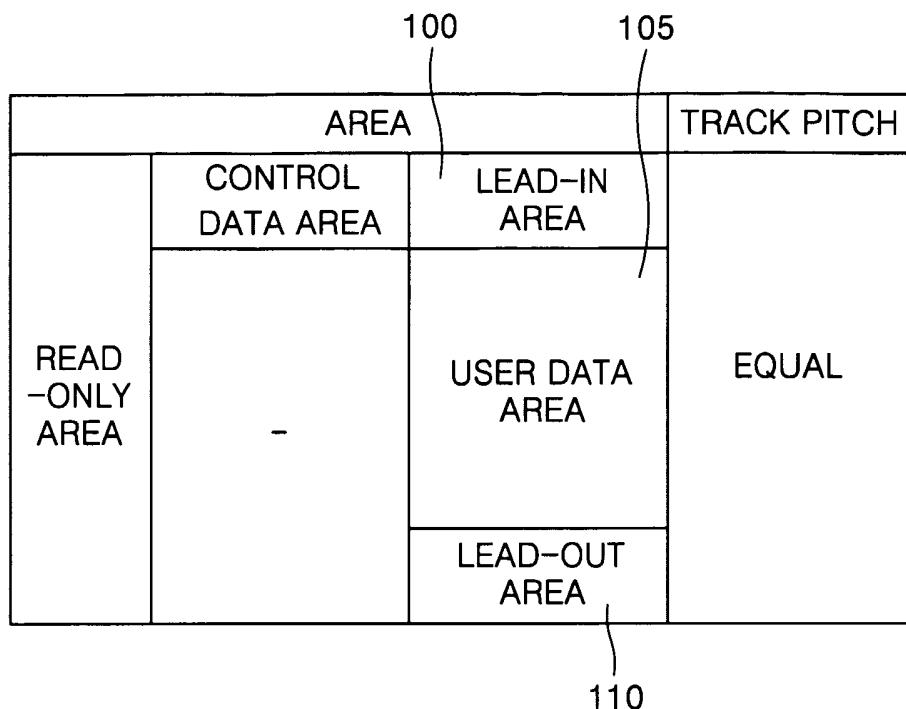


FIG. 2

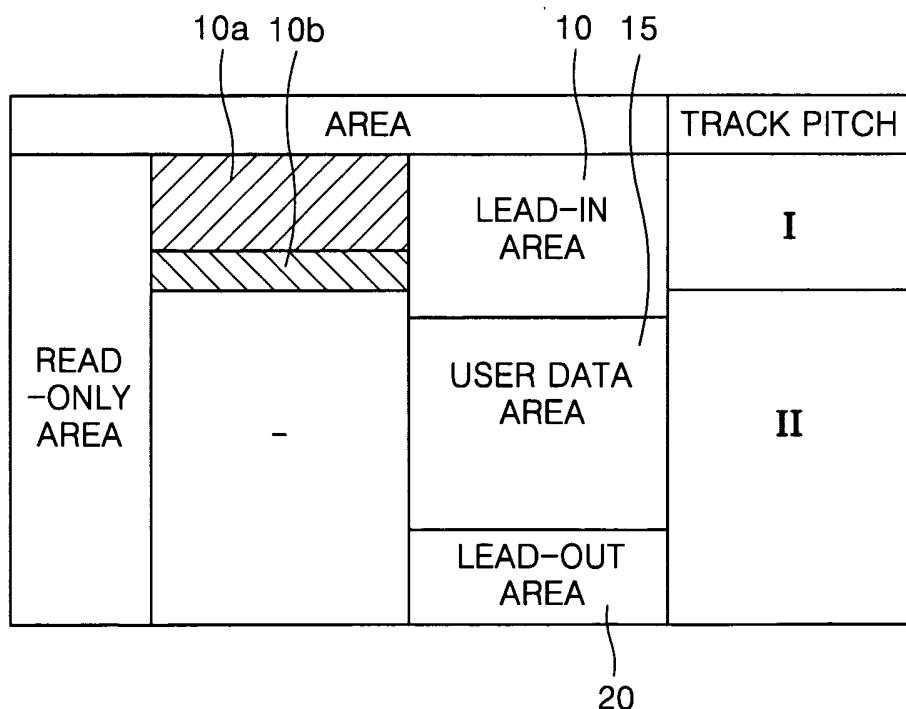

2/3

FIG. 3A



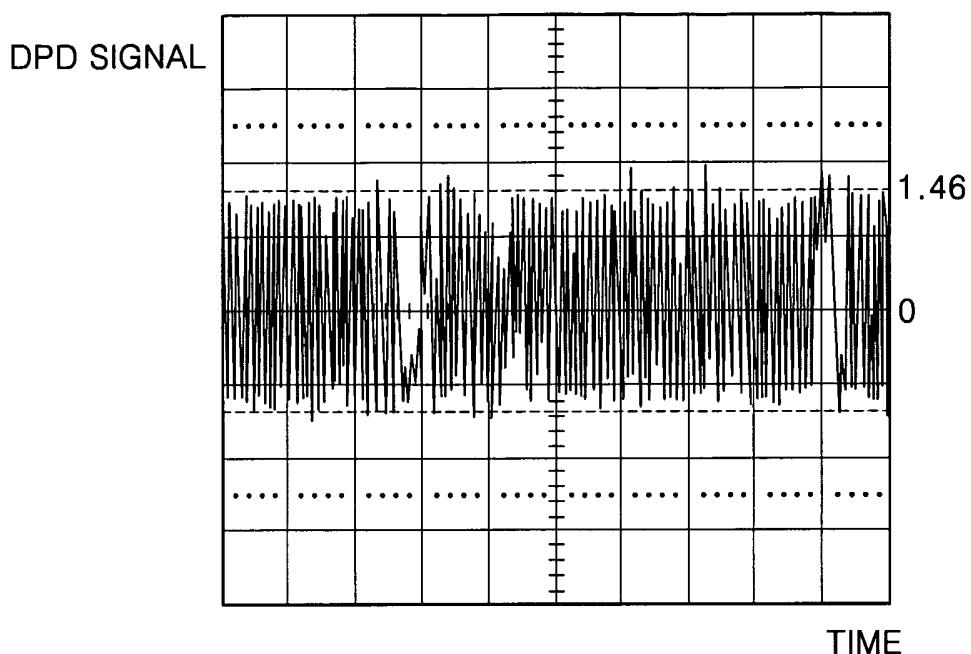


FIG. 3B

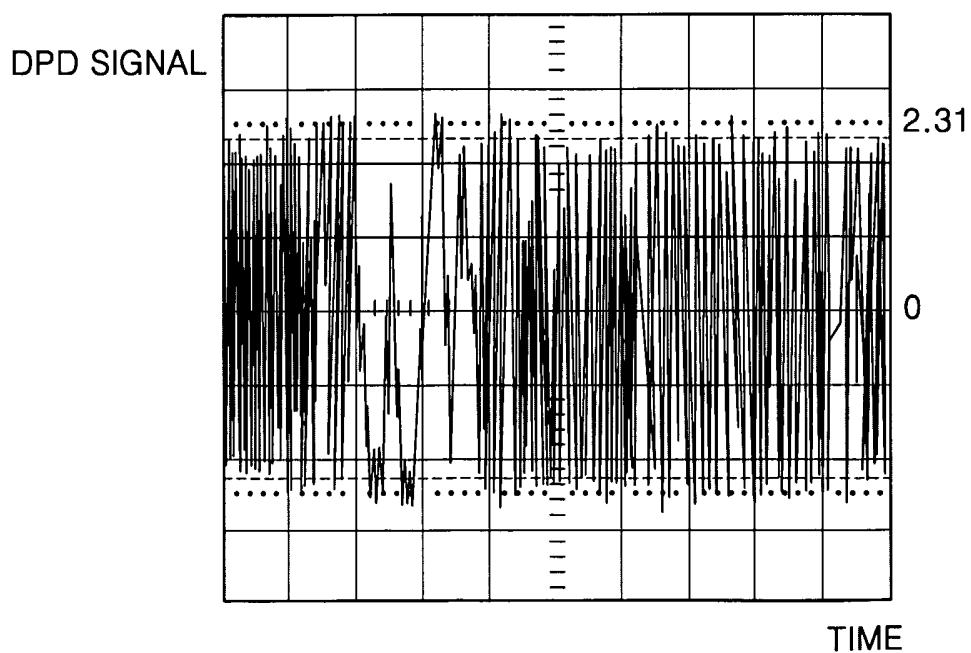

3/3

FIG. 4

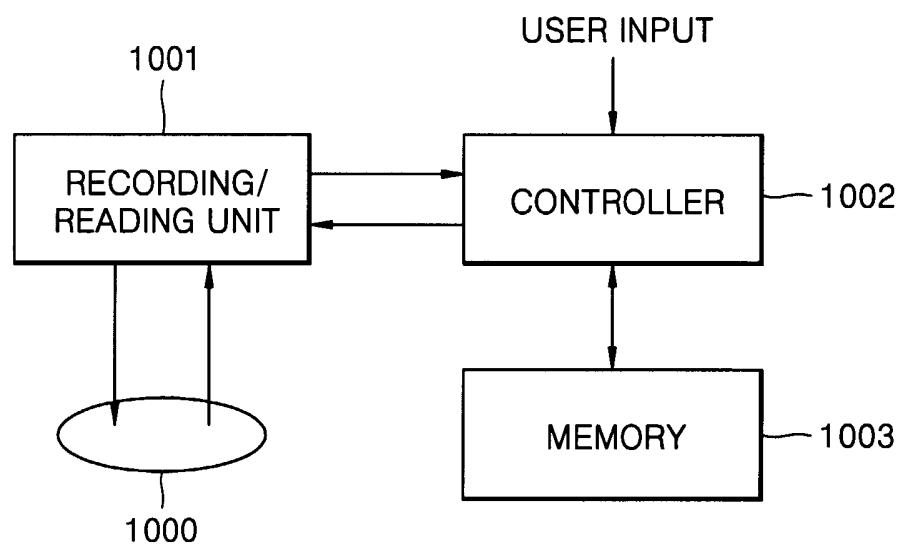

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/01793

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 G11B 7/007

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean Patents and applications for inventions since 1975
Korean Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
KIPASS(KOREAN INTELLECTUAL PROPERTY OFFICE PATENT SEARCH SYSTEM)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/39434 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.) 16 MAY 2002 See the whole document & KR 2003-0045849 A	1, 10, 21
A	WO 01/99103 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.) 27 DECEMBER 2001 See the whole document & KR 2003-0018000 A	1, 10, 21
A	WO 00/75921 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 14 DECEMBER 2000 See the whole document & KR 2001-0072164 A	1, 10, 21
A	WO 99/48091 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 23 SEPTEMBER 1999 See the whole document & KR 2001-0041877 A	1, 10, 21

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
12 DECEMBER 2003 (12.12.2003)

Date of mailing of the international search report
13 DECEMBER 2003 (13.12.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Faxsimile No. 82-42-472-7140

Authorized officer

HONG, Seung Moo

Telephone No. 82-42-481-5687

