



(22) **Date de dépôt/Filing Date:** 2014/08/28

(41) **Mise à la disp. pub./Open to Public Insp.:** 2015/03/30

(45) **Date de délivrance/Issue Date:** 2016/09/13

(30) **Priorité/Priority:** 2013/09/30 (EP13 400021.5)

(51) **Cl.Int./Int.Cl.** *B64D 33/02* (2006.01),
B64C 27/00 (2006.01), *F02K 7/10* (2006.01)


(72) **Inventeur/Inventor:**
BRAUTIGAM, RALF, DE

(73) **Propriétaire/Owner:**
AIRBUS HELICOPTERS DEUTSCHLAND GMBH, DE

(74) **Agent:** FASKEN MARTINEAU DUMOULIN LLP

(54) **Titre : HELICOPTERE AVEC ENTREES D'AIR POUR MOTEUR**

(54) **Title: HELICOPTER WITH ENGINE AIR INTAKES**

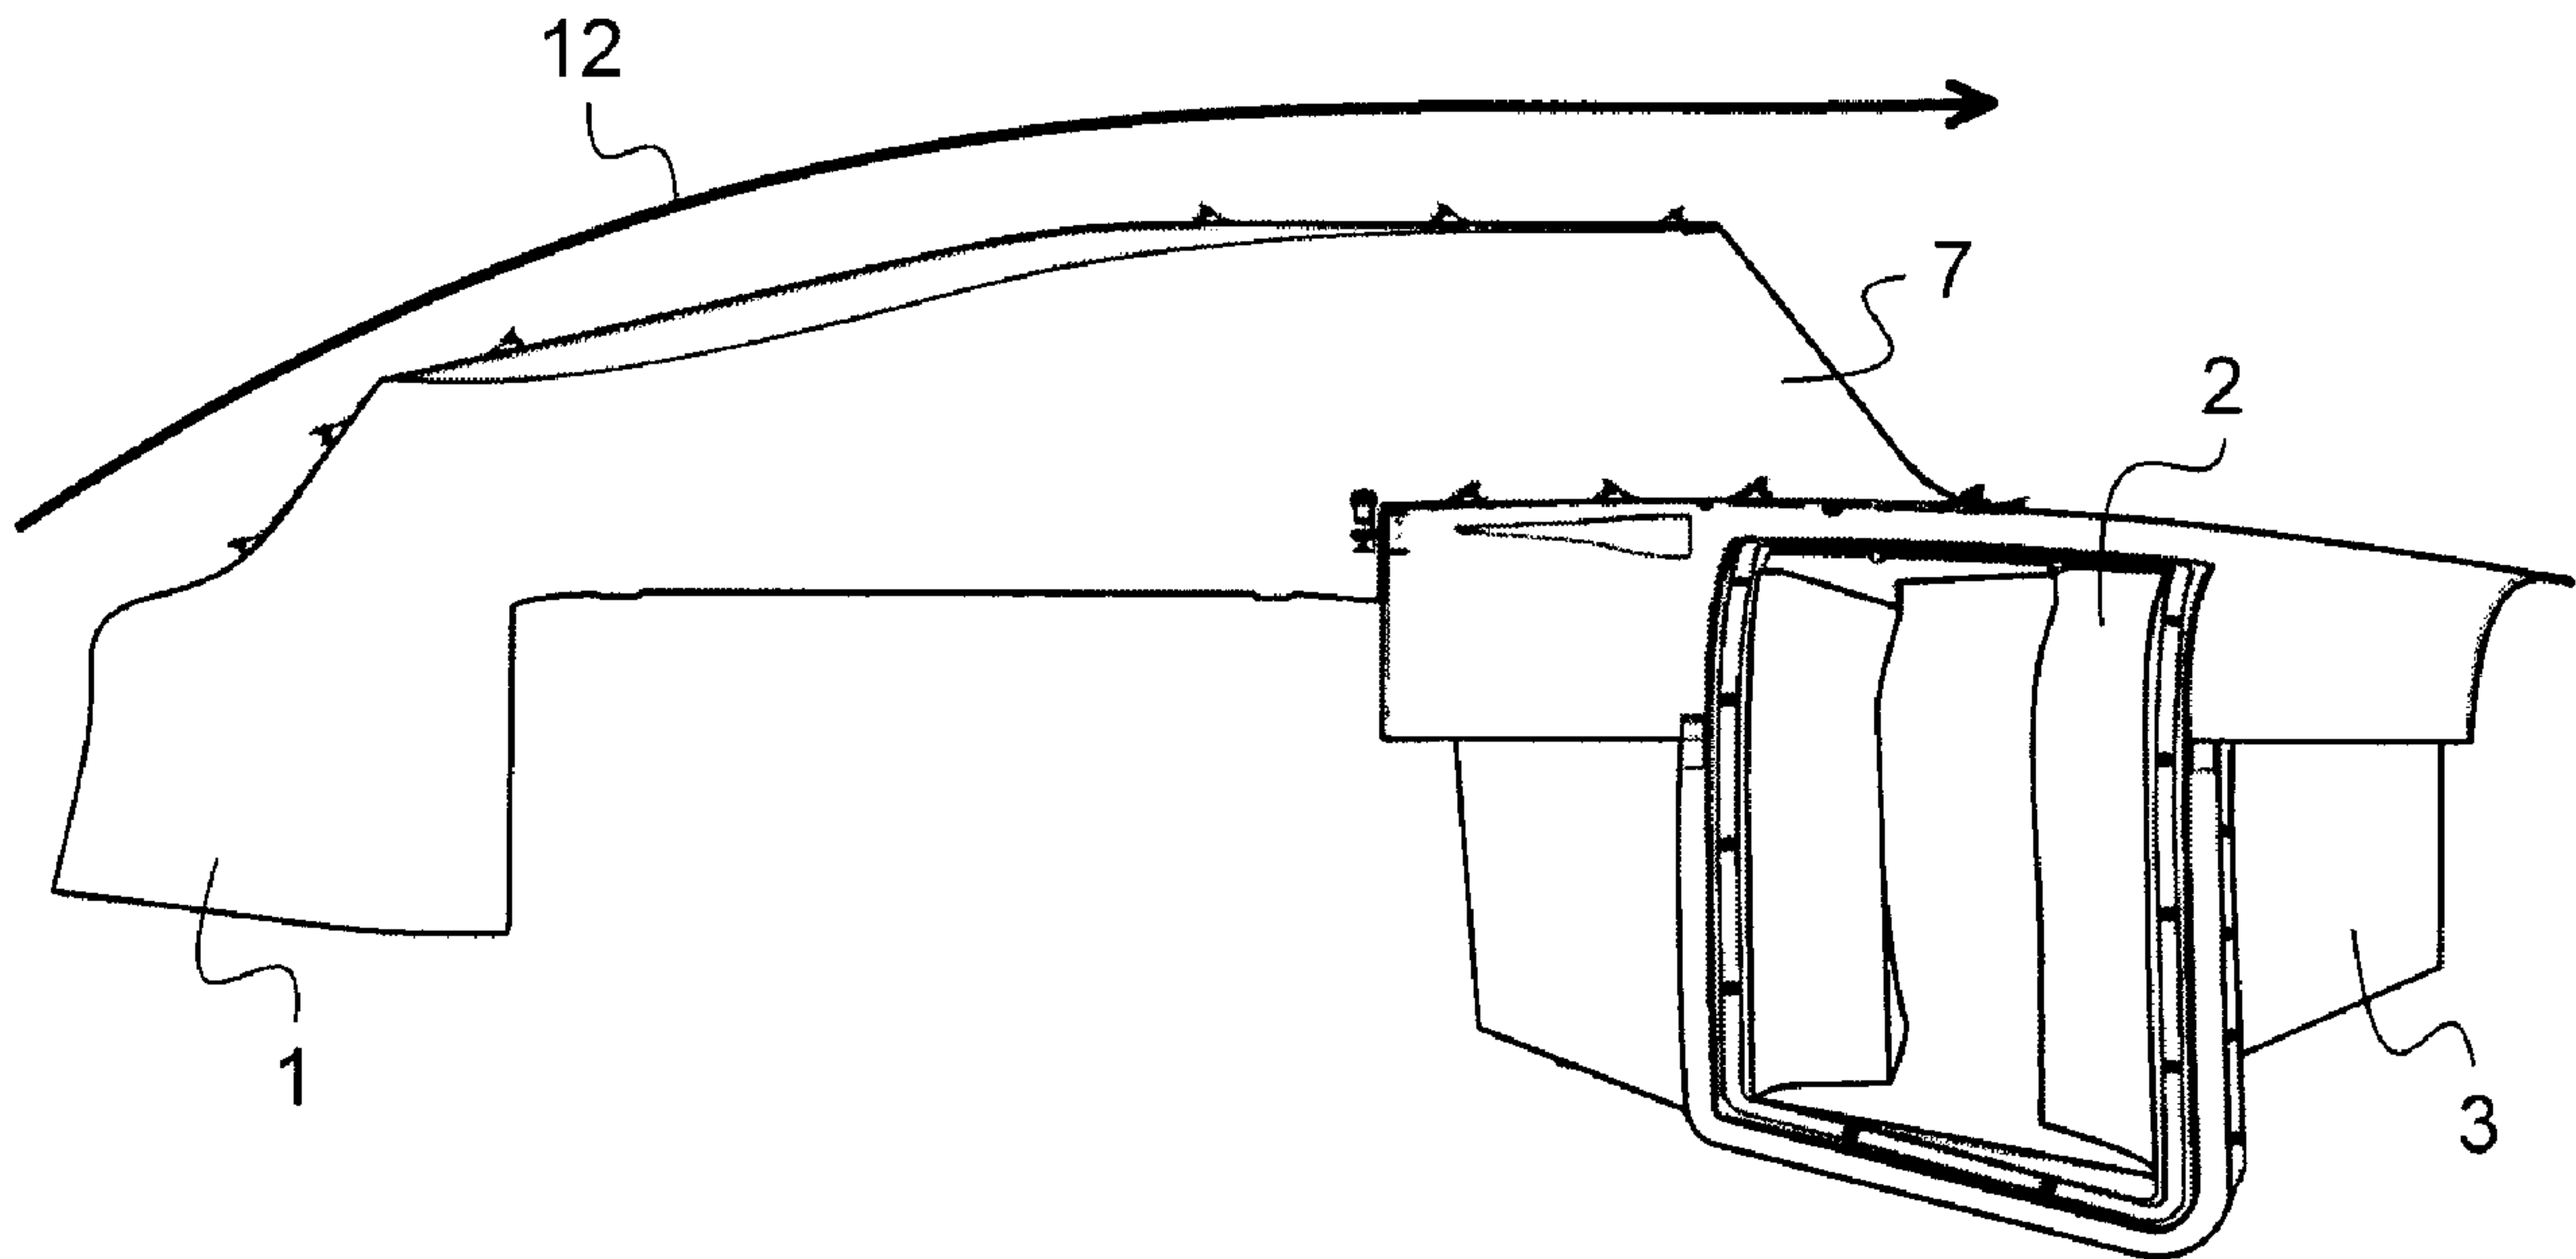

(57) **Abrégé/Abstract:**

The invention is related to a helicopter with a fuselage, at least two engines substantially inside said fuselage, an air intake for each of said two engines and at least two separate lateral air inlet ports for said at least two engines in said fuselage. Said separate lateral air inlet ports being arranged on sides opposed to each other relative to an essentially vertical midplane of said fuselage and oriented with their respective cross section substantially parallel to a forward flight direction of the helicopter. At least one frontal air inlet port with a forward portion is provided separate from said lateral air inlet ports, said frontal air inlet port being located on a gear cowl of the fuselage oriented with its cross section substantially perpendicular to the forward flight direction of the helicopter.

“Helicopter with engine air intakes”

ABSTRACT

The invention is related to a helicopter with a fuselage, at least two engines substantially inside said fuselage, an air intake for each
5 of said two engines and at least two separate lateral air inlet ports for said at least two engines in said fuselage. Said separate lateral air inlet ports being arranged on sides opposed to each other relative to an essentially vertical midplane of said fuselage and oriented with their respective cross section substantially parallel to a forward flight
10 direction of the helicopter. At least one frontal air inlet port with a forward portion is provided separate from said lateral air inlet ports, said frontal air inlet port being located on a gear cowling of the fuselage oriented with its cross section substantially perpendicular to the forward flight direction of the helicopter.

Helicopter with engine air intakes

The invention is related to helicopters with engine air intakes, particularly to helicopters with radial engine air intakes with the features of the preamble of claim 1.

5 Helicopters (HC) with lateral engine air inlet ports suck in the engine air from the side. In forward flight conditions of HC there will be air pressure losses with lateral engine air inlet ports, while for hover operations said lateral inlet ports are suitable. A ram-air intake is any intake design which uses the dynamic air pressure – so called
10 RAM effect - created by vehicle motion to increase the static air pressure inside of the intake manifold on an engine, thus allowing a greater mass flow through the engine and hence increasing engine power.

The document US 2010065139 A1 discloses a device for feeding
15 combustion air to an engine disposed in an interior of an aircraft with an air inlet duct extending between an exterior surface of the aircraft and the engine, wherein the air inlet duct extends from air inlets disposed in a first region of the exterior surface; at least one further air inlet duct extending between a second region of the exterior
20 surface and the engine, so as to provide a two-way airstream supply; and a control device configured to switch the air supply to the engine to the at least one further air inlet duct when a blockage occurs in the air inlets.

The document US 5662292 A discloses a specially contoured
25 barrier type filter disposed in front of a helicopter turbine inlet for maximized airflow during forward, as well as sideways flight. The contouring additionally reduces the tendency of the filter to clog. A

bypass mechanism is provided should the pressure differential across the filter exceed a predetermined value. The bypass configuration achieves a limited particle separation function in order to provide residual protection. An air box attached to the inlet is formed to
5 provide low distortion levels in the airflow entering the engine inlet.

It is an object of the invention to provide a helicopter with improved engine air supply for fast forward flight conditions.

The solution is provided with a helicopter with engine air intakes.

10 According to the invention a helicopter is provided with a fuselage, at least two engines substantially inside said fuselage, an air intake for each of said two engines and at least two separate lateral air inlet ports for said at least two engines in said fuselage. Said separate lateral air inlet ports are arranged on sides opposed to
15 each other relative to an essentially vertical midplane of said fuselage and oriented with their respective cross section substantially parallel to a forward flight direction of the helicopter. Further at least one frontal air inlet port with a forward portion is provided separate from said lateral air inlet ports, said frontal air inlet port being located on a
20 gear cowl of the fuselage and being oriented with its cross section substantially perpendicular to the forward flight direction of the helicopter. A straight path for airflow through the frontal air inlet port aligned with the longitudinal airflow and two further separate paths through said separate lateral air inlet ports are provided to each air
25 intake for each engine from the forward direction and both sideways of the helicopter. According to an advantage of the invention in fast forward flight conditions the inventive HC – with an inlet port pointing

in flight direction - can use the RAM effect of forward flight with the frontal inlet port and thus the inventive HC can profit from the dynamic air pressure created by its own forward motion to increase the static air pressure inside of the respective intake manifold for the
5 at least two engines, thus allowing a greater mass flow through the engine and hence increasing engine power. The two lateral air intakes of the two engines introduce additionally air to the engine in hover operations or in slow speed maneuvers. During fast forward flights of the helicopter the two lateral air intakes continue to provide air to the
10 two engines but additionally the frontal air duct supports the two engines with dynamic air pressure and any air pressure and installation losses due to exclusive lateral air intake can be avoided or compensated.

According to a preferred embodiment of the invention air ducts
15 are provided from the at least one frontal air inlet port to the at least two radial air intakes. Said air ducts lead additionally air to the engines, while avoiding any structural obstacles or warm air through heat convection. The air ducts lead the air to the respective engine air intakes while avoiding hot helicopter structures, for example a
20 main gear box or a rotor box.

According to a further preferred embodiment of the invention the at least two air intakes are radial and further preferable twice as large as the at least two radial air intakes of two engines with only two separated lateral air inlet ports.

25 Preferred embodiments of the invention are described with reference to the following description and drawings.

Fig. 1 shows a lateral view of a part of a helicopter with lateral air inlet ports according to the state of the art,

Fig. 2 shows a cross sectional view through a radial air intake of one engine of a helicopter according to the invention,

Fig. 3 shows a lateral view of a part of the fuselage of the helicopter with air inlet ports according to the invention, and

5 Fig. 4 shows a perspective top view of the fuselage of the helicopter with air inlet ports to the engine according to Fig. 3.

According to Fig. 1 a part of a fuselage 1 with a gear cowling 7 of a helicopter of the state of the art is provided with a lateral air inlet port 2 to one of two engines 3. Said lateral air inlet port 2 is oriented
10 with its cross section substantially parallel to a forward flight direction of the helicopter causing an opposed air flow direction 12. Another lateral air inlet port 2 to the other one of the two engines 3 (not shown) is provided on the fuselage symmetrically relative to a vertical midplane of the helicopter and opposed to the one of the two engines
15 3.

According to Fig. 2 corresponding features are referred to with the references of Fig. 1. A radial air intake 4 of one engine 3 is supplied with air from the lateral air inlet port 2 through an angular segment α of the circumference of said radial air intake 4, with $\alpha =$
20 100° . The radial air intake 4 of said one engine 3 is further supplied via an air duct 6 with air from a frontal air inlet port 5 through a supplemental angular segment β of the circumference of said radial air intake 4, with $\beta = 108^\circ$.

According to Fig. 3 corresponding features are referred to with
25 the references of Fig. 1, 2. RAM-air 8 is led to the frontal air inlet port 5 on each side of the fuselage 1 along an outside of the fuselage 1 and the gear cowling 7 while avoiding the gear box 11 below the gear

cowling 7 and is biased into the respective air ducts 6 on each side of the fuselage 1. Lateral air 9 is supplied to the lateral air inlet port 2 to one of two engines 3. Smooth air ducts 6 of heat resistant composite compound are provided from the frontal air inlet port 5 to the two air
5 intakes 4.

According to Fig. 4 corresponding features are referred to with the references of Fig. 1 - 3. The right hand fuselage (not shown entirely) with its air flow conditions is symmetrical to the left hand fuselage with regard to the midplane of the fuselage 1 of the
10 helicopter. The RAM-air 8 of the helicopter in forward flight is led along the fuselage 1 with the gear cowling 7 to the frontal air inlet port 5 via the air duct 6 while avoiding the rotor box 10 of the helicopter. Lateral air 9 is supplied through the lateral air inlet port 2 to the two engines 3.

Reference List

	1	Fuselage
	2	lateral air inlet port
5	3	engine
	4	radial air intake
	5	frontal air inlet port
	6	air duct
	7	gear cowling
10	8	ram air
	9	lateral air
	10	rotor box
	11	gear box
	12	air flow direction
15		

CLAIMS

1. A helicopter with a fuselage (1), at least two engines (3) substantially inside said fuselage (1), an air intake (4) for each of said two engines (3) and at least two separate lateral air inlet ports (2) for said at least two engines (3) in said fuselage (1), said separate lateral air inlet ports (2) being arranged on sides opposed to each other relative to an essentially vertical midplane of said fuselage (1) and oriented with their respective cross section substantially parallel to a forward flight direction of the helicopter, wherein further at least one frontal air inlet port (5) with a forward portion is provided separate from said lateral air inlet ports (2), said at least one frontal air inlet port (5) being located on a gear cowl of the fuselage (1) and being oriented with its cross section substantially perpendicular to a forward flight direction, whereby a straight path for airflow through the at least one frontal air inlet port (5) aligned with the longitudinal airflow and two further separate paths through said separate lateral air inlet ports (2) are provided to each air intake (4) for each engine (3) from forward and both sideways.

2. The helicopter according to claim 1, whereby air ducts (6) are provided from the at least one frontal air inlet port (5) to the at least two air intakes (4).

3. The helicopter according to claim 1, whereby the at least two air intakes (4) are radial.

4. The helicopter according to claim 3, whereby the at least two radial air intakes (4) are twice as large as the at least two radial air intakes (4) of two engines (3) with only two separated lateral air inlet ports (2) for said at least two engines (3) in said fuselage (1).

1/3

Fig.1

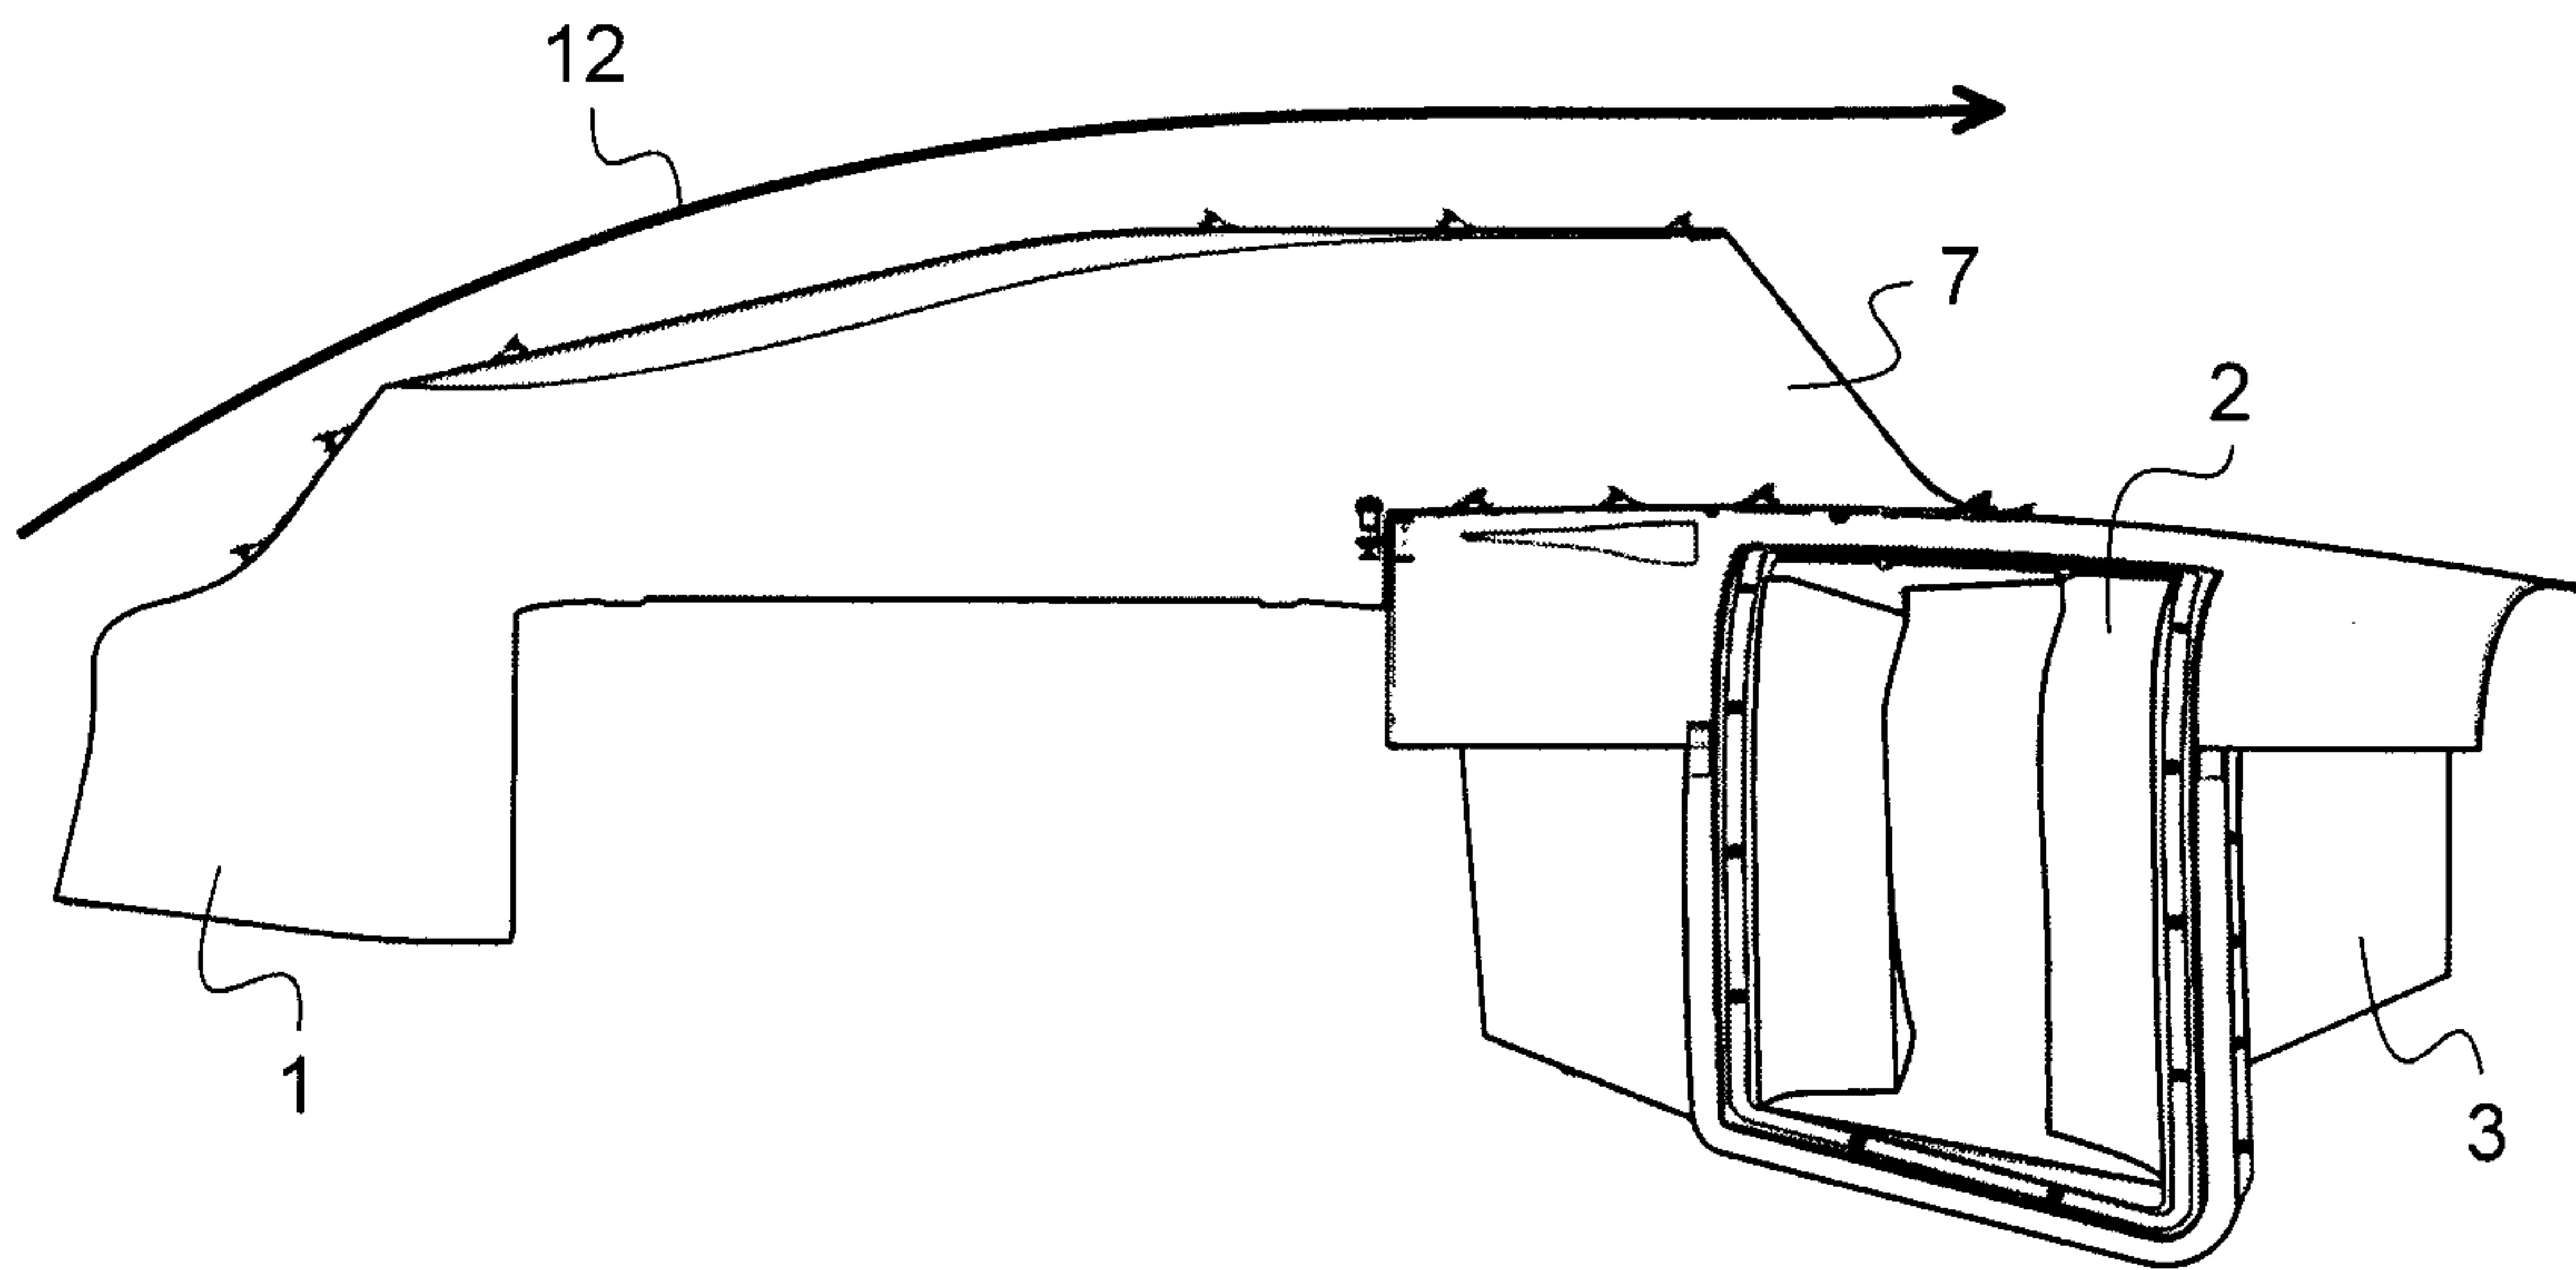
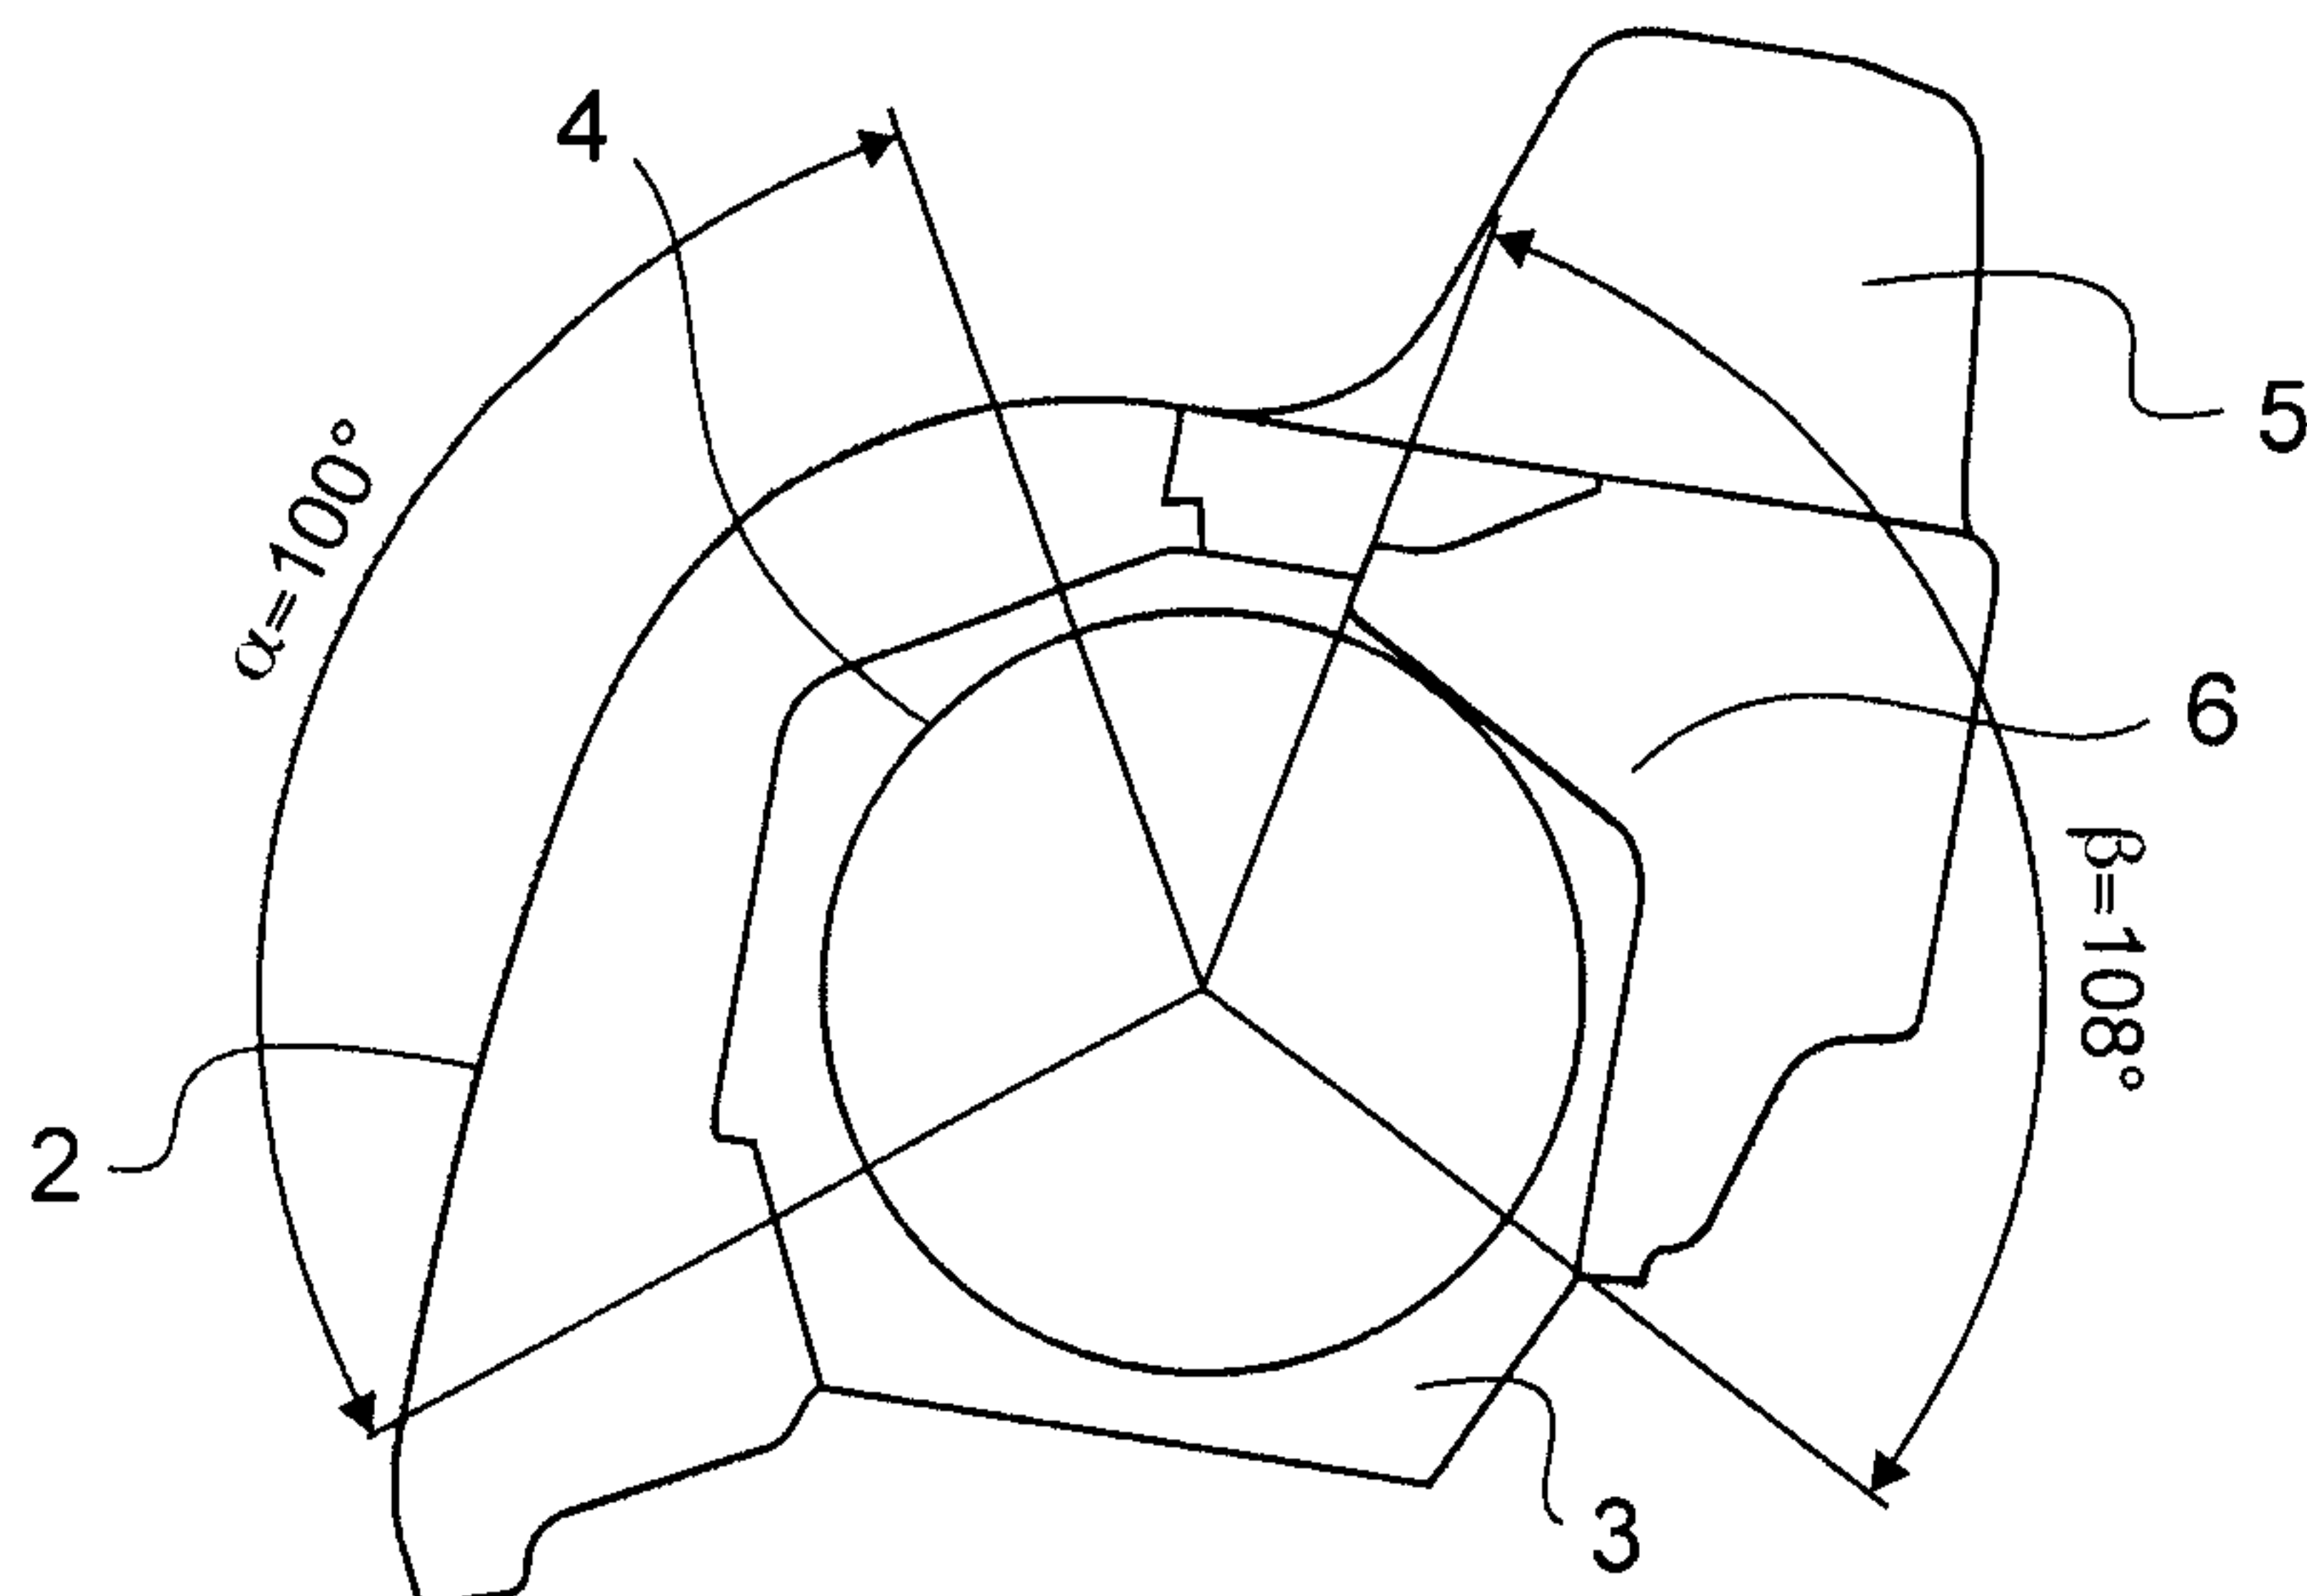


Fig.2



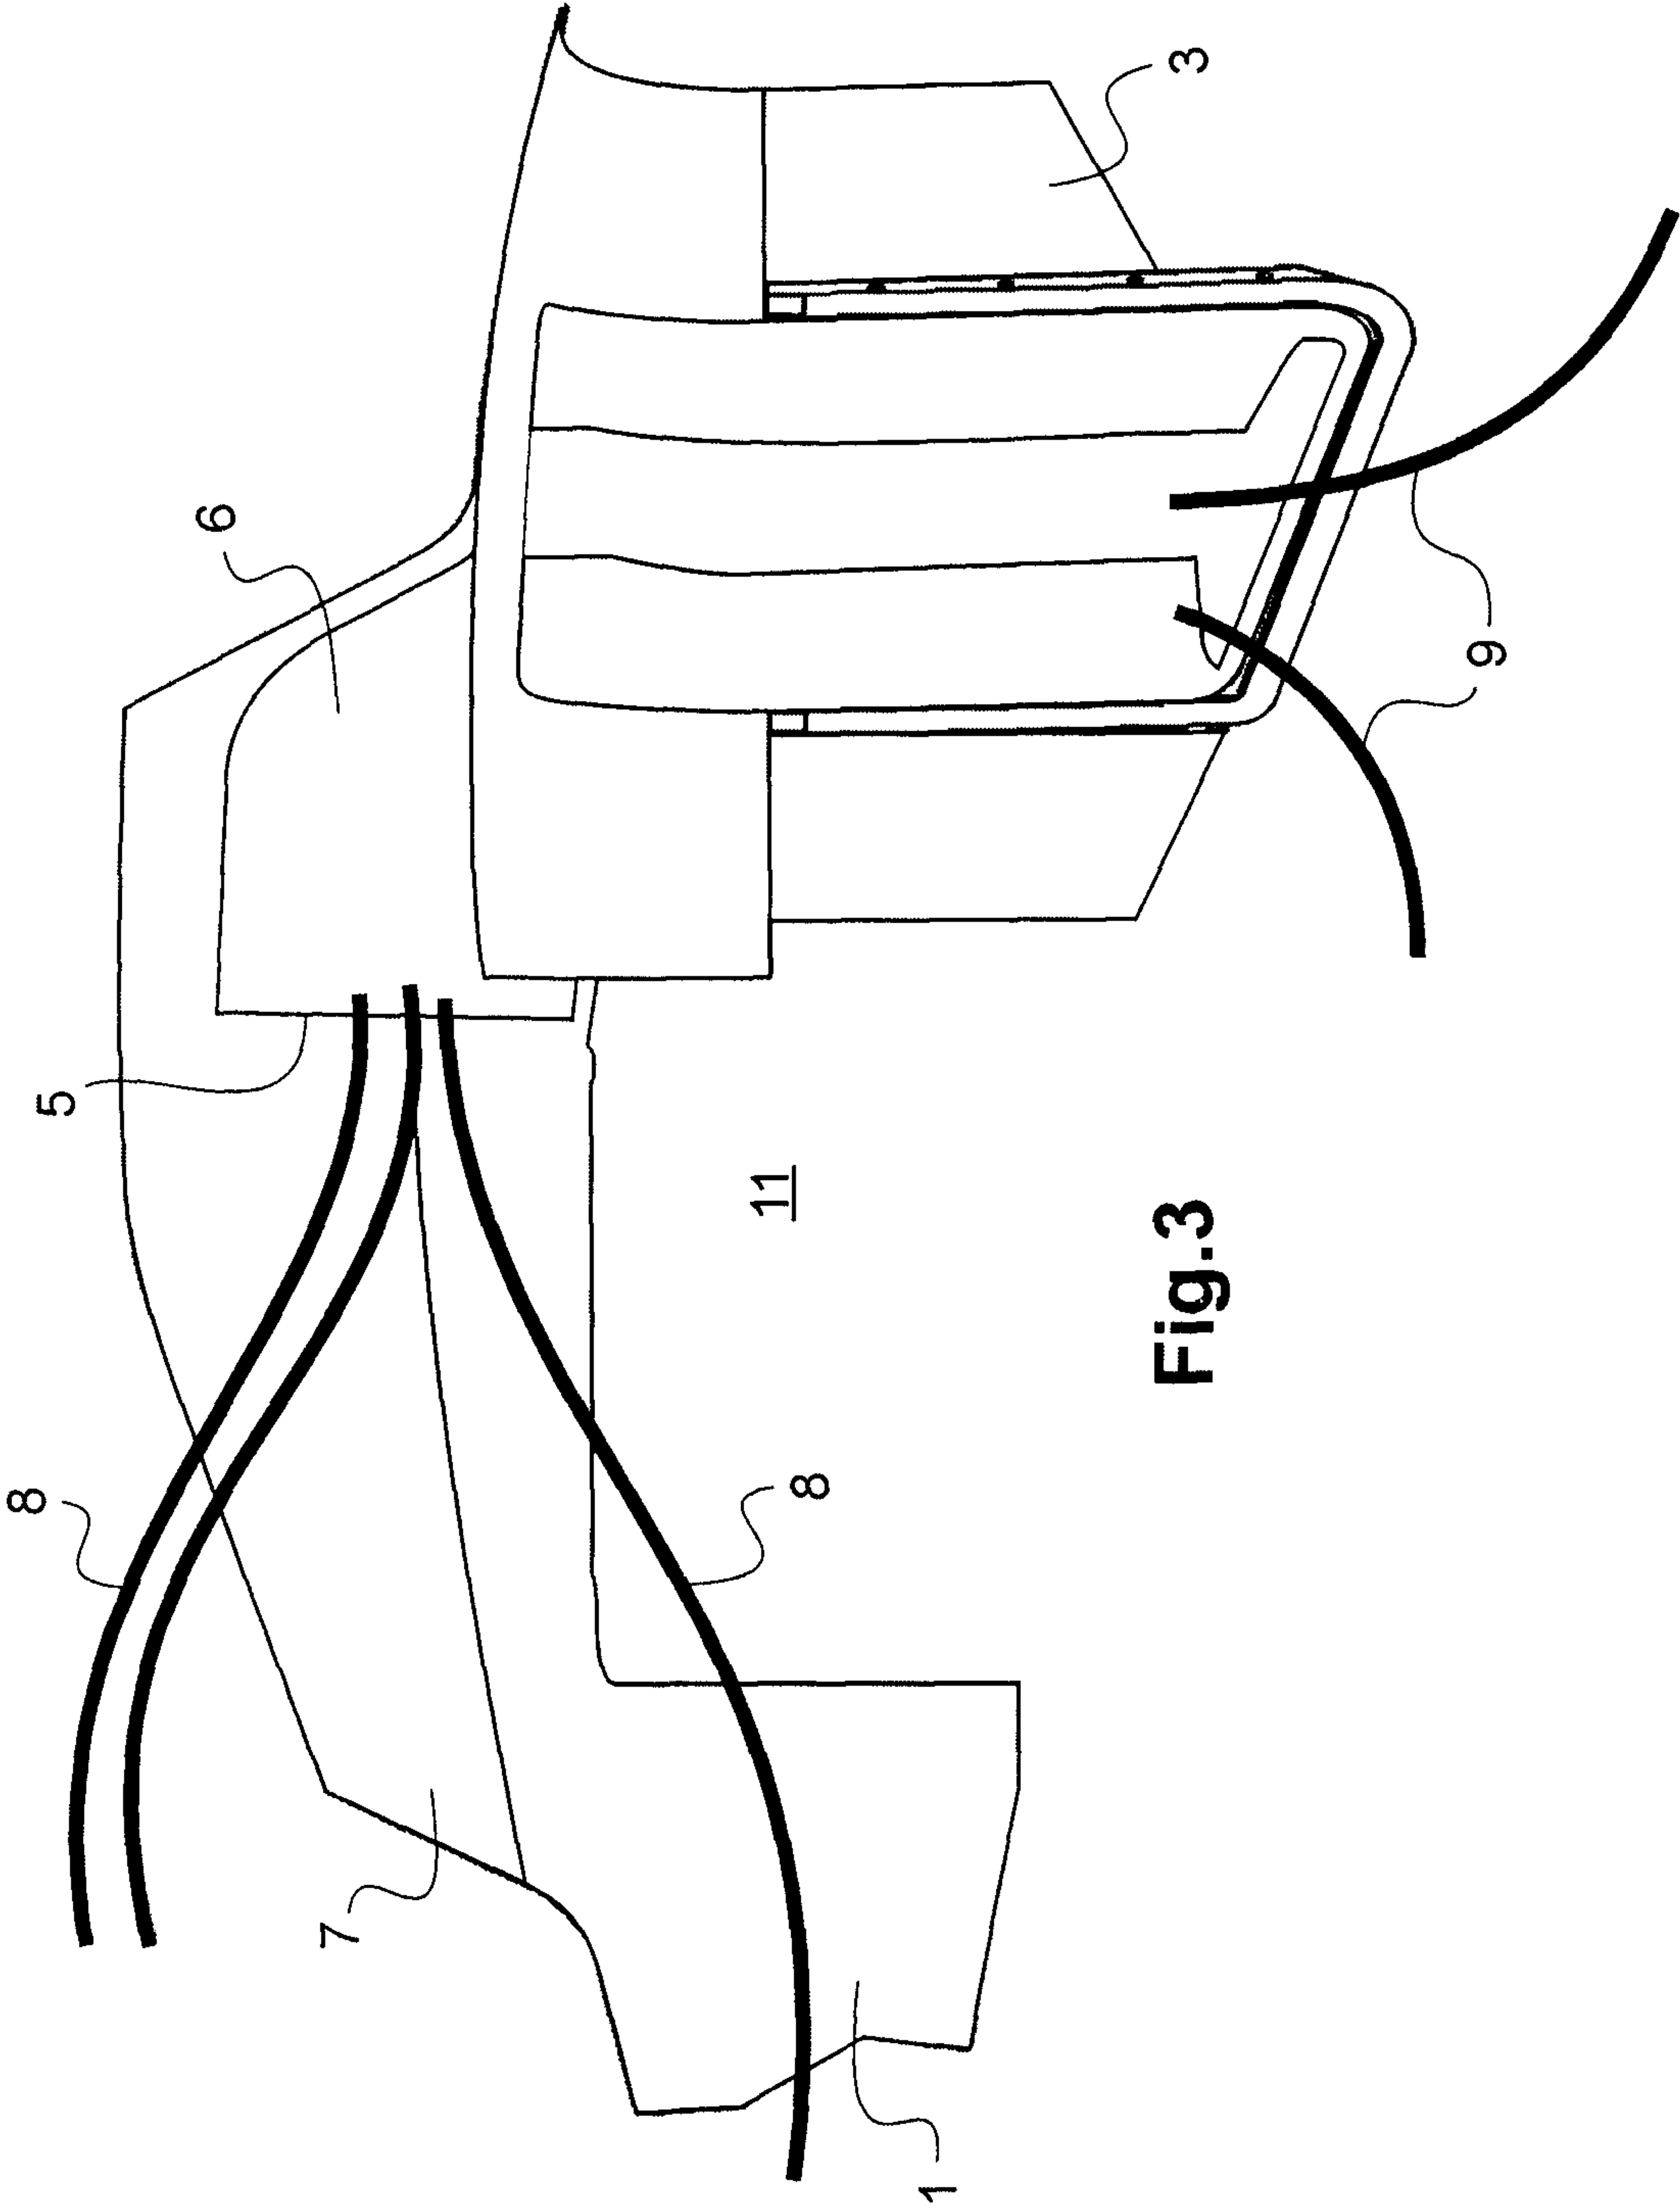


Fig.3

Fig.4

