




(86) Date de dépôt PCT/PCT Filing Date: 2014/02/27
(87) Date publication PCT/PCT Publication Date: 2014/09/25
(45) Date de délivrance/Issue Date: 2021/08/24
(85) Entrée phase nationale/National Entry: 2015/09/14
(86) N° demande PCT/PCT Application No.: US 2014/019061
(87) N° publication PCT/PCT Publication No.: 2014/149501
(30) Priorité/Priority: 2013/03/15 (US13/842,343)

(51) Cl.Int./Int.Cl. *A47K 10/34* (2006.01)
(72) Inventeur/Inventor:
OSBORNE, CHARLES AGNEW JR., US
(73) Propriétaire/Owner:
VALVE SOLUTIONS, INC., US
(74) Agent: MACRAE & CO.

(54) Titre : DISTRIBUTEUR DE PAPIER RESIDENTIEL ELECTRONIQUE
(54) Title: ELECTRONIC RESIDENTIAL TISSUE DISPENSER

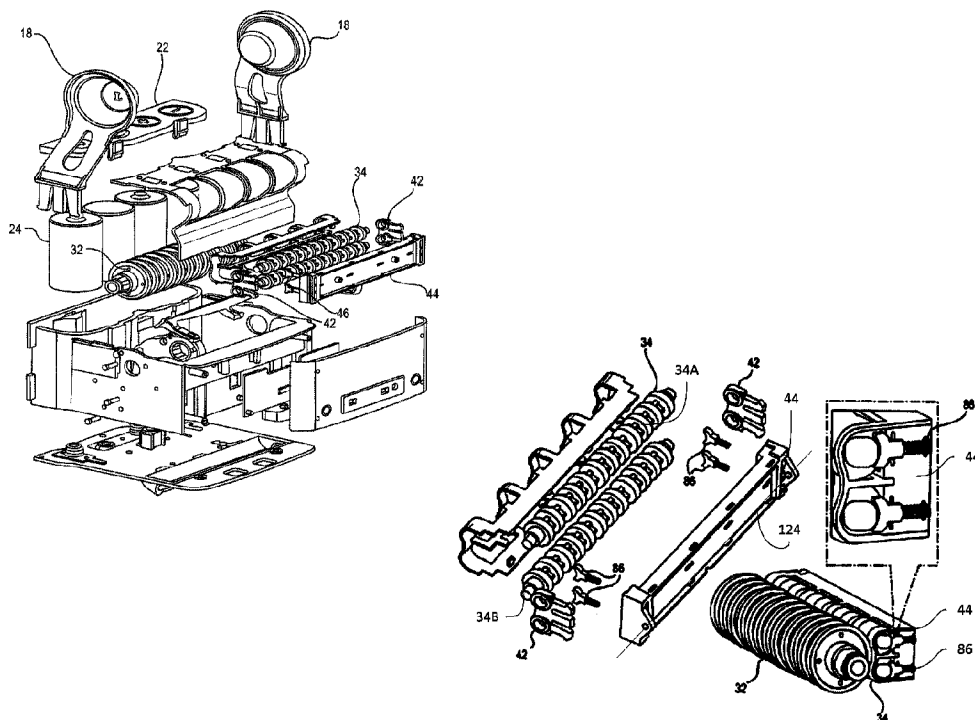

(57) Abrégé/Abstract:

An automatic electronic dispenser (10) for dispensing a roll of paper product. A dispenser module (20) drives paper from the roll (16) through a discharge chute (58) at the bottom of the module (120). A front cover (12) hinged on each side rotates to an open position for loading a paper roll (16). A back cover (14) enables mounting the electronic dispenser (20) to a vertical surface such as a wall. A paper roll holder (18) is attached to the sides of the dispenser module (20). A driving roller (32) unrolls the paper from the paper holder (18) in response to a signal from an electronic sensor. A plurality of pressing rollers (34) engages the driving roller (32) as paper is being dispensed along a path between the pressing (34) and driving rollers (32) to a discharge chute (58).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2014/149501 A1

(43) International Publication Date
25 September 2014 (25.09.2014)

(51) International Patent Classification:
A47K 10/34 (2006.01)

(21) International Application Number:
PCT/US2014/019061

(22) International Filing Date:
27 February 2014 (27.02.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/842,343 15 March 2013 (15.03.2013) US

(71) Applicant: VSI IMPORT SOLUTIONS, LLC [US/US];
1155 Alpha Drive, Suite B, Alpharetta, GA 30004 (US).

(72) Inventor: OSBORNE, Charles, Agnew Jr.; 7255 Gre-
sham Trace, Cumming, GA 30040 (US).

(74) Agent: TIMAR, John, J.; Womble Carlyle Sandridge &
Rice, LLP, P.O. Box 7037, Atlanta, GA 30357-0037 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTRONIC RESIDENTIAL TISSUE DISPENSER

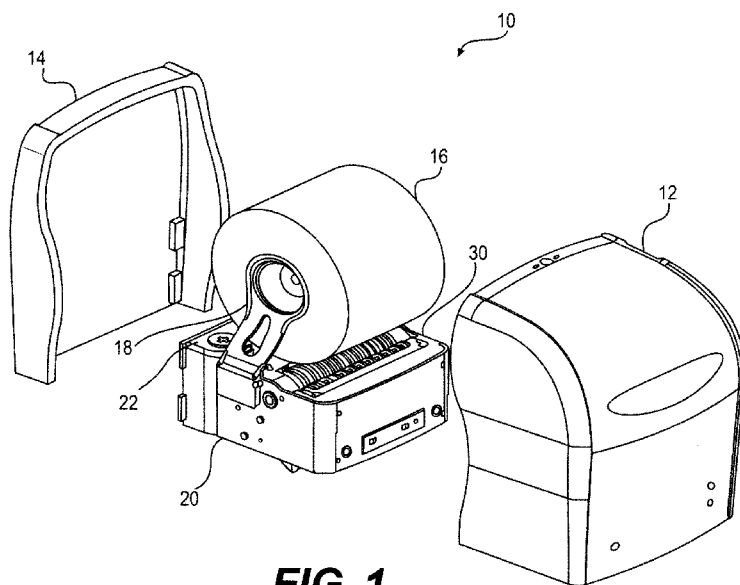


FIG. 1

(57) Abstract: An automatic electronic dispenser (10) for dispensing a roll of paper product. A dispenser module (20) drives paper from the roll (16) through a discharge chute (58) at the bottom of the module (120). A front cover (12) hinged on each side rotates to an open position for loading a paper roll (16). A back cover (14) enables mounting the electronic dispenser (20) to a vertical surface such as a wall. A paper roll holder (18) is attached to the sides of the dispenser module (20). A driving roller (32) unrolls the paper from the paper holder (18) in response to a signal from an electronic sensor. A plurality of pressing rollers (34) engages the driving roller (32) as paper is being dispensed along a path between the pressing (34) and driving rollers (32) to a discharge chute (58).

ELECTRONIC RESIDENTIAL TISSUE DISPENSER

Technical Field

[001] Embodiments of the invention relate generally to tissue dispensing mechanisms and, more particularly, to electronic tissue dispensing systems for perforated flexible sheet material.

Background

[002] The dispensing of paper products has resulted in many different types of dispensing devices for controlling quantities dispensed as well as for determining how efficiently the paper products are dispensed. Primarily, these dispensers use mechanical paper feeding mechanisms, actuated by the user physically touching the dispenser equipment to deliver a fixed length of paper. This bodily contact can raise concerns over hygiene when such dispensers are located in public restroom facilities.

[003] Commercial dispensing devices for separating a continuous roll of tissue paper typically include a pair of arms for supporting the roll of tissue. Such devices include a driving roller and a pressing roller for pulling the tissue down through the dispenser throat. A cutting blade can cut the toilet paper when the paper is pulled by the user. Dispensing devices for separating a continuous roll of tissue paper with tear lines (i.e., perforations) typically drive the tissue through the dispenser so that the user tears the tissue paper along the tear lines.

[004] The use of electronic dispensers is becoming more prevalent especially in public restroom facilities where the electronic dispensers can dispense a measured length of towel sheet material upon sensing the presence of a user. In such “hands

free” operation, the user does not manually activate or otherwise contact the dispenser in order to initiate a dispense cycle. However, the thinness of tissue sheet material has generally prevented the use of electronic dispensers for either public-use or residential dispensing equipment because the dispensing equipment will stop functioning if the perforated tissue breaks inside the dispenser.

[005] In addition, conventional electronic dispensers accumulate and discharge static electricity during the dispense cycle. Static charge can be generated by various components or operations such as the movement of sheet material over rollers, interactions between rollers, etc. If the static charge is not dissipated, the user may receive a static shock if he touches the dispenser during use. The static charge can adversely affect the electronic control and sensor circuitry in the dispenser.

Summary

[006] In one embodiment, an electronic tissue dispenser is provided for dispensing tissue sheet material. A dispenser housing contains a support mechanism for holding at least one roll of tissue sheet material, and includes a base for mounting to a surface, a cover pivotally mounted to the base, and a discharge chute formed within the housing for discharging the tissue sheet material from the dispenser. A control circuit in the housing can control dispensing of the sheet material from the housing. A dispensing mechanism can drive tissue sheet material from the housing upon receiving a signal from the control circuit. The dispenser can include an adjustable proximity sensor. The dispensing mechanism is operative to be responsive to a signal from the proximity sensor to dispense a sheet of material.

[007] In one embodiment, an automatic electronic dispenser for dispensing a roll of paper product includes a dispenser module for driving paper from the roll through a discharge chute at the bottom of the module. A front cover hinged on each side rotates to an open position for loading a paper roll. A back cover enables mounting the electronic dispenser to a vertical surface such as a wall. The dispenser module includes a paper roll holder attached to the sides of the dispenser module; a driving roller for unrolling the paper from the paper holder in response to a signal from an electronic sensor; and a plurality of pressing rollers, the pressing rollers engaging the driving roller as paper is being dispensed along a path between the pressing and driving rollers to a discharge chute.

[008] In another embodiment, an automatic electronic dispenser for dispensing a roll of perforated tissue paper includes a dispenser module for driving perforated tissue from the roll through a discharge chute at the bottom of the module. The dispenser module has a front portion that is pivotable about a hinge. The dispenser module includes a paper roll holder attached to the sides of the dispenser module; a driving roller for unrolling the perforated tissue from the paper holder in response to a signal from an electronic sensor; and a plurality of pressing rollers, the pressing rollers engaging the driving roller as perforated tissue is being dispensed along a path between the pressing and driving rollers to a discharge chute. A front cover hinged on each side rotates to an open position for loading a roll of perforated tissue paper causing the front portion of the dispenser module to pivot forward.

Brief Description of the Drawings

[0009] These and other advantages and aspects of the embodiments of the disclosure will become apparent and more readily appreciated from the following detailed description of the embodiments taken in conjunction with the accompanying drawings as follows:

[0010] Fig. 1 illustrates an isometric view of components of the electronic residential dispenser with front and back covers removed in an exemplary embodiment.

[0011] Fig. 2 illustrates an exploded isometric view of the components of the electronic residential dispenser in an exemplary embodiment.

[0012] Fig. 3 illustrates an exploded view of the dual driving roller assembly in an exemplary embodiment.

[0013] Figs. 4A – 4B illustrate external isometric front and bottom views of the residential electronic dispenser in an exemplary embodiment.

[0014] Figs. 5A – 5B illustrate the electronic residential dispenser module supporting a roll of electronic tissue between a pair of paper holder arms showing the location of a static release inside in an exemplary embodiment.

[0015] Figs. 6A – 6B illustrate the electronic residential dispenser module with the paper holder arms removed and an exploded view of the module frame and other components in an exemplary embodiment.

[0016] Figs. 7A – 7B illustrate the electronic residential dispenser module with the paper holder arms installed and an exploded view of the module frame and other components in an exemplary embodiment.

- [0017] Fig. 8 illustrates the driving roller and dual pressing rollers in physical contact with each other in an exemplary embodiment.
- [0018] Fig. 9 illustrates the separate driving roller and dual pressing roller components in an exemplary embodiment.
- [0019] Figs. 10A – 10B illustrate front and bottom isometric views of the electronic residential dispenser module in an exemplary embodiment.
- [0020] Fig. 11 illustrates an isometric side view of the electronic residential dispenser module with the cover and paper holder arms removed in an exemplary embodiment.
- [0021] Figs. 12A – 12B illustrate an isometric view of the electronic residential dispenser module with the cover closed and with the cover opened in an exemplary embodiment.
- [0022] Fig. 13 illustrates an isometric view of an electronic residential dispenser in an alternate exemplary embodiment.
- [0023] Fig. 14 illustrates an isometric view of an electronic residential dispenser with the front cover open in an alternate embodiment.
- [0024] Fig. 15 illustrates an exploded view of the dual driving roller assembly in an alternate embodiment.
- [0025] Fig. 16 illustrates a sequence of positions for the components of the electronic residential dispenser as the cover is opened and closed in an alternate embodiment.
- [0026] Figs. 17A – 17B illustrate front and side elevation views of the electronic residential dispenser in an alternate exemplary embodiment.
- [0027] Figs. 18A – 18B illustrate isometric front and rear views of the electronic residential dispenser in an alternate exemplary embodiment.

[0028] Fig. 19 illustrates a sequence of positions for the components of the electronic residential dispenser module in an alternate exemplary embodiment.

[0029] Fig. 20 illustrates the position of the dual pressing rollers inside the electronic residential dispenser with the side cover removed in an alternate exemplary embodiment.

[0030] Fig. 21 illustrates the position of the dual pressing rollers inside the electronic residential dispenser with the back and side covers removed in an alternate exemplary embodiment.

[0031] Fig. 22 illustrates an exploded view of the individual components of the dual pressing rollers, driving roller, and spring mounts in an alternate exemplary embodiment.

Detailed Description

[0032] The following description is provided as an enabling teaching of embodiments of the invention. Those skilled in the relevant art will recognize that many changes can be made to the embodiments described, while still obtaining the beneficial results. It will also be apparent that some of the desired benefits of the embodiments described can be obtained by selecting some of the features of the embodiments without utilizing other features. Accordingly, those who work in the art will recognize that many modifications and adaptations to the embodiments described are possible and may even be desirable in certain circumstances. Thus, the following description is provided as illustrative of the principles of the invention and not in limitation thereof, since the scope of the invention is defined by the claims.

[0033]

[0034] The dispenser in the disclosed embodiments may also be referred to herein as the electronic residential tissue dispenser (ERTD) although the disclosed embodiments of the dispenser are also suitable for public or commercial uses.

[0035] In one embodiment, a tissue dispenser is provided wherein the tissue paper can actually sit on the dispenser arms in a manner similar to that of towel dispensers currently available. When the user pulls tissue paper from the roll (manual operation), the tissue paper is pulled by the large driving roller through the two small pressing rollers. The problem with tissue paper is that is perforated. With the current design of towel dispensers modified for use as a tissue dispenser, if the user pulls tissue and the perforation breaks above the pressing roller, the paper can no longer feed. The paper will not feed unless the dispenser unit “rolls the roll” as disclosed in US 7,213,782 and US 7,370,824. However, a more cost-effective design for tissue dispensing is provided by the disclosed embodiments having at least double pressing rollers. If the perforation tears between the two pressing rollers the dispenser will continue to self-feed in both manual and automatic operation (using infrared sensors to trigger tissue dispensing).

[0036] The embodiments disclosed are suitable for both residential and commercial use. The use of double pressing rollers is unique in dispenser mechanisms. Other tissue dispensers function like the commercially available paper towel dispensers. If a perforation is read when paper is being dispensed, the dispenser re-feeds the perforated sheet and then sets the tissue so that it tears on the other side of the pressing roller.

[0037] In the exemplary embodiments, perforations are not read since it does not matter where the perforation is because of the double pressing rollers. Unless the tissue breaks above the top pressing roller, the tissue in the dispenser is always self-feeding. The tissue paper is always re-fed automatically through the driving roller and the dual pressing rollers.

[0038] Fig. 1 illustrates an isometric view of components of the electronic residential dispenser with front and back covers removed in an exemplary embodiment. In this embodiment, the electronic residential dispenser 10 includes an electronic residential dispenser module 20, a rear cover 14 that can be mounted to a wall, a front cover 12, a roll of perforated tissue paper mounted between a pair of paper holder arms 18, battery compartment lid 22, and roller assembly 30. The roller assembly including the driving roller and dual pressing rollers is described in detail herein. Although this embodiment is intended for mounting to a wall in a residential bathroom, other embodiments may use other types of mounts including a pedestal mount. This embodiment can also be installed in a commercial restroom modified to accept alternating current power instead of battery power.

[0039] Fig. 2 illustrates an exploded isometric view of the components of the electronic residential dispenser in an exemplary embodiment. The components shown include driving roller 32, dual pressing rollers 34, paper holder arms 18, battery lid 22, batteries 24, and various frame components. The dual pressing rollers 34 are mounted between end mounts 42 and to frame 44 by front mounts 46. The dual pressing rollers 34, driving roller 32, and most components of electronic residential dispenser 10 are made from ABS plastic, although other materials may be used in other embodiments.

[0040] In the prior art, paper dispensers use a single pressing roller. However, with a single pressing roller, the user can tear the paper and the perforation may break inside the rollers. In the exemplary embodiment of Fig. 2, the two pressing rollers 34 are spring-loaded ABS rollers. The two pressing rollers 34 press against the driving roller 32. The two pressing rollers are also referred to herein as double or dual pressing rollers. Both pressing rollers 34 press against the driving roller 32 when tissue is being dispensed. This allows the dispenser mechanism to prevent tissue perforations from tearing above the second pressing roller. If the perforation ever breaks between the pressing rollers, the tissue paper will continue to feed.

[0041] In an exemplary embodiment, the electronic tissue paper dispenser has standard arms for holding the roll of tissue paper. The double pressing rollers may also be referred to as double feeding rollers. In contrast to automatic tissue dispensers in the art which include a tear bar or similar mechanism to cut paper towel, the disclosed embodiments do not have or need a tear bar. Instead a flapper bar is located at the bottom of the discharge chute (dispenser throat). The significance of having

two rollers pressing on the driving roller is that if the perforations ever break on the upstream side of the second pressing roller, the second pressing roller continues to feed the paper. If the perforation breaks on the discharge side, the paper will continue to feed when requested by the user.

[0042] Fig. 3 illustrates an exploded view of the dual pressing roller 34 assembly in an exemplary embodiment. The figure shows the dual pressing rollers 34, end mounts 42, front frame part 44, and a plurality of mounts 46 for securing frame part 44 to the dual pressing rollers 34.

[0043] Figs. 4A – 4B illustrate external isometric front and bottom views of the residential electronic dispenser in an exemplary embodiment. The front isometric view of Fig. 4A shows the paper holder arms 18, the battery compartment lid 22, the driving roller 32, and the upper pressing roller 34 of residential electronic dispenser 20. Fig. 4B shows bottom surface 50, cutting bar 56, and proximity sensors 52, 54 which detect the presence of a user's hand below the throat 58 of the dispenser 20. In one embodiment, the proximity sensors may include an infrared emitter and an infrared receiver. A flapper bar 56 is located adjacent the discharge chute (throat) 58 of the dispenser 20 for removing the perforated tissue paper hanging below the discharge chute 58.

[0044] Figs. 5A – 5B illustrate the electronic residential dispenser module supporting a roll of tissue paper between a pair of paper holder arms showing the location of a static release in an exemplary embodiment. Fig. 5A shows the roll of tissue paper 16 which may be perforated held in place by paper roll holder 18. Also shown is driving roller 32 contacting pressing roller 34. Fig. 5B shows an interior portion of the

electronic residential dispenser module 20 including a static release 60. Static is released from the bottom of the module 20. The dual rollers solve the paper break problem inside the dispenser module. The batteries that provide power for operation of the dispenser are loaded in the battery compartment on the back part of the dispenser. The static release is from the bottom of the dispenser module.

[0045] Figs. 6A – 6B illustrate the electronic residential dispenser module with the paper holder arms removed and an exploded view of the module frame and other components in an exemplary embodiment. Fig. 6A shows the position of battery compartment lid 22 covering the battery compartment of residential dispenser module 20 and the top parts of the driving roller 32 and the upper pressing roller of dual pressing roller 34. The exploded view of the module frame in Fig. 6B also shows battery compartment 62, batteries 24, driving roller 32, dual pressing rollers 34, end mounts 42, front frame part 44, and a plurality of mounts 46 for securing frame part 44 to the dual pressing rollers 34.

[0046] Figs. 7A – 7B illustrate the electronic residential dispenser module with the paper holder arms installed and an exploded view of the module frame and other components in an exemplary embodiment. Fig. 7A shows the attachment of the paper holder arms to the electronic residential dispenser module 20. In one embodiment, the paper holder arms 18 may be similar to paper holder arms used to support heavier sheet material such as paper towels. The driving roller 32, pressing roller 34, and battery compartment lid 22 of electronic residential dispenser module 20 are also shown in this drawing. Fig. 7B shows an exploded view of the module frame in

addition to driving roller 32, battery compartment lid 22, batteries 24, and paper holder arms 18.

[0047] Figs 8-9 illustrate the driving roller 32 and dual pressing rollers 34 in physical contact with each other and separately, respectively, in an exemplary embodiment. In the embodiments shown, both driving roller 32 and pressing rollers 34 include a series of evenly-spaced annular ridges 33, 35, respectively, on the periphery of each roller. As the rollers 32, 34 are activated to dispense tissue paper 16 between the driving and pressing rollers, the ridges 33, 35 make contact with the tissue paper 16 as the rollers rotate to drive the tissue paper through the discharge chute.

[0048] Figs. 10A – 10B illustrate front and bottom isometric views of the electronic residential dispenser module in an exemplary embodiment. Fig. 10A shows the electronic residential dispenser with the front cover removed. The components depicted include dispenser module 20, tissue paper roll 16, paper holder support arm 18, and rear cover 14. Fig. 10B shows bottom surface 50 and proximity sensors 52, 54 which detect the presence of a user's hand below the throat 58 of the dispenser 20. In one embodiment, the proximity sensors may include an infrared emitter and an infrared receiver.

[0049] Fig. 11 illustrates an isometric side view of the electronic residential dispenser module with the cover and paper holder arms removed in an exemplary embodiment. Fig. 11 shows driving roller 32, dual pressing rollers 34, and battery compartment cover 22.

[0050] Figs. 12A – 12B illustrate an isometric view of the electronic residential dispenser module with the cover closed and with the cover opened in an exemplary

embodiment. As shown in these figures, the electronic residential dispenser module 20 is fixed relative to the frame support.

[0051] Figs. 13 – 22 illustrate an alternate embodiment of the electronic tissue dispenser in which electronic residential dispenser module 20 has a swivel portion that opens for weight when the front cover is opened.

[0052] Fig. 13 illustrates an isometric view of an electronic residential dispenser 100 in a closed position in another exemplary embodiment. This embodiment can operate on 3 C-size batteries. Low power light 102 and manual button 104 are on the front cover of the dispenser.

[0053] Fig. 14 illustrates an isometric view of an electronic residential dispenser with the hinged front cover in an open position. Also shown in this figure is a paper length switch 106, paper roll holder 22, rear wall mounting plate 114, paper roll 16, and electronic tissue dispenser module 120. The electronic tissue dispenser module 120 has a front portion that swivels (i.e., pivots) forward when the hinged dispenser cover is opened. The pivoting forward of the front portion of the electronic tissue dispenser module 120 reduces the requirement for having tight tolerances between the driving roller and the plurality of pressing rollers.

[0054] Fig. 15 illustrates an exploded view of the dual driving roller assembly in an alternate embodiment. The figure shows the dual pressing rollers 34, the driving roller 32, front cover 112, rear wall mounting plate 114, paper holders 22, and parts of the dispenser frame.

[0055] Fig. 16 illustrates a sequence of positions for the components of the electronic residential dispenser as the cover is opened and closed in an alternate embodiment.

When front cover 112 opens, the swivel part of electronic tissue dispenser module 120 opens and pivots forward. When the cover 112 is closed, the swivel part 122 of electronic tissue dispenser module 120 is pushed close.

[0056] Figs. 17A – 17B illustrate front and side elevation views of the electronic residential dispenser in an alternate exemplary embodiment. Figs. 18A – 18B illustrate isometric front and rear views of the electronic residential dispenser in an alternate exemplary embodiment.

[0057] Fig. 19 illustrates a sequence of positions for the components of the electronic residential dispenser module 120 in an alternate exemplary embodiment. Opening the front cover results in the swivel portion of electronic tissue dispenser module 120 pivoting about a hinge 121 on the module. When the front cover closes it pushes a pair of buttons 124 on the front side of the swivel portion causing the swivel portion 122 of electronic tissue dispenser module 120 to close.

[0058] Fig. 20 illustrates the position of the dual pressing rollers inside the electronic residential module dispenser with the side cover removed. Fig. 21 illustrates the position of the dual pressing rollers 34 inside the electronic residential dispenser with the back and side covers removed. Fig. 22 illustrates an exploded view of the individual components of the dual pressing rollers 34, driving roller 32, and spring mounts 86. As illustrated in Figs. 20 – 22, the dual roller configuration allows continuous contact with the paper in two positions to eliminate perforation tear resulting in dispenser malfunction. If the perforation tears above the top dual roller 34, the dispenser is not functional. The pivot 121 and the springs 86 enhance the

dispensing function reducing the requirement for tight tolerances between the dual rollers 34 and the main roller 32.

[0059] Fig. 20 illustrates the position of the dual pressing rollers 34 inside the electronic residential dispenser module 120 with the side cover removed. Fig. 21 illustrates the position of the dual pressing rollers 34 inside the electronic residential dispenser module 120 with the back and side covers removed. Fig. 22 illustrates an exploded view of the individual components of the dual pressing rollers 34, driving roller 32, and spring mounts 86 for the pressing rollers 34, which spring mounts 86 are mounted to front frame part 44, adjacent end mounts 42 of the frame for the dual pressing rollers 34. As illustrated in Figs. 20-22, the dual pressing rollers 34 are pivotable about a common pivot axis 124 extending through mounting pins (not shown) connecting the front frame part 44 and the dual pressing rollers 34 to the swivel portion 122 of the electronic residential dispenser module 120. Fig. 20 indicates that as a first or upper pressing roller 34A of the dual pressing rollers 34 is pivoted away from the driving roller 32, a second or lower pressing roller 34B correspondingly is pivoted toward closer frictional contact with the driving roller 32. Likewise, as the lower pressing roller 34B is pivoted away from the driving roller 32, the upper roller 34A correspondingly will be pivoted toward closer frictional contact with the driving roller 32. Such a pivoting dual roller configuration allows continuous contact with the paper in two positions to eliminate perforation tear resulting in dispenser malfunction. If the perforation tears above the upper pressing roller 34A, the dispenser is not functional. The ability of the pressing rollers to pivot together

about axis 124 and the springs 86 enhance the dispensing function, reducing the requirement for tight tolerances between the dual rollers 34 and the main roller 32.

[0060] The dispenser control circuitry controls activation of the dispensing mechanism upon valid detection of a user's hand for dispensing a measured length of the sheet material. Sensors and associated circuitry may be provided for this purpose. Various types of sensors are well known to those skilled in the art, including IR, radio frequency (RF), capacitive sensors, etc. Any one or a combination of such sensing systems can be used.

[0061] The corresponding structures, materials, acts, and equivalents of all means plus function elements in any claims below are intended to include any structure, material, or acts for performing the function in combination with other claim elements as specifically claimed.

[0062] Those skilled in the art will appreciate that many modifications to the exemplary embodiments are possible without departing from the scope of the present invention. In addition, it is possible to use some of the features of the embodiments disclosed without the corresponding use of the other features. Accordingly, the foregoing description of the exemplary embodiments is provided for the purpose of illustrating the principles of the invention, and not in limitation thereof, since the scope of the invention is defined solely by the appended claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An automatic electronic dispenser for dispensing paper, comprising:
 - a paper roll holder for supporting a roll of paper, the roll of paper being rotatable on or with the paper roll holder for feeding the paper therefrom and along a discharge path;
 - a driving roller engaging the paper and causing a length of paper to feed from the paper roll; and
 - a plurality of independently rotatable pressing rollers, each biased toward engagement with the driving roller sufficient to engage the paper therebetween for drawing the length of paper along its discharge path between the pressing and driving rollers and to a discharge chute, wherein the pressing rollers are mounted in a spaced arrangement adjacent the driving roller and are pivotable about a common pivot axis such that one of the pressing rollers is moved toward closer engagement with the driving roller as another one of the pressing rollers is moved away from the driving roller.
2. The automatic electronic dispenser of claim 1, further comprising a frame to which the pressing rollers are rotatably mounted, and at least one biasing member urging at least one of the pressing rollers toward the driving roller.
3. The automatic electronic dispenser of claim 2, wherein the frame further comprises a front frame part and end mounts coupled to the front frame part and rotatably supporting the pressing rollers therebetween, and wherein the front frame part is pivotally mounted

along the common pivot axis so as to pivot the pressing rollers about the common pivot axis.

4. The automatic electronic dispenser of claim 1 further comprising a sensor located along the dispenser and operable to initiate rotation of the driving roller.
5. The automatic electronic dispenser of claim 4 wherein the sensor is located on a bottom side of the dispenser for detecting the proximity of a user.
6. The automatic electronic dispenser of claim 1 wherein the paper comprises rolled tissue paper.
7. An electronic dispenser for tissue paper, comprising:
 - a housing having a discharge chute defined along a bottom portion thereof;
 - a paper roll holder attached to the housing for supporting a roll of tissue paper;
 - a driving roller for unrolling the tissue paper from the roll of tissue paper; and
 - a plurality of pressing rollers, including an upper pressing roller and a lower pressing roller mounted in a substantially parallel configuration and pivotable about a common axis, wherein each of the pressing rollers is independently rotatable and frictionally contacts the driving roller so as to rotate therewith for feeding the tissue paper along a path between the pressing and driving rollers toward the discharge chute, and wherein as the upper pressing roller or the lower pressing roller is pivoted away from the driving roller, the lower or upper pressing roller correspondingly is pivoted toward closer frictional contact with the driving roller so as to substantially maintain engagement of the tissue paper between the driving roller and at least the upper pressing

roller or the lower pressing roller sufficient to continue feeding the tissue paper if the tissue paper breaks between the pressing rollers.

8. The electronic dispenser of claim 7 further comprising a front cover hinged on each side of the housing to rotate to an open position for loading a roll of tissue paper, and wherein the front portion of the housing pivots forward when the front cover of the electronic dispenser is opened.
9. The electronic dispenser of claim 8 wherein the pivoting the front portion of the housing reduces a requirement for having tight tolerances between the driving roller and the pressing rollers.
10. The electronic dispenser of claim 7 further comprising a back cover for mounting the electronic dispenser to a vertical surface.
11. An intelligent dispensing system for automatically dispensing and monitoring usage of a paper product, comprising:
 - a plurality of dispensers, each feeding paper from a roll of the paper product through a discharge chute, each dispenser comprising:
 - a driving roller for unrolling the paper from a paper roll holder in response to a signal from an electronic sensor; and
 - a plurality of pressing rollers, the pressing rollers engaging the driving roller so as to engage the paper therebetween for dispensing the paper along a path between the pressing and driving rollers to a discharge chute, wherein the pressing rollers are independently rotatable and are mounted for common rotation about a pivot axis such

that one of the pressing rollers to moves toward tighter engagement with the driving roller as another one of the pressing rollers is moved away from the driving roller.

12. The intelligent dispensing system of claim 11 wherein each dispenser further comprises a microprocessor controller and a transceiver.
13. The intelligent dispensing system of claim 12 further comprising:
 - a master network device operatively connected with the transceiver in each dispenser; and
 - a local network for enabling a paper product status message to be transmitted from each dispenser to the master network device.
14. A dispenser module for an automatic electronic dispenser for dispensing a roll of perforated paper, comprising:
 - a driving roller for driving feeding of the perforated paper in response to a signal from a proximity sensor; and
 - dual pressing rollers, including a top roller arranged above and parallel to a lower roller, the pressing rollers being substantially independently rotatable and each biased toward engaging contact with the driving roller, wherein the perforated paper is engaged in driven contact therebetween for dispensing the perforated paper along a path between the pressing and driving rollers to a discharge chute;
 - wherein the dual pressing rollers are pivotally mounted for rotation about a common pivot axis, wherein the top roller is pivoted toward the driving roller as the lower roller is pivoted away from the driving roller to substantially maintain contact of the perforated paper between the driving roller and at least one of the pressing rollers.

15. The dispenser module of claim 14 wherein the pressing rollers comprise spring-loaded plastic rollers.
16. The dispenser module of claim 14 wherein the driving roller and the plurality of pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each roller.
17. The dispenser module of claim 14 wherein the pressing rollers continue to feed the paper if the paper breaks between the pressing rollers as the paper is being dispensed.
18. The dispenser module of claim 14 wherein the pressing rollers comprise spring-loaded plastic rollers.
19. The dispenser module of claim 18 wherein the dispenser further comprises a frame having a plurality of end mounts for rotatably supporting the plurality of pressing rollers on the frame.
20. An automatic electronic dispenser for dispensing a roll of paper product, comprising:
 - a dispenser module for driving paper from the roll through a discharge chute at the bottom of the dispenser module, the dispenser module including:
 - a paper roll holder attached to the sides of the dispenser module;
 - a driving roller for unrolling the paper from the paper roll holder in response to a signal from an electronic sensor; and
 - a frame at least partially supporting a plurality of independent rotatable pressing rollers, the frame connected to one or more biasing members that urge each of the

plurality of pressing rollers toward engagement with the driving roller to engage the paper therebetween for dispensing the paper along a path between the pressing and driving rollers to a discharge chute, wherein the pressing rollers are mounted to the frame along a common pivot axis so that one of the pressing rollers is moved toward closer engagement with the driving roller as another one of the pressing rollers is moved away from the driving roller.

21. The automatic electronic dispenser of claim 20 wherein the pressing rollers comprise spring-loaded plastic rollers.
22. The automatic electronic dispenser of claim 20 wherein the dispenser module further comprises a battery compartment located on a back side of the module.
23. The automatic electronic dispenser of claim 20 wherein the frame further comprises a plurality of frame parts and a plurality of mounts for attaching the plurality of pressing rollers to the frame parts.
24. The automatic electronic dispenser of claim 20 wherein the driving roller and the plurality of pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each roller.
25. The automatic electronic dispenser of claim 20 wherein the dispenser module further comprises a static release.

26. The automatic electronic dispenser of claim 20 wherein the paper product comprises rolled tissue paper.
27. The automatic electronic dispenser of claim 20 wherein the paper product comprises flexible sheet material.
28. The automatic electronic dispenser of claim 20 wherein the electronic sensor is located on a bottom side of the dispenser module for detecting the proximity of a user.
29. The automatic electronic dispenser of claim 20 further comprising a front cover hinged on each side to rotate to an open position for loading of one or more rolls of paper product.
30. The automatic electronic dispenser of claim 20 further comprising a back cover for mounting the electronic dispenser to a vertical surface.
31. The automatic electronic dispenser of claim 20 wherein the pressing rollers continue to feed the paper if the paper breaks between the pressing rollers as the paper is being dispensed.
32. An automatic electronic dispenser for dispensing a roll of tissue paper from the roll through a discharge chute, comprising:
 - a paper roll holder attached to the sides of the dispenser;
 - a driving roller for unrolling the paper from the paper roll holder in response to a signal from an electronic sensor; and

a pair of pressing rollers pivotally mounted in a parallel stacked arrangement defining a substantially unitary structure that is pivotable about a common axis, each of the pressing rollers arranged adjacent the driving roller and engaging the driving roller in biased engagement so as to feed the paper along a path between the pressing and driving rollers and through the discharge chute;

wherein the pair of pressing rollers are pivotable together about the common axis such that as one of the pressing rollers is pivoted away from the driving roller, another one of the pressing rollers is pivoted toward the driving roller.

33. The automatic electronic dispenser of claim 32 wherein the pressing rollers comprise spring-loaded plastic rollers.
34. The automatic electronic dispenser of claim 32 wherein the dispenser further comprises a battery compartment located on a back side of the dispenser.
35. The automatic electronic dispenser of claim 32 wherein the dispenser further comprises a plurality of frame parts and a plurality of mounts for attaching the plurality of pressing rollers to the frame parts.
36. The automatic electronic dispenser of claim 32 wherein the driving roller and the plurality of pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each roller.
37. The automatic electronic dispenser of claim 32 wherein the dispenser further comprises a static release.

38. The automatic electronic dispenser of claim 32 wherein the electronic sensor is located on a bottom side of the dispenser for detecting the proximity of a user.
39. The automatic electronic dispenser of claim 32 wherein the pressing rollers continue to dispense the tissue paper if the tissue paper breaks between the pressing rollers as the tissue paper is being dispensed.
40. An automatic electronic dispenser for dispensing a roll of tissue paper, comprising:
- a dispenser module for driving tissue paper from the roll through a discharge chute at the bottom of the dispenser module, the dispenser module having a front portion that is pivotable about a hinge, the dispenser module including:
 - a paper roll holder attached to one or more sides of the dispenser module;
 - a driving roller for unrolling the tissue paper from the paper holder in response to a signal from an electronic sensor; and
 - a plurality of pressing rollers including an upper pressing roller and a lower pressing roller mounted in a vertically stacked, parallel configuration and pivotable as a substantially unitary structure about a common axis, the pressing rollers each frictionally contacting the driving roller so as to rotate therewith to dispense the tissue paper along a path between the pressing and driving rollers to the discharge chute, and wherein as the substantially unitary structure rotates about the common axis, the lower pressing roller is pivoted away from the driving roller, and the upper pressing roller is pivoted into closer frictional contact with the driving roller.

41. The automatic electronic dispenser of claim 40 further comprising a front cover hinged on each side to rotate to an open position for loading a roll of tissue paper, and wherein the front portion of the dispenser module pivots forward about the hinge when the front cover of the electronic dispenser is opened.
42. The automatic electronic dispenser of claim 41 wherein the front portion of the dispenser module pivots rearward about the hinge when the front cover of the electronic dispenser is closed.
43. The automatic electronic dispenser of claim 41 wherein the pivoting forward of the front portion of the dispenser module reduces a requirement for having tight tolerances between the driving roller and the pressing rollers.
44. The automatic electronic dispenser of claim 40 wherein the driving roller and the plurality of pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each pressing roller.
45. The automatic electronic dispenser of claim 40 wherein the pressing rollers comprise spring-loaded plastic rollers.
46. The automatic electronic dispenser of claim 40 wherein the pressing rollers continue to feed the tissue paper if the tissue paper breaks between pressing rollers as the tissue paper is being dispensed.

47. An intelligent dispensing system for automatically dispensing and monitoring usage of a paper product, comprising:

a plurality of dispensers, each dispenser having a dispenser module for driving paper from a roll of the paper product through a discharge chute, the dispenser module including:

a driving roller for unrolling the paper from a paper roll holder in response to a signal from an electronic sensor; and

a plurality of pressing rollers, the pressing rollers engaging the driving roller so as to engage the paper therebetween for dispensing the paper along a path between the pressing and driving rollers to a discharge chute, wherein the pressing rollers are independently rotatable and are mounted for common rotation about a pivot axis such that one of the pressing rollers moves toward tighter engagement with the driving roller as another one of the pressing rollers is moved away from the driving roller.

48. The intelligent dispensing system of claim 47 wherein each dispenser further comprises a microprocessor controller and a transceiver.

49. The intelligent dispensing system of claim 48 further comprising:

a master network device operatively connected with the transceiver in each dispenser; and

a local network for enabling a paper product status message to be transmitted from each dispenser to the master network device.

50. The intelligent dispensing system of claim 49 further comprising an automation and control network interoperable with the local network for monitoring a status of each dispenser.
51. The intelligent dispensing system of claim 50 wherein the master network device transmits status messages over the automation and control network.
52. The intelligent dispensing system of claim 50 wherein the automation and control network uses a building automation and control network protocol.
53. The intelligent dispensing system of claim 49 wherein the master network device receives status messages from the transceiver in each dispenser.
54. The intelligent dispensing system of claim 49 wherein each dispenser and the master network device communicate with each other using wireless signals.
55. The intelligent dispensing system of claim 49 wherein the master network device and each dispenser transceiver use a wired connection for communication.
56. The intelligent dispensing system of claim 49 wherein the local network uses a standard data communications protocol.
57. The intelligent dispensing system of claim 49 further comprising a handheld device for data communications with the master network device.

58. The intelligent dispensing system of claim 48 wherein the microprocessor controller for each dispenser determines an amount of paper remaining on the paper roll holder and transmits a status message signal containing a status of the paper product to the master network device.
59. The intelligent dispensing system of claim 47 wherein the pressing rollers comprise spring-loaded plastic rollers.
60. The intelligent dispensing system of claim 47 wherein the driving roller and the plurality of pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each roller.
61. The intelligent dispensing system of claim 47 wherein the pressing rollers continue to feed the paper if the paper breaks between the pressing rollers as the paper is being dispensed.
62. A dispenser module for an automatic electronic dispenser for dispensing a roll of perforated paper mounted on a paper holder, comprising:
- a driving roller for unrolling the perforated paper from the paper holder in response to a signal from a proximity sensor; and
 - dual pressing rollers, including a top roller arranged above and parallel to a lower roller, the pressing rollers being substantially independently rotatable and each substantially simultaneously engaging the driving roller with the perforated paper in driven contact therebetween for dispensing the perforated paper along a path between the pressing and driving rollers to a discharge chute;

wherein the dual pressing rollers are pivotally mounted for rotation about a common pivot axis, wherein the top roller is pivoted toward the driving roller as the lower roller is pivoted away from the driving roller to substantially maintain contact of the perforated paper between the driving roller and at least one of the dual pressing rollers.

63. The dispenser module of claim 62 wherein the dual pressing rollers comprise spring-loaded plastic rollers.
64. The dispenser module of claim 62 wherein the driving roller and the dual pressing rollers comprise a plurality of spaced-apart ridges on a periphery of each roller.
65. The dispenser module of claim 62 wherein the dual pressing rollers continue to feed the paper if the paper breaks between the dual pressing rollers as the paper is being dispensed.
66. An automatic dispenser for dispensing a roll of paper, comprising:
 - a paper holder connected to at least a portion of the automatic dispenser, the paper holder at least partially supporting the roll of paper;
 - a driving roller that dispenses paper from the roll of paper in response to a signal from an electronic sensor;
 - a frame arranged substantially adjacent to the driving roller; and
 - a plurality of pressing rollers connected to the frame by one or more mounts defining a substantially unitary structure that is pivotable about an axis, and wherein the plurality of pressing rollers are disposed along the driving roller to at least partially

define a path between the pressing rollers and the driving roller for guiding the paper toward a discharge chute,

wherein the plurality of pressing rollers comprises a first pressing roller and a second pressing roller each connected to and biased by a respective biasing member, and wherein the first and second pressing rollers pivot about the axis to maintain substantially continuous contact with the paper to substantially prevent at least partial tearing of one or more perforated portions defined in the paper.

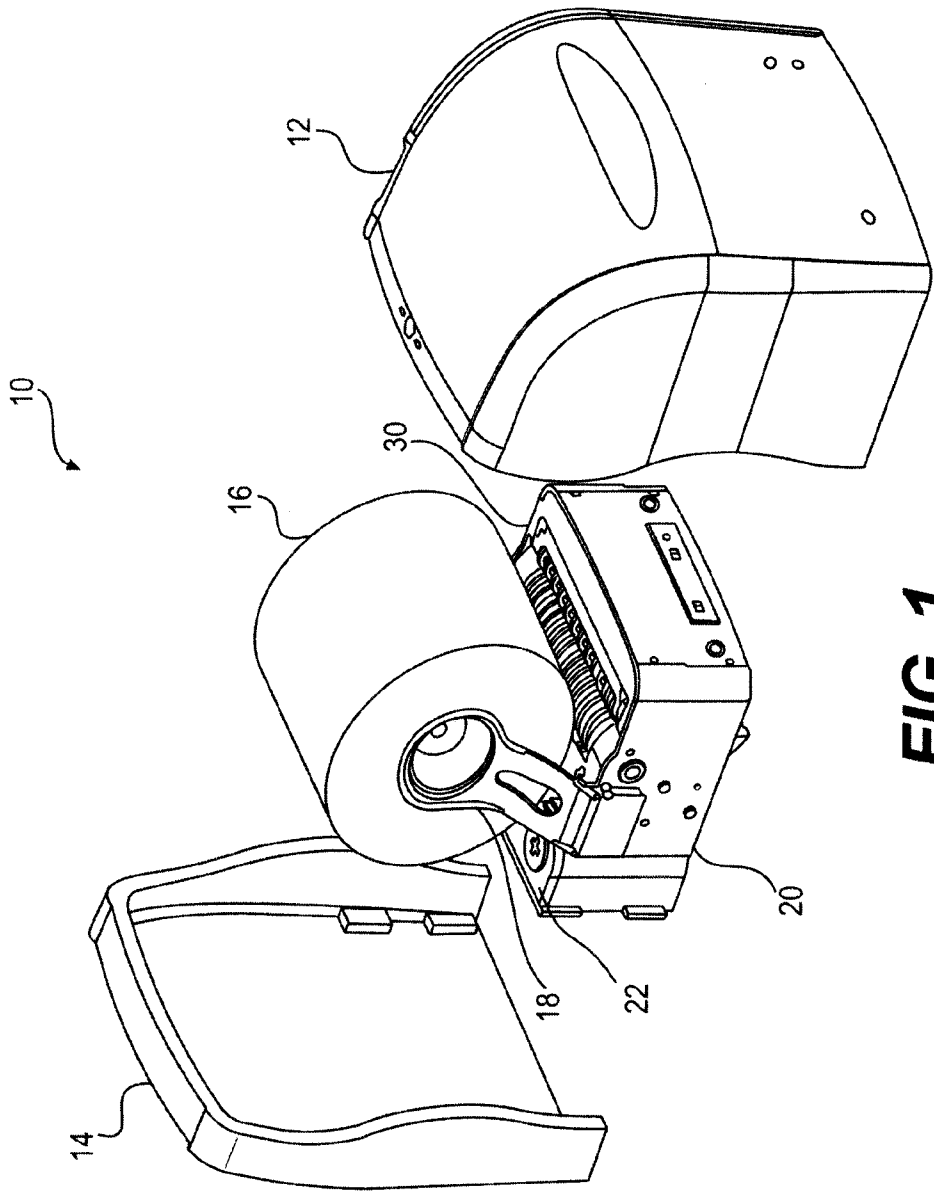
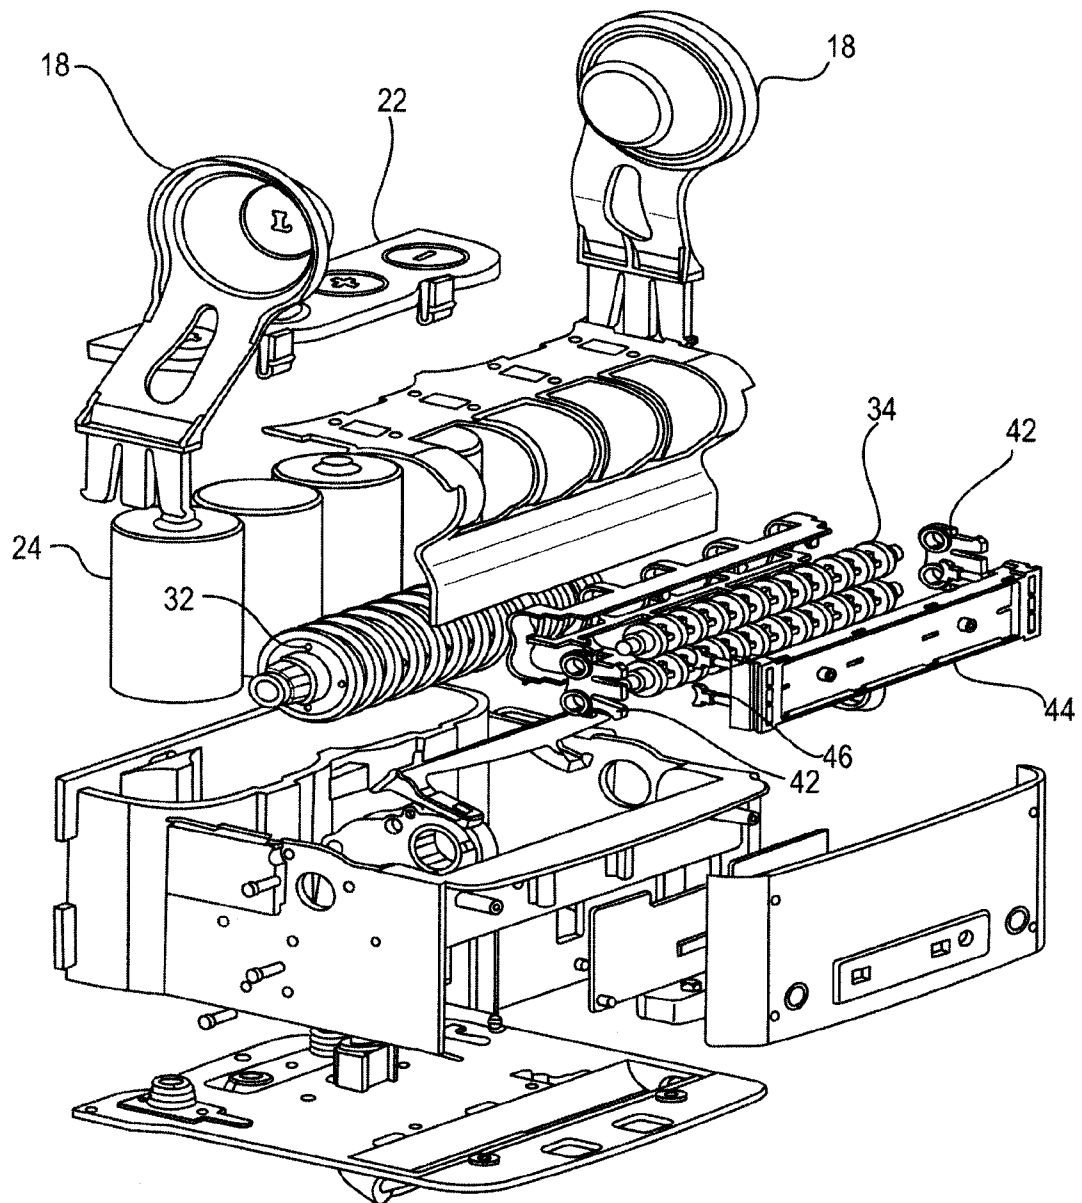


FIG. 1

2/21

**FIG. 2**

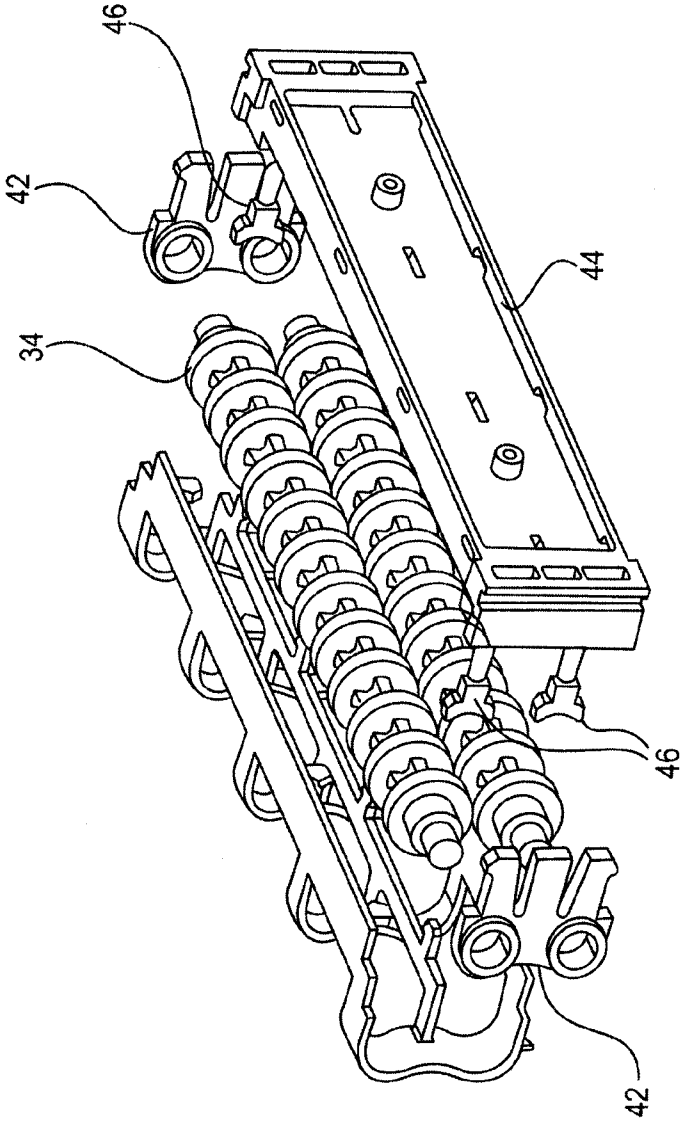
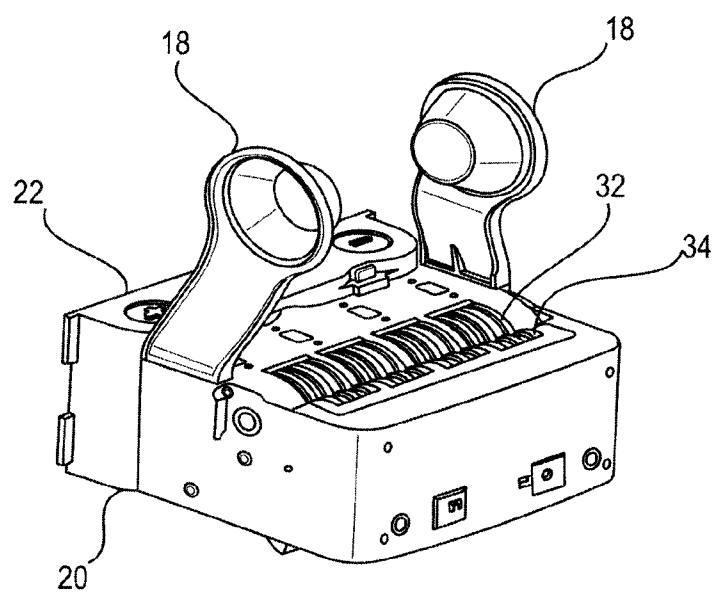
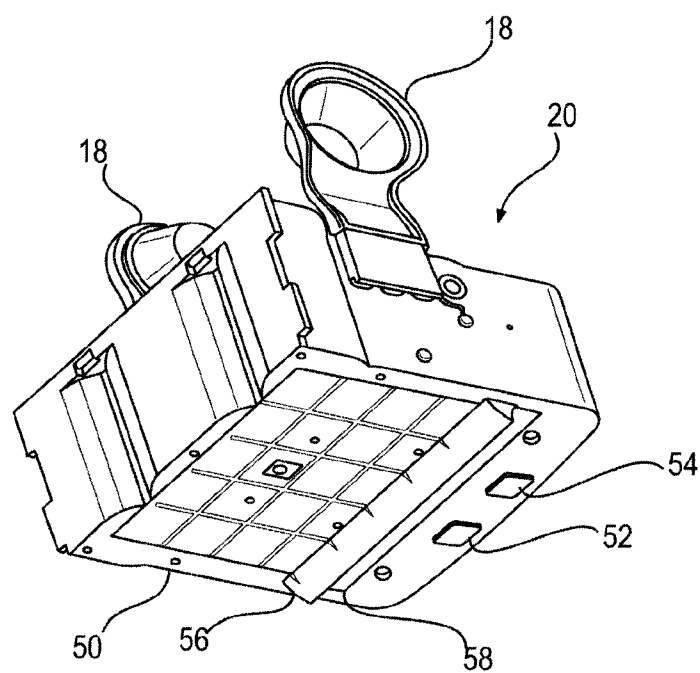


FIG. 3

4/21

**FIG. 4A****FIG. 4B**

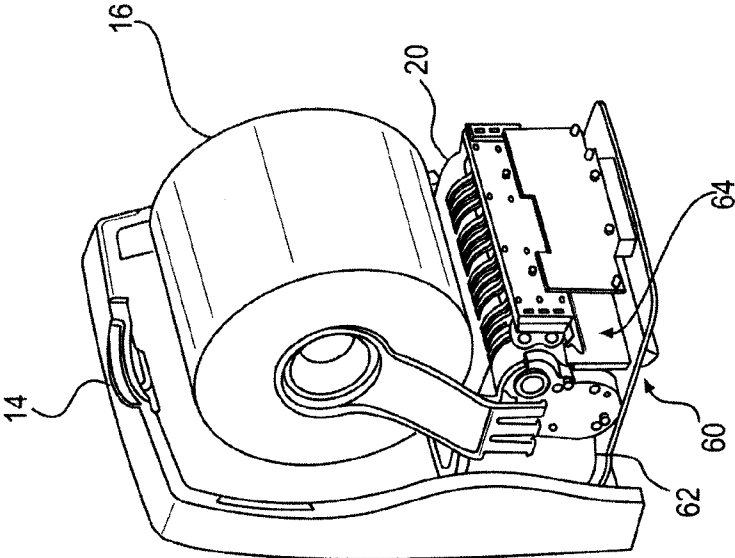


FIG. 5B

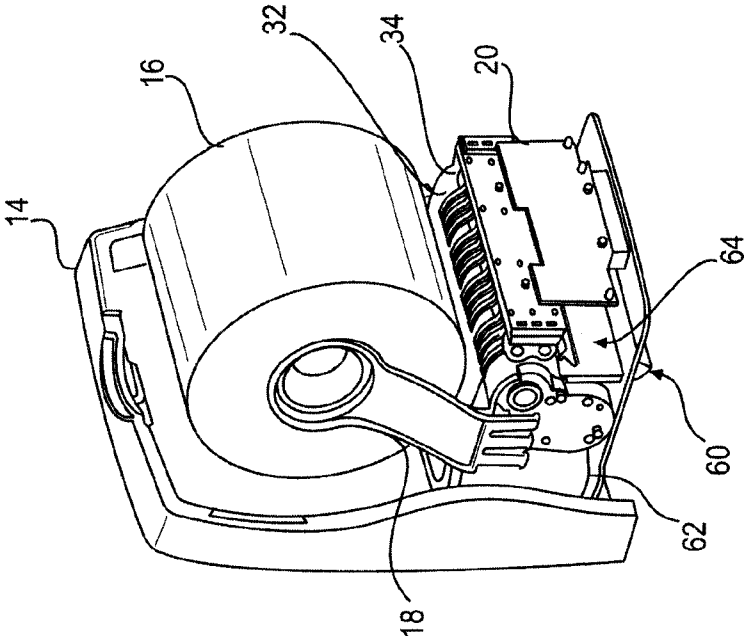


FIG. 5A

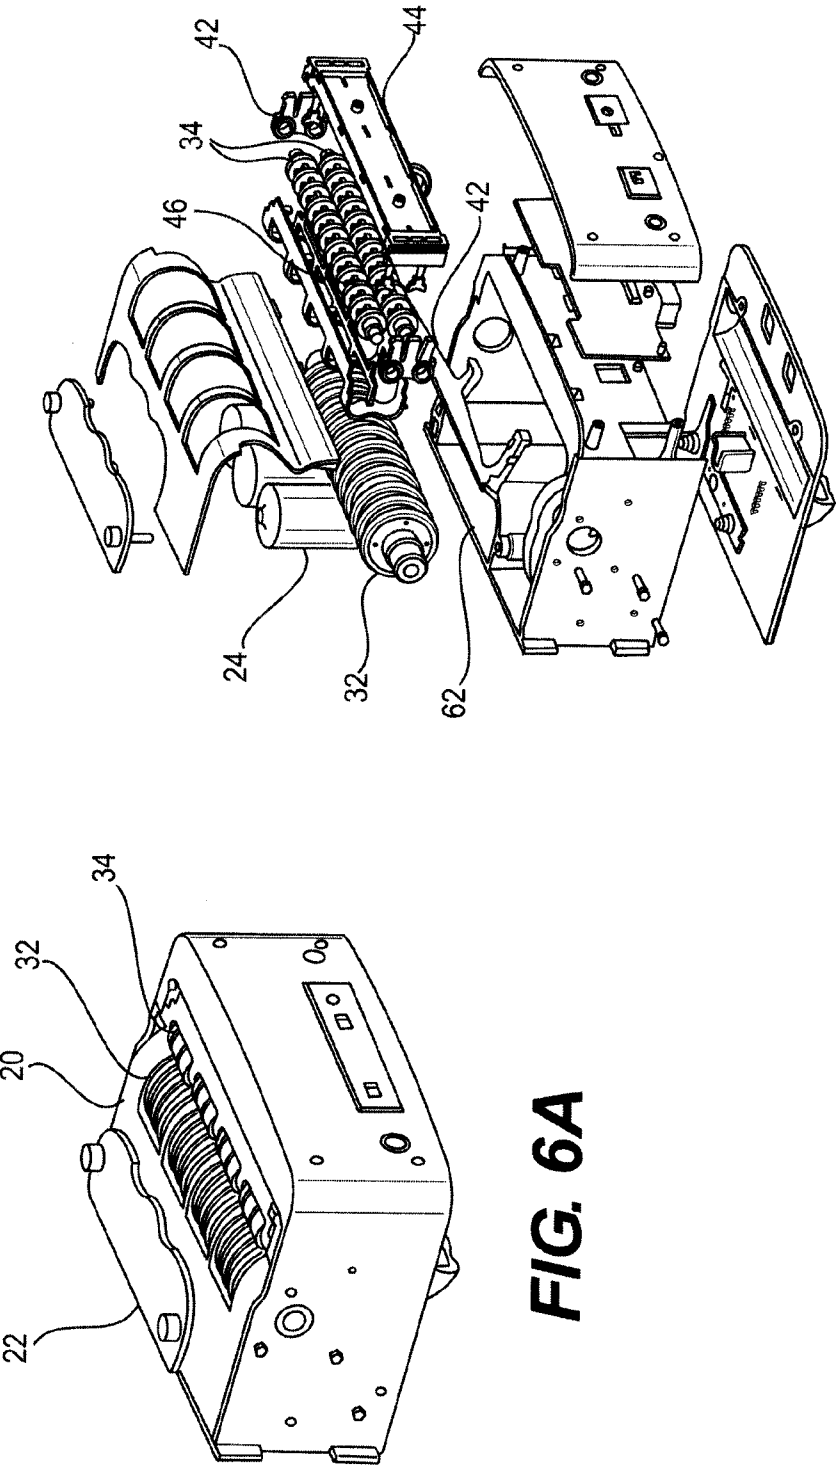


FIG. 6B

FIG. 6A

7/21

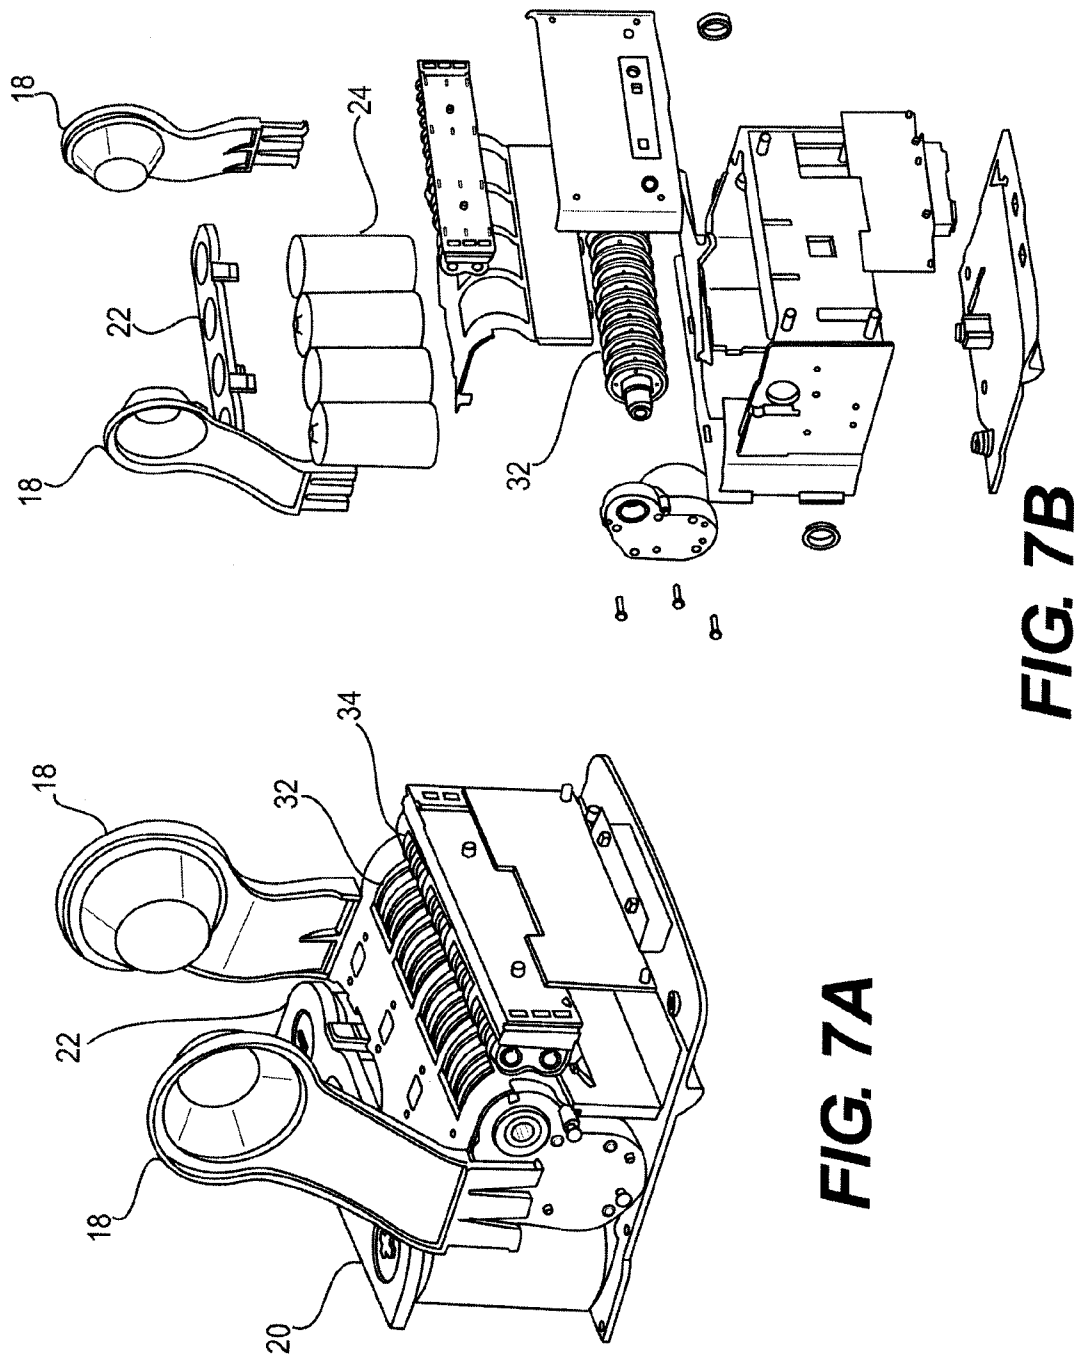


FIG. 7A

FIG. 7B

8/21

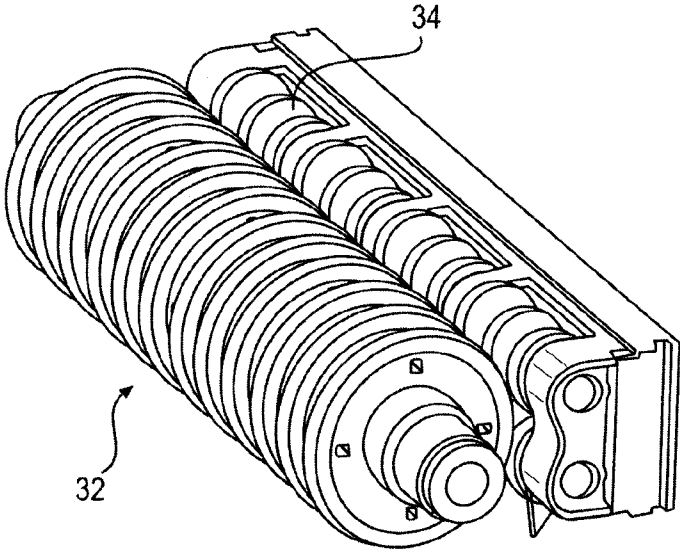


FIG. 8

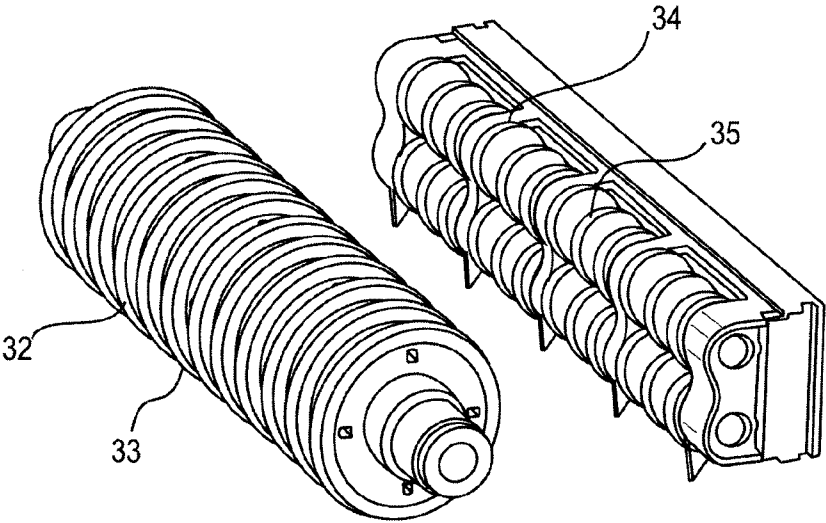


FIG. 9

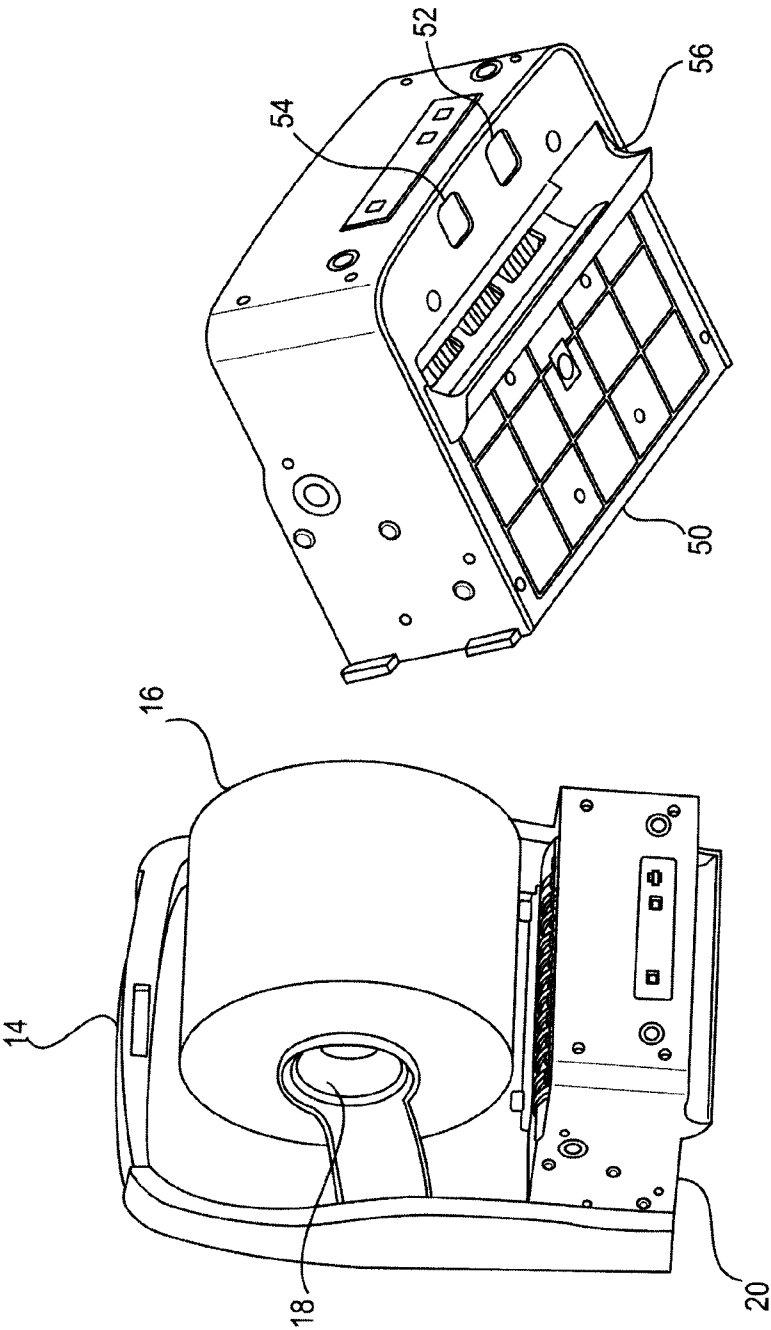
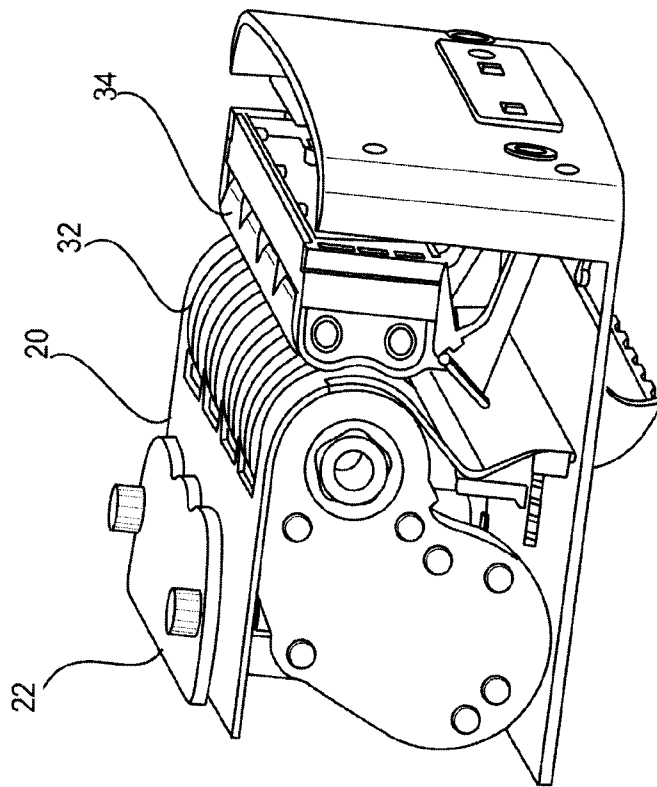


FIG. 10B

FIG. 10A

10/21

**FIG. 11**

11/21

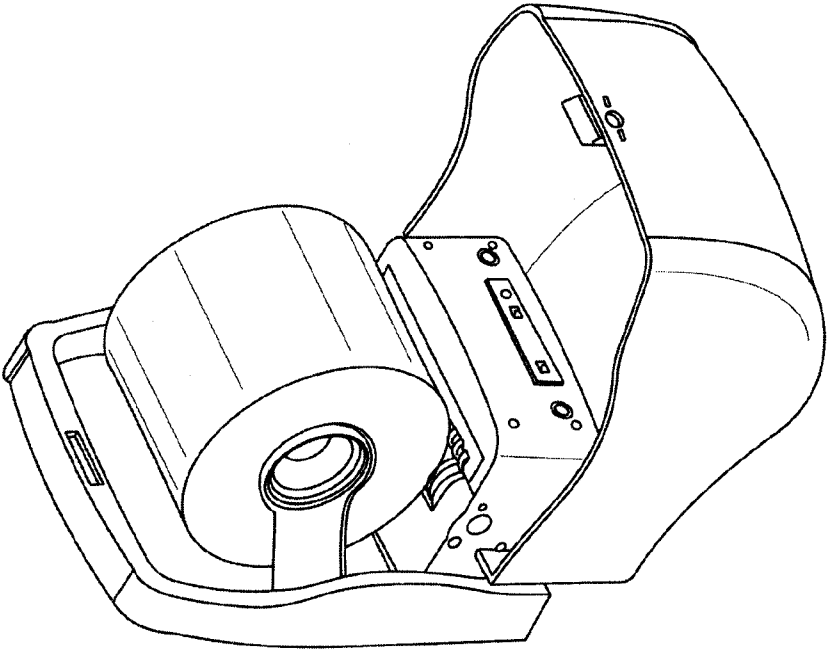


FIG. 12B

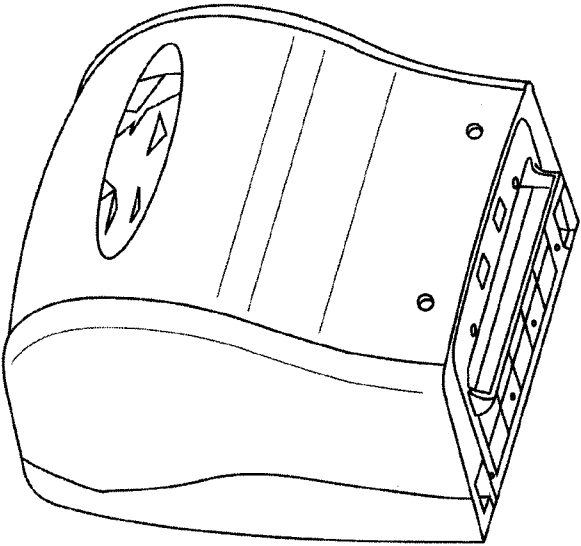
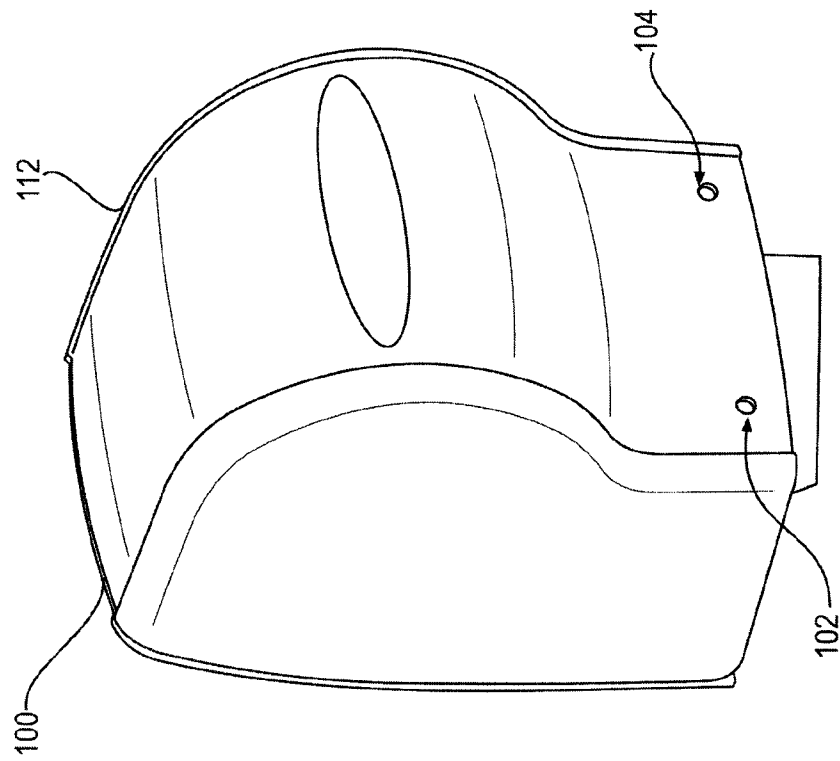


FIG. 12A

12/21

**FIG. 13**

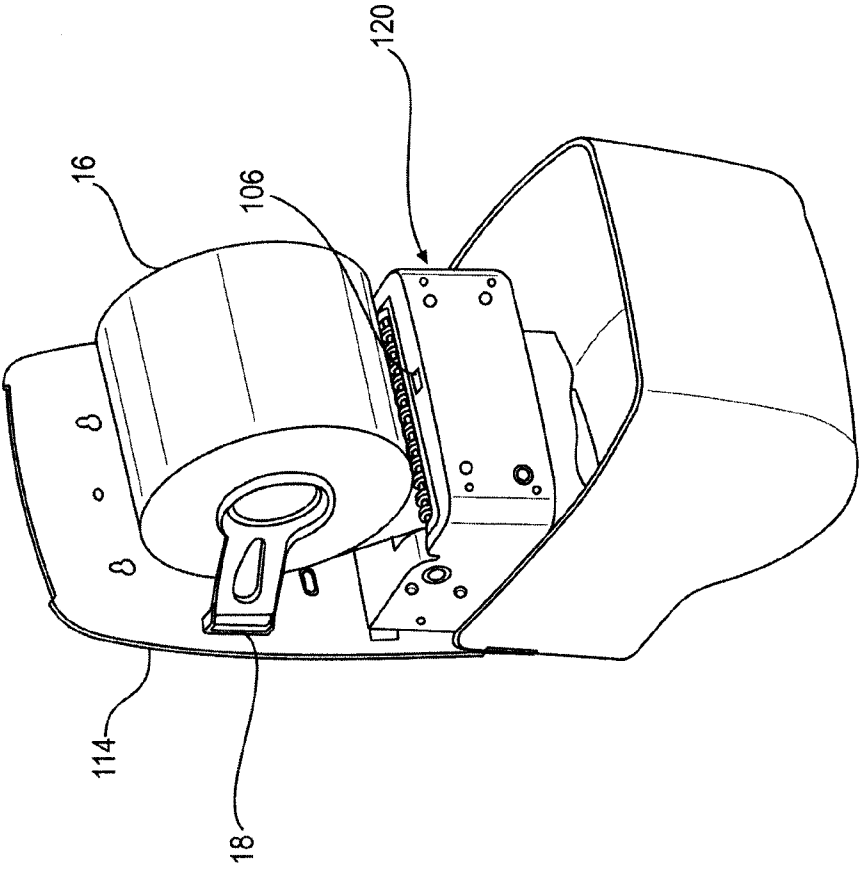


FIG. 14

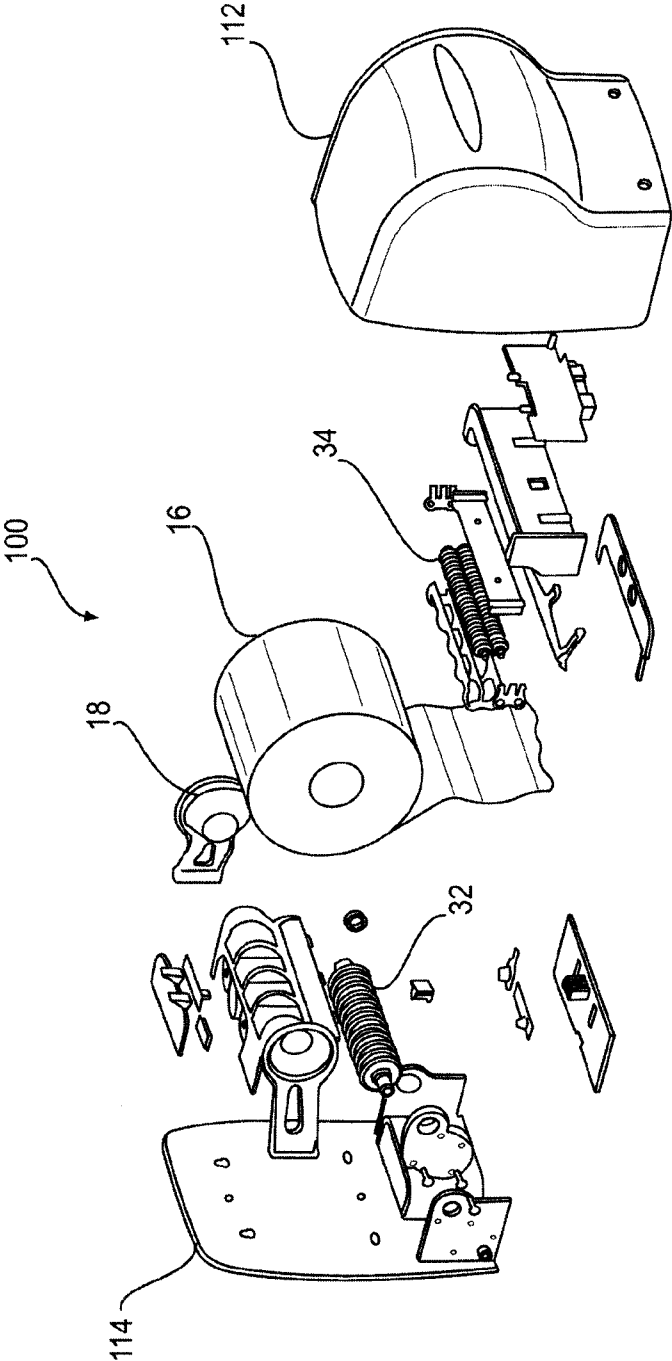


FIG. 15

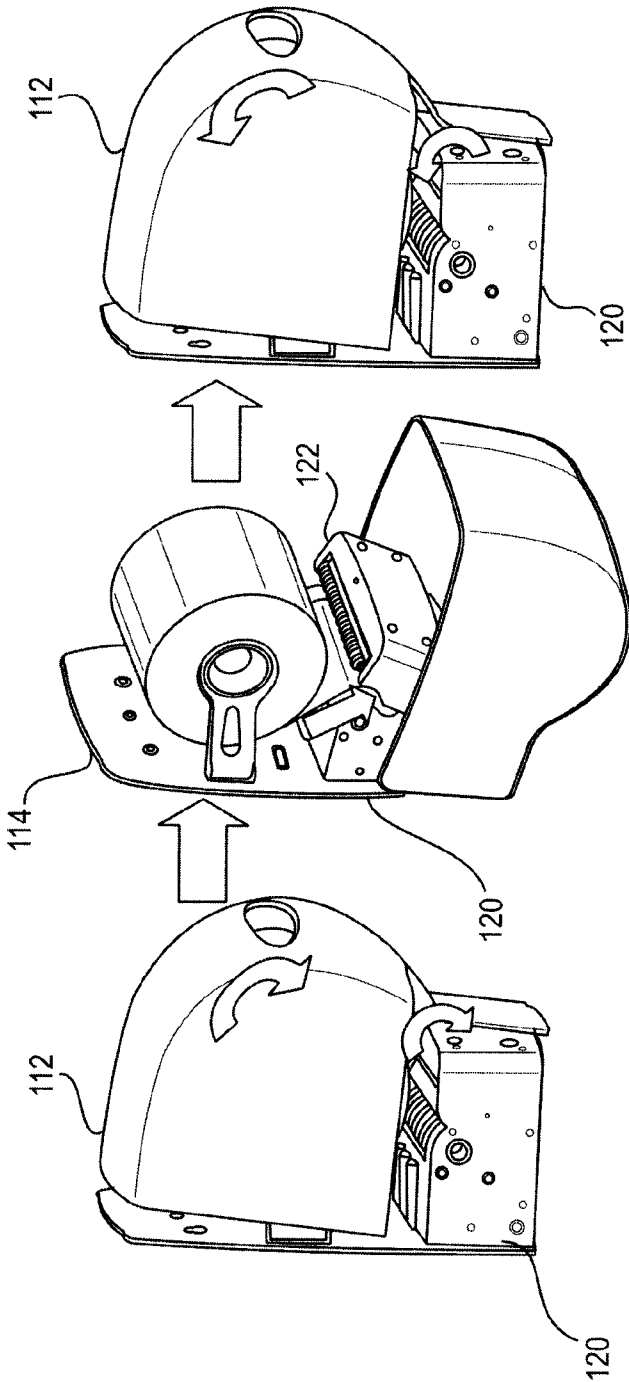


FIG. 16

16/21

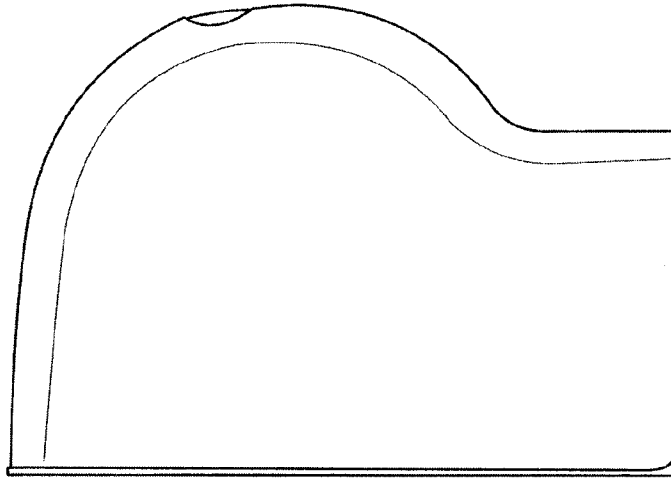


FIG. 17B

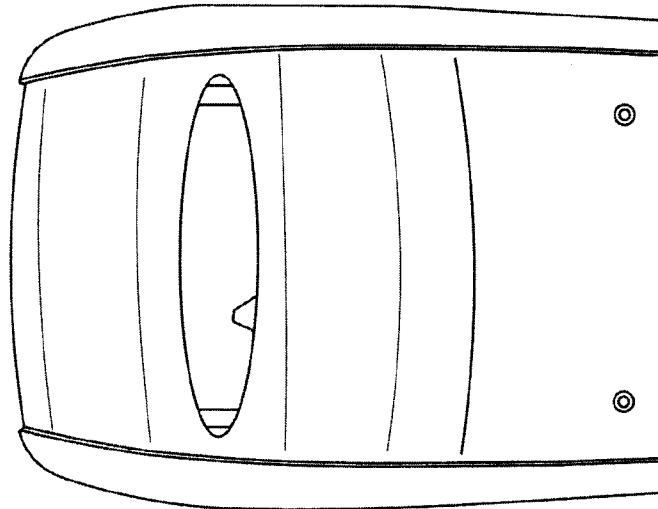


FIG. 17A

17/21

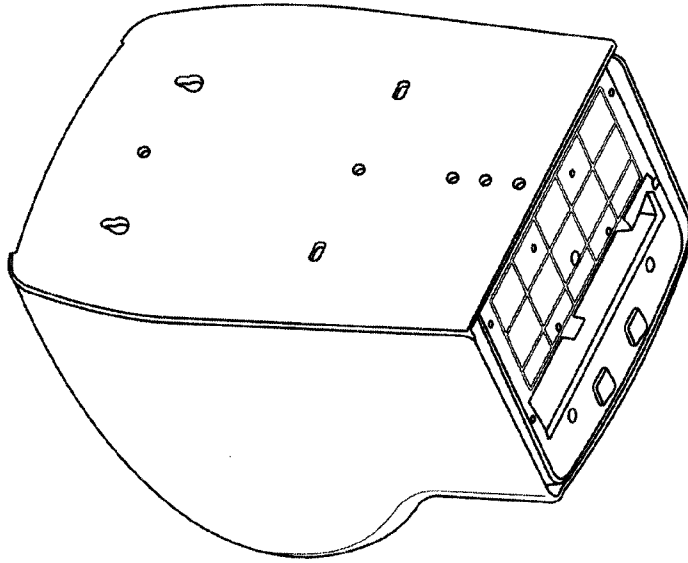


FIG. 18B

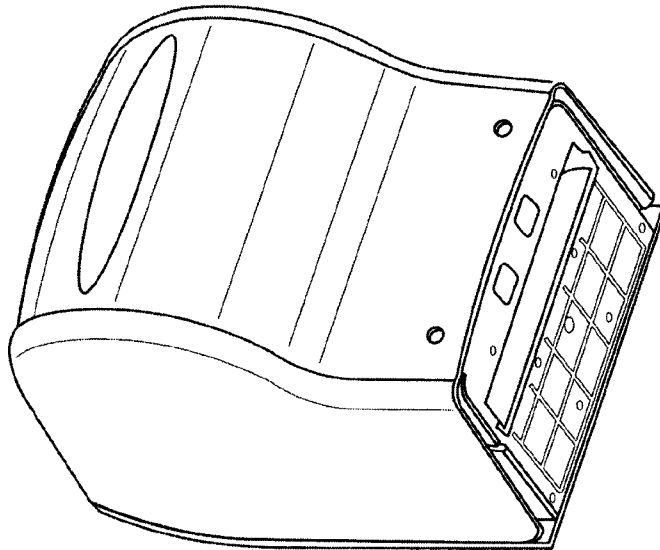


FIG. 18A

18/21

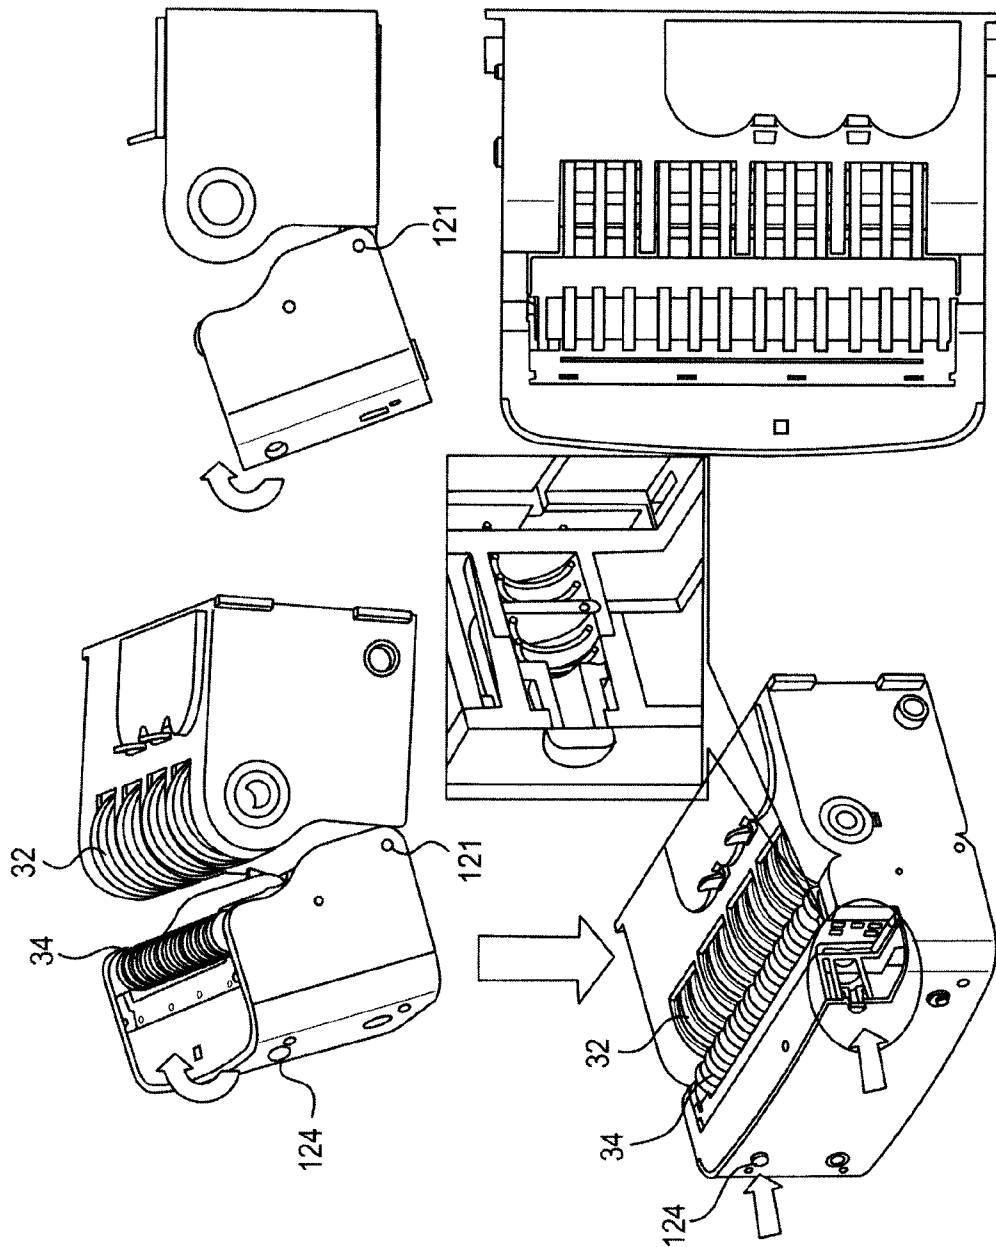


FIG. 19

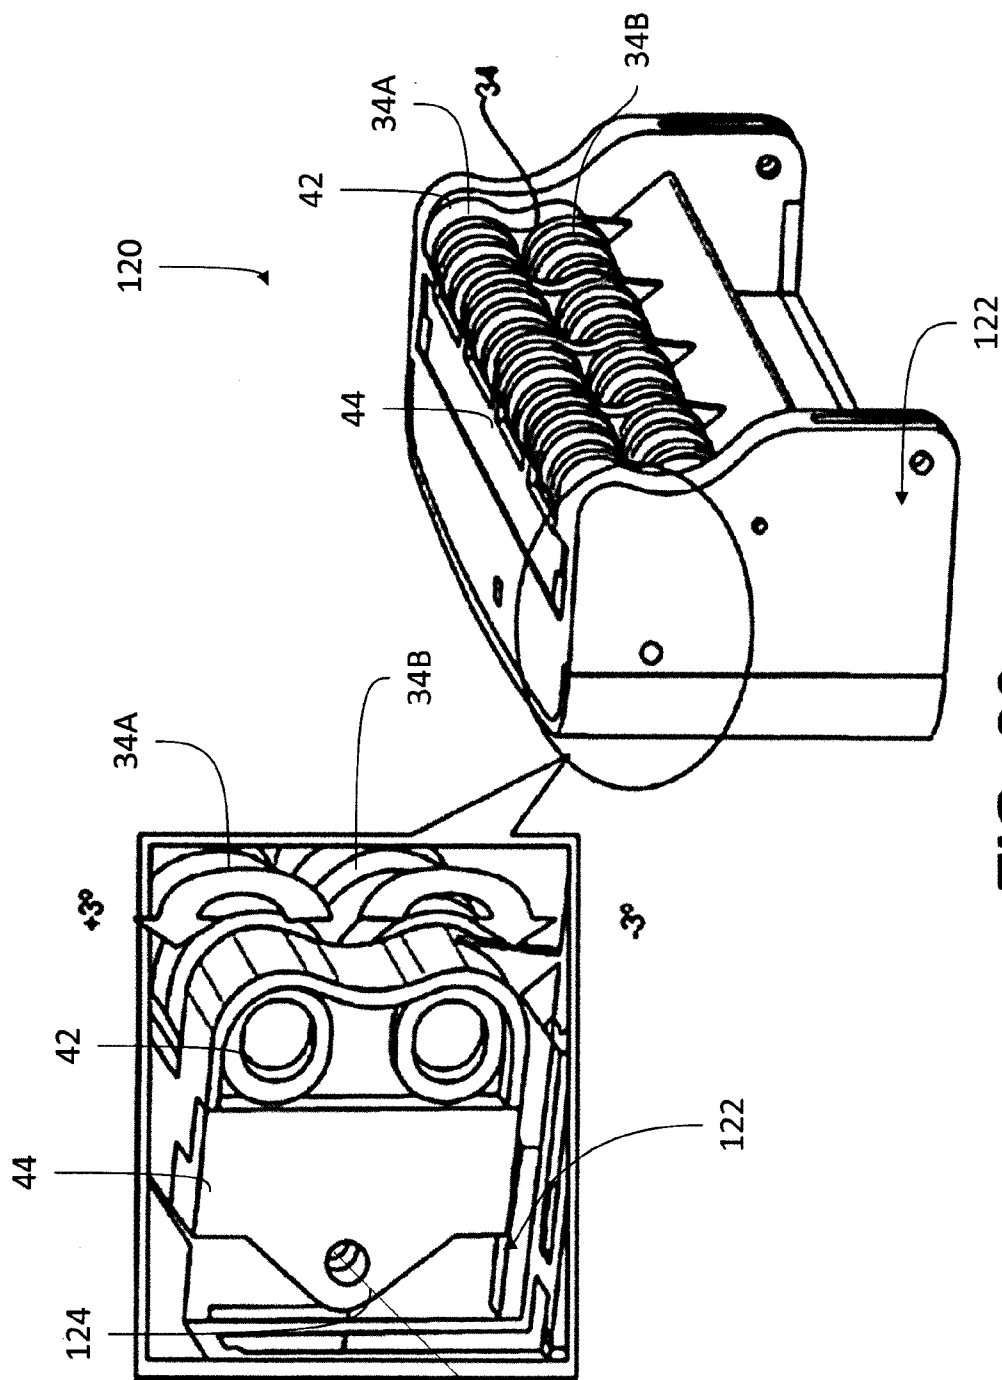
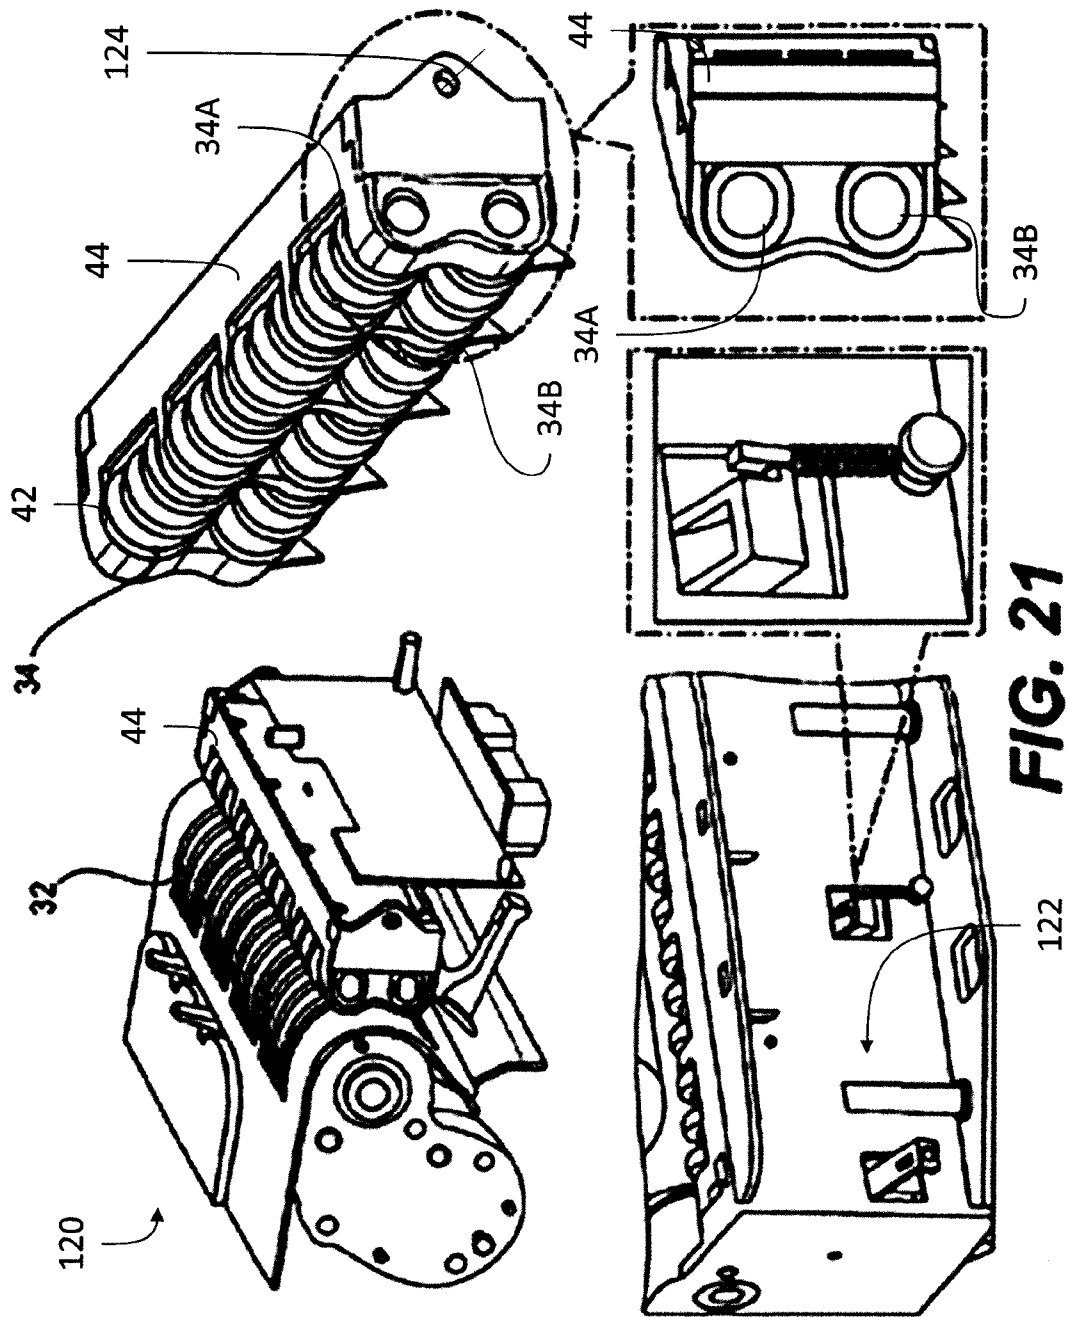


FIG. 20



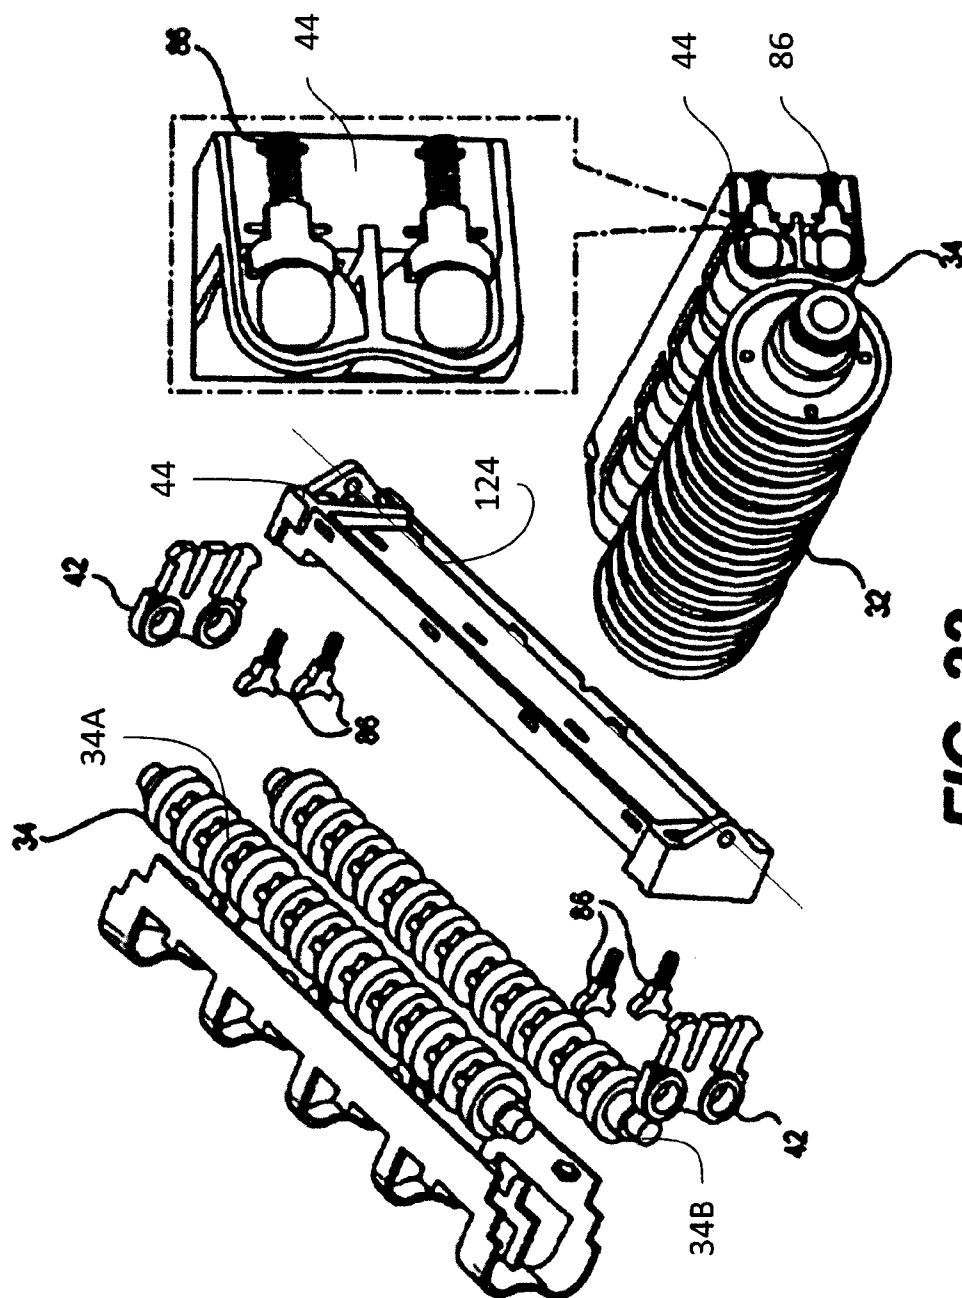


FIG. 22

