




- (51) International Patent Classification:
C10G 1/00 (2006.01) *C10G 3/00* (2006.01)
C10G 1/02 (2006.01)
- (21) International Application Number:
PCT/EP2019/069512
- (22) International Filing Date:
19 July 2019 (19.07.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20185655 20 July 2018 (20.07.2018) FI
- (71) Applicant: NESTE OYJ [FI/FI]; Keilaranta 21, 02150 Espoo (FI).
- (72) Inventors: **TOURONEN, Jouni**; c/o Neste Oyj/IPR, P.O. Box 310, 06101 Porvoo (FI). **LINDBLAD, Marina**; c/o Neste Oyj/IPR, P.O. Box 310, 06101 Porvoo (FI). **KÄLDSTRÖM, Mats**; c/o Neste Oyj/IPR, P.O. Box 310, 06101 Porvoo (FI). **LAMMINPÄÄ, Kaisa**; c/o Neste Oyj/IPR, P.O. Box 310, 06101 Porvoo (FI).
- (74) Agent: **KOLSTER OY AB**; (Salmisaarenaukio 1), P.O. Box 204, 00181 Helsinki (FI).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: PRODUCTION OF HYDROCARBONS FROM RECYCLED OR RENEWABLE ORGANIC MATERIAL

Figure 1

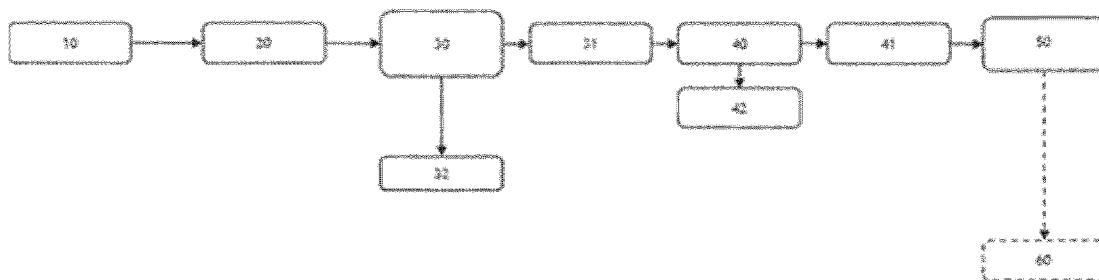

(57) Abstract: Provided herein is a method of producing hydrocarbons from a recycled or renewable organic material (10), wherein the recycled or renewable organic material comprises from 5 to 30 wt-% oxygen as organic oxygen compounds and from 1 to 1000 ppm phosphorous as phosphorous compounds, comprising the steps of a) providing the recycled or renewable organic material (10); b) optionally heat treating the recycled or renewable organic material to form a heat treated recycled or renewable organic material, wherein the at least part of silicon compounds present in the recycled or renewable organic material are converted to volatile silicon compounds; and c) thermally cracking (20) the recycled or renewable organic material (10) thereby reducing the oxygen and phosphorous content of the recycled or renewable organic material to obtain (i) a vapor fraction (32) comprising the major part of volatiles, and (ii) a thermally cracked recycled or renewable organic material fraction (31) comprising less oxygen and less phosphorous than the recycled or renewable organic material (10) provided in step (a); (d) optionally removing volatiles from the vapor fraction; e) optionally removing solids/precipitates from the thermally cracked recycled or renewable organic material fraction (31); and f) hydrotreating (50) the thermally cracked recycled or renewable organic material fraction (31) in a presence of a hydrotreating catalyst; to obtain hydrocarbons comprising less than 1 wt% oxygen and less phosphorous than the recycled or renewable organic material provided in step (a).

WO 2020/016415 A1

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

PRODUCTION OF HYDROCARBONS FROM RECYCLED OR RENEWABLE ORGANIC MATERIAL

FIELD OF THE INVENTION

The present invention relates to a method of producing hydrocarbons from a recycled or renewable organic material, in particular from a recycled or renewable organic material comprising organic oxygen compounds and phosphorous compounds.

BACKGROUND OF THE INVENTION

Recycled or renewable organic material typically contains organic oxygen compounds and phosphorous compounds. Before hydrotreating the recycled or renewable organic material by catalytic processing the phosphorous compounds need to be removed from the material as phosphorous and excess oxygen is thought to cause pore blocking of catalysts during upgrading.

BRIEF DESCRIPTION OF THE INVENTION

An object of the present invention is thus to provide a method so as to overcome the above problems. The objects of the invention are achieved by a method which is characterized by what is stated in the independent claims. The preferred embodiments of the invention are disclosed in the dependent claims.

The invention is based on the surprising realization that hydrocarbons may be produced from recycled or renewable organic material containing organic oxygen compounds and phosphorous compounds by a method that leads to removal of oxygen and phosphorous from recycled or renewable organic material as the recycled or renewable organic material is thermally cracked at a temperature between 350 to 450°C, and then hydrotreated in a presence of a hydrotreating catalyst to obtain hydrocarbons comprising less than 1 wt% oxygen and less than 10% of the original phosphorous content of the recycled or renewable organic material provided in step (a).

The method allows use of low quality recycled or renewable organic material feeds as a feedstock in producing hydrocarbons, e.g. in processes producing high quality renewable fuels and/or chemicals.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following the invention will be described in greater detail by means of preferred embodiments with reference to the attached drawings, in which

5 Figure 1 illustrates a first exemplary process flow of the present method;

 Figure 2 shows sulfur content in feed and liquid product as function of temperature;

10 Figure 3 shows oxygen content and TAN in feed and liquid product as function of temperature;

 Figure 4 shows Br-number of feed and liquid product as function of temperature;

 Figure 5 shows phosphorous in feed and liquid product as function of temperature.

15 DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a method of producing hydrocarbons from a recycled or renewable organic material.

20 The term "recycled or renewable organic material" refers to organic material, i.e. material containing carbon, obtained 1) from a natural resource which replenishes to overcome recourse depletion caused by its usage and consumption or 2) from a raw or processed material that is recovered from a waste for reuse. The recycled or renewable organic material characteristically comprises aliphatic compounds having a carbon chain of from 4 to 30 carbon atoms, particularly from 12 to 22 carbon atoms. Typical examples of such aliphatic
25 compounds are fatty acids or esters thereof, in particular wherein the fatty acids have an aliphatic chain of from 4 to 30 carbon atoms, more particularly from 12 to 22 carbon atoms. The recycled or renewable organic material typically comprises at least 50 wt% aliphatic compound of the total weight of the recycled or renewable organic material.

30 Typically the recycled or renewable organic material refers to fats and/or oils of plant, microbial, algal, and/or animal origin. It also refers to any waste stream received from processing of such oils and/or fats. The recycled or renewable organic material may be in an unprocessed form (e.g. animal fat), or a processed form (used cooking oil). The recycled or renewable organic material
35 also refers to fossil waste-based oils and waste oils.

The term "plant based fats and oils" refers to fat and/or oils of plant origin i.e. oils that can originate directly from plants or can be byproducts from various industrial sectors, such as agriculture or forest industry.

5 Examples of plant based fats and oils of the present invention include, but are not limited to, sludge palm oil, rapeseed oil, canola oil, colza oil, sunflower oil, soybean oil, hemp oil, olive oil, linseed oil, cottonseed oil, mustard oil, palm oil, arachis oil, castor oil and coconut oil.

Other examples of plant based fats and oils include biocrudes and bio oils. Biocrudes and bio oils are produced from biomass, in particular from ligno-
10 cellulosic biomass, with various liquefying methods, such as hydrothermal liquefaction, or pyrolysis, in particular fast pyrolysis.

The term "biocrude" refers to oils produced from biomass by employing hydrothermal liquefaction. The term "bio oil" refers to pyrolysis oils produced from biomass by employing pyrolysis. The term "biomass" refers to material derived from recently living organisms, which includes plants, animals and their byproducts. The term "lignocellulosic biomass" refers to biomass derived from plants or their byproducts. Lignocellulosic biomass is composed of carbohydrate polymers (cellulose, hemicellulose) and an aromatic polymer (lignin).
15

The term "pyrolysis" refers to thermal decomposition of materials at elevated temperatures in a non-oxidative atmosphere. The term "fast pyrolysis" refers to thermochemical decomposition of biomass through rapid heating in absence of oxygen. The term "hydrothermal liquefaction" (HTL) refers to a thermal depolymerization process used to convert wet biomass into crude-like oil under moderate temperature and high pressure.
20

25 Examples of bio oil and biocrude produced from lignocellulosic biomass, e.g. materials like forest harvesting residues or byproducts of a saw mill, are lignocellulosic pyrolysis liquid (LPL), produced by employing fast pyrolysis, and HTL-biocrude, produced by employing hydrothermal liquefaction.

Further examples of plant based fats and oils include crude tall oil (CTO), obtained as a by-product of the Kraft process (wood pulping), and its derivatives, such as tall oil pitch (TOP), crude fatty acid (CFA), tall oil fatty acid (TOFA) and distilled tall oil (DTO).
30

Crude tall oil comprises resin acids, fatty acids, and unsaponifiables. Resin acids are a mixture of organic acids derived from oxidation and polymerization reactions of terpenes. The main resin acid in crude tall oil is abietic acid but abietic derivatives and other acids, such as primaric acid are also found. Fat-
35

ty acids are long chain monocarboxylic acids and are found in hardwoods and softwoods. The main fatty acids in crude tall oil are oleic, linoleic and palmitic acids. Unsaponifiables cannot be turned into soaps as they are neutral compounds which do not react with sodium hydroxide to form salts. They include
5 sterols, higher alcohols and hydrocarbons. Sterols are steroids derivatives which also include a hydroxyl group.

The term "tall oil pitch (TOP)" refers to residual bottom fraction from crude tall oil (CTO) distillation processes. Tall oil pitch typically comprises from 34 to 51 wt% free acids, from 23 to 37 wt% esterified acids, and from 25 to 34
10 wt% unsaponifiable neutral compounds of the total weight of the tall oil pitch. The free acids are typically selected from a group consisting of dehydroabietic acid, abietic and other resin acids. The esterified acids are typically selected from a group consisting of oleic and linoleic acids. The unsaponifiables neutral compounds are typically selected from a group consisting of diterpene sterols, fatty
15 alcohols, sterols, and dehydrated sterols.

The term "crude fatty acid (CFA)" refers to fatty acid-containing materials obtainable by purification (e.g., distillation under reduced pressure, extraction, and/or crystallization) of CTO.

The term "tall oil fatty acid (TOFA)" refers to fatty acid rich fraction of
20 crude tall oil (CTO) distillation processes. TOFA typically comprises mainly fatty acids, typically at least 80 wt% of the total weight of the TOFA. Typically TOFA comprises less than 10 wt% rosin acids.

The term "distilled tall oil (DTO)" refers to resin acid rich fraction of crude tall oil (CTO) distillation processes. DTO typically comprises mainly fatty
25 acids, typically from 55 to 90 wt%, and rosin acids, typically from 10 to 40 wt% rosin acids, of the total weight of the DTO. Typically DTO comprises less than 10 wt% unsaponifiable neutral compounds of the total weight of the distilled tall oil.

The term "animal based fats and oils" refers to fats and/or oils of animal
30 origin i.e. lipid materials derived from animals. Examples of animal based fats and oils include, but are not limited to, such as suet, tallow, blubber, lard, train oil, milk fat, fish oil, poultry oil and poultry fat.

The term "microbial oils" refers to triglycerides (lipids) produced by
microbes.

35 The term "algal oils" refers to oils derived directly from algae.

The term “fossil waste-based oils” refers to oils produced from waste streams like waste plastics or end-life-tires. Examples of fossil waste-based oils include waste plastic pyrolysis oil (WPPO) and end-life-tire pyrolysis oil (ELT-PO).

5 The term “waste oils” refers to any oils that, through contamination, have become unsuitable for their original purpose due to the presence of impurities or loss of original properties. Examples of waste oils are used lubricant oils (ULO), hydraulic oils, transformer oils or oils used in metal working.

10 In the present invention the recycled or renewable organic material is typically selected from a group consisting of plant based fats and oils, animal based fats and oils, fossil waste-based oils, waste oils, algal oils and microbial oils.

Particular examples of the recycled or renewable organic material of the present invention include, but are not limited to, animal based fats and oils, 15 such as suet, tallow, blubber, lard, train oil, milk fat, fish oil, poultry oil, and poultry fat; plant based fats and oils, such as sludge palm oil, rapeseed oil, canola oil, colza oil, sunflower oil, soybean oil, hemp oil, olive oil, linseed oil, cottonseed oil, mustard oil, palm oil, arachis oil, castor oil, coconut oil, lignocellulosic pyrolysis liquid (LPL), HTL biocrude, crude tall oil (CTO), tall oil pitch (TOP), crude fatty acid (CFA), tall oil fatty acid (TOFA) and distilled tall oil (DTO); microbial oils; 20 algal oils; recycled fats or various waste streams of the food industry, such as used cooking oil, yellow and brown greases; free fatty acids, any lipids containing phosphorous and/or metals, oils originating from yeast or mold products, recycled alimentary fats; starting materials produced by genetic engineering, and any mixtures of said feedstocks. In an example of the present invention the 25 recycled or renewable organic material is selected from a group consisting of tall oil, its derivatives and pyrolysis oils; in particular from a group consisting of tall oil, tall oil pitch (TOP), crude fatty acids (CFA), tall oil fatty acids (TOFA), distilled tall oil (DTO), lignocellulose pyrolysis liquid (LPL) and HTL-biocrude.. In particular, the recycled or renewable organic material is tall oil pitch (TOP). 30

The recycled or renewable organic material to be treated by the present method contains impurities comprising phosphorus and may also comprise other impurities such as metals. These impurities are typically present in the form of phospholipids, soaps and/or salts. Further impurities may for example 35 be in the form of phosphates or sulfates, iron salts, organic salts, or soaps. The metal impurities that may be present in the biomass-based lipid material are for

example alkali metals or alkali earth metals, such as sodium or potassium salts, or magnesium or calcium salts, or any compounds of said metals.

The recycled or renewable organic material of the present invention comprises from 1 to 1000 ppm phosphorous as phosphorous compounds. The phosphorous compounds present in the recycled or renewable organic material are typically phospholipids. The phospholipids present in the recycled or renewable organic material are in particular one or more of phosphatidyl ethanolamines, phosphadityl cholines, phosphatidyl inositols, phosphatidic acids, and phosphatidyl ethanolamines.

The recycled or renewable organic material of the present invention further comprises from 5 to 30 wt-% oxygen as organic oxygen compounds of the total weight of the recycled or renewable organic material.

In a particular example the recycled or renewable organic material comprises i) more than 20 ppm, especially more than 50 ppm, particularly more than 70 ppm, phosphorous compounds; and ii) more than 5 wt% of the total weight of the biomass-based lipid material, especially from 8 to 15 wt% organic oxygen compounds of the total weight of the recycled or renewable organic material.

Accordingly provided herein is method of producing hydrocarbons from a recycled or renewable organic material, wherein the recycled or renewable organic material comprises from 5 to 30 wt-% oxygen as organic oxygen compounds and from 1 to 1000 ppm phosphorous as phosphorous compounds, comprising the steps of

(a) providing the recycled or renewable organic material;
(b) optionally heat treating the recycled or renewable organic material to form a heat treated recycled or renewable organic material, wherein the at least part of silicon compounds present in the recycled or renewable organic material are converted to volatile silicon compounds; and

(c) thermally cracking the recycled or renewable organic material thereby reducing the oxygen and phosphorous content of the recycled or renewable organic material to obtain

(i) a vapor fraction comprising the major part of volatiles, and (ii) a thermally cracked recycled or renewable organic material fraction comprising less oxygen and less phosphorous than the recycled or renewable organic material provided in step (a);

(d) optionally removing volatiles from the vapor fraction;
(e) optionally removing solids/precipitates from the thermally cracked recycled or renewable organic material fraction; and
(f) hydrotreating the thermally cracked recycled or renewable organic material fraction in a presence of a hydrotreating catalyst;
5 to obtain hydrocarbons comprising less than 1 wt% oxygen and less phosphorous than the recycled or renewable organic material provided in step (a).

In step (c) the recycled or renewable organic material is heated to
10 cause thermal cracking of the recycled or renewable organic material disrupting phosphorus compounds comprised in the recycled or renewable organic material creating a solid material that can be subsequently removed from the heat treated recycled or renewable organic material e.g. by filtration.

The thermal cracking of step (c) may be performed in a separate reactor unit or in hydrotreating reactor before catalyst bed at a guard bed.
15

Accordingly in step (c) the recycled or renewable organic material is thermally cracked thereby reducing the oxygen content of the recycled or renewable organic material and phosphorous content of the recycled or renewable organic material.

The thermal cracking of step (c) typically takes place at any temperature from 350 to 450°C.
20

The thermal cracking of step (c) takes place in an apparatus enabling sufficient residence time. The time during which the recycled or renewable organic material is heated and held at the desired temperature, i.e. residence time,
25 is typically from 1 to 300 min, preferably from 5 to 240 min, more preferably from 30 to 90 min in step (c).

The pressure in step (c) is such that sufficient oxygen removal is achieved. Typically the pressure in step (c) is from 4 to 20 MPa, preferably from 8 to 16 MPa.

After the thermal cracking of step (c) the volatiles created due to the thermal cracking and/or otherwise present in the recycled or renewable organic material may be removed. Accordingly (d) the recycled or renewable organic material is optionally subjected to removing volatiles from the vapor fraction obtained in step (c) from the recycled or renewable organic material. This can be
30 achieved in one or more stages. Typical examples of the volatiles include CO and CO₂.
35

Removal of the volatiles may be achieved for example by any separation method found suitable by a skilled person for separation of the volatiles from the thermally cracked renewable or recycled material. Suitable examples include, but are not limited to, evaporation, in particular flash evaporation and thin film evaporation.

The optimum temperature, pressure, evaporated mass and how many flash stages to use depends on composition and quality of the recycled or renewable organic material and also on the thermal cracking parameters (temperature, pressure and residence time) of step (c).

The temperature and pressure in step (d) is such that evaporation of volatile oxygen compounds is achieved. In step (d) the removal of volatiles is typically achieved at any temperature from 300 to 450°C. For achieving optimal results, step (d) is performed at from 350°C to 450°C. Typically the pressure in step (d) is from 0.1 to 5 kPa, preferably from 0.1 to 3 kPa.

Removal of volatiles reduces the amount of oxygen in the recycled or renewable organic material.

Prior to thermal cracking of step (c) the recycled or renewable organic material may be subjected to heat treatment to convert at least part of silicon compounds present in the recycled or renewable organic material to volatile silicon compounds.

In step (b) the recycled or renewable organic material is heated to cause thermal reactions that disrupt silicon containing impurities comprised in the recycled or renewable organic material creating volatile silicon compounds material that can be subsequently removed from the heat treated recycled or renewable organic material. In particular polydimethylsiloxanes (PDMS) resulting from anti-fouling agents degrade to volatile polydimethylcyclsiloxanes (PDMCS) under the process conditions.

In step (b) the water content in the feed, i.e. the recycled or renewable organic material may advantageously vary in from 200 to 5000 ppm. If the recycled or renewable organic material comprises more than 5000 ppm water, it may be removed from the feed before step (b) by any suitable means known to a skilled person for lowering the water content in the recycled or renewable organic material below 5000ppm.

The heat treatment of step (b) typically takes place at any temperature from 180 to 325°C. For achieving optimal results, step (b) is performed at 200 to 300°C, preferably at 240 to 280°C.

The time during which the recycled or renewable organic material is heated and held at the desired temperature, i.e. residence time, is typically from 1 to 300 min, preferably from 5 to 90 min, more preferably from 20 to 40 min in step (b).

5 The pressure in the heat treatment in step (b) is typically from 500 to 5000 kPa, preferably from 800 to 2000 kPa.

The pressure range in step (b) is dictated by volatility of water and it is advantageous to keep the heat treatment pressure slightly higher than the balance pressure of water boiling in particular heat treatment temperature. Too
10 low pressure may drive volatile components like water and fractions of fatty acids into gas phase. Carry over of organic volatiles is enhanced by presence of water or stripping.

Optionally, the process can be further enhanced by acid addition before or after heat treatment in step (b). This removes any remaining sodium im-
15 purities. The acid is preferably selected from citric acid and phosphoric acid.

In step (b) the solid material created due to the heat treatment may be removed. Removal of the solid material may be achieved for example by any separation method found suitable by a skilled person for separation of the solid material from the heat treated renewable or recycled material. Suitable exam-
20 ples include, but are not limited to, filtration, centrifugation, bleaching, degumming and phase separation. It is also to be understood that several separation methods, e.g. filtration and centrifugation, may be combined. Preferably the removal is accomplished by filtration. The removal is preferably performed at any temperature from 100 to 180°C.

25 Removal of solids/precipitates avoids deactivation of the hydrotreating catalyst in hydrotreatment of the renewable or recycled material.

After the thermal cracking of step (c) the solid material created due to the thermal cracking may be removed. Accordingly in step (f) the recycled or renewable organic material is optionally subjected to removing solids/precip-
30 itates from the recycled or renewable organic material.

Removal of the solid material may be achieved for example by any separation method found suitable by a skilled person for separation of the solid material from the thermally cracked renewable or recycled material. Suitable examples include, but are not limited to, filtration, centrifugation, *bleaching*,
35 *degumming* and phase separation. It is also to be understood that several separation methods, e.g. filtration and centrifugation, may be combined. Preferably the

removal is accomplished by filtration. The removal is preferably performed at any temperature from 100 to 180°C.

Removal of solids/precipitates, in particular those comprising phosphorous, avoids deactivation of the hydrotreating catalyst in hydrotreatment of the renewable or recycled material.

The recycled or renewable organic material treated in accordance with steps (c), and optionally steps (b), (d) and/or (e), of the present method typically comprises significantly lower content of oxygen and phosphorous as compared to the biomass-based lipid material prior to purification.

An applicable purification step (c) and optional steps (b), (d) and/or (e), provide a purified recycled or renewable organic material, wherein the oxygen content of the recycled or renewable organic material is reduced by at least 10%, preferably at least 30%, more preferably at least 50% as compared to the recycled or renewable organic material provided in step (a). This leads to reduced hydrogen consumption in hydrotreatment processing of the recycled or renewable organic material in step (f). Further step (c) leads to precipitation of phosphorous compounds that can be removed in step (e) and the phosphorous content of the recycled or renewable organic material is thus reduced at least 10%, preferably at least 30%, more preferably at least 50% as compared to the recycled or renewable organic material provided in step (a).

For obtaining the desired hydrocarbons from the recycled or renewable organic material, the recycled or renewable organic material treated in accordance with steps (c), and optionally steps (b), (d) and/or (e), is then subjected to (f) hydrotreating the recycled or renewable organic material in a presence of a hydrotreating catalyst.

The term "hydrotreating" refers to a chemical engineer process in which reaction of hydrogen is used to remove impurities, such as oxygen, sulfur, nitrogen, phosphorous, silicon and metals, especially as part of oil refining.

Hydrotreating can be performed in one or several steps in one or more reactor units or catalyst beds.

Step (f) is typically achieved under continuous hydrogen flow. For achieving optimal results the continuous hydrogen flow in step (f) preferably has H₂/feed ratio from 500 to 2000 n-L/L, more preferably from 800 to 1400 n-L/L.

In step (f) hydrotreatment is advantageously performed at a temperature from 270 to 380°C, preferably from 275 to 360°C, more preferably from 300 to 350°C. Typically the pressure in step (f) is from 4 to 20 MPa.

The hydrotreating catalyst is step (f) preferably comprises at least one component selected from IUPAC group 6, 8 or 10 of the Periodic Table.. Preferably the hydrotreating catalyst in step (f) is a supported Pd, Pt, Ni, NiW, NiMo or a CoMo catalysts and the support is zeolite, zeolite-alumina, alumina and/or silica, preferably NiW/Al₂O₃, NiMo/Al₂O₃ or CoMo/Al₂O₃. In particular the hydrotreating catalyst is a sulfided NiMo or CoMo catalyst.

In a particular example step (f) is accomplished by (f1) hydrodeoxygenating (HDO) the heat treated recycled or renewable organic material fraction. This is preferably achieved in a presence of a HDO catalyst at a temperature from 290 to 350°C under pressure from 4 to 20 MPa and under continuous hydrogen flow.

The term “hydrodeoxygenation (HDO)” refers to removal of oxygen as water by the means of molecular hydrogen under the influence of a (HDO) catalyst.

The time during which the recycled or renewable organic material is heated and held at the desired temperature, i.e. residence time, is typically from 1 to 300 min, preferably from 5 to 240 min, more preferably from 30 to 90 min in step (f1).

Step (f1) is performed under pressure from 4 to 20 MPa and under continuous hydrogen flow. Preferably the continuous hydrogen flow has H₂/feed ratio from 500 to 2000 n-L/L, preferably from 800 to 1400 n-L/L.

The HDO catalyst may for example be selected from a group consisting of NiMo-, CoMo-, NiW-catalysts. Preferably the HDO catalyst in step (f1) is sulfided NiMo, sulfided CoMo or sulfided NiW-catalyst or any mixture thereof.

Advantageously step (f1) is performed to obtain hydrodeoxygenated recycled or renewable organic material comprising less than 1 wt% oxygen.

For achieving optimal results part of the deoxygenated recycled or renewable organic material may be recycled in step (f1). Preferably the ratio of the fresh feed i.e. purified recycled or renewable organic material obtained in previous step to the recycled deoxygenated recycled or renewable organic material is from 2:1 to 20:1.

In another example step (f) is accomplished by (f2) hydrodesulfurizing (HSD) the heat treated recycled or renewable organic material fraction. The term “hydrodesulfurisation (HDS)” refers to removal of sulfur as hydrogen sulfide by the means of molecular hydrogen under the influence of a (HDS) catalyst.

In another example step (f) is accomplished by (f3) hydrometallizing (HDM) the heat treated recycled or renewable organic material fraction. The term "hydrodemetallization (HDM)" refers to removal of metals by trapping them with a (HDM) catalyst.

5 In another example step (f) is accomplished by (f4) hydrodenitrification (HDN) the heat treated recycled or renewable organic material fraction. The term "hydrodenitrification (HDN)" refers to removal of nitrogen by the means of molecular hydrogen under the influence of a (HDN) catalyst.

10 In another example step (f) is accomplished by (f5) hydrodesaromatizing (HDA) the heat treated recycled or renewable organic material fraction. The term "hydrodearomatisation (HDA)" refers to saturation or ring opening of aromatics by the means of molecular hydrogen under the influence of a (HDA) catalyst.

15 Figure 1 illustrates a first exemplary process flow of the present method.

Referring to Figure 1, a feed of recycled or renewable organic material, in particular tall oil pitch (TOP), 10 is subjected to a step of thermally cracking 20 the recycled or renewable organic material as discussed herein for step (c). The heat treated feed of recycled or renewable organic material is then subjected to evaporation 30 as discussed herein for step (d) and a bottom containing thermally cracked recycled or renewable organic material fraction 31 and a vapor fraction 32 comprising the major part of volatile impurities is obtained. The thermally recycled or renewable organic material comprising degraded phosphorous containing impurities in solid form 31 is the subjected to removal of the solid impurities 40 as discussed herein for step (e), e.g. by filtration, to obtain to obtain purified recycled or renewable organic material 41 and solid impurities 42. The purified recycled or renewable organic material 41 is then hydrodeoxygenated 50, as discussed herein for step (f) flow to obtain hydrocarbons comprising less than 1 wt% oxygen and less than 10 % of the original phosphorous content of the recycled or renewable organic material provided in step (a). The obtained hydrocarbons may then be subjected to catalytic upgrading 60.

35 After hydrocarbons have been produced in accordance with the present method, it may be subjected to further processing e.g. catalytic upgrading. Such catalytic upgrading processes include, but are not limited to, catalytic cracking, catalytic hydrocracking, thermo-catalytic cracking, catalytic hydrotreatment, fluid catalytic cracking, catalytic ketonization, and catalytic esteri-

fication. Such processes require the recycled or renewable organic material to be sufficiently pure and free from impurities that may otherwise hamper the catalytic process or poison the catalyst(s) present in the process.

Accordingly the present invention further provides a process for producing recycled or renewable hydrocarbons, comprising steps of (x) producing hydrocarbons from a recycled or renewable organic material as discussed herein, and (y) subjecting the purified recycled or renewable organic material to an oil refinery conversion process, wherein the oil refinery conversion process comprises altering the molecular weight of the feed, removal of heteroatoms from the feed, altering the degree of saturation of the feed, rearranging the molecular structure of the feed, or any combination thereof to obtain at least one recycled or renewable hydrocarbon.

In a typical example of the present process the recycled or renewable hydrocarbon is a renewable traffic fuel or fuel component.

In an example of the present process, step (y) is hydrocracking. In such example, step (y) is preferably performed in a mild hydrocracking (MHC) refinery unit, in particular in a presence of a hydrocracking catalyst.

In another example of the present process, step (y) is steamcracking. In such example step (y) is preferably performed in a steamcracking unit.

In yet another example of the present process, step (y) is isomerization. In such example, step (y) is preferably performed in an isomerization unit.

Accordingly the present invention further provides a process for producing a renewable traffic fuel or fuel component, comprising the steps of (x) producing hydrocarbons from a recycled or renewable organic material as discussed herein, and (y) hydrodeoxygenating (HDO) the purified recycled or renewable organic material to obtain a renewable traffic fuel or fuel component. Step (y) is preferably performed in a mild hydrocracking (MHC) refinery unit, in particular in a presence of an alumina based HDO catalyst.

EXAMPLES

30 **Example 1**

The experiment was carried out in continuous tubular reactor loaded with silicon carbide > 0.42 mm. The pressure was adjusted to 8 MPa partial pressure of hydrogen, with a hydrogen feed rate of 15.7 ml/h. The feed rate of tall oil pitch (TOP) was 15 g/h. When carrying out catalytic experiments in this reactor unit, this feed rate is usually applied when applying weight hour space

velocities close to 1. The temperature was varied in the range 250 -> 300 -> -> 350 -> 400 -> 450°C and the liquid samples were analyzed.

Results

Results are shown in Figures 2 to 5.

5

Oxygen & Total Acid Number (TAN)

TAN increased from 71 in the feed to 89 at 350°C after which it started to decrease. The increase in TAN is thought to be due to thermal decomposition of esters, forming acids and alcohols. Oxygen content started to decrease fast at 350°C and was almost halved, compared to the feed, at 400°C.

10

Phosphorous

The phosphorous content was halved from 300 to 350°C and stayed on the same level when increasing the temperature further.

Br-number

15

Br-number started to decrease after 250°C and was halved at 350°C, compared to the level of the feed. Br-number is a measure of the number of double bonds in the feedstock, and gives an idea about the reactivity of the components. As the Br-number is halved compared to the feedstock at 400°C, the reactivity of the feedstock due to the presence of double bonds is considerably reduced.

20

Sulphur

The sulfur content of the feed was 2400 ppm. The sulfur content in the liquid product started to decrease as the temperature increased above 250°C (Figure 2). At 400°C the sulfur content was 1400 ppm.

25

It will be obvious to a person skilled in the art that, as the technology advances, the inventive concept can be implemented in various ways. The invention and its embodiments are not limited to the examples described above but may vary within the scope of the claims.

CLAIMS

1. A method of producing hydrocarbons from a recycled or renewable organic material (10), wherein the recycled or renewable organic material (10) comprises from 5 to 30 wt-% oxygen as organic oxygen compounds and from 1 to 1000 ppm phosphorous as phosphorous compounds, comprising the steps of
- (a) providing the recycled or renewable organic material (10);
 - (b) optionally heat treating the recycled or renewable organic material to form a heat treated recycled or renewable organic material, wherein the at least part of silicon compounds present in the recycled or renewable organic material are converted to volatile silicon compounds; and
 - (c) thermally cracking (20) at a temperature from 300 to 450°C the recycled or renewable organic material (10) thereby reducing the oxygen and phosphorous content of the recycled or renewable organic material to obtain
 - (i) a vapor fraction (32) comprising the major part of volatiles, and
 - (ii) a thermally cracked recycled or renewable organic material fraction (31) comprising less oxygen and less phosphorous than the recycled or renewable organic material provided in step (a);
 - (d) the volatiles created due to the thermal cracking and/or otherwise present in the recycled or renewable organic material are removed;
 - (e) optionally removing solids/precipitates from the thermally cracked recycled or renewable organic material fraction; and
 - (f) hydrotreating (50) the thermally cracked recycled or renewable organic material fraction (31) in a presence of a hydrotreating catalyst; to obtain hydrocarbons comprising less than 1 wt% oxygen and less phosphorous than the recycled or renewable organic material provided in step (a).
2. A method as claimed in claim 1, wherein the residence time, is from 1 to 300 min, preferably from 5 to 240 min, more preferably from 30 to 90 min in step (c).
3. A method as claimed in any one of claim 1 to 2, wherein the pressure in step (c) is from is from 4 to 20 MPa, preferably from 8 to 16 MPa.
4. A method as claimed in claim 3, wherein step (c) is performed at 350 to 400°C.

5. A method as claimed in claim 3 or 4, wherein the pressure in step (d) is from 0.1 to 5 kPa, preferably from 0.1 to 3 kPa.

6. A method as claimed in any one of claims 1 to 5, wherein (e) the recycled or renewable organic material is subjected to removing solids/precipitates from the thermally cracked recycled or renewable organic material fraction.

7. A method as claimed in claim 6, wherein removing solids/precipitates is accomplished by filtration.

8. A method as claimed in any one of claims 1 to 7, wherein hydro-
10 treating step (f) takes place under continuous hydrogen flow.

9. A method as claimed in claim 8, wherein in step (f) the continuous hydrogen flow has H₂/feed ratio from 500 to 2000 n-L/L, preferably from 800 to 1400 n-L/L.

10. A method as claimed in any one of claims 1 to 9, wherein step (f)
15 is performed at a temperature from 270 to 380°C, preferably from 275 to 360°C, more preferably from 300 to 350°C.

11. A method as claimed in any one of claims 1 to 10, wherein step (f) is performed under pressure from 4 to 20 MPa.

12. A method as claimed in any one of claims 1 to 11, wherein the hydro-
20 drotreating catalyst in step (f) comprises at least one component selected from IUPAC group 6, 8 or 10 of the Periodic Table.

13. A method as claimed in any one of claims 1 to 12, wherein the hydro-
drotreating catalyst in step (f) is a supported Pd, Pt, Ni, NiW, NiMo or a CoMo
catalysts and the support is zeolite, zeolite-alumina, alumina and/or silica, pref-
25 erably NiW/Al₂O₃, NiMo/Al₂O₃ or CoMo/Al₂O₃.

14. A method as claimed in any one of claims 1 to 13, wherein step (f) is accomplished by (f1) hydrodeoxygenating (HDO) the thermally cracked recycled or renewable organic material fraction.

15. A method as claimed in claim 14, wherein step (f1) is performed
30 in a presence of a HDO catalyst at 290 to 350°C under pressure from 4 to 20 MPa and under continuous hydrogen flow.

16. A method as claimed in claim 14, wherein step (f1) is accomplished by (f1) hydrodeoxygenating (HDO) the thermally cracked recycled or renewable organic material fraction in a presence of a HDO catalyst at a temper-
35 ature from 290 to 350°C under pressure from 4 to 20 MPa and under continuous hydrogen flow to obtain purified recycled or renewable organic material com-

prising less than 1 wt% of oxygen and less phosphorous than the recycled or renewable organic material provided in step (a).

17. A method as claimed in any one of claims 15 to 16, wherein in step (f1) the HDO catalyst is sulfided NiW, NiMo or CoMo catalyst.

5 18. A method as claimed in any one of claim 15 to 17, wherein in step (f1) the continuous hydrogen flow has H₂/feed ratio from 500 to 2000 n-L/L, preferably from 800 to 1400 n-L/L.

19. A method as claimed in any one of claims 1 to 18, wherein the phosphorous content of the purified recycled or renewable organic material is reduced at least 10%, preferably at least 30%, more preferably at least 50% as compared to the recycled or renewable organic material provided in step (a).

20. A method as claimed in any one of claims 1 to 19, wherein the method comprises (b) heat treating the recycled or renewable organic material to form a heat treated recycled or renewable organic material, wherein the at least part of silicon compounds present in the recycled or renewable organic material are converted to volatile silicon compounds.

21. A method as claimed in any one of claims 1 to 20, wherein step (b) is performed at 180 to 325°C, preferably at 200 to 300°C, more preferably at 240 to 280°C.

22. A method as claimed in any one of claims 1 to 21, wherein the residence time, is from 1 to 300 min, preferably from 5 to 90 min, more preferably from 20 to 40 min in step (b).

23. A method as claimed in any one of claims 1 to 22, wherein the pressure in step (b) is from 500 to 5000 kPa, preferably from 800 to 2000 kPa.

25 24. A process for producing recycled or renewable hydrocarbons, comprising steps of

(x) producing hydrocarbons from a recycled or renewable organic material as claimed in any one of claims 1 to 23, and

(y) subjecting the purified recycled or renewable organic material to a oil refinery conversion process, wherein the oil refinery conversion process comprises altering the molecular weight of the feed, removal of heteroatoms from the feed, altering the degree of saturation of the feed, rearranging the molecular structure of the feed, or any combination thereof to obtain at least one recycled or renewable hydrocarbon.

35 25. A process as claimed in claim 24 wherein step (y) is hydrocracking.

26. A process as claimed in claim 26, wherein step (y) is performed in a mild hydrocracking (MHC) refinery unit.

27. A process as claimed in claim 25 or 26, wherein step (y) is performed in a presence of a hydrocracking catalyst.

5 28. A process as claimed in claim 24 wherein step (y) is steamcracking.

29. A process as claimed in claim 24 wherein step (y) is isomerization.

10 30. A process as claimed in claim 24 wherein step (y) is hydrotreating.

31. A process as claimed in claim 24 wherein step (y) is thermal catalytic cracking.

32. A process as claimed in claim 24 wherein step (y) is fluid catalytic cracking.

15

Figure 1

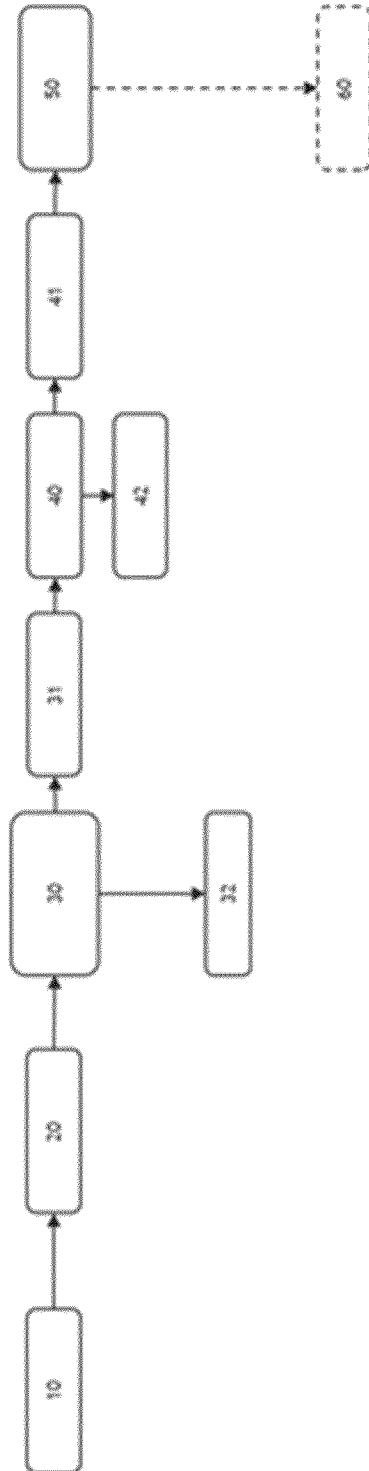


Figure 2

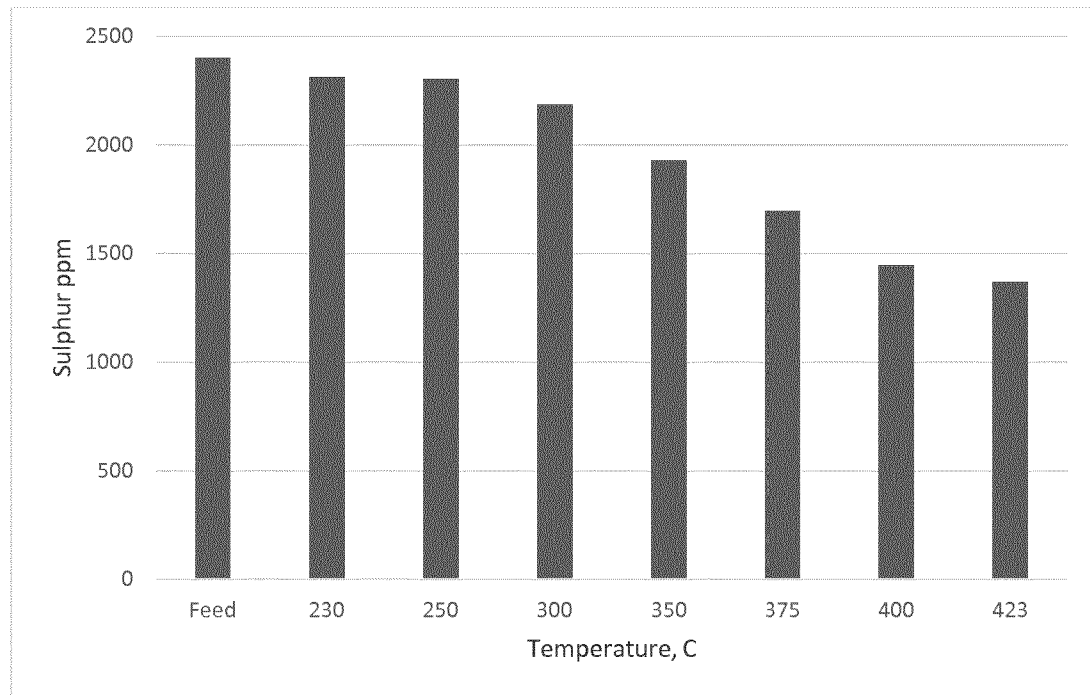


Figure 3

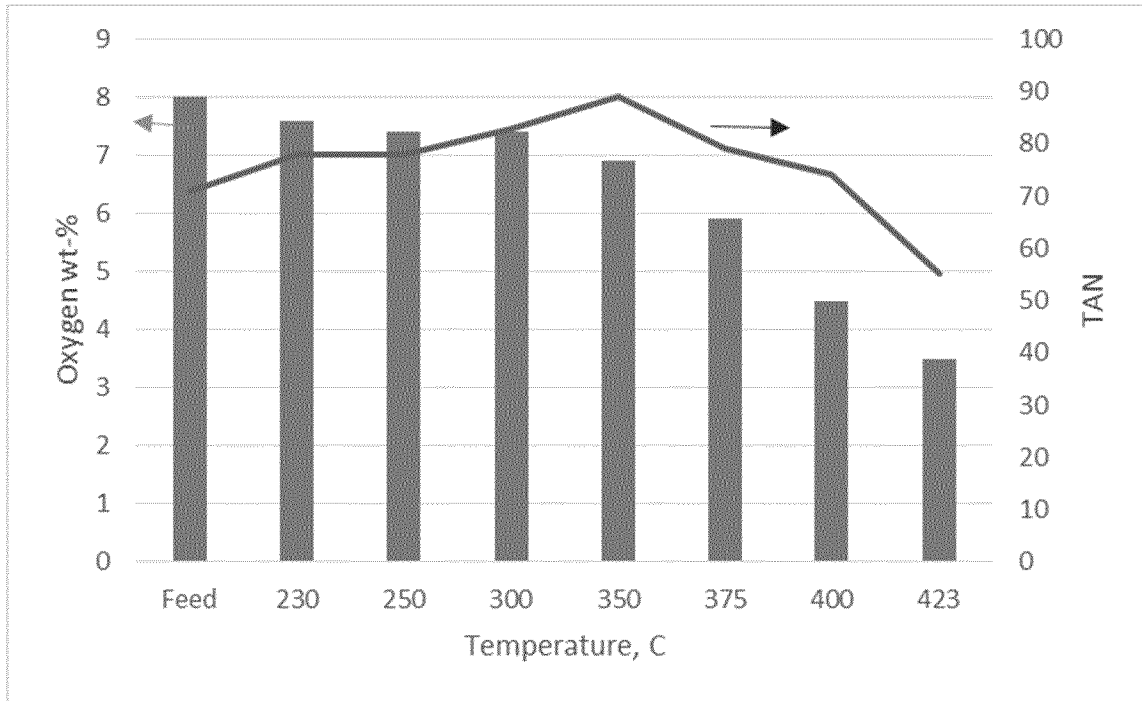


Figure 4


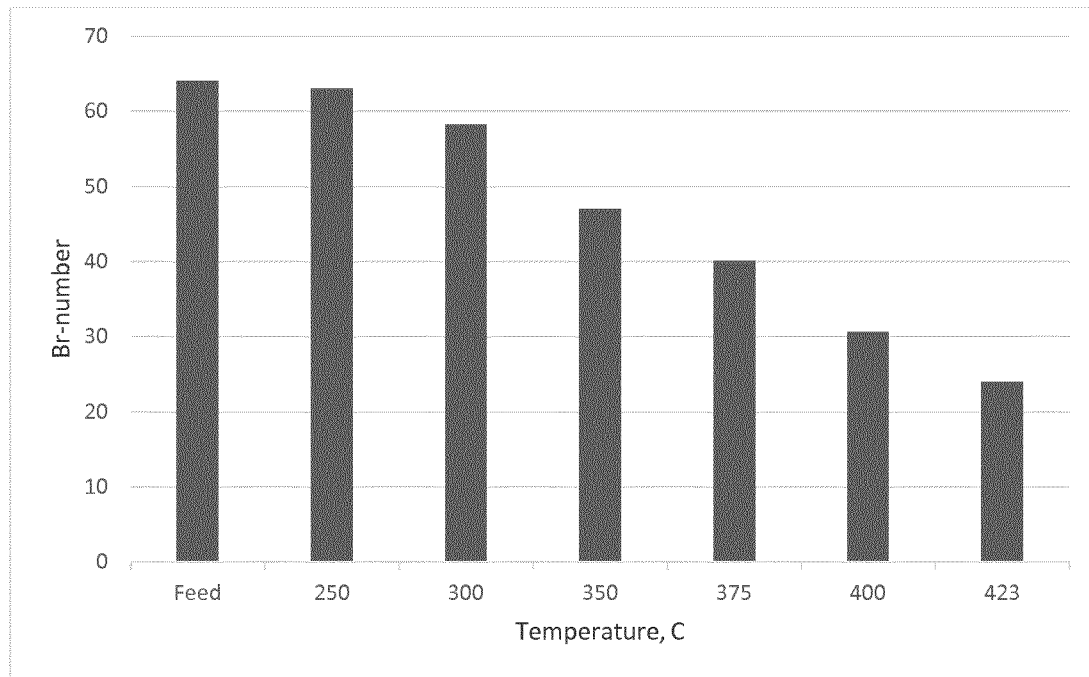


Figure 5

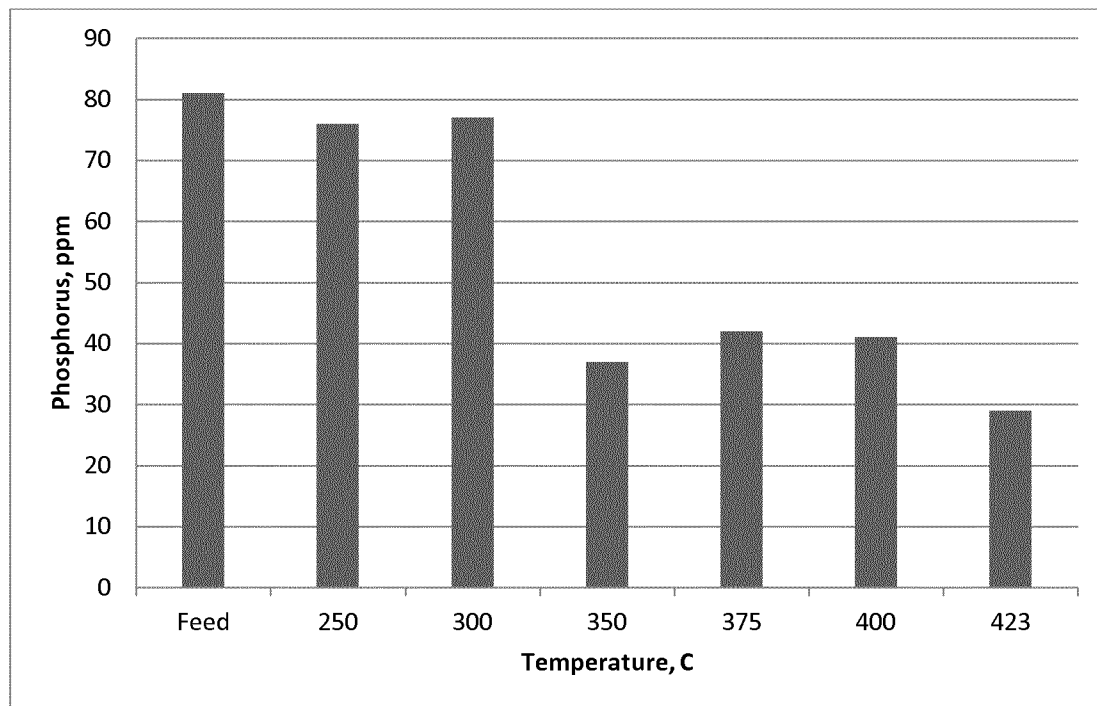

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/069512

A. CLASSIFICATION OF SUBJECT MATTER
INV. C10G1/00 C10G1/02 C10G3/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C10G
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/101713 A1 (UPM KYMMENE CORP [FI]) 9 July 2015 (2015-07-09) claim 1 lines 26-36, paragraph 14 -----	1-32
X	US 2007/170091 A1 (MONNIER JACQUES [CA] ET AL) 26 July 2007 (2007-07-26) figure 1 claims 1-4 paragraph [0025] -----	1-32
X	CN 102 786 986 A (UNIV QINGDAO SCIENCE & TECH) 21 November 2012 (2012-11-21) figures 1-2 paragraphs [0036] - [0042] claim 1 -----	1-32
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 2 September 2019	Date of mailing of the international search report 10/09/2019
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pardo Torre, J
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/069512

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/001632 A1 (UPM KYMMENE CORP [FI]) 3 January 2014 (2014-01-03) figure 1 page 7, lines 13-22 page 24, lines 21-38 claim 1 -----	1-32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2019/069512

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
WO 2015101713	A1	09-07-2015	NONE	

US 2007170091	A1	26-07-2007	AU 2006294366 A1	29-03-2007
			CA 2621231 A1	29-03-2007
			EP 1928983 A1	11-06-2008
			JP 4885962 B2	29-02-2012
			JP 2009510185 A	12-03-2009
			US 2007068848 A1	29-03-2007
			US 2007170091 A1	26-07-2007
			WO 2007033460 A1	29-03-2007

CN 102786986	A	21-11-2012	NONE	

WO 2014001632	A1	03-01-2014	FI 126813 B	31-05-2017
			WO 2014001632 A1	03-01-2014
