




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01R 23/175	A1	(11) International Publication Number: WO 00/31552 (43) International Publication Date: 2 June 2000 (02.06.00)
(21) International Application Number: PCT/US99/18766 (22) International Filing Date: 20 August 1999 (20.08.99) (30) Priority Data: 09/207,896 23 November 1998 (23.11.98) US (71) Applicant (for all designated States except US): THE GOVERNMENT OF THE UNITED STATES OF AMERICA, represented by THE SECRETARY OF THE NAVY [US/US]; Naval Research Laboratory, Code 3008.2, 4555 Overlook Avenue, S.W., Washington, DC 20375-5325 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): LOHRMANN, Dieter, R. [-/US]; 1013 Stone Avenue, Waldorf, MD 20602 (US). (74) Agent: EDELBERG, Barry, A.; Associate Counsel (Patents), Naval Research Laboratory, Code 3008.2, 4555 Overlook Avenue, S.W., Washington, DC 20375-5325 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: APPARATUS TO OSCILLOGRAPH SINGLE SUB-NANOSECOND EVENTS

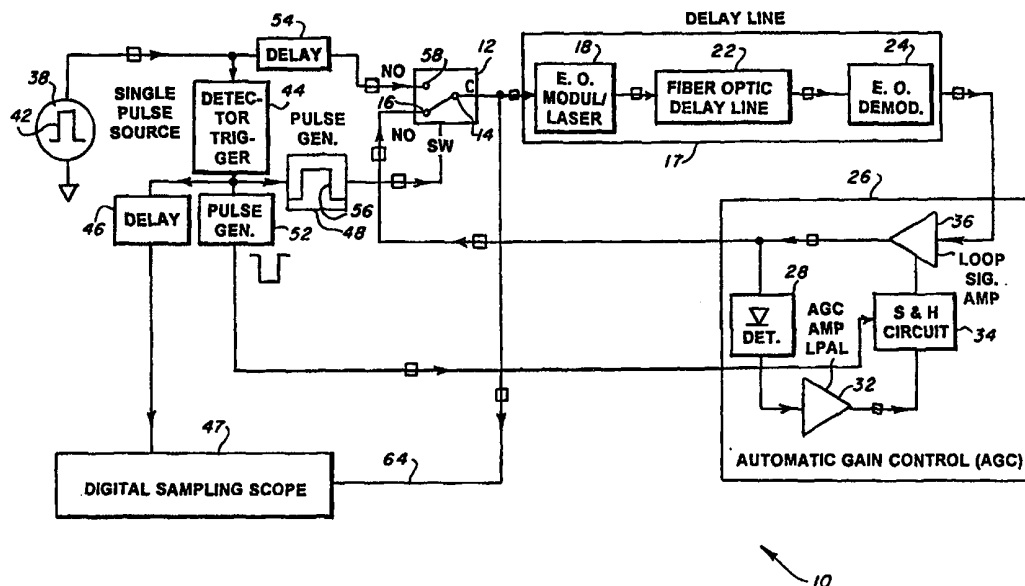

(57) Abstract

This invention transforms a single sub-nanosecond event into a repetitive event, which then can be used as input to a conventional high bandwidth digital sampling oscilloscope (47) by utilizing a delay line (17) switched to form a closed loop provided with a gain. The single event, as a single pulse of a series of repetitive pulses, is allowed to enter and circulate around the loop where it is amplified and periodically read out to a readout device.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

APPARATUS TO OSCILLOGRAPH SINGLE SUB-NANOSECOND EVENTS

BACKGROUND OF THE INVENTION

Field of the Invention

This invention pertains generally to a sampling oscilloscope and more specifically to an apparatus to oscillograph a single event of sub-nanosecond duration utilizing a conventional sampling oscilloscope.

Description of the Related Art

The frequency response of oscillograph tubes is limited by limitations in the deflection system of the electron ray and the high beam brightness required to make ultra-short events visible on the screen. These limitations have been overcome to a large extent by the invention of the digital sampling oscilloscope. The principle of these oscilloscopes is based on sampling technique, which permits the taking of ultra-short (down to picoseconds) samples of a signal, e.g., using step-recovery diode switches. If samples of a repetitive signal are taken at progressive time intervals in reference to the signal, then, after a sufficient number of samples, the repetitive wave form of the signal can be reconstructed from the samples. Digital sampling oscilloscopes are available that can oscillograph repetitive signals up to 50 GHz. This technique does not work for single events.

SUMMARY OF THE INVENTION

The object of this invention is to provide an apparatus that will allow digital sampling oscilloscopes to oscillograph single sub-nanosecond events by extending the bandwidth.

This and other objectives is accomplished by transforming the single sub-nanosecond event into a repetitive event, which then can be used as input to a conventional high bandwidth digital sampling oscilloscope by utilizing a delay line switched to form a closed loop provided with a gain, set automatically to one, into which the single pulse is allowed to enter and circulate around the loop. The delay line is tapped to periodically read the pulse out to a readout device; e.g., a digital sampling oscilloscope.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows an apparatus for allowing single sub-nanosecond events to be converted

into a repetitive event for measurement by a conventional digital sampling oscilloscope.

DESCRIPTION OF THE PREFERRED EMBODIMENT

In the preferred embodiment, the apparatus 10, as shown in **Figure 1**, a switch 12 is positioned so as to interconnect terminals C 14 and NC 16 closing a loop formed by an electro-optical modulator/laser 18, fiber optic delay line 22, electro-optic demodulator 24 and automatic gain control (AGC) amplifier 26. The loop gain is adjusted such that at first, it is slightly above 1, e.g., 1.1. Under this condition, self-excitation of the loop occurs with exponentially rising amplitude, which increases until the AGC 26 comprised of detector 28, AGC amplifier/low pass filter 32, sample and hold circuit 34 and loop signal amplifier 36 act to stabilize the signal amplitude. After the loop has stabilized, the loop gain is exactly equal to one.

The source 38 of the single pulse to be oscillographed emits a pulse 42, a detector-trigger 44 provides a pulse a trigger of a digital sampling oscilloscope (DSO) 47 after delay 46. Also a first and second pulse generator 48 and 52, respectively, are triggered. The pulse 42 from the single pulse source 38 is also applied to the switch 12 thru delay line 54.

The output pulse 56 of the first pulse generator 48 switches switch 12 to a position connecting C 14 and NO 58 completing a circuit between the output of delay line 54 and the electro-optical (E/O) modulator/laser 18 and the input to the DSO 47. The laser optical signal within the electro-optic modulator/laser 18 is modulated by the pulse 42 forming a modulated optical pulse which is applied to the fiber optic delay line 22. Also, the output pulse of the second pulse generator 52 opens the AGC 26 loop by switching the S&H circuit 34 to "HOLD", maintaining the loop gain equal to 1.

Until the pulse 42 exits the delay line 54, the output of the delay line 54 is zero, transmitting zero level into the fiber optic delay line (FODL) 22 via the switch 12. The delay of delay line 54 is chosen such that it slightly exceeds the delay in the FODL 22. Therefore, when the signal pulse 42 exits the delay line 54, the FODL 22 is empty.

After the modulated optical signal pulse from the electro-optical modulator/laser 18 has entered the FODL 22, switch 12 is switched so as to interconnect positions C 14 and NC 16, thereby closing the FODL 22 loop. Now the modulated optical pulse circulates around the loop and is repetitively appearing at the input 64 of the DSO 47. This allows the DSO 47 to receive a sequence of pulses, derived from the single pulse 42.

Due to noise introduced into the delay line loop 17 comprised of the electro-optical modulator/laser 18, fiber optic delay line 22 and electro-optical demodulator 24 loop, noise is

added to the signal every time the signal travels around the loop **17**. With a maximum input power to the delay line **17** of typically 20 dBm and a dynamic range of 65 dB/MHz, the maximum time the pulse can travel around the delay line **17** is 1 ms, before it is destroyed by noise. Since the maximum delay time needed is in the order of only 20 ns, the noise problem can be overcome by proper design utilizing techniques well known to those skilled in the art.

The delay line **17** comprised of electro-optical modulator/laser **18**, fiber optic delay line **22** and electro-optical demodulator **24** can be replaced by other types of delay lines, e.g., transverse electro magnetic (TEM), coaxial, microstrip, delay lines, provided the dispersion is sufficiently low.

The readout device need not be a digital sampling oscilloscope **47**, it may be any other device producing oscillograph periodic signals.

This invention allows for a single event of sub-nanosecond duration to be oscilloscoped by a conventional sampling oscilloscope.

The device set forth may be applied to oscillograph subnanosecond single laser pulses. The optical pulse is converted into an electrical pulse utilizing techniques well known to those skilled in the art, and then applied to the claimed device.

Although this invention has been described in relation to an exemplary embodiment thereof, it will be understood by those skilled in the art that still other variations and modifications can be affected in the preferred embodiment without detracting from the scope and spirit of the invention as described in the claims.

WHAT IS CLAIMED:

1. An apparatus to oscillograph sub-nanosecond single pulses comprised of:
means for forming a delay line into a closed loop;
means for applying a single event pulse to the delay line;
means for increasing the amplitude of the pulse to set the loop gain automatically to a predetermined value;
means of opening the loop to allow the pulse to enter the loop and to close the loop after the pulse has entered so as to allow the pulse circulate around the loop; and
means to sample the circulating pulse in the delay line so as to periodically read the pulse out to a display device.
2. An apparatus, as in Claim 1, wherein the means for forming a delay line into a closed loop is a fiber optic delay line
3. An apparatus, as in Claim 1, wherein the means for applying a single event pulse to the delay line is a transverse electro magnetic type electrical transmission line.
4. An apparatus, as in Claim 1, wherein the means for increasing the amplitude of the pulse to set the loop gain automatically to a predetermined value is an automatic gain control circuit.
5. An apparatus, as in Claim 1, wherein the means of opening the loop to allow the pulse to enter the loop and to close the loop after the pulse has entered so as to allow the pulse circulate around the loop is an electronic switch.
6. An apparatus, as in Claim 1, wherein the means to sample the circulating pulse in the delay line so as to periodically read the pulse on a display device is a digital sampling oscilloscope.
7. A method to oscillograph sub-nanosecond single pulses comprised of:
forming a delay line into a closed loop;
increasing the amplitude of an applied single event pulse to set the loop gain automatically to a predetermined value;
opening the loop to allow the pulse to enter the loop and to close the loop after the pulse has entered; so as to allow the pulse circulate around the loop; and

sampling the circulated pulse in the delay line so as to periodically read the pulse on a display device.

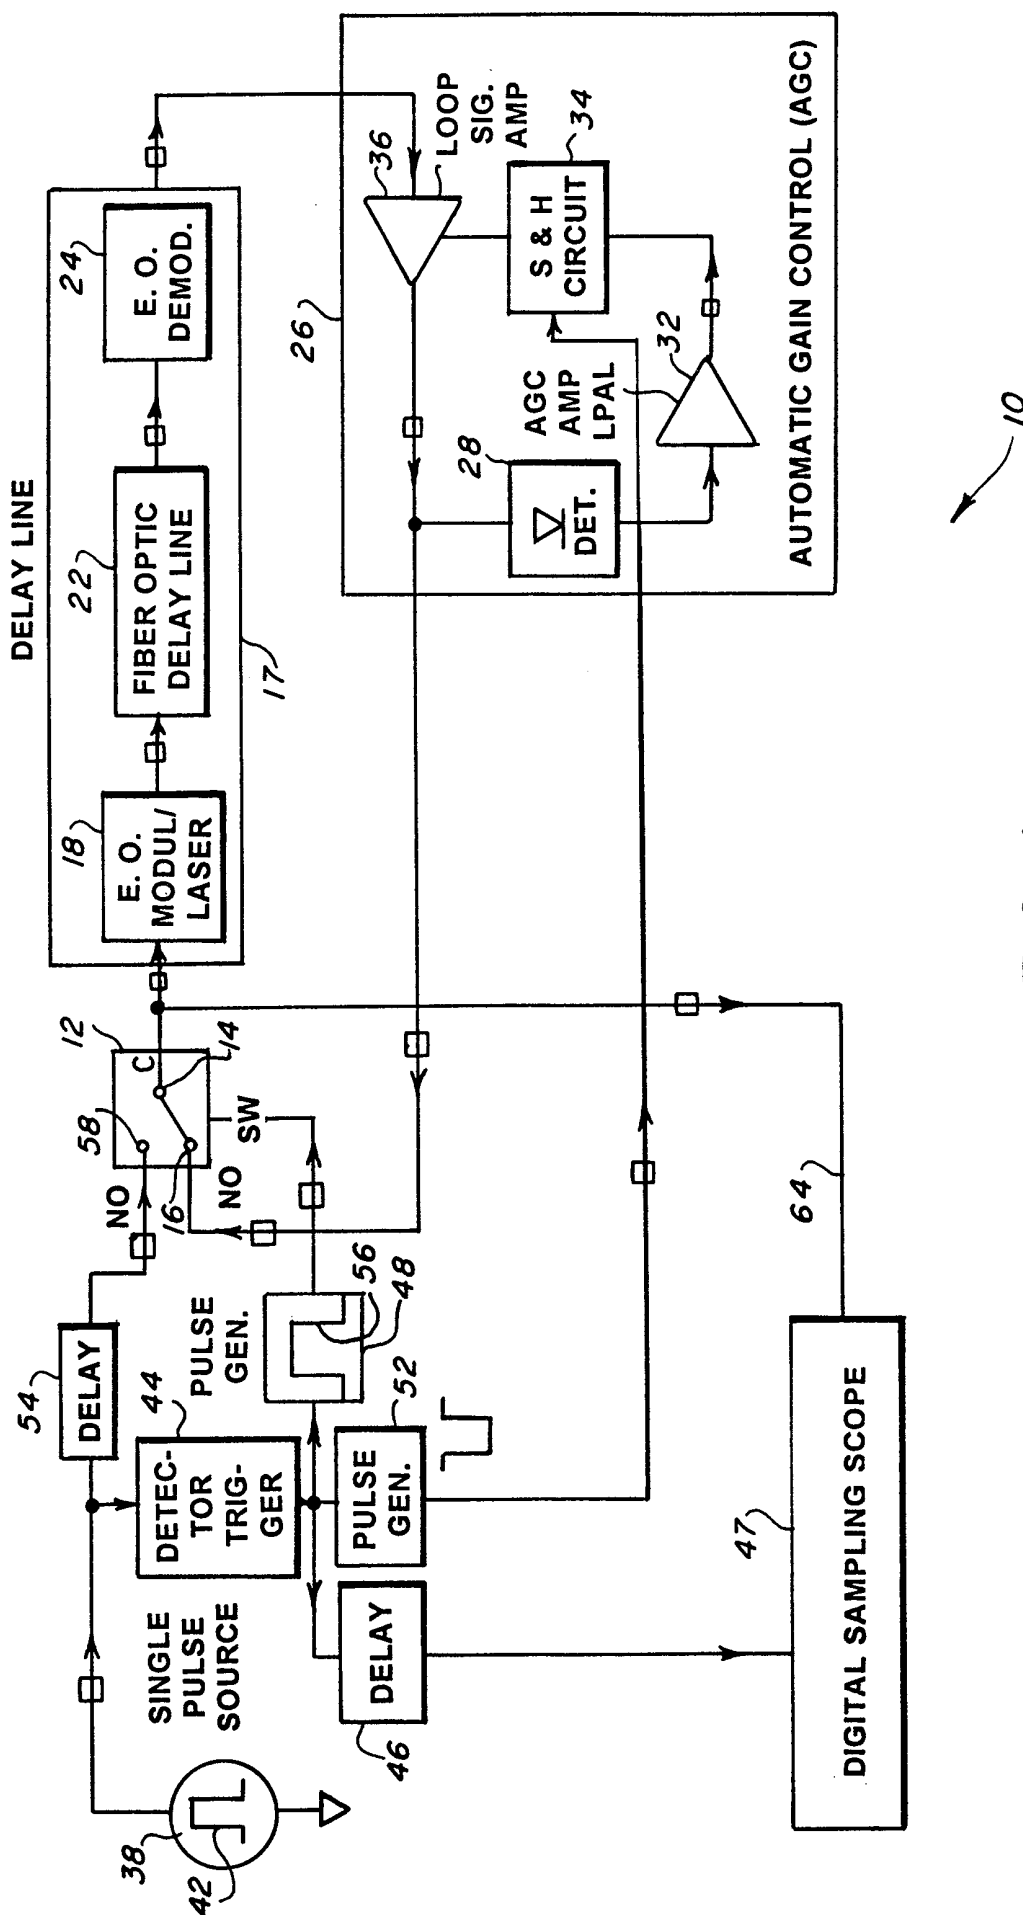


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/18766

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G01R 23/175

US CL :702/79, 66; 324/76.15, 76.35, 76.54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
None

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

U.S. PTO - DIALOG

search terms: closed loop, delay line, single event, oscilloscope, oscillograph

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,555,119 A (LEWIS) 10 September 1996 (10.09.96), Abstract, col. 1, lines 36-45.	1-7
A	US 5,148,373 A (DENT) 15 September 1992 (15.09.92), Abstract, col. 1, lines 17-21.	1-7
A	US 4,641,246 A (HALBERT et al) 03 February 1987 (03.02.87), Abstract, col. 9, lines 18-28.	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

09 NOVEMBER 1999

Date of mailing of the international search report

16 FEB 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

HAL D. WACHSMAN

Telephone No. (703) 305-9788

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/18766

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

702/79, 66, 57, 67-74, 78, 89, 107, 109-112, 124-126, 176, 183, 189, FOR 103, FOR 104, FOR 109, FOR 110;
324/76.15, 76.35, 76.54, 617, 621, 76.13, 76.24, 76.36, 76.38, 76.54, 76.58, 76.82; 359/140, 110, 127; 700/73, 74;
327/149, 153, 158, 161, 182, 183, 392, 393, 395; 341/122, 123, 137, 139, 142