

(57) Abrégé(suite)/Abstract(continued):

determination of the type of flowing material. The instantaneous heat output for the flowing material is determined from the type of flowing material and the heat capacity thereof and the mass flow determination. The output from the metering device (8) is regulated to match the set feed rate, depending on the instantaneous heat output. Also disclosed is a corresponding device (1), for the continuous gravimetric metering of flowing materials for burner systems (40), comprising a metering unit (8), by means of which the flowing material can be metered. Also provided is a material recognition system (20), for determining the type of the flowing material, an arithmetic unit (30), for determining the instantaneous heat output of the flowing material and a metering controller (10), by means of which the output from the metering unit (8) is regulated to match the set feed rate, depending on the instantaneous heat output.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
13. Januar 2005 (13.01.2005)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2005/003696 A1(51) Internationale Patentklassifikation⁷: **G01G 11/08**

(21) Internationales Aktenzeichen: PCT/EP2004/007289

(22) Internationales Anmeldedatum:
4. Juli 2004 (04.07.2004)

(25) Einreichungssprache: Deutsch


(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
103 30 376.6 4. Juli 2003 (04.07.2003) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): **PFISTER GMBH** [DE/DE]; Stätzlinger Strasse 70,
86165 Augsburg (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **WOLFSCHAFFNER,
Hubert** [DE/DE]; Paarstr. 16, 86453 Dasing (DE).(74) Anwalt: **FIENER, Josef**; J. Fiener et Col., Maximilianstr.
57, Postf. 1249, 87712 Mindelheim (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Fortsetzung auf der nächsten Seite]

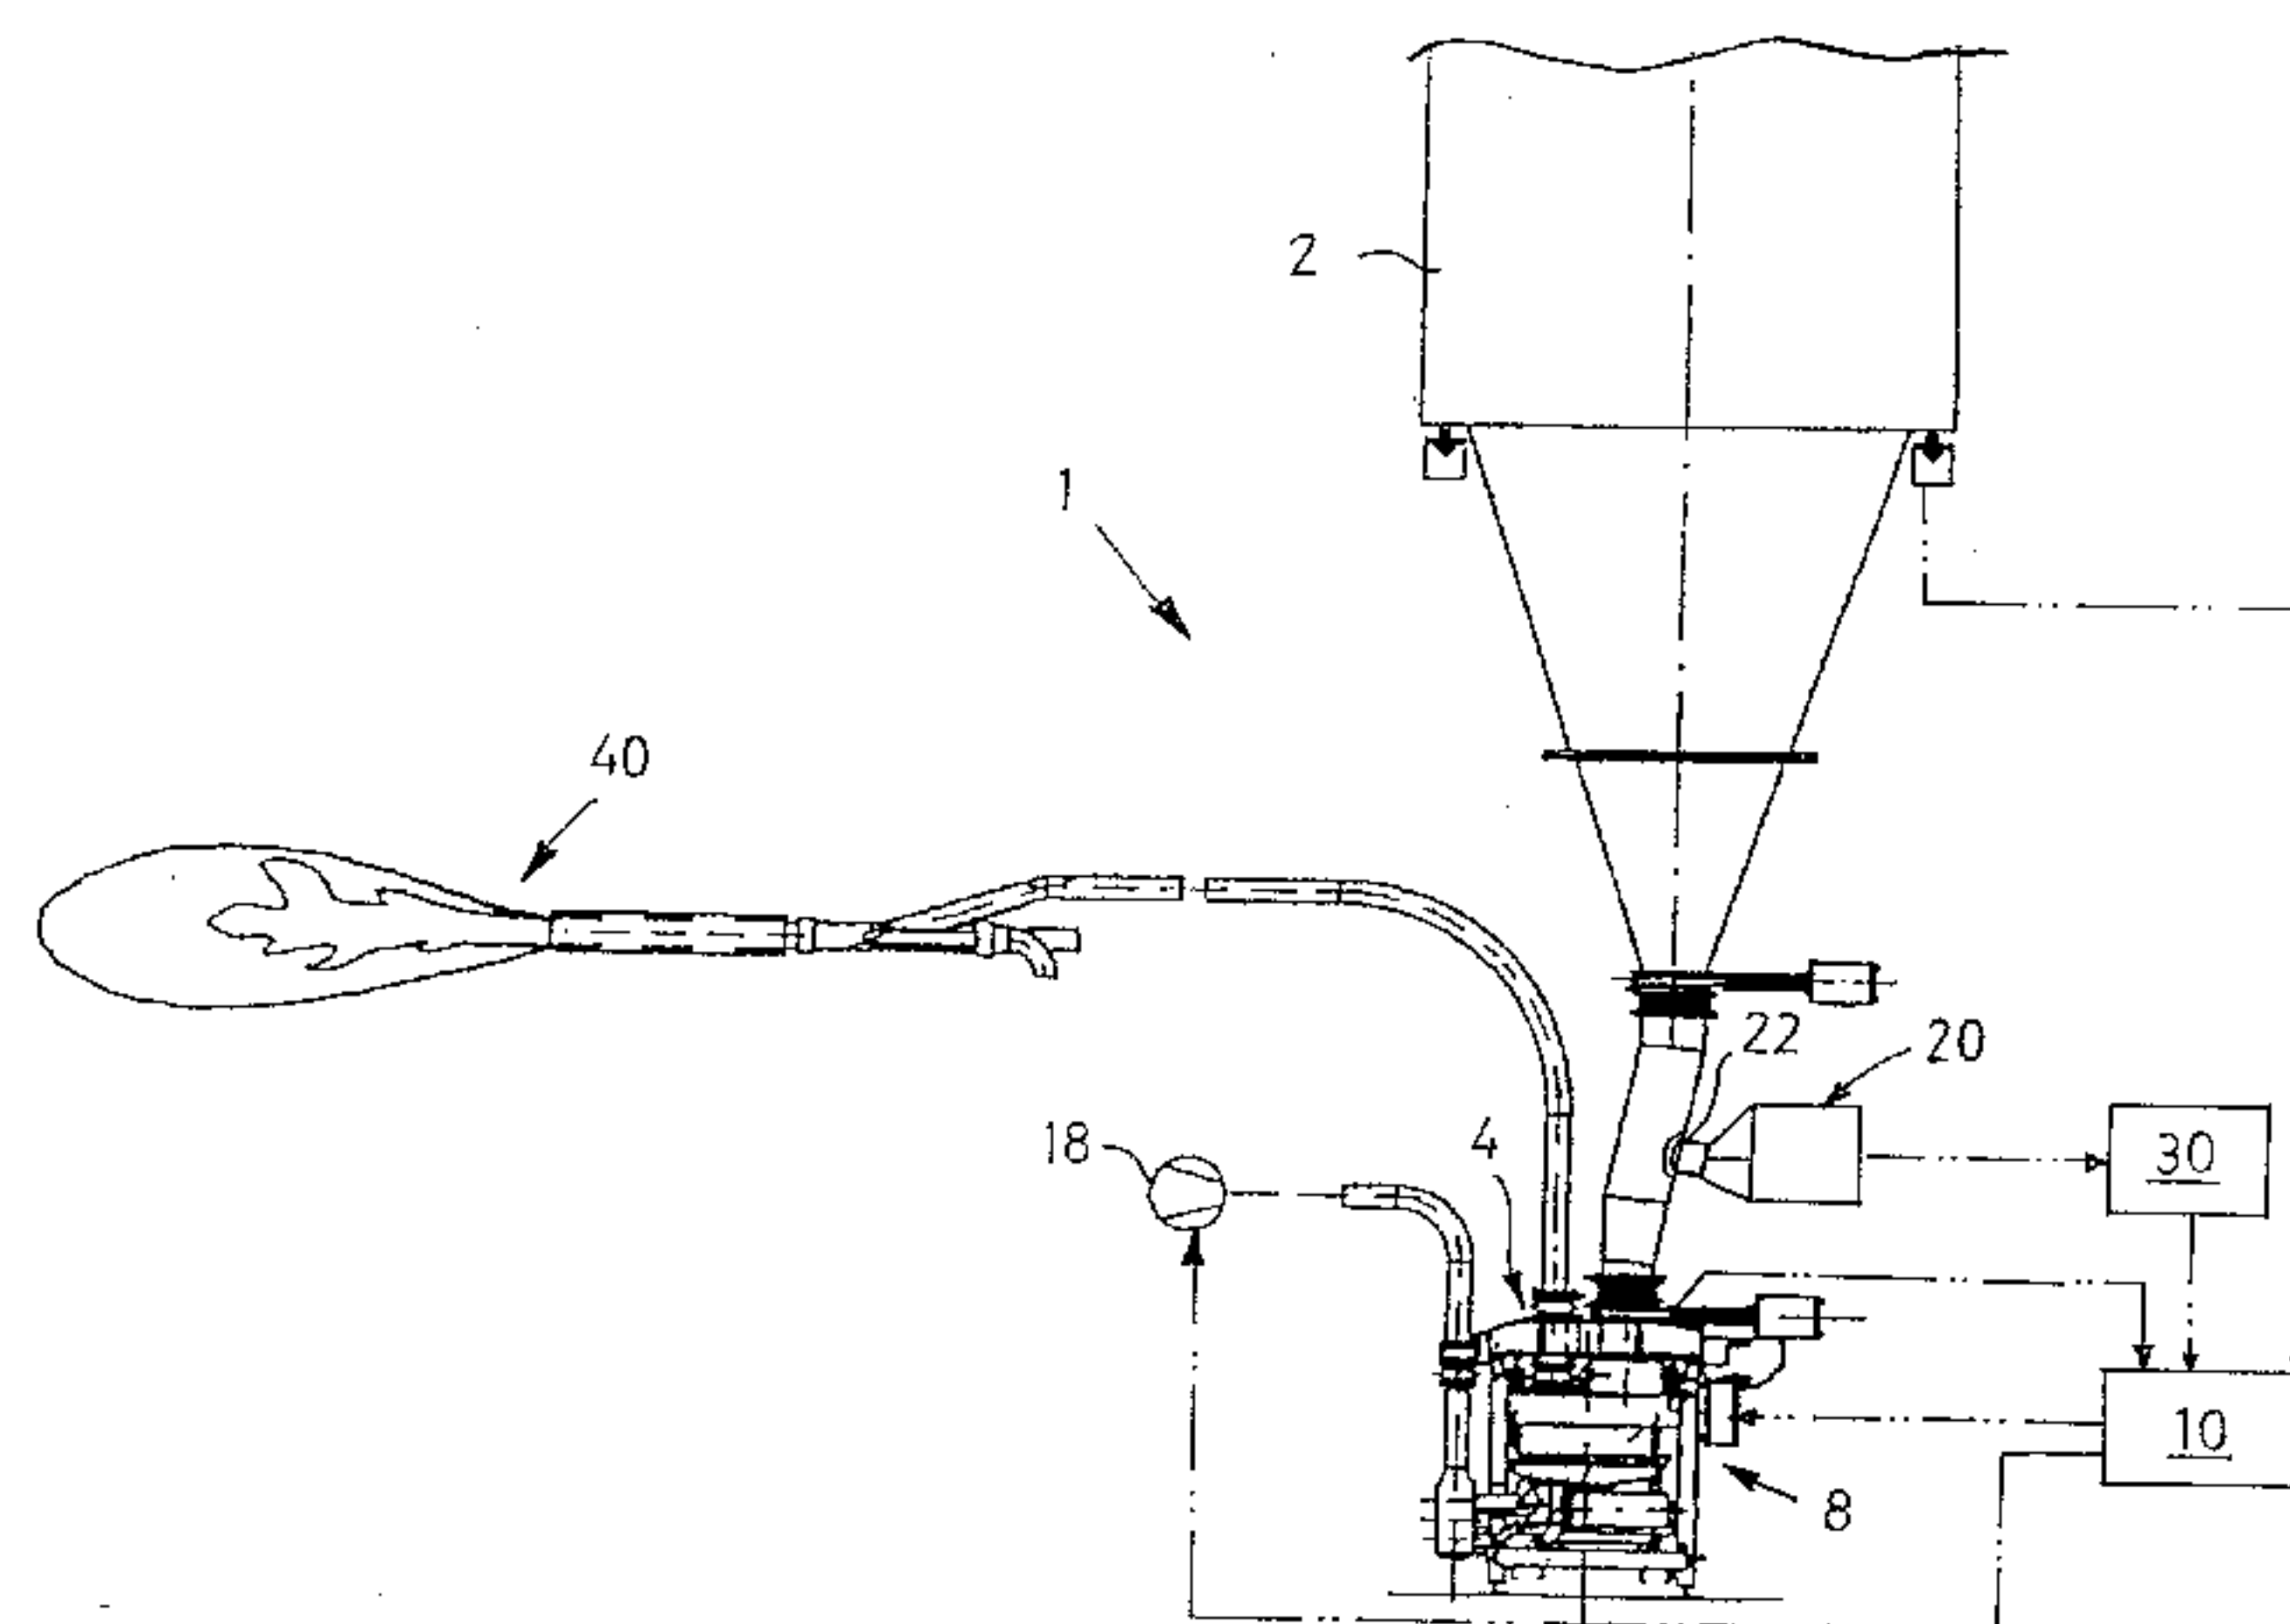(54) Title: METHOD AND DEVICE FOR THE CONTINUOUS GRAVIMETRIC METERING OF FLOWING MATERIALS FOR
BURNER SYSTEMS(54) Bezeichnung: VERFAHREN UND VORRICHTUNG ZUR KONTINUIERLICHEN, GRAVIMETRISCHEN DOSIERUNG
VON FLIESSFÄHIGEN GÜTERN FÜR FEUERUNGSANLAGEN

(57) **Abstract:** According to the invention, a method for the continuous gravimetric metering of flowing materials for burner systems, in which the instantaneous mass flow is determined and metering occurs by means of a metering unit (8), can be achieved by means of determination of the type of flowing material. The instantaneous heat output for the flowing material is determined from the type of flowing material and the heat capacity thereof and the mass flow determination. The output from the metering device (8) is regulated to match the set feed rate, depending on the instantaneous heat output. Also disclosed is a corresponding device (1), for the continuous gravimetric metering of flowing materials for burner systems (40), comprising a metering unit (8), by means of which the flowing material can be metered. Also provided is a material recognition system (20), for determining the type of the flowing material, an arithmetic unit (30), for determining the instantaneous heat output of the flowing material and a metering controller (10), by means of which the output from the metering unit (8) is regulated to match the set feed rate, depending on the instantaneous heat output.

(57) **Zusammenfassung:** Zur Schaffung eines Verfahrens zur kontinuierlichen, gravimetrischen Dosierung von fließfähigen Gütern für Feuerungsanlagen, wobei der momentane Massenstrom festgestellt wird und die Dosierung mit einer Dosiereinrichtung (8) erfolgt, wird vorgeschlagen, dass die Art jedes fließfähigen Gutes festgestellt.

[Fortsetzung auf der nächsten Seite]

WO 2005/003696 A1

WO 2005/003696 A1

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Bestimmungsstaaten (*soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT,

Veröffentlicht:

— mit internationalem Recherchenbericht

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

Aus der Art jedes fließfähigen Gutes, dessen bekanntem, individuellem Brennwert und der Massenstrombestimmung wird der momentane Brennwert der fließfähigen Güter bestimmt und der Austrag der Dosiereinrichtung (8) in Anpassung an die Soll-Förderstärke in Abhängigkeit von dem momentanen Brennwert geregelt. Beschrieben wird weiter eine dementsprechende Vorrichtung (1) zur kontinuierlichen, gravimetrischen Dosierung von fließfähigen Gütern für Feuerungsanlagen (40), die eine Dosiereinrichtung (8) aufweist, mit der die fließfähigen Güter dosierbar sind. Vorgesehen sind dabei ein Stofferkennungssystem (20) zum Feststellen der Art jedes fließfähigen Gutes, eine Recheneinheit (30) zur Bestimmung des momentanen Brennwertes der fließfähigen Güter und eine Dosiersteuerung (10), mit der der Austrag der Dosiereinrichtung (8) an die Soll-Förderstärke in Abhängigkeit von dem momentanen Brennwert anpassbar ist.

A method and apparatus for the continuous gravimetric metering of flowing materials for burner systems

BACKGROUND

Numerous apparatuses and methods for the continuous gravimetric metering of flowing materials for burner systems are known from the state of the art. Flowing materials are understood as being all materials which can be used for fuelling burner systems. Coal dust and waste of all kinds, and in particular plastic waste, are hereby mentioned as examples. The flowing materials can be present both in the form of particles as well as in coarse form. The plastic waste can be shredded, e.g. shreds of waste tires or carpets, or it can be used in an unchanged way, e.g. in the form of plastic containers and packaging. The flowing materials are usually stored in a silo or bunker and supplied with the help of metering and transport apparatuses to the burner system, e.g. a rotary kiln in the production of cement.

Such systems for continuous gravimetric conveyance and/or mixing of pourable material are known for example from DE 40 23 948 A1, with a rotary metering weigher according to DE 32 17 406 A1 or EP-A-0 198 956 being used, because such a metering apparatus can be used in an enclosed pneumatic conveying path to continuously determine the flow of pourable material situated therein and the throughput of pourable material can be influenced by varying the supplied quantity of air per unit of time or by changing the speed. A computer-controlled central metering control system is used for the respective control of the desired mixture ratio or the desired conveyed quantity per unit of time (conveying rate), as is described for example in DE 32 17 406. The weighing signal of the bunker weighing cells is used as an input signal and especially the speed of the metering rotor is controlled for the supply of the pourable material.

Such an apparatus is further known from DE 44 43 053. The apparatus described therein for the continuous gravimetric metering and determination of mass flow of flowing materials comprises a flow meter, especially a Coriolis metering wheel for determining the instantaneous mass flow, and a metering device connected

downstream of the flow meter. The flow meter is connected with the metering device via a metering control unit and the delivery of the metering device can be controlled in a time-shifted manner on the flow meter depending on the deviations in the mass flow.

It is becoming increasingly more important to govern the supply in such a way that the combustion process can occur in an optimal manner where the supply of flowing materials to burner systems is concerned, especially in cases where different types of flowing materials are to be supplied, as a result of environmental and economical considerations. This means that the supply of flowing materials as a fuel and the supply of air must be controlled in such a way that the combustion processes can run optimally and the desired temperature can be kept constant at the same time. The problem arises in connection with different fuels that the calorific value of the individual goods or the flowing materials cannot be determined in their entirety until the present day. For this reason, only a part of the usually employed fuels, e.g. coal dust for rotary kilns for the production of cement, are currently partly replaced by alternative fuels such as plastic waste. It is also often tried to add merely one single type of plastic material, because of the diversity in calorific values of the individual types of plastic. Plastic material of a "pure assortment" has a calorific value which lies in the magnitude of crude oil, whereas fractions of mixed plastic materials as are obtained especially in waste management have a calorific value which is close to that of wood or coal.

SUMMARY

It is an object of the present invention to provide a method and an apparatus for continuous gravimetric metering of flowing materials for burner systems with which a metering of the flowing materials can be performed depending on the condition and the calorific value of the respective goods.

The instantaneous mass flow is determined in the method in accordance with the invention with the help of a flow meter or in combination with a metering device, e.g. a belt weigher or a Coriolis metering wheel. The mass of the continuously flowing materials is thus continuously determined. In addition to the determination of the mass, there is also a determination as to which type of flowing material flows past. It is thus

determined whether coal dust, plastic materials, waste carpets, waste tires, wood or other combustible goods are provided for supply to the furnace. The type of plastic materials is further determined, e.g. whether polyethyleneterephthalate (PET), polypropylene (PP), polyvinyl chloride (PVC) or plastic-coated materials are contained. In particular, the respective type of recycling plastics are to be determined. Since the calorific value is known for each of the known flowing materials, the instantaneous calorific value of the flowing materials is determined from the data of mass flow determination and from the data of the determination of the type of flowing material and its known individual calorific value. The instantaneous calorific value is designated as such calorific value of the flowing materials which are supplied momentarily (at the time of determining the mass and type) to the furnace. The delivery of the metering device is then regulated in adjustment to the setpoint conveying rate depending on the instantaneous calorific value. Such a regulation occurs for example in such a way that the furnace is supplied with more or less fuel or that a regulation of the air supply occurs. As a result of the method in accordance with the invention and the respective apparatus in accordance with the invention with which the method in accordance with the invention is performed it is advantageously ensured that the calorific value of each individual fraction of flowing materials will be known prior to the supply to the furnace and a precise regulation of the metering can occur. It is no longer necessary to make estimates concerning the possible calorific value. Instead, there are precise data for this purpose. The combustion process can thus be optimized and the ecological and economic aspects are considered optimally.

The invention is now explained in closer detail by reference to the enclosed drawings, wherein:

Fig. 1 shows a block diagram of an apparatus in accordance with the invention;

Fig. 2 shows a schematic view of an embodiment of the invention, and

Fig. 3 shows a further preferred embodiment in the form of a rotary metering weigher.

Fig. 1 shows a schematic view of an embodiment of the invention. The illustration shows a schematic configuration of an apparatus **100** and the respective signal and material flows. Flowing materials are supplied both to the flow meter **104** and to the material recognition system **120** from a silo **102** with the help of a draw-off apparatus **103**. The flow of the fuels is shown in Fig. 1 with an unbroken arrow **150**. After passing through the flow meter **104**, these materials flow further via a meter device **108** to the burner system **140**. All known apparatuses can be used as draw-off apparatus **103**, e.g. cellular wheel sluices or metering worms. A large number of known flow meters can also be used as flow meters, with a belt weigher preferably being used as a flow meter **104** in the embodiment according to Fig. 1. Different apparatuses can also be used as the metering device **108**, e.g. cellular wheel sluices or metering worms or, as shown in Fig. 3, a rotary metering weigher as a combination or module of the two. A rotary kiln is preferably used as a burner system **140**, as is used in the production of cement for example. It is also possible to use other burner systems, e.g. burner systems in power plants. The flowing fuel materials not only flow through the flow meter **104** but also through the material recognition system **120**. The material recognition system is arranged in or above the flow meter **104** in the embodiment of Fig. 1. The material recognition system **120** can also be arranged directly before the metering device or directly after the flow meter **104**.

The material recognition system **120** comprises a contactless material sensor, especially a microwave sensor, X-ray sensor or NIR spectroscopic sensor. The material recognition system **120** further comprises a radiation source with which the flowing material can be irradiated with a radiation to which the material sensor is sensitive. An NIR spectroscopic sensor is preferably used. Every flowing material is thus recognized with the help of the material recognition system **120**. The data determined in the material recognition system is forwarded to the computer unit **130** (arrow **170**). An evaluation of the data occurs there, with the type of the determined flowing materials being linked with the respective calorific value. The data linked in the computer unit is then sent to the metering control unit **110** (arrow **175**). The metering control unit **110**

also receives the data on the determination of the mass flow (arrow **160**) which is determined by the flow meter **104**.

As is shown in **Fig. 1**, the parameters received by the metering control unit **110** are shown with broken lines. The metering control unit **110** evaluates the received data and determines the instantaneous calorific value of the flowing materials. The output of the metering device **108** to the burner system (**140**) is adjusted to the setpoint conveying rate and depends on the instantaneous calorific value. This is indicated by the dot-dash arrow **180**. A further possibility for regulation is regulating the air supply to the burner system **140**, which is carried out with the help of the control unit of a blower **118** (arrow **185**). Any signals originating from the metering control unit are shown with a dot-dash line. The blower **118** regulates the supply of air to the burner system **140**, illustrated by the arrow **190**. The combustion of the flowing materials in the burner system **140** can occur both via a regulation of the metering device **108** so that more or less flowing fuels are conveyed, as well as via a regulation of the blower **118**, as a result of which the supply of air is increased or reduced.

Fig. 2 shows an apparatus **1** for the continuous gravimetric metering and determination of mass flow, with the conveying material to be metered according to an adjustable setpoint conveying rate, especially a pourable flowing material, is supplied from a bunker or silo **2** by means of a draw-off apparatus **3** configured here in the form of a cellular wheel sluice. The conveyed material reaches a flow meter **4** which is arranged within a housing **5** and thus defines a measuring section. The flow meter **4** is configured here as a Coriolis metering wheel, as is described in closer detail in DE 41 34 319 A1. This Coriolis metering wheel is held in this case on a drive housing projecting laterally from the housing **5** and is driven by an electromotor **6** which rests on a load cell **7** by way of a jib in a limited pivoting movable way. The required torque of the metering wheel rotating at an approximately constant speed changes here according to the occurring Coriolis force, with the change of the drive torque and thus the reaction moment on the laterally arranged load cell **7** being directly proportional to the mass of the material flow which flows through.

The power consumption of the drive motor **6** can also be used for detecting the change in torque and thus the determination of the mass flow. The flow meter **4** according to the Coriolis metering principle comes with the advantage of a very high measuring precision. It is also possible to use other flow meters such as baffle-plate continuous-flow weighing machines or inductive or capacitive flow meters.

A pneumatic conveyor **18** is provided in this case as a metering device **8** for metering and further conveying the flowing materials. It opens into the blow-out line **9**. The transducer of the flow meter **4**, which in this case is the load cell **7**, is connected with the metering control unit **10**, which thus determines the instantaneous mass flow and places the same in relationship to the setpoint conveying rate, and thus directly triggers the motor **18a** of the metering device **8** in order to vary the speed of the pneumatic conveyor **18** and to thus keep the set conveying rate constant. If the flow meter **4** thus measures a negative deviation of the mass flow, the speed of the pneumatic conveyor **18** is increased by the respective value in order to maintain the conveying rate. A relevant aspect is also that as a result of the arrangement of the dosing device **8** at a certain distance from the flow meter **4** or the burner system **40**, geometrically predetermined conditions are present, so that metering control unit **10** is capable of calculating precisely the time at which the disturbance occurred in the blow-out line **9**. This can also be placed in relationship with the instantaneous calorific value as determined by the material recognition system **120**. As a result, the metering control unit **10** can give the respective command at this time or shortly before by taking into account the inertial behavior of the metering device **8** to increase the speed by 0.2% for example. A kind of anticipatory regulation of the actual conveying rate is thus enabled by this apparatus **1**.

In order to substantially maintain the constancy of the mass flow supplied to the flow meter **4**, the draw-off apparatus **3** can be controlled or regulated in an advantageous embodiment according to the measurement results of the flow meter **4**. In an especially simple embodiment it is sufficient to branch off a drive from the drive motor **18a** and an

associated transmission of the metering device **8** in order to achieve a synchronous regulation of draw-off apparatus **3** and dosing device **8**. It is understood that certainly separate motors could be provided which are triggered by the meter control unit **10** in an electronically coupled way.

In accordance with the invention, the apparatus **1** comprises a material recognition system **20** (similar to the one in **Fig. 4** with reference numeral **120**), which is arranged in this case before the flow meter **4** however. The material recognition system **20** comprises an NIR spectrometer **21** in the embodiment of **Fig. 2**. A material sensor **22**, which more precisely is an NIR spectroscopic sensor, receives the light absorption of the flowing materials that flow past. The flowing materials are illuminated homogeneously with NIR light, for which the radiation sources **23** and **24** are provided. A halogen lamp can be used as such a source of radiation for example. The material sensor **22** is contactless and collects the transmitted and reflected light irrespective of the distance to the flowing materials and guides the same forward via suitable optical waveguides to the spectrometer **21**. Since the different types of flowing materials each have a characteristic light absorption, they can thus be recognized. The near infrared range extends in the spectral range of 850 to 2200 nm. In this wavelength range, the O-H-, N-H- or C-H-molecule oscillations for example show clear absorption bands. By evaluating the extinction of the individual bands it is thus possible to make precise statements on the composition even of complex mixtures. This can occur directly on site during the supply of the flowing materials to the burner system **40** and supplies the results in real time. The data is forwarded by the spectrometer **21** to the computer unit **30** where it is compared with the data of fuels as known from calibration methods or known sources and is associated with the respectively known calorific values. This data is then supplied to the metering control unit **10** which regulates the conveying rate in adjustment to the setpoint conveying rate with the help of the data obtained in the flow meter **4** by taking into account the instantaneous calorific value of the fuel supplied to the system. A regulation of the metering device and also the draw-off device can thus occur.

A further possibility for regulation is that a metering flap **18'** is provided on the pneumatic conveyor **18** which changes the air flow and thus controls the output from the housing **5** depending on instantaneous mass flow and calorific value as determined by the flow meter **4**. Depending on a positive or negative deviation, the air injection by the pneumatic conveyor **18** can be varied as a consequence of the speed regulation of the drive motor **18a** and/or the opening or closing of the metering flap **18'** in order to maintain the setpoint conveying rate.

A further possibility is that an additional blower **28** is connected to the blow-out line **9**, with the drive motor **28a** of the additional blower **28** being connected to the metering control unit **10**, as is shown originating from a data linkage point in unbroken lines. Instead of changing the secondary air quantity and/or air speed, it is possible to readjust a primary air blower **38** as a further alternative. Fixed distances, which are $h+l_1+l_2$ in this case, and thus time differences between the flow meter **4** and the orifice into the burner system **40** are predetermined. The change of the primary air supply is especially relevant in this case in burner systems **40** for maintaining the air/fuel ratio. As a result, the three illustrated blowers **18**, **28** and **38** are preferably coupled with each other in a controller integrated in the metering control unit **10** for example, so that in the case of an increase in the air quantity in the blower **18** a respective reduction of the supplied air quantity is made in the blower **38** in order to maintain not only the supplied fuel quantity but also the preferably stoichiometric air/fuel ratio according to the setpoint values.

Fig. 3 shows a preferred embodiment of the apparatus (with the same reference numerals for respective components), namely with a rotary metering weigher of the configuration as mentioned above. This configuration of the rotary metering weigher as a metering device **8** simultaneously integrates the flow meter **4** as a result of its configuration, as is indicated by the double arrow designation. This leads to an especially compact configuration of the apparatus in a module, so that the individual components as shown in Figs. 1 and 2 are combined in a practical way in one metering device. The material recognition system **20** which is relevant here can be arranged

shortly before the material inlet from the bunker **2**. It can also be integrated in the housing of the rotary metering weigher **4** and **8**. The same applies for similar metering devices of the applicant, e.g. metering chain weighers.

CLAIMS:**I claim:**

1. A method for the continuous gravimetric metering of materials flowing to a burner system (140) said method comprising the steps of:
 - (a) determining an instantaneous mass flow of the materials;
 - (b) determining a type for each material;
 - (c) determining a known calorific value for each material from the type determined at Step (b);
 - (d) determining, from the instantaneous mass flow determined at Step (a) and the known calorific value determined at Step (c), an instantaneous calorific value of the materials; and,
 - (e) regulating the output from a metering device (8, 108) metering the flow of the materials to the burner system (140), wherein the regulating is done on the basis of the instantaneous calorific value determined at Step (d).
2. A method according to claim 1, wherein the determination of the type of material at Step (b) is carried out by way of NIR spectroscopy.
3. A method according to claim 1 or 2, wherein the materials are plastic materials.
4. A method according to claim 1, 2, or 3, wherein Step (e) comprises taking into account the distance between the metering device (8, 108) and the burner system (140).
5. A method according to claim 1, 2, 3, or 4, wherein Step (e) comprises changing the speed of the metering device (8, 108).
6. A method according to claim 1, 2, 3, 4, or 5, wherein conveyance of the materials is effectuated by a pneumatic conveyance, and wherein Step (e) comprises changing at least one of air quality and air speed of the pneumatic conveyance.
7. An apparatus for the continuous gravimetric metering of flowing materials for burner systems, wherein the instantaneous mass flow of the flowing materials is determined, and

wherein the flowing materials are metered by means of a metering device (8, 108), said apparatus comprising:

- (a) a material recognition system (20, 120) for determining any kind of flowing material;
- (b) a computer unit (30, 130) for determining the instantaneous calorific value of the flowing materials; and,
- (c) a metering control unit (10, 110) with which an output of the metering device (8, 108) is adjusted to a set-point conveying rate depending on the instantaneous calorific value.

8. An apparatus according to claim 7, wherein the material recognition system (20, 120) comprises a contactless material sensor (22) and a radiation source (23, 24) with which the flowing material can be irradiated with a radiation to which the material sensor is sensitive.

9. An apparatus according to claim 8, wherein the material sensor (22) is an NIR spectroscopic sensor and the radiation source (23, 24) emits light in the near-infrared range.

10. An apparatus according to claim 9 wherein the radiation source is a halogen lamp.

11. An apparatus according to claim 7, 8, or 9, wherein the material recognition system (20) is arranged directly before the metering device (8, 108).

12. An apparatus according to claim 7, 8, or 9, wherein the material recognition system (120) is arranged in a flow meter (104).

13. An apparatus according to claim 12, wherein the flow meter (104) is arranged on a band weigher or a Coriolis flow meter.

14. An apparatus according to claim 12 wherein the flow meter is configured as a rotary metering weigher (8).

15. An apparatus according to claim 7, 8, 9, 10, 11, or 12 wherein the flowing materials are plastic materials.

16. An apparatus according to claim 7, 8, 9, 10, 11, 12, or 13, wherein the burner system (40, 140) is a rotary kiln for cement production.
17. An apparatus according to claim 12, wherein the metering device (8) and the flow meter (104) form a unit.

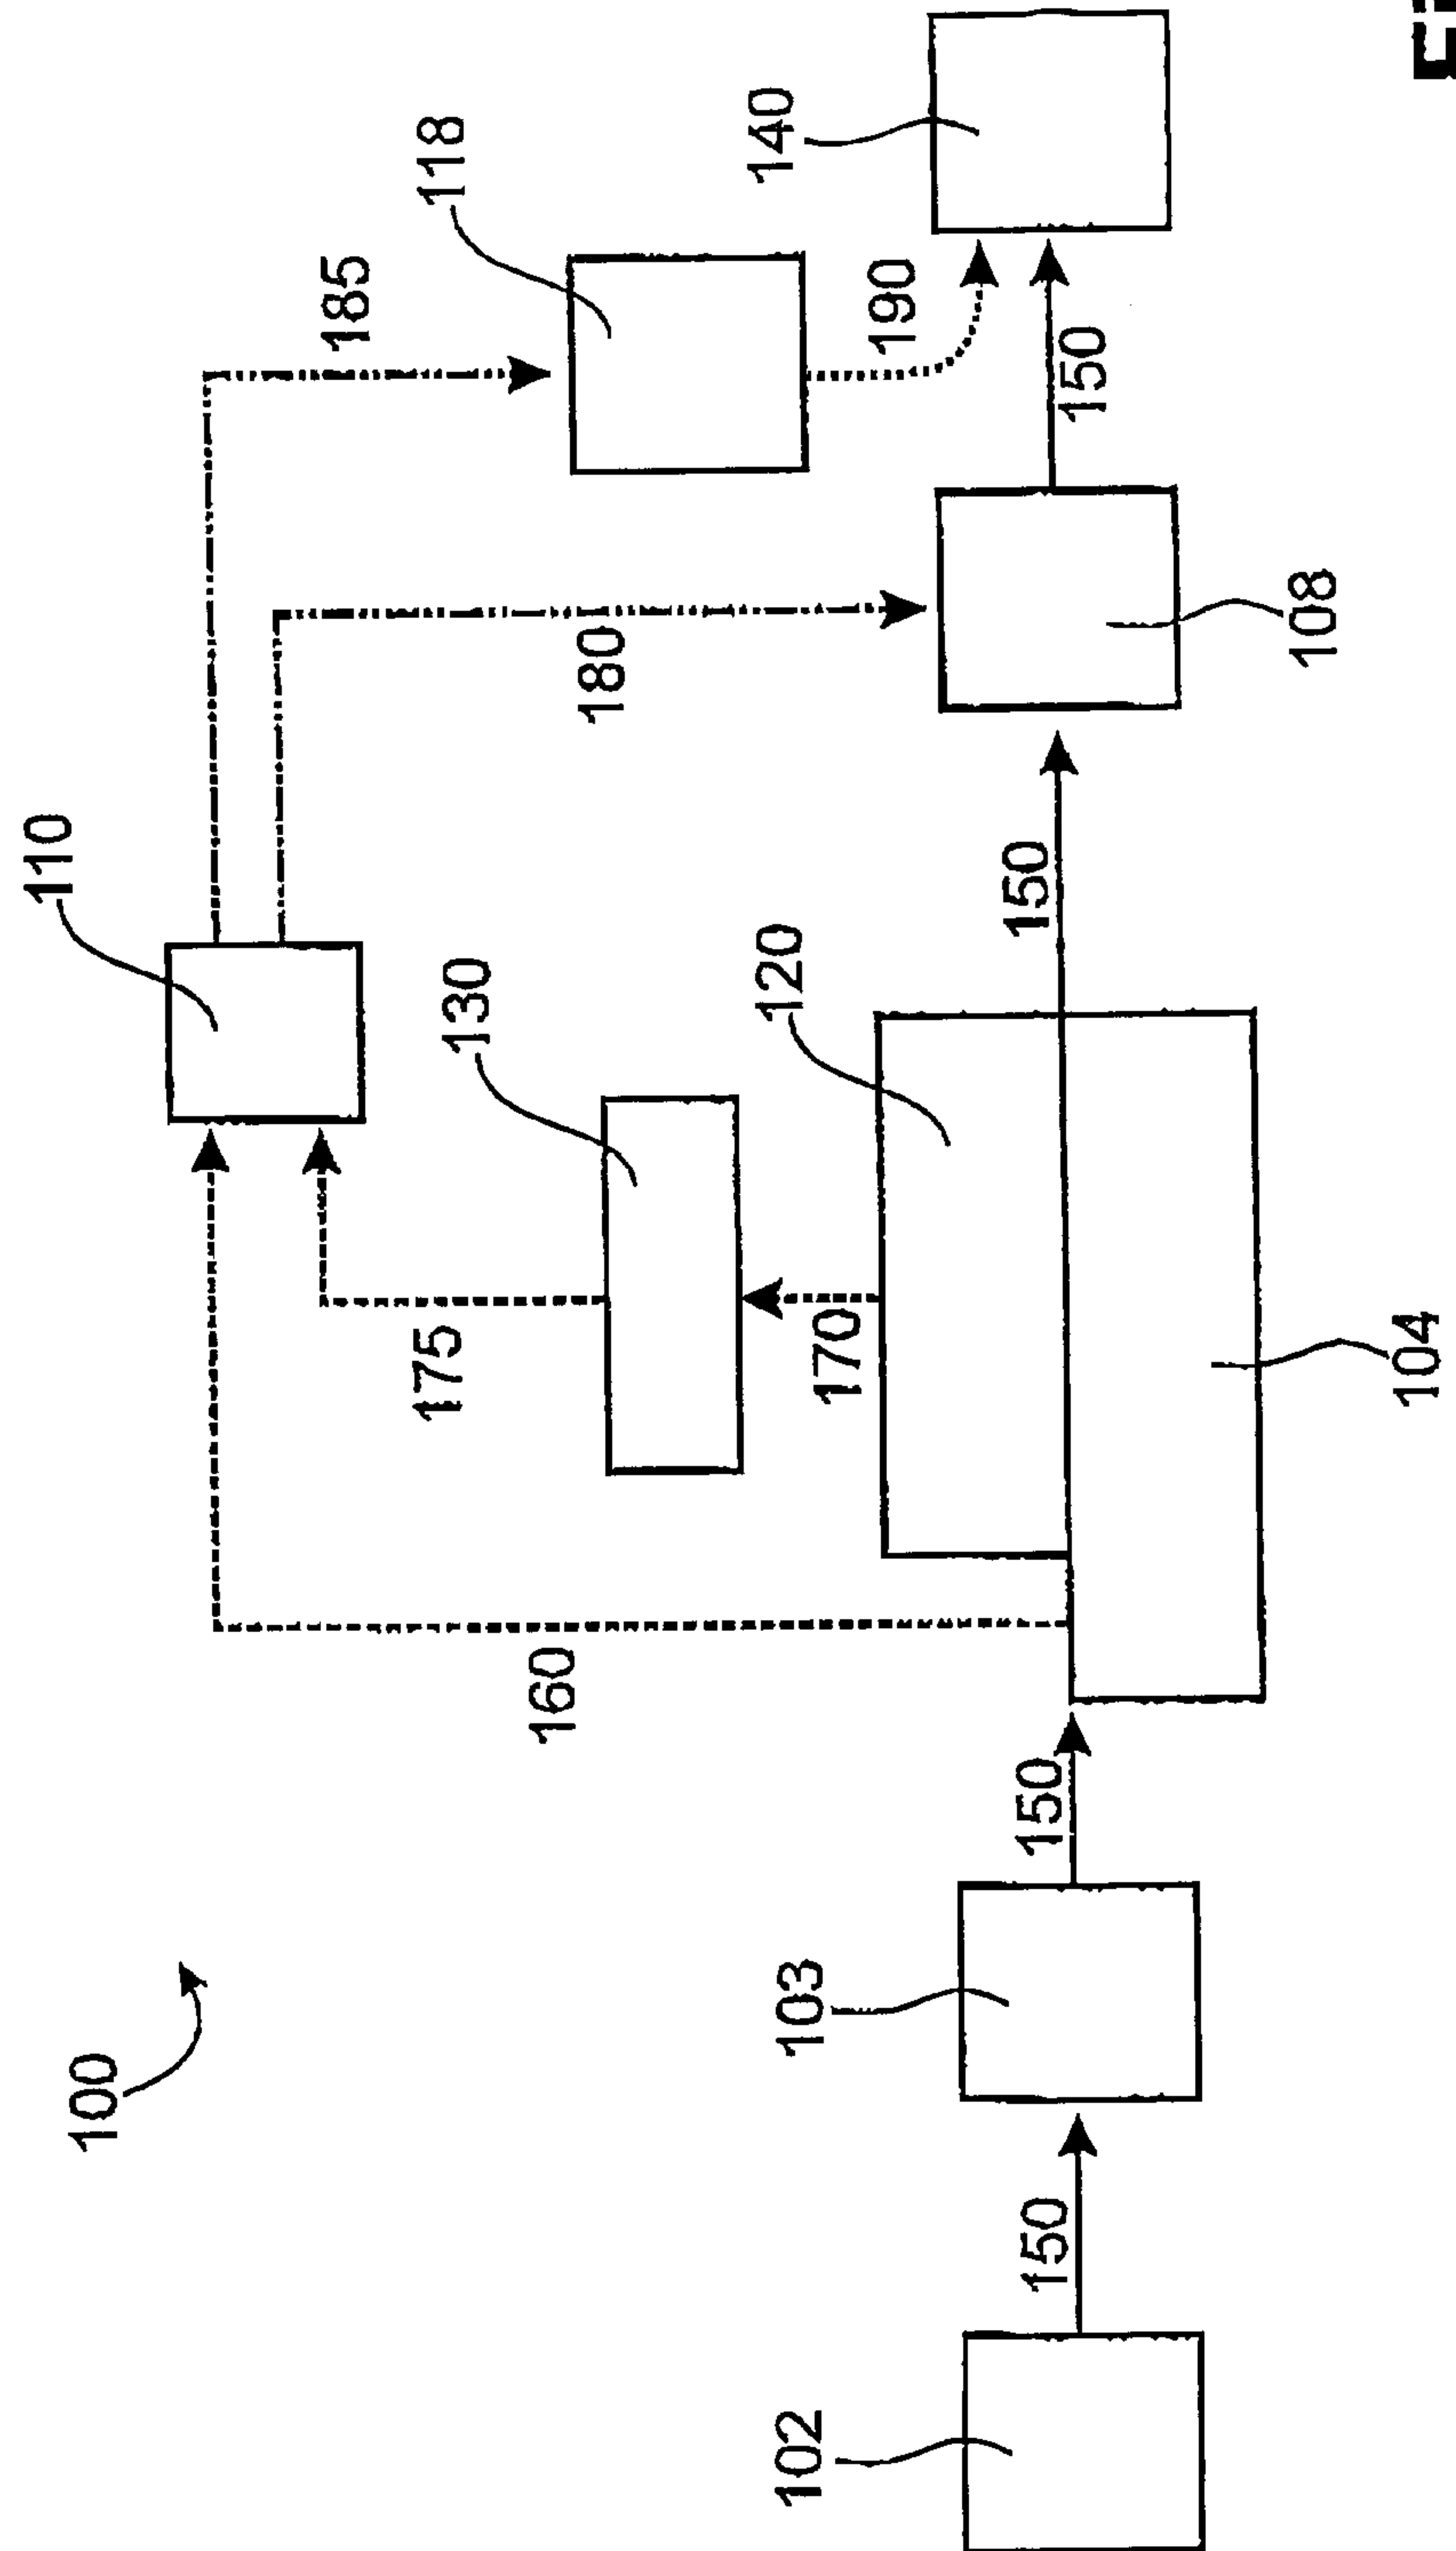


Fig. 1

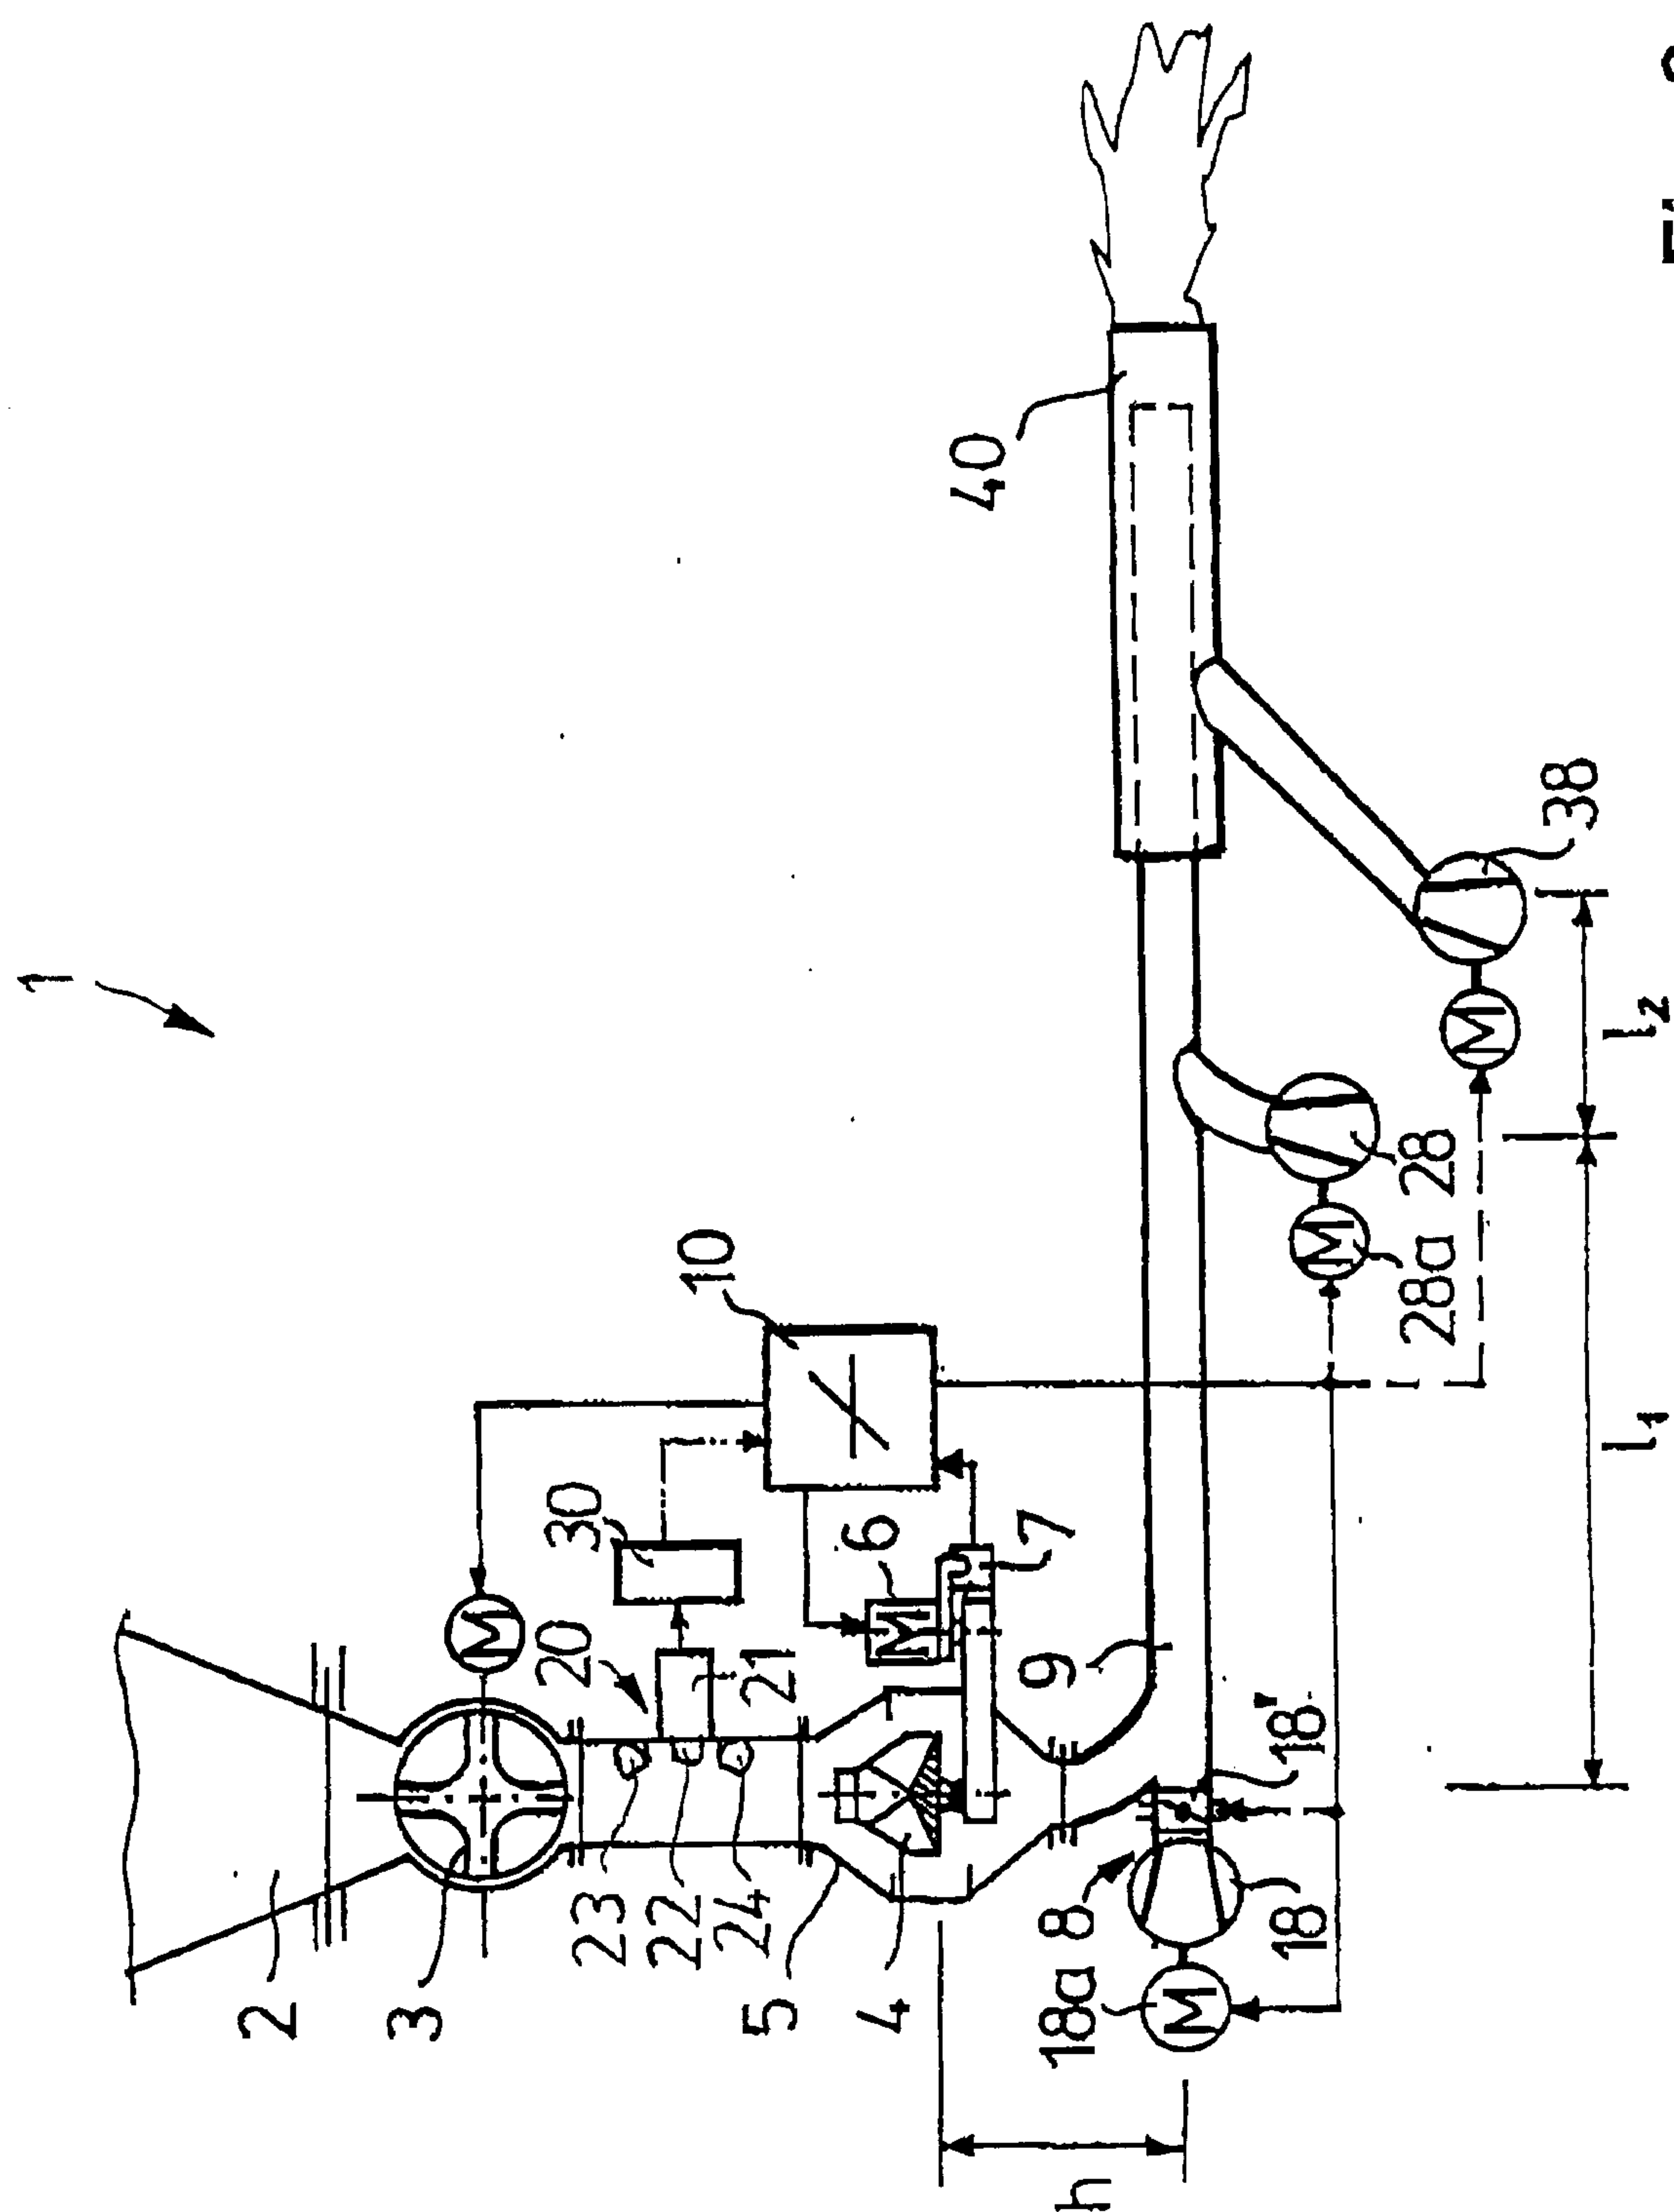


Fig. 2

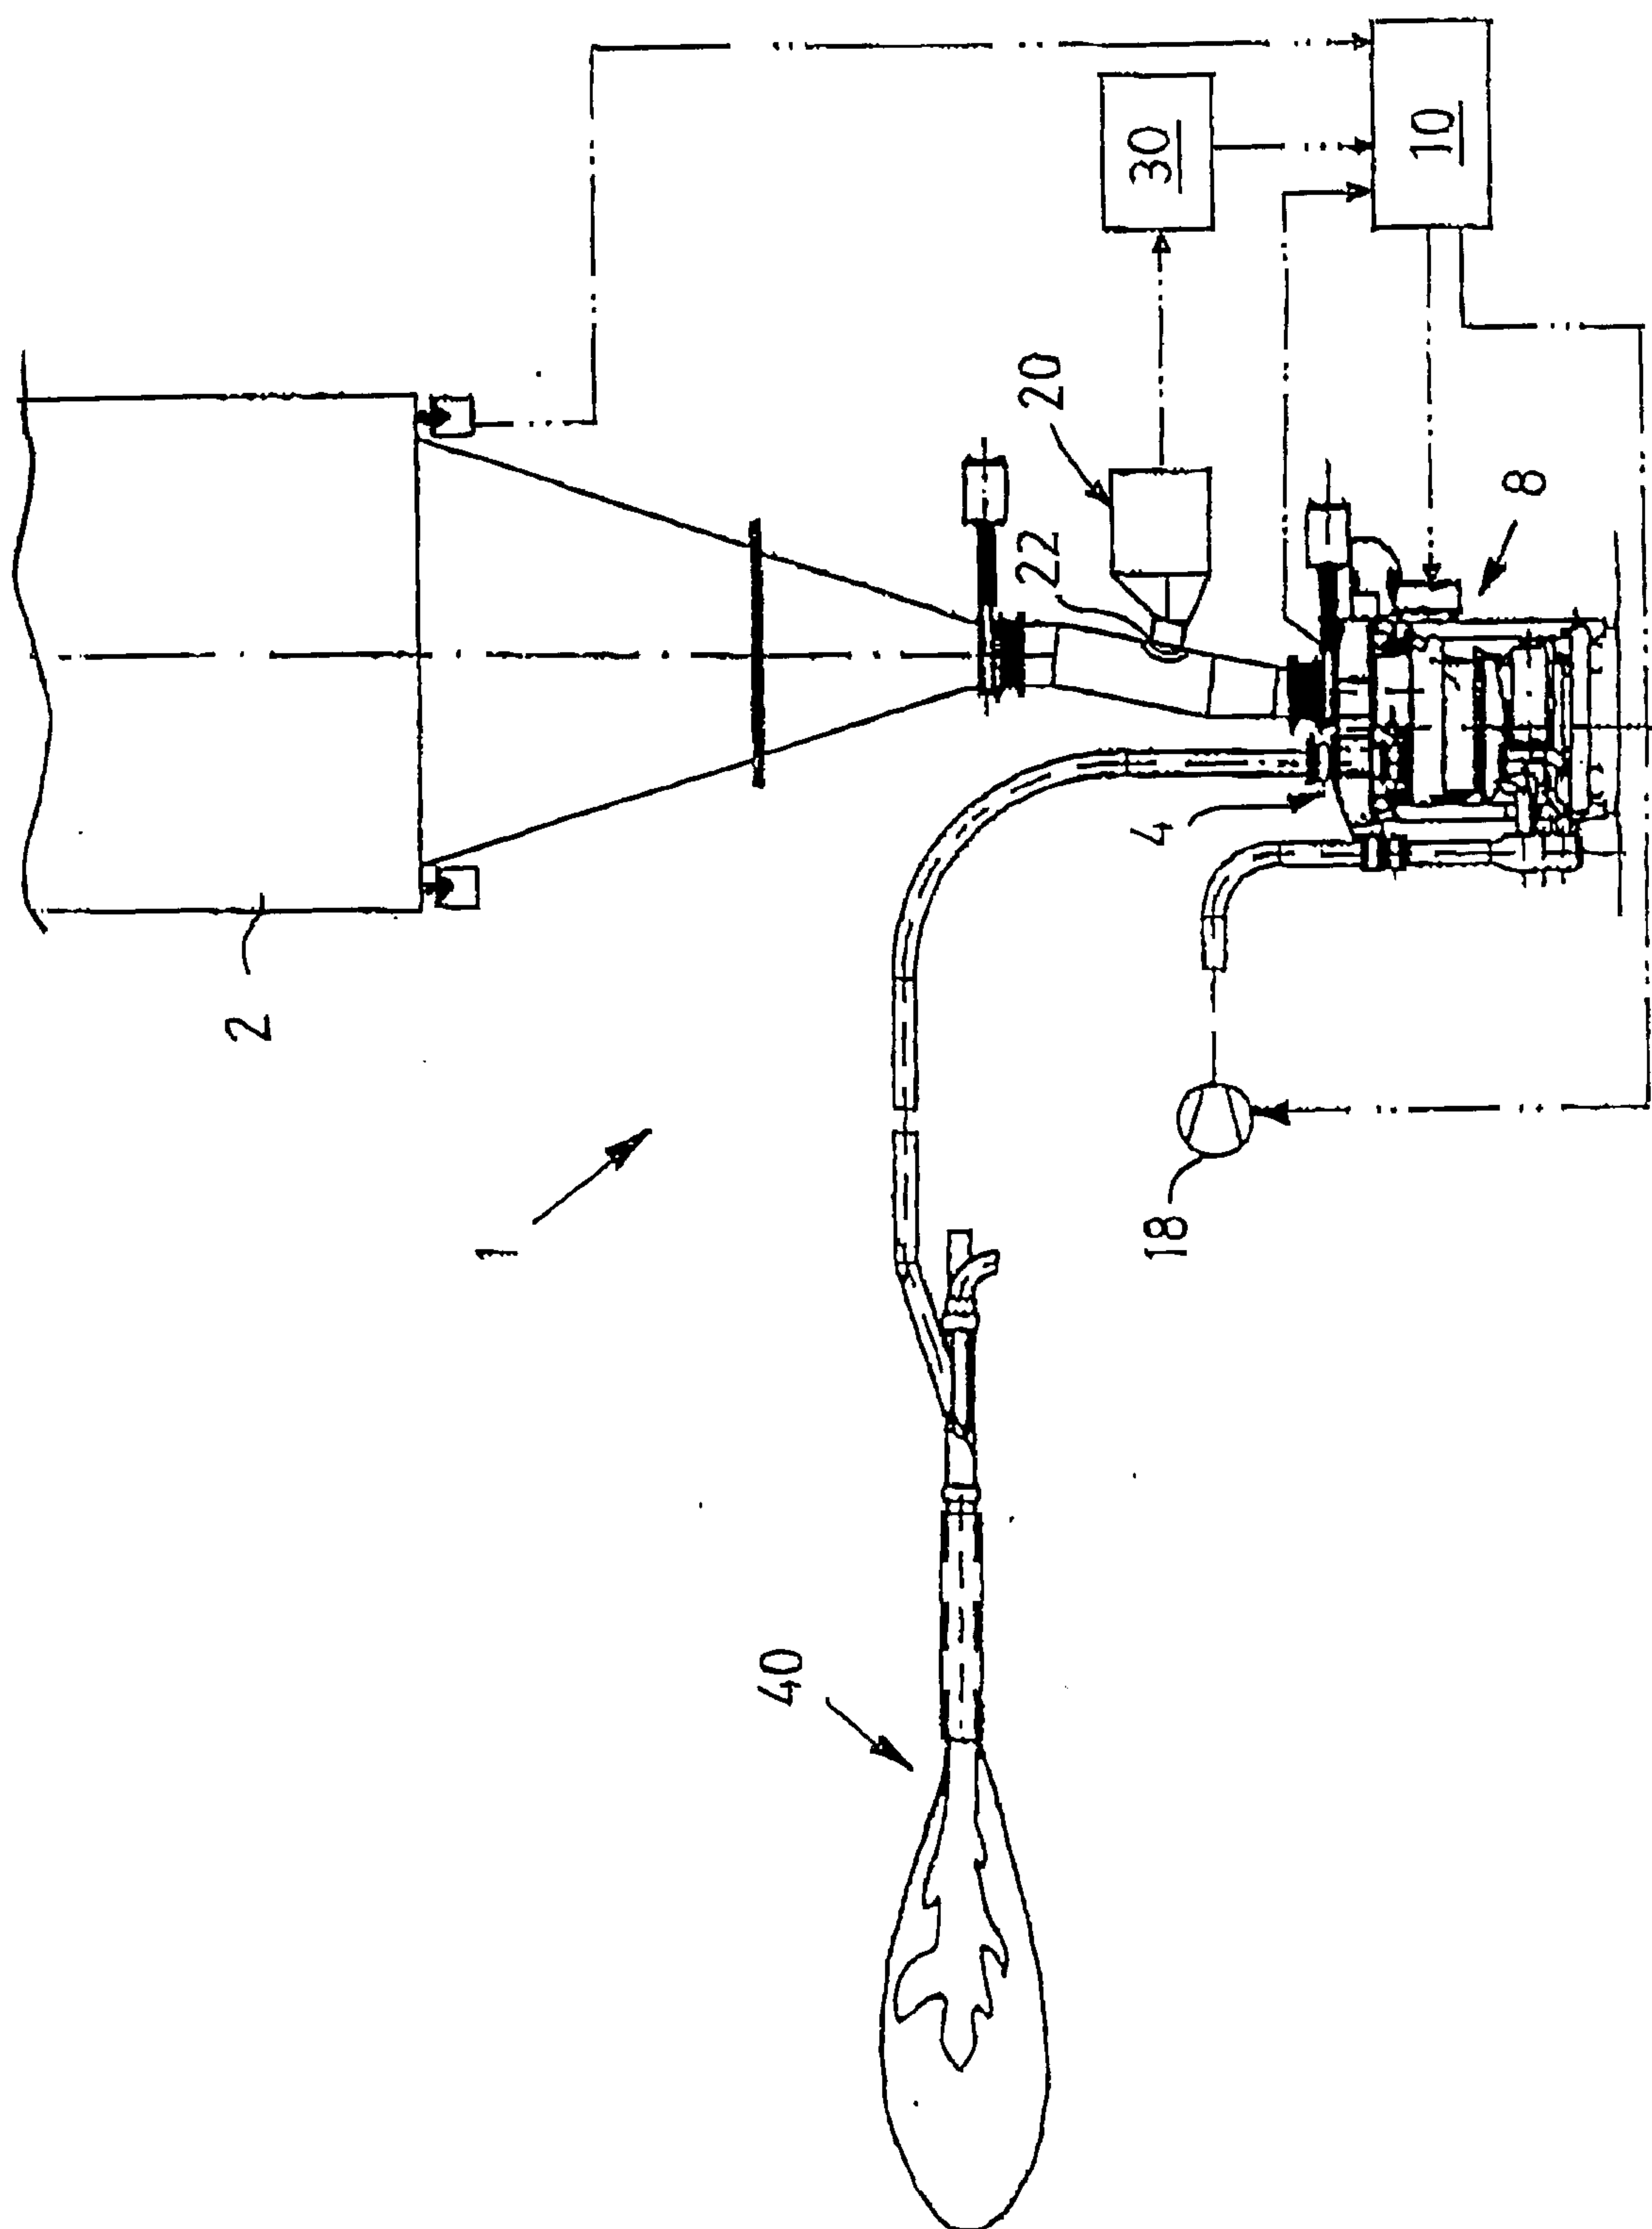


Fig. 3

